A220

Master

Aircraft characteristics publication ACP

BD500-3AB48-13800-00
Issue No. 014-00

Copyright © 2026 Airbus Canada Limited Partnership

All rights reserved. No part of this work may be reproduced or copied in any form or by any means without written permission of Airbus Canada Limited Partnership.

The Airbus and A220 logos are registered trademarks of Airbus Canada Limited Partnership.

The information, technical data and the designs disclosed herein are the exclusive property of Airbus Canada Limited Partnership or contain proprietary rights of others and are not to be used or disclosed to others without the written consent of Airbus Canada Limited Partnership. The recipient of this document, by its retention and use, agrees to hold in confidence the technical data and designs contained herein. The foregoing shall not apply to persons having proprietary rights to such information, technical data or such designs to the extent that such rights exist.

Publication No.: BD500-3AB48-13800-00

Manufacturer:

AIRBUS

Airbus Canada Limited Partnership
Customer Services
13100 Henri-Fabre Blvd., Mirabel, Quebec
Canada J7N 3C6

Applicable to: All

Intentionally left blank

A220

Highlights

Issue 014-00

The listed changes are introduced in Issue 014-00, dated 2026-11-19, of this publication.

Data module code	Reason for change
BD500-A-J00-00-00-00AAA-030A-A	Changed Data Module To change procedure.
BD500-A-J00-00-00-12AAA-030A-A	Changed Data Module To change procedure and illustration.
BD500-A-J14-20-00-01AAA-030A-A	Changed Data Module To change illustration.
BD500-A-J14-20-00-02AAA-030A-A	Changed Data Module To change applicability.
BD500-A-J00-00-00-18AAA-030A-A	Changed Data Module To change illustration.
BD500-A-J15-41-00-02AAA-989A-A	Changed Data Module To change procedure and illustration.
BD500-A-J26-00-00-00AAA-030A-A	Changed Data Module To change procedure and illustration.

Applicable to: All

Intentionally left blank

A220

Change record

Make sure that the previous issues have been incorporated.

Incorporated issues must be recorded with the date of incorporation and a signature.

Issue	Incorporated date	by (signature)	Issue	Incorporated date	by (signature)
001-00	Oct 19/2023	Signature on file	000		
002-00	Nov 16/2023	Signature on file	000		
002-01	Nov 30/2023	Signature on file	000		
003-00	Dec 14/2023	Signature on file	000		
003-01	May 23/2024	Signature on file	000		
004-00	Jun 20/2024	Signature on file	000		
004-01	Jun 27/2024	Signature on file	000		
004-02	Jul 11/2024	Signature on file	000		
005-00	Jul 18/2024	Signature on file	000		
005-01	Aug 01/2024	Signature on file	000		
006-00	Aug 15/2024	Signature on file	000		
006-01	Sep 05/2024	Signature on file	000		
007-00	Sep 19/2024	Signature on file	000		
008-00	Dec 19/2024	Signature on file	000		
008-01	Feb 28/2025	Signature on file	000		
009-00	Apr 24/2025	Signature on file	000		
010-00	Aug 21/2025	Signature on file	000		
011-00	Sep 18/2025	Signature on file	000		
011-01	Oct 16/2025	Signature on file	000		
012-00	Oct 30/2025	Signature on file	000		
12-01	Nov 13/2025	Signature on file	000		
13-00	Nov 27/2025	Signature on file	000		
013-01	Oct 29/2026	Signature on file	000		
014-00	Nov 19/2026	Signature on file	000		
			000		

Applicable to: All

Intentionally left blank

List of effective data modules

The listed documents are included in Issue 014-00, dated 2026-11-19, of this publication.

C = Changed data module
N = New data module

Document title	Data module code		Issue date	No. of pages	Applicable to
A220-100 Aircraft Charact eristics - Introduction	BD500-A-J00-00-00-20AAA-018A-A		2023-09-15		50001-54999
A220-300 Aircraft Charact eristics - Introduction	BD500-A-J00-00-00-20AAB-018A-A		2023-09-15		55001-59999
Aircraft charact eristics - Technical data	BD500-A-J00-00-00-00AAA-030A-A	C	2026-10-16		50001-54999, 55001-59999
Analysis of necessary equipment - Technical data	BD500-A-J00-00-00-03AAA-030A-A		2019-08-12		50001-54999, 55001-59999
Necessary hangar space - Technical data	BD500-A-J00-00-00-05AAA-030A-A		2016-04-14		50001-54999, 55001-59999
Equipment needs - Technical data	BD500-A-J00-00-00-06AAA-030A-A		2019-08-13		50001-54999, 55001-59999
Utilities - Technical data	BD500-A-J00-00-00-07AAA-030A-A		2019-08-13		50001-54999, 55001-59999
A220 Aircraft Charact eristics - Introduction	BD500-A-J00-00-00-09AAA-018A-A		2023-09-15		50001-54999, 55001-59999
Aircraft description - Technical data	BD500-A-J00-00-00-12AAA-030A-A	C	2026-10-16		50001-54999
Aircraft description - Technical data	BD500-A-J00-00-00-12AAB-030A-A		2024-11-19		55001-59999
Aircraft dimensions - Technical data	BD500-A-J06-10-00-00AAA-030A-A		2023-11-01		50001-54999, 55001-59999
Nacelle and pylon stations - Technical data	BD500-A-J06-20-03-01AAA-030A-A		2014-11-13		50001-54999, 55001-59999
Jacking for maintenance - Technical data	BD500-A-J07-11-00-00AAA-030A-A		2025-09-10		50001-54999, 55001-59999
Slinging and hoisting - Function, data for plans and description	BD500-A-J07-30-00-00AAA-000A-A		2019-10-21		50001-54999, 55001-59999
Aircraft grounding - General maintenance procedure	BD500-A-J10-10-02-01AAA-913A-A		2017-08-08		50001-54999, 55001-59999
Forward cargo compartment volume, weight and	BD500-A-J14-20-00-01AAA-030A-A	C	2026-10-16		50001-54999, 55001-59999

Applicable to: All

Document title	Data module code		Issue date	No. of pages	Applicable to
maximum item dimensions - Technical data					
Aft cargo compartment volume, weight and maximum item dimensions - Technical data	BD500-A-J14-20-00-02AAA-030A-A	C	2026-10-16		50001-50065, 50067-50085, 50087-54987, 55001-59999
Aircraft touch and no-touch zones - Technical data	BD500-A-J15-30-00-00AAA-030A-A		2019-10-21		50001-54999, 55001-59999
Aircraft antennas - Technical data	BD500-A-J23-00-00-00AAA-030A-A		2024-08-23		50001-54999, 55001-59999
Aircraft performance - Technical data	BD500-A-J00-00-00-13AAA-030A-A		2024-12-06		50001-54999
Aircraft performance - Technical data	BD500-A-J00-00-00-13AAB-030A-A		2024-12-06		55001-59999
Operating conditions - Technical data	BD500-A-J00-00-00-17AAA-030A-A		2025-10-29		50001-54999
Operating conditions - Technical data	BD500-A-J00-00-00-17AAB-030A-A		2020-07-08		55001-59999
Ground maneuvering - Technical data	BD500-A-J00-00-00-19AAA-030A-A		2019-10-22		50001-54999
Ground maneuvering - Technical data	BD500-A-J00-00-00-19AAB-030A-A		2019-10-22		55001-59999
Ground maneuvering, turning radii - Technical data	BD500-A-J09-20-01-00AAA-030A-A		2018-02-05	4	50001-54999, 55001-59999
Ground maneuvering, visibility from flight compartment - Technical data	BD500-A-J09-20-01-01AAA-030A-A		2016-01-13		50001-54999, 55001-59999
Wheel chocks - Handling procedure	BD500-A-J10-16-01-01AAA-912A-A		2024-05-15		50001-54999, 55001-59999
Terminal servicing - Technical data	BD500-A-J00-00-00-18AAA-030A-A	C	2026-10-16		50001-54999
Terminal servicing - Technical data	BD500-A-J00-00-00-18AAB-030A-A		2022-09-30		55001-59999
Refueling - rate and time - Technical data	BD500-A-J12-10-28-01AAB-030A-A		2017-01-16		55001-59999
Deicing/Anti-icing - Remove ice	BD500-A-J12-31-00-00AAA-261A-A		2025-10-29	2	50001-54999, 55001-59999
Crew safety precautions - dangerous areas - Technical data	BD500-A-J15-30-10-00AAA-030A-A		2019-12-03		50001-54999

Document title	Data module code		Issue date	No. of pages	Applicable to
Pavement data - Technical data	BD500-A-J00-00-00-11AAA-030A-A		2025-01-28		50001-54999
Pavement data - Technical data	BD500-A-J00-00-00-11AAB-030A-A		2025-01-28		55001-59999
Principal dimensions, landing gear footprint - Technical data	BD500-A-J06-10-32-00AAA-030A-A		2016-05-02		50001-54999, 55001-59999
Scaled drawings - Technical data	BD500-A-J00-00-00-21AAA-030A-A		2019-10-22		50001-54999
Scaled drawings - Technical data	BD500-A-J00-00-00-21AAB-030A-A		2019-10-22		55001-59999
Aircraft scaled down dimensions - Technical data	BD500-A-J06-10-00-01AAA-030A-A		2019-10-21		50001-54999, 55001-59999
Emergency exits and evacuation - Technical data	BD500-A-J15-41-00-01AAA-030A-A		2019-11-05		50001-54999, 55001-59999
Fire-fighting - Fire-fighting and rescue	BD500-A-J15-41-00-02AAA-989A-A	C	2026-10-16		50001-54999, 55001-59999
Cargo compartment and fire protection system safety risk assessment - Technical data	BD500-A-J26-00-00-00AAA-030A-A	C	2026-10-16		50001-54999, 55001-59999

Intentionally left blank

Table of contents

The listed documents are included in Issue 014-00, dated 2026-11-19, of this publication.

Document title	Data module code	Issue date	Applicable to
Chapter 1: Scope			
A220-100 Aircraft Characteristics - Introduction	BD500-A-J00-00-00-20AAA-018A-A	2023-09-15	50001-54999
A220-300 Aircraft Characteristics - Introduction	BD500-A-J00-00-00-20AAB-018A-A	2023-09-15	55001-59999
Chapter 2: Aircraft description			
Aircraft characteristics - Technical data	BD500-A-J00-00-00-00AAA-030A-A	2026-10-16	50001-54999, 55001-59999
Analysis of necessary equipment - Technical data	BD500-A-J00-00-00-03AAA-030A-A	2019-08-12	50001-54999, 55001-59999
Necessary hangar space - Technical data	BD500-A-J00-00-00-05AAA-030A-A	2016-04-14	50001-54999, 55001-59999
Equipment needs - Technical data	BD500-A-J00-00-00-06AAA-030A-A	2019-08-13	50001-54999, 55001-59999
Utilities - Technical data	BD500-A-J00-00-00-07AAA-030A-A	2019-08-13	50001-54999, 55001-59999
A220 Aircraft Characteristics - Introduction	BD500-A-J00-00-00-09AAA-018A-A	2023-09-15	50001-54999, 55001-59999
Aircraft description - Technical data	BD500-A-J00-00-00-12AAA-030A-A	2026-10-16	50001-54999
Aircraft description - Technical data	BD500-A-J00-00-00-12AAB-030A-A	2024-11-19	55001-59999
Aircraft dimensions - Technical data	BD500-A-J06-10-00-00AAA-030A-A	2023-11-01	50001-54999, 55001-59999
Nacelle and pylon stations - Technical data	BD500-A-J06-20-03-01AAA-030A-A	2014-11-13	50001-54999, 55001-59999
Jacking for maintenance - Technical data	BD500-A-J07-11-00-00AAA-030A-A	2025-09-10	50001-54999, 55001-59999
Slinging and hoisting - Function, data for plans and description	BD500-A-J07-30-00-00AAA-000A-A	2019-10-21	50001-54999, 55001-59999
Aircraft grounding - General maintenance procedure	BD500-A-J10-10-02-01AAA-913A-A	2017-08-08	50001-54999, 55001-59999
Forward cargo compartment volume, weight and maximum item dimensions - Technical data	BD500-A-J14-20-00-01AAA-030A-A	2026-10-16	50001-54999, 55001-59999
Aft cargo compartment volume, weight and maximum item dimensions - Technical data	BD500-A-J14-20-00-02AAA-030A-A	2026-10-16	50001-50065, 50067-50085, 50087-54987, 55001-59999

Applicable to: All

Document title	Data module code	Issue date	Applicable to
Aircraft touch and no-touch zones - Technical data	BD500-A-J15-30-00-00AAA-030A-A	2019-10-21	50001-54999, 55001-59999
Aircraft antennas - Technical data	BD500-A-J23-00-00-00AAA-030A-A	2024-08-23	50001-54999, 55001-59999
Chapter 3: Aircraft performance			
Aircraft performance - Technical data	BD500-A-J00-00-00-13AAA-030A-A	2024-12-06	50001-54999
Aircraft performance - Technical data	BD500-A-J00-00-00-13AAB-030A-A	2024-12-06	55001-59999
Chapter 4: Ground maneuvering			
Operating conditions - Technical data	BD500-A-J00-00-00-17AAA-030A-A	2025-10-29	50001-54999
Operating conditions - Technical data	BD500-A-J00-00-00-17AAB-030A-A	2020-07-08	55001-59999
Ground maneuvering - Technical data	BD500-A-J00-00-00-19AAA-030A-A	2019-10-22	50001-54999
Ground maneuvering - Technical data	BD500-A-J00-00-00-19AAB-030A-A	2019-10-22	55001-59999
Ground maneuvering, turning radii - Technical data	BD500-A-J09-20-01-00AAA-030A-A	2018-02-05	50001-54999, 55001-59999
Ground maneuvering, visibility from flight compartment - Technical data	BD500-A-J09-20-01-01AAA-030A-A	2016-01-13	50001-54999, 55001-59999
Wheel chocks - Handling procedure	BD500-A-J10-16-01-01AAA-912A-A	2024-05-15	50001-54999, 55001-59999
Chapter 5: Terminal servicing			
Terminal servicing - Technical data	BD500-A-J00-00-00-18AAA-030A-A	2026-10-16	50001-54999
Terminal servicing - Technical data	BD500-A-J00-00-00-18AAB-030A-A	2022-09-30	55001-59999
Refueling - rate and time - Technical data	BD500-A-J12-10-28-01AAB-030A-A	2017-01-16	55001-59999
Deicing/Anti-icing - Remove ice	BD500-A-J12-31-00-00AAA-261A-A	2025-10-29	50001-54999, 55001-59999
Chapter 6: Operating conditions			
Crew safety precautions - dangerous areas - Technical data	BD500-A-J15-30-10-00AAA-030A-A	2019-12-03	50001-54999
Chapter 7: Pavement data			
Pavement data - Technical data	BD500-A-J00-00-00-11AAA-030A-A	2025-01-28	50001-54999
Pavement data - Technical data	BD500-A-J00-00-00-11AAB-030A-A	2025-01-28	55001-59999
Principal dimensions, landing gear footprint - Technical data	BD500-A-J06-10-32-00AAA-030A-A	2016-05-02	50001-54999, 55001-59999
Chapter 8: Scaled drawing			
Scaled drawings - Technical data	BD500-A-J00-00-00-21AAA-030A-A	2019-10-22	50001-54999
Scaled drawings - Technical data	BD500-A-J00-00-00-21AAB-030A-A	2019-10-22	55001-59999
Aircraft scaled down dimensions - Technical data	BD500-A-J06-10-00-01AAA-030A-A	2019-10-21	50001-54999, 55001-59999
Chapter 10: Aircraft rescue and fire fighting			

Applicable to: All

Document title	Data module code	Issue date	Applicable to
Emergency exits and evacuation - Technical data	BD500-A-J15-41-00-01AAA-030A-A	2019-11-05	50001-54999, 55001-59999
Fire-fighting - Fire-fighting and rescue	BD500-A-J15-41-00-02AAA-989A-A	2026-10-16	50001-54999, 55001-59999
Chapter 11: Fire Protection			
Cargo compartment and fire protection system safety risk assessment - Technical data	BD500-A-J26-00-00-00AAA-030A-A	2026-10-16	50001-54999, 55001-59999

Intentionally left blank

A220

Chapter 1: Scope

Intentionally left blank

A220

A220-100 Aircraft Characteristics - Introduction

Applicability:
50001-54999

Table of contents

Page

A220-100 Aircraft Characteristics - Introduction 1
References 1
Description 1
1 Scope of the publication 1
2 Publication organization 1
3 Dimensions and weight 2
4 Correspondence 2
5 Translation of publication 2
6 Standard term definitions 2
7 Acronyms 3

List of tables

Page

1 References 1

References

Table 1 References

Data Module/Technical Publication	Title
None	

Description

1 Scope of the publication

The A220-100 Aircraft Characteristics , prepared by Airbus, contains general data on the airport facilities, ramp, and runway areas necessary to operate the Airbus commercial aircraft model BD-500-1A10 (A220-100).

Since operational practices vary among airlines, specific data should be coordinated with the user airlines prior to facility design. For additional information, please contact Airbus.

The content of this publication will change as options and aircraft changes occur. Make sure that you refer to the latest release of this publication.

If there is a difference between the data contained in this publication and that given by the local regulatory authority, the data from the local regulatory authority must be obeyed.

2 Publication organization

This publication is divided into eight sections:

- Aircraft description
- Aircraft performance
- Ground maneuvering

- Terminal servicing
- Operating conditions
- Pavement data
- Derivative aircraft
- Scaled drawings

3 Dimensions and weight

Linear dimensions given in this publication are in inches. The metric equivalents are given in parentheses ( ).

Weight measures is given in pound (lb) with the metric equivalent in parentheses ( ).

4 Correspondence

The publications change request form is available online and is used to request technical changes to rectify any errors, omissions, or procedural inconsistencies (if applicable), etc. using the Airbus A220 Interactive Electronic Technical Publication (IETP) viewer.

5 Translation of publication

If all or part of this publication is translated, the official version is the English language version by Airbus.

6 Standard term definitions

Maximum design Taxi Weight (MTW)	Maximum weight at which an aircraft can move safely on the ground. This includes the fuel for these displacements and the takeoff run.
Maximum design Landing Weight (MLW)	Maximum weight for landing as limited by aircraft strength and airworthiness requirement.
Maximum design Take-Off Weight (MTOW)	Maximum weight for take off as limited by aircraft strength and airworthiness requirements. This includes weight of fuel for taxi and run-up.
Operational Weight Empty (OWE)	Weight of structure, power plant, furnishings, systems, unusable fuel and other items of equipment that are a necessary part of a particular aircraft configuration. Also included are certain standard items, personnel, equipment and supplies necessary for full operations, but does not include usable fuel or payload.
Maximum design Zero Fuel Weight (MZFW)	Maximum weight permitted before usable fuel and other usable agents must be loaded in defined sections of the aircraft, as limited by strength and airworthiness requirements.
Maximum cargo volume	The maximum space available for cargo.

Maximum seating capacity	The maximum number of passengers permitted based on certification requirements.
Usable fuel	Fuel available for aircraft propulsion and the Auxiliary Power Unit (APU).

7 Acronyms

The first time an acronym is used it will be defined, and all subsequent uses will be in blue. When you mouse over the acronym the definition will appear. Acronyms are not plural in this publication.

Intentionally left blank

A220

A220-300 Aircraft Characteristics - Introduction

Applicability:
55001-59999

Table of contents

Page

A220-300 Aircraft Characteristics - Introduction 1
References 1
Description 1
1 Scope of the publication 1
2 Publication organization 1
3 Dimensions and weight 2
4 Correspondence 2
5 Translation of publication 2
6 Standard term definitions 2
7 Acronyms 3

List of tables

Page

1 References 1

References

Table 1 References

Data Module/Technical Publication	Title
None	

Description

1 Scope of the publication

The A220-300 Aircraft Characteristics prepared by Airbus, contains general data on the airport facilities, ramp, and runway areas necessary to operate the Airbus BD-500-1A11 (A220-300).

Since operational practices vary among airlines, specific data should be coordinated with the user airlines prior to facility design. For additional information, please contact Airbus.

The content of this publication will change as options and aircraft changes occur. Make sure that you refer to the latest release of this publication.

If there is a difference between the data contained in this publication and that given by the local regulatory authority, the data from the local regulatory authority must be obeyed.

2 Publication organization

This publication is divided into eight sections:

- Aircraft description
- Aircraft performance
- Ground maneuvering

- Terminal servicing
- Operating conditions
- Pavement data
- Derivative aircraft
- Scaled drawings

3 Dimensions and weight

Linear dimensions given in this publication are in inches. The metric equivalents are given in parentheses ( ).

Weight measures is given in pound (lb) with the metric equivalent in parentheses ( ).

4 Correspondence

The publications change request form is available online and is used to request technical changes to rectify any errors, omissions, or procedural inconsistencies (if applicable), etc. using the Airbus A220 Interactive Electronic Technical Publication (IETP) viewer.

5 Translation of publication

If all or part of this publication is translated, the official version is the English language version by Airbus.

6 Standard term definitions

Maximum design Taxi Weight (MTW)	Maximum weight at which an aircraft can move safely on the ground. This includes the fuel for these displacements and the takeoff run.
Maximum design Landing Weight (MLW)	Maximum weight for landing as limited by aircraft strength and airworthiness requirement.
Maximum design Take-Off Weight (MTOW)	Maximum weight for take off as limited by aircraft strength and airworthiness requirements. This includes weight of fuel for taxi and run-up.
Operational Weight Empty (OWE)	Weight of structure, power plant, furnishings, systems, unusable fuel and other items of equipment that are a necessary part of a particular aircraft configuration. Also included are certain standard items, personnel, equipment and supplies necessary for full operations, but does not include usable fuel or payload.
Maximum design Zero Fuel Weight (MZFW)	Maximum weight permitted before usable fuel and other usable agents must be loaded in defined sections of the aircraft, as limited by strength and airworthiness requirements.
Maximum cargo volume	The maximum space available for cargo.

Maximum seating capacity	The maximum number of passengers permitted based on certification requirements.
Usable fuel	Fuel available for aircraft propulsion and the Auxiliary Power Unit (APU).

7 Acronyms

The first time an acronym is used it will be defined, and all subsequent uses will be in blue. When you mouse over the acronym the definition will appear. Acronyms are not plural in this publication.

Intentionally left blank

A220

Chapter 2: Aircraft description

Intentionally left blank

Aircraft characteristics - Technical data

Applicability:
50001-54999, 55001-59999

Table of contents

Page

Aircraft characteristics - Technical data 1
References 1
Description 1
1 Introduction 1
2 Aircraft characteristics 2
3 System fluid capacities 3
4 Service fluid capacities 4

List of tables

Page

1 References 1
2 Aircraft characteristics 2
3 Aircraft characteristics 2
4 System fluid capacities 3
5 Service fluid capacities 4

References

Table 1 References

Data Module/Technical Publication	Title
None	

Description

1 Introduction

This data module contains general data about the BD-500-1A10 (A220-100) and BD-500-1A11 (A220-300) aircraft characteristics. The structural weight limits, such as maximum ramp weight, and zero fuel weight are dependent on configuration. Refer to each aircraft's specified Weight and Balance Manual (WBM BD500-A-J00-00-00-00AAA-030A-A) and weight and balance report for structural limits and other weight information.

Applicability:
50001-50065, 50067-50085, 50087-54987, 55001-59999

Refer to Table 2 for the aircraft characteristics.

Applicability:
50066, 50086

Refer to Table 3 for the aircraft characteristics.

Refer to Table 4 for the system fluid capacities.

Refer to Table 5 for the service fluid capacities.

2 Aircraft characteristics

Applicability:
50001-50065, 50067-50085, 50087-54987, 55001-59999

Table 2 Aircraft characteristics

Description	BD-500-1A10 (A220-100)	BD-500-1A11 (A220-300)
Engines	QTY: 2 Pure Power™ PW1519G	QTY: 2 Pure Power™ PW1521G
Mode	Passenger	Passenger
Standard seating capacity	120	140
Maximum Ramp Weight (MRW)	135,000 lb (61 235 kg)	150,000 lb (68 039 kg)
Maximum Take-Off Weight (MTOW)	134,000 lb (60 781 kg)	149,000 lb (67 585 kg)
Maximum Landing Weight (MLW)	115,500 lb (52 390 kg)	129,500 lb (58 740 kg)
Operating Weight Empty (OWE)	77,650 lb (35 221 kg)	81,750 lb (37 081 kg)
Maximum Zero Fuel Weight (MZFW)	111,000 lb (50 349 kg)	123,000 lb (55 792 kg)
Maximum fuel tank capacity	5,790 USG (21 918 L)	5,790 USG (21 918 L)
Unusable fuel	240 lb (109 kg)	240 lb (109 kg)
Maximum wet cargo volume - Aft cargo compartment	474 cu. ft (13,4 cu. m)	627 cu. ft (17,75 cu. m)
Maximum wet cargo volume - Fwd cargo compartment	349 cu. ft (9,88 cu. m)	473 cu. ft (13,39 cu. m)
Maximum cargo volume - Over-head bins	280 cu. ft (7,93 cu. m)	332 cu. ft (9,40 cu. m)

Applicability:
50066, 50086

Table 3 Aircraft characteristics

Description	BD-500-1A10 (A220-100)
Engines	QTY: 2 Pure Power™ PW1519G
Mode	Passenger
Standard seating capacity	19

Description	BD-500-1A10 (A220-100)
Maximum Ramp Weight (MRW)	135,000 lb (61 235 kg)
Maximum Take-Off Weight (MTOW)	134,000 lb (60 781 kg)
Maximum Landing Weight (MLW)	115,500 lb (52 390 kg)
Operating Weight Empty (OWE)	77,650 lb (35 221 kg)
Maximum Zero Fuel Weight (MZFW)	111,000 lb (50 349 kg)
Maximum fuel tank capacity	7101 USG (26 884 L)
Unusable fuel	404.5 lb (183.48 kg)
Maximum wet cargo volume - Fwd cargo compartment	349 cu. ft (9,88 cu. m)
Maximum cargo volume - Overhead bins	280 cu. ft (7,93 cu. m)

3 System fluid capacities

Table 4 System fluid capacities

Description	Volume	Weight
Engine fluids calculated with 7.7 lb/US gal (0,920 kg/L)		
Engines oil tank at 60 °F	12.9 US gal (49,0 L)	99 lb (44,9 kg)
Lines and internal engine oil	3.3 US gal (12,6 L)	26 lb (11,8 kg)
Total	16.2 US gal (61,6 L)	125 lb (56,7 kg)
APU fluids calculated with 7.7 lb/US gal (0,920 kg/L)		
APU	3.3 US gal (12,3 L)	25 lb (11,3 kg)
Hydraulic fluids at 77°F (25 °C) low density 8.43 lb/US gal (1,01 kg/L)		
System 1 reservoir	4.98 US gal (18.85 L)	41.98 lb (19.04 kg)
System 2 reservoir	4.33 US gal (16.39 L)	36.50 lb (16.55 kg)
System 3 reservoir	3.46 US gal (13.10 L)	29.17 lb (13.23 kg)
Total	12.77 US gal (48.34 L)	107.65 lb (48.82 kg)
Hydraulic fluids at 77°F (25 °C) high density 8.86 lb/US gal (1,06 kg/L)		
System 1 reservoir	4.98 US gal (18.85 L)	44.12 lb (20.01 kg)
System 2 reservoir	4.33 US gal (16.39 L)	38.36 lb (17.40 kg)
System 3 reservoir	3.46 US gal (13.10 L)	30.65 lb (13.90 kg)

Description	Volume	Weight
Total	12.77 US gal (48.34 L)	113.13 lb (51.31 kg)

4 Service fluid capacities

Table 5 Service fluid capacities

Description	Volume	Weight
Potable water at 60 °F (15,5 °C)		
Galley/Lavatory tank	42.0 US gal (159,0 L)	350.5 lb (159.0 kg)
Chemical toilet fluid at 60 °F (15,5 °C)		
Waste tank	42.0 US gal (159,1 L)	350 lb (158,8 kg)

Analysis of necessary equipment - Technical data

Applicability:
50001-54999, 55001-59999

Table of contents

Page

Analysis of necessary equipment - Technical data 1
References 1
Description 1
1 General 1
1.1 Hangar areas for maintenance 2
1.2 Aircraft apron 2
1.3 Aircraft maintenance support shops 2
1.4 Component overhaul shops 3
1.5 Stock rooms 3
1.6 Administrative offices and auxiliary facilities 4
1.7 Utilities 4

List of tables

Page

1 References 1

References

Table 1 References

Data Module/Technical Publication	Title
None	

Description

1 General

This section identifies and gives an analysis of the equipment necessary to do maintenance on the A220 aircraft.

Refer to the lists that follow for the equipment and facilities that you must have for aircraft maintenance and servicing. These lists show the different functions that a maintenance or service center (or an approved external subcontractor) must provide to support the operator’s aircraft.

Usually, it is best for a maintenance facility to have all the shops and equipment necessary on-site to do maintenance. But, to try to lower repair costs and decrease turnaround times, it can sometimes be more cost-effective to use the facilities and services of approved external vendors as an alternative to your own service or repair facilities.

If an operator decides to use an external service or repair facility, they must first examine how much of the aircraft maintenance to keep on-site and how much to contract out to an external services facility. The operator should first identify what equipment, components, or parts are necessary to do repairs and/or an overhaul at their own maintenance facility. If some of the necessary equipment is not available, or it is not cost-effective to purchase/rent, then the operator

should probably use an external (off-site) maintenance or services facility to do these maintenance functions.

During the initial planning stage, it is important that the operator look at the type of the maintenance to be done at the operator's facilities and the overhaul equipment that is necessary to do the job. After a check of the work flow processes, the operator must calculate the space allocation necessary and what equipment and supplies for the shop facilities must be purchased, in order to calculate an approximate cost estimate. As the planning stage continues, more accurate costs will become known which will give a more accurate estimate of the total costs necessary in the production of the operator's maintenance facility.

The typical maintenance facility has the areas, shops and rooms that follow, as applicable:

- Hangar areas for maintenance
- Aircraft apron
- Aircraft maintenance support shops
- Component overhaul shops
- Stock rooms
- Administrative offices and auxiliary facilities
- Utilities.

1.1 Hangar areas for maintenance

These are the areas that should be provided:

- Hangar
- Work stands and docks
- Cranes, stands and docks
- Service pits for electricity, air and fuel

1.2 Aircraft apron

These are the areas that should be provided:

- Aircraft maintenance aprons
- Aircraft parking aprons
- Taxiways
- Wash rack
- Blast fences and noise suppressors

1.3 Aircraft maintenance support shops

These are the areas that should be provided:

- Wheels, brakes and tires
- Power plant and Auxiliary Power Unit (APU) (quick engine change)
- Sheet metal/composites
- Avionics
- Interiors and seats

- Aircraft cleaners

1.4 Component overhaul shops

These are the areas that should be provided:

- Sheet metal
- Composite structures
- Parts cleaning
- Painting
- Plating
- Welding
- Heat treating
- Machining
- Engine / power plant
  - Module replacement
  - Module overhaul
  - Test cell
- Auxiliary power unit
- Hydraulic
- Pneumatic
- Mechanical accessories
- Fuel components
- Battery
- Electrical
- Landing gear
- Wheels, brakes and tires
- Avionics
  - Communications
  - Navigation
- Instruments, electrical
- Instruments, mechanical
- Bottled gas (O_2, N_2, CO_2)
- Seats and interiors
- Galley refrigeration
- Non-destructive testing and laboratories

1.5 Stock rooms

These are the areas that should be provided:

- Aircraft spares

- Consumable materials
- Combustible materials
- Tool cribs
- Receiving and shipping
- Quarantine area (for faulty or rejected items)

1.6 Administrative offices and auxiliary facilities

These are the areas that should be provided:

- Maintenance administration office
- Maintenance support office
- Quality control and reliability
- Engineering
- Manufacturer’s representatives
- Computer services
- Medical station
- Security
- Cafeteria
- Toilets, washrooms, and lockers
- Building maintenance

1.7 Utilities

These are the areas that should be provided:

- Electricity (main and emergency)
- Water
- Sewage and wastewater
- Telephone
- Heating, ventilation, and air conditioning
- Compressed air

A220

Necessary hangar space - Technical data

Applicability:
50001-54999, 55001-59999

Table of contents

Page

Necessary hangar space - Technical data 1
References 1
Description 1
1 General 1

List of tables

Page

1 References 1
2 Hangar arrangement legend for Ground Support Equipment (GSE) and tools 1

List of figures

Page

1 Hangar arrangement 4

References

Table 1 References

Data Module/Technical Publication	Title
BD500-A-J06-10-00-00AAA-030A-A	Aircraft dimensions - Technical data

Description

1 General

The first facility an operator may want to consider is the maintenance hangar. The number of hangar positions is dependant on the number of aircraft types, the number of aircraft per type, aircraft utilization, maintenance check frequency (scheduled, unscheduled, equalized), the elapsed time required to perform maintenance checks, and the number of working hours available per day.

Hangar proposed arrangement is provided in Fig. 1 to assist in determining location, size, and clearance requirements for Ground Support Equipment (GSE) , tools and workstands, refer to Table 2 for a legend. Aircraft parking space requirements can also be determined from Fig. 1 and to BD500-A-J06-10-00-00AAA-030A-A for aircraft dimensions.

Table 2 Hangar arrangement legend for Ground Support Equipment (GSE) and tools.

Reference letter	Description
A	Desks and reference tables
B	Tool boxes
C	Eye wash station

Reference letter	Description
D	Spill kit
E	Main Landing Gear (MLG) ladder station
F	Avionic station
G	Garbage and recycling station
H	Ladder storage/parking
J	Mule
K	Ladders parking
L	Oxygen/nitogen
M	Racks and shelves
N	Carts and charging stations
P	Sanding room
Q	Used oil tank
R	Oil warehouse
S	Store office
T	Rack and shelves
U	Kitchen
V	Office
W	Washrooms
X	Sprinkler room
Y	Nacelles parking
Z	Electrical room
AA	Conference room
AB	Avionic lab
AC	Service desk
AD	Lockers
AE	Printing room
AF	Ground Power Unit (GPU)
AG	Hydraulic cart

Reference letter	Description
AH	Latchways vaccuum anchor
AJ	Supports and jacks
AK	Coffee area
AL	Cleaning room
AM	Air conditioning room
AN	Servicing carts
AP	Drop area for parts
AQ	Oxygen and nitrogen

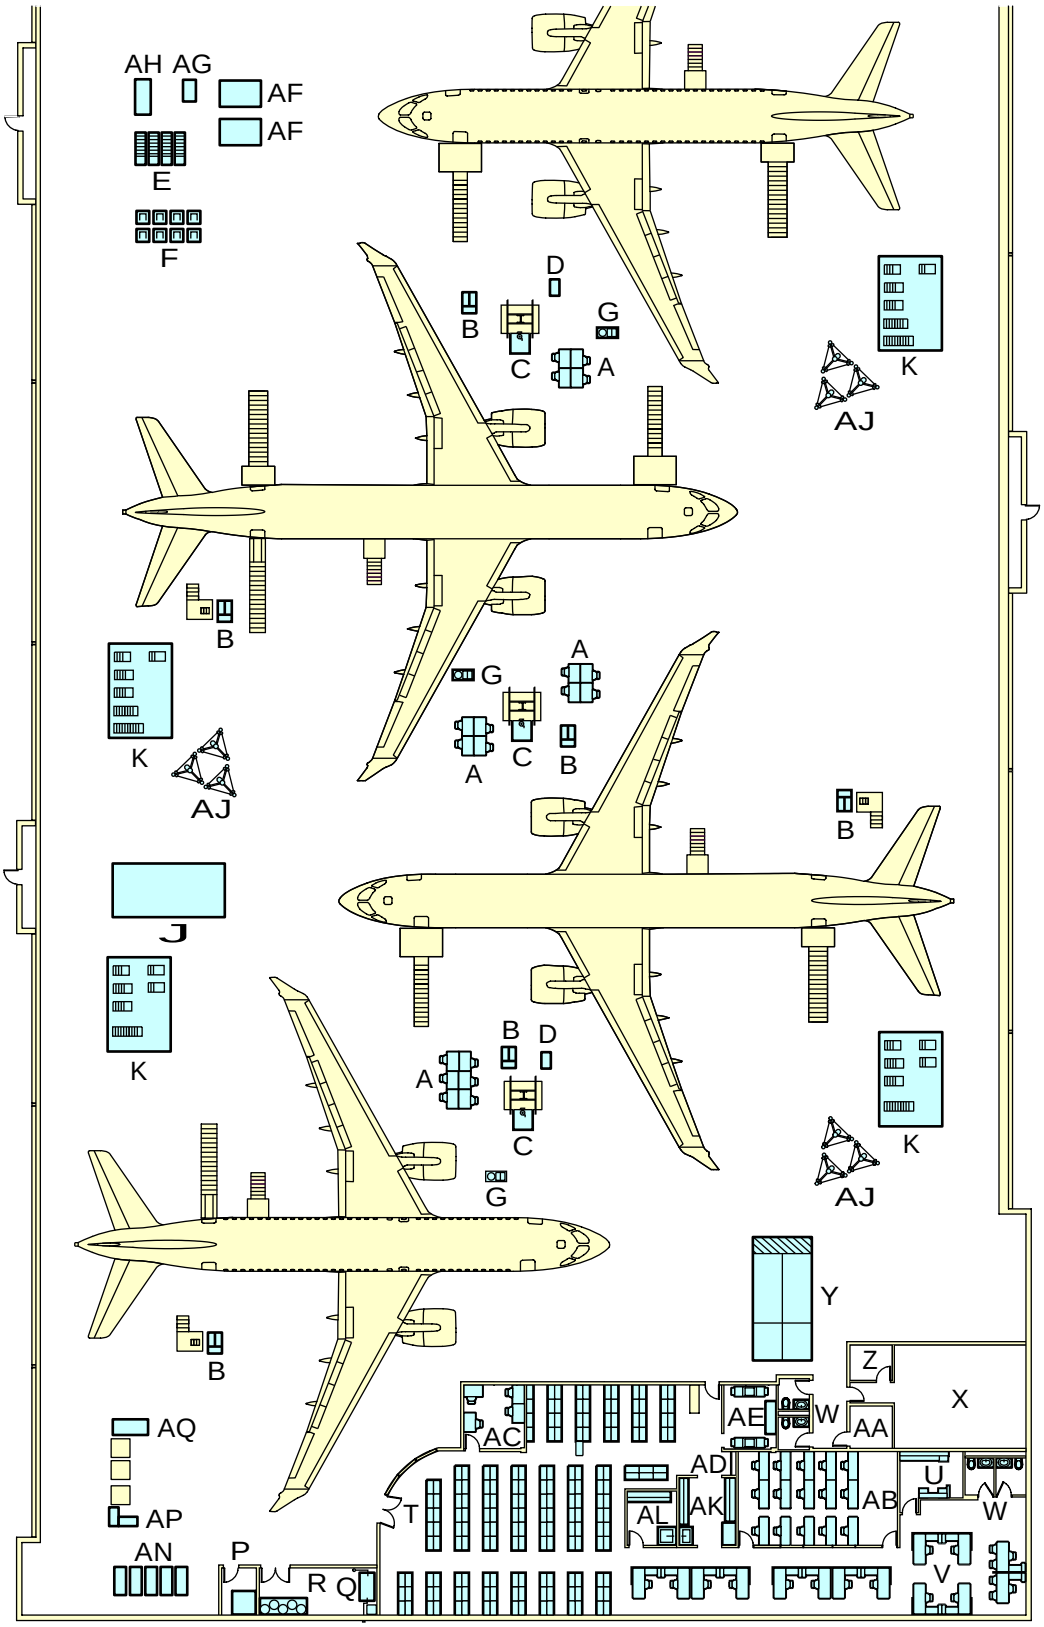

ICN-BD500-A-J000000-A-3AB48-29850-A-001-01

Figure 1 Hangar arrangement

A220

Equipment needs - Technical data

Applicability:
50001-54999, 55001-59999

Table of contents

		Page
Equipment needs - Technical data		1
References		2
Description		2
1	General	2
2	Technical group	2
2.1	Maintenance shop	3
2.2	Battery shop	5
2.3	Tire/Wheel shop	7
2.4	Tube shop	7
2.5	Refinishing shop (paint/composites)	9
2.6	Avionics/Electrical laboratory shop	11
2.7	Engine Build-Up (EBU) shop	12
2.8	Hydraulic shop	13
2.9	Composite clean room	15
2.10	Non-Destructive Test (NDT) shop	16
3	Technical support group	17
3.1	Petroleum, Oil, and Lubricants (POL) store	17
3.2	Ground Support Equipment (GSE) repair shop	18
3.3	Tool and GSE store	19
3.4	Spare parts store (shipping/receiving)	20
4	Administrative group	20
4.1	Human resources/administration office	21
4.2	Waste management office	21
4.3	Hazardous materials management office	22
4.4	Documentation control office	22
4.5	Documentation library	23
4.6	Maintenance supervisor’s office	23
4.7	Quality Control (QC) inspection office	23
4.8	Training classroom	23
4.9	Customer service representative’s office	23
4.10	Cafeteria	23
4.11	Planning/Scheduling	23
4.12	Sales office	24
4.13	Finance department	24
4.14	Telecommunications/Copy room	24
4.15	Information service’s office	24
4.16	Main entrance	24
4.17	Customer lounge	24
4.18	Building maintenance office	24

List of tables

		Page
1	References	2
2	Maintenance shop	3
3	Battery shop	6
4	Tire/Wheel shop	7
5	Tube shop	8

6 Refinishing shop..... 10
7 Avionics/Electrical laboratory shop..... 11
8 Engine build-up shop..... 12
9 Hydraulic shop..... 14
10 Composite clean room..... 16
11 Non-destructive test shop..... 17
12 Petroleum, oil, and lubricants store..... 18
13 Ground support equipment repair shop..... 18
14 Tool and GSE store..... 19
15 Spare parts store..... 20

References

Table 1 References

Data Module/Technical Publication	Title
None	

Description

1 General

This section describes the equipments you need for the hangar, with its support shops. The support shops can be divided into the three groups that follow:

- Technical group;
- Technical support group;
- Administrative group.

2 Technical group

There are certain repair and support shops which are closely related to line maintenance. Storage areas for repairable items and consumable materials as well as tool cribs are all necessary elements of the repair facilities.

The level of maintenance work to be done by the line maintenance shops and the availability of fully equipped shops to assist in the more extensive maintenance tasks are necessary when you plan the size and functions of the line maintenance shops. The line maintenance shops can be housed in the overhaul facilities if the hangar and the overhaul shops are closely attached.

Any level of maintenance facility should integrate a guide for effective and efficient workplaces and instructions to promote continued safety and efficiency. The health and safety of their employes at their respective work stations, laboratories and office space is also a factor to consider as necessary elements of the facility.

Maintenance facilities must be capable of changing avionics, components, engine/APU and wheels as necessary, with shop tasks such as the overhaul of these units or components which can be contracted to approved outside service facilities. Heat treating, plating/coating, some non-destructive testing/inspection, and other such special work is usually given to external contractors unless the maintenance facilities are sufficiently equipped or are too far from an approved external service facility.

The technical group has the shops that follow:

- Maintenance shop
- Battery shop
- Tire/Wheel shop
- Tube shop
- Refinishing shop (paint/composites)
- Avionics/Electrical laboratory/shop
- Engine build-up shop
- Hydraulic shop
- Composite clean room
- Non-destructive test shop.

2.1 Maintenance shop

The primary function of this shop is to make some parts (approved by Engineering), repairs, install pins and bearings, and to do small welding repairs.

Table 2 Maintenance shop

Nomenclature	Quantity
Work benches	3
Vises	3
Drill press	1
Cabinet for metal sheet	1
Metal shears (heavy duty)	1
Metal shears (light duty)	1
Band saw	1
Grinder/Buffer	1
Buffer	1
Disc and belt sander	1
Welder (dial arc)	1
Welder (tungsten arc)	1
Welding screen (portable)	1
Welding gas for the TIG welder	A/R
Storage cabinet (wall) for fasteners, bolts, and washers	1
Desk	1
Chair	1

Nomenclature	Quantity
Storage cabinet that is resistant to explosions	1
Alodine bath (for small parts)	1
Wash tank 20 gallons (75.70 l) capacity	1
Storage rack for sheet metal	1
Sandblaster	1
Dry ice container (to freeze bearings)	1
Smoke detector	A/R
Metal break	1
Slip roll (forming machine)	1
Small press	1
Flypress (hand)	1
Small lathe	1
Stand for lathe tools	1
Spot welder	1
Sheet metal shrinker/spreader	1
Tool box with cabinet (fully equipped for the mechanic)	1
Right angle guillotine	1
Milling machine	1
Honing machine	1
Fire extinguishers 150 lb (68.2 kg) purple K, with wheels	2
Hot and cold water supply	A/R
Drinking water fountain	1
Central vacuum line attached to the grinder and sander	1
Vacuum pump	1
Rivet guns (air-operated)	2
Hand router (air-operated)	1
Metal spreader roller	1 set
Metal stamps (numbers/letters) 1/16 in. (1.6 mm) high	1 set

Nomenclature	Quantity
Etching tool (electrical vibrator)	1
Stand for milling machine tools	1
Stand for honing machine tools	1
Garbage containers	2
Eye bath	1
First aid kit	1

Maintenance shop dimensions: 32.5 ft x 32.5 ft (10.0 m x 10.0 m). Total area 1056.25 ft² (100.0 m²)

2.2 Battery shop

WARNINGS

- **When you do maintenance on the battery, make sure that you have a good flow of air. Explosive gases can be released. A concentration of these gases can cause injury to persons and/or damage to equipment.**

- **Be careful when you do work with a Ni-Cad battery. A solution of potassium hydroxide and water makes electrolyte in Ni-Cad batteries. To make the electrolyte of a Ni-Cad battery neutral, use a 3% solution of acetic acid, vinegar, or lemon juice, or a 10% solution of boric acid. The electrolyte in a Ni-Cad battery is very corrosive and can cause burns.**

The battery shop is a part of the “Component repair and overhaul shops“. Also in the “Component repair and overhaul shops“ are the tube shop, the composite shop, and the throttle quadrant shop.

The battery shop must have a non-slip floor surface treated with epoxy. Also, it must have good airflow with no acidic fumes.

The shop does maintenance on Nickel-Cadmium (Ni-Cad) batteries. It has the necessary equipment to make an analysis of these batteries, to deep cycle and also to charge them.

Note

A solution of potassium hydroxide and water makes the electrolyte in Ni-Cad batteries. Make this electrolyte neutral with a 3% solution of acetic acid, vinegar, lemon juice, or a 10% solution of boric acid.

Make sulfuric acid neutral with baking soda before you discard unserviceable batteries. Also, obey the local environmental regulations when you discard these or other dangerous materials.

Make sure to keep lead-acid and Ni-Cad batteries isolated. The fumes from lead−acid batteries can cause contamination of Ni-Cad batteries and decrease their efficiency.

Table 3 Battery shop

Nomenclature	Quantity
Air conditioner	1
Battery wash through (alkali resistant) with hot/cold water	1
Wooden benches with cupboards (alkali resistant)	2
Portable battery chargers/analyzers	2
Wooden shelf unit to keep various parts	1
Plastic containers (with covers)	2
Container for potassium hydroxide	1
Container for sulfuric acid	1
Water filter	1
Cart to move the batteries	1
Cabinet for tool storage	1
Water heater	1
Battery charger/analyzer	1
Desk	1
Chair	1
Shelf unit to charge batteries installed in place	1
Ventilation fan	1
Plastic bottles 1 qt. US (946.3 ml)	2
Container to make potassium hydroxide neutral (3% solution of acetic acid, vinegar, lemon juice, or a 10% solution of boric acid	1
Container for baking soda (to neutralize acid)	1
Container for pure water 60 gal US (227.1 l)	1
Emergency shower	1
Eye bath	1
First aid kit	1

Battery shop dimensions: 19.5 ft x 9.75 ft (6.0 m x 3.0 m). Total area 190.12 ft² (18.0 m²)

2.3 Tire/Wheel shop

The tire/wheel shop replaces tires and does the maintenance, servicing and repairs to aircraft wheels and brakes. To do an overhaul of brake assemblies, refer to the brake manufacturer's procedures.

Table 4 Tire/Wheel shop

Nomenclature	Quantity
Steel work bench	1
Vise	1
Safety cage to inflate tires	1
3–shelf racks	2
Fire extinguisher	1
Wash tank for wheel bearings	1
Work bench	1
Portable eddy current tester	1
Wall storage cabinet for tools	1
Tire bead breaker	1
Varsol wash tank	1
Nitrogen gas cart	1
Plastic containers for solvent, leak detector	A/R
Desk	1
Chair	1
Paint stripper (plastic medium)	1
Ventilation fan	1
Hydraulic press	1
Caustic or steam cleaner for brakes	1
Cart to move the wheels	1
Shop air supply (regulated)	A/R

Tire/wheel shop dimensions: 13.0 ft x 9.75 ft (4.0 m x 3.0 m). Total area 126.75 ft² (12.0 m²)

2.4 Tube shop

The tube shop can make and repair tubes and hoses for the aircraft.

It is recommended to put the tube shop near the hydraulic shop. This makes it easier to do tests on new or repaired tubes and hoses.

Table 5 Tube shop

Nomenclature	Quantity
Rack to hold tubes of different dimensions	1
Steel work bench 3.0 x 6.0 ft (0.92 x 1.85 m)	1
Vise	1
Tool to bend tubes	1
Tube bending/flaring machine	1
Wiggins tool to swage tubes	1
Harrison tool to swage tubes	1
Tool to bend pipes	1
Emergency Shower	1
Desk	1
Chair	1
Peg Board	1
Telephone	1
Shop air supply (regulated)	A/R
First aid kit	1

Tube shop dimensions: 26.0 ft x 19.5 ft (8.0 m x 6.0 m). Total area 507.0 ft² (48.0 m²)

2.5 Refinishing shop (paint/composites)

WARNINGS

- **Obey the precautions that follow when you do work with composite materials:**
  - **Do the work in an area that has a good flow of clean air**
  - **Use approved eyes, mouth, and body protection. Small particles can go through usual clothing**
  - **Do not let the materials touch your eyes, mouth, or skin**
  - **If irritation occurs, get medical aid immediately**
  - **Make sure that the area has no sparks, flame, or hot surfaces**
  - **Make sure that you have sufficient fire protection available**
  - **Obey the manufacturer's instructions**
  - **Do not use chemical paint removers. To remove paint from composites that have resin, use abrasive materials**
  - **Do not use abrasive materials on composite cloth that has no resin**
  - **When you remove a glossy finish from the surface of a composite, make sure that you remove only the minimum amount necessary. You must not touch the cloth below the resin**
  - **Do not use power tools to make a surface rough.**

  Some composite materials are poisonous, flammable and/or irritating to the skin. Some procedures can make composite parts weak. If you do not follow this precautions, you can cause injury to persons or damage to equipment.

- **Obey the precautions that follow when you use resins:**
  - **use safety glasses**
  - **put on protective clothing**
  - **do not let the resins or solvents touch your skin, eyes, and mouth**
  - **work in an area that has good flow of clean air**
  - **do not work in an area that has sparks, flame, and hot surfaces**
  - **obey the manufacturer's instructions**
  - **get medical aid if irritation occurs**

  many resins are poisonous and can cause injury to persons.

- **Sanding/machining/cutting of the component will give off dust that can cause skin irritations. Do not breathe this dust.**
  - **Epoxy resins or solvents contain dangerous ingredients.**
  - **Have plenty of clean air ventilation and use respiratory protection when using these materials in a confined area.**
  - **Make sure these materials do not get into your skin, eyes or clothing.**
  - **Wear rubber gloves along with cotton gloves to protect your hands and wear protective clothing.**
  - **If skin touches with uncured resins or curing agent, clean with warm water and soap.**
  - **Do not use solvent to clean the skin.**

The refinishing shop does repairs to the painted surfaces of composite parts (fairings, flight control surfaces, or access panels) that are installed or removed from the aircraft.

The shop also does repairs to composite fairings, detail parts and sub-assemblies.

Table 6 Refinishing shop

Nomenclature	Quantity
Paint booth with regulated air, filters, and exhaust fan 8.0 x 6.0 x 8.0 ft (2.46 x 1.85 x 2.46 m)	1
Holder for paper (used to mask parts)	1
Flame-proof paint lockers	2
Holder for masking tape	1
Respirators	2
Machine to shake paint cans	1
Paint spray guns (# 3 to # 13 patterns)	2
Paint spray gun to airbrush parts	1
Air gun	1
Explosion-proof lighting	A/R
Equipment to clean paint guns	A/R
Overhead chains to hang parts	A/R
Wooden work bench on which to paint parts	1
Fire extinguishers	2
Orbital sanders	2
Flame-proof locker for flammable liquids	1
Air operated sanders to polish parts	2
Shelves 3.0 x 1.5 x 6.0 ft (0.92 x 0.46 x 1.85 m)	4
Heat lamps to cure parts	10
Vacuum dust collectors − 1 outlet for each work bench	2
Work benches	2
Vises	2
Eye bath	1
Desk	1
Chair	1
Locker to keep supplies	1

Refinishing shop dimensions: 26.0 ft x 19.5 ft (8.0 m x 6.0 m). Total area 507.0 ft² (48.0 m²)

2.6 Avionics/Electrical laboratory shop

The avionics/electrical laboratory must have a clean room (with a controlled environment) to do repairs and tests of some instruments such as gyros and air data sensors. Also, the laboratory must have the correct equipment to touch and move Electrostatic-Discharge Sensitive (ESDS) devices.

The avionics/electrical shop does the troubleshooting of the avionics system. This shop makes, identifies, and repairs the wiring and services and inspects the avionics and electrical systems of the aircraft.

Such items as tools that crimp, heat guns, and other approved electrical equipment must be in the avionics/electrical shop's usual inventory.

Table 7 Avionics/Electrical laboratory shop

Nomenclature	Quantity
Work bench	1
Vent fan and filter	1
Shelves for test equipment	A/R
Fire-proof lamp	1
Lock-up cabinet	1
Filtered shop air	2 outlets
Stools	2
Protective clothing: face shield, gloves, and coveralls	2 sets
Eye bath	1
Anti−static mats	A/R
Vacuum dust collectors	2 outlets
Electrical ground facilities	A/R
Fire extinguisher	1
Work bench lights	A/R
Different types of test equipment	A/R
Bench light with magnifying glass	1
Telephone	1
Desk	1
Chair	1
Vacuum pump	1

Nomenclature	Quantity
Plastic containers (with covers)	A/R
Garbage containers	2

Avionics/Electrical laboratory/shop dimensions: 13.0 ft x 13.0 ft (4.0 m x 4.0 m). Total area 169.0 ft² (16.0 m²)

2.7 Engine Build-Up (EBU) shop

WARNING

Do the borescope inspection in an area which has protection from the weather. If a borescope inspection is done in wet conditions, use sufficient protection to prevent possible electrical shock to the operator or damage to the equipment.

CAUTION

Make sure the temperature in the engine is less than 140º f (60º c) before you install the flexible borescope in the engine. If the engine is hotter than 140º f (60º c), the flexible borescope can melt.

The shop must have a large entry door (approximately 19.5 ft (6.0 m) wide) to receive such large components as engines.

The engine build-up shop has three horizontal work stations, two engine staging areas, and the equipment area. For on−line maintenance, the shop can do servicing on the Pratt & Whitney engines, engine nacelles, and thrust reversers. Other tasks that the shop can do are as follows:

- Borescope checks
- Replace external Line Replaceable Units (LRU).

Table 8 Engine build-up shop

Nomenclature	Quantity
Engine stands	3
Work benches	3
Shipping stand	1
Vises	3
Bench light with magnifying glass	1
Overhead crane	1
Step ladders (3 step)	3
Borescope equipment	1
Regulated shop air supply	A/R

Nomenclature	Quantity
Drip trays	A/R
Solvent cleaning area	1
Fire extinguishers	3
Eye bath	1
Protective clothing (face shield, gloves, and coveralls)	2 sets
Garbage containers	3
Explosion-proof lamps	A/R
Test equipment of different types	A/R
Telephone	1
Desk	1
Chairs	2
Inspection chairs (low)	3
Storage cabinet	1
First aid kit	1

Engine build-up shop dimensions: 32.5 ft x 39.0 ft (10.0 m x 12.0 m). Total area 1267.5 ft² (120.0 m²)

2.8 Hydraulic shop

WARNINGS

- **Make sure that the work area has a good flow of air. Hydraulic fumes and spray are poisonous and can cause in juryto persons and damage to equipment if used in a closed area.**
- **Do not get hydraulic fluid on your skin, in your mouth or in your eyes. Hydraulic fluid is poisonous and can go through your skin and into your body. Flush hydraulic fluid from your eyes, mouth or skin with water. Get medical aid if you get hydraulic fluid in your eyes or mouth.**
- **Do not breathe the hydraulic fluid fumes. Do not let hydraulic fluid touch your eyes or stay on your skin. Hydraulic fluid is poisonous and can cause injury to persons.**
- **Put barrier cream on your hands and arms and use protective clothing when you do work on the hydraulic systems. Hydraulic fluid on the skin is poisonous and can cause injury to persons.**

- **Catch the hydraulic fluid in a container or cloth when you disconnect the hydraulic lines. Immediately clean all surfaces that hydraulic fluid falls on. Hydraulic fluid causes damage to equipment.**

- **Clean hydraulic fluid leakage from the workarea. Hydraulic fluid is dangerous and can cause injury to personsand damage to equipment.**

CAUTION

Make sure that you always use the same typeof hydraulic fluid. If you mix hydraulic fluids, you can cause contaminationof the system and/or damage to the equipment.

The hydraulic shop does the maintenance and tests of hydraulic pumps, motors, tubes, hoses, and other hydraulic components and their related parts. The shop must be clean because you must have a clean environment to do the build-up or overhaul of hydraulic components.

Table 9 Hydraulic shop

Nomenclature	Quantity
Hydraulic test stand	1
Work bench	1
Tool board	1
Storage cabinet	1
Special tools	A/R
Filtered shop air	A/R
Desk	1
Chair	1
Telephone	1
Filing cabinet	1
Stools	2
Bench light with magnifying glass	1
Protective clothing (face shield, gloves, and coveralls)	2 sets
Solvent wash tank	1
Eye bath	1
First aid kit	1

Hydraulic shop dimensions: 13.0 ft x 16.25 ft (4.0 m x 5.0 m). Total area 211.25 ft² (20.0 m²)

2.9 Composite clean room

WARNINGS

- **Obey the precautions that follow when you do work with composite materials:**
  - **Do the work in an area that has a good flow of clean air**
  - **Use approved eyes, mouth, and body protection. Small particles can go through usual clothing**
  - **Do not let the materials touch your eyes, mouth, or skin**
  - **If irritation occurs, get medical aid immediately**
  - **Make sure that the area has no sparks, flame, or hot surfaces**
  - **Make sure that you have sufficient fire protection available**
  - **Obey the manufacturer's instructions**
  - **Do not use chemical paint removers. To remove paint from composites that have resin, use abrasive materials**
  - **Do not use abrasive materials on composite cloth that has no resin**
  - **When you remove a glossy finish from the surface of a composite, make sure that you remove only the minimum amount necessary. You must not touch the cloth below the resin**
  - **Do not use power tools to make a surface rough.**

  Some composite materials are poisonous, flammable and/or irritating to the skin. Some procedures can make composite parts weak. If you do not follow this precautions, you can cause injury to persons or damage to equipment.

- **Obey the precautions that follow when you use resins:**
  - **use safety glasses**
  - **put on protective clothing**
  - **do not let the resins or solvents touch your skin, eyes, and mouth**
  - **work in an area that has good flow of clean air**
  - **do not work in an area that has sparks, flame, and hot surfaces**
  - **obey the manufacturer's instructions**
  - **get medical aid if irritation occurs**

  many resins are poisonous and can cause injury to persons.

- **Sanding/machining/cutting of the component will give off dust that can cause skin irritations. Do not breathe this dust.**
  - **Epoxy resins or solvents contain dangerous ingredients.**
  - **Have plenty of clean air ventilation and use respiratory protection when using these materials in a confined area.**
  - **Make sure these materials do not get into your skin, eyes or clothing.**
  - **Wear rubber gloves along with cotton gloves to protect your hands and wear protective clothing.**
  - **If skin touches with uncured resins or curing agent, clean with warm water and soap.**
  - **Do not use solvent to clean the skin.**

The composite clean room must have a controlled atmosphere. This room is where technicians do the lay−up of fabric layers and mix and apply resins to the fabric layers to make composite panels and/or fairings for the aircraft.

To dispose leftovers or rolls of composite materials use the appropriate disposal bins.

Table 10 Composite clean room

Nomenclature	Quantity
Stands to hold fabric rolls	A/R
Large table	1
Tool board	1
Storage cabinet	1
Special tools	A/R
Vent fan and filter	1
Filtered and regulated shop air supply	A/R
Computer	1
Fire extinguishers	2
Desk	1
Chair	1
Telephone	1
Eye bath	1
Waste paper basket	2

Composite clean room dimensions: 26.0 ft x 19.5 ft (8.0 m x 6.0 m). Total area 507.0 ft² (48.0 m²)

2.10 Non-Destructive Test (NDT) shop

WARNING

Obey all the X-ray safety precautions when you use X-ray equipment. X-rays are very dangerous and can cause injury or death to personnel and/or damage to equipment.

The Non-Destructive Test (NDT) shop has the equipment to do special inspections such as prism inspections, dye-penetrant, eddy current, and ultrasonic tests and X-rays.

Put the NDT shop near the hydraulic and tire shops. That makes it easier to do Brinell and crack tests on wheels and other parts.

Note

To do NDT inspections on the engines, Pratt & Whitney can recommend more inspection equipment when you send them your inspection plans.

Table 11 Non-destructive test shop

Nomenclature	Quantity
Baths for Liquid Penetrant Inspection (LPI)	2
Solvent cleaning area	1
Vent fan and filter	1
Blackout curtain	1
Work bench	1
Light with magnifying glass	1
Stool	1
Storage cabinet	1
Filing cabinet	1
Specialized equipment	A/R
Tool board	1
Regulated shop air supply	A/R
Desk	1
Chairs	2
Telephone	1
Fire extinguisher	1
First aid kit	1
Protective clothing: face shield, gloves, and coveralls	2 sets

Composite clean room dimensions: 9.75 ft x 13.0 ft (3.0 m x 4.0 m). Total area 126.75 ft² (12.0 m²)

3 Technical support group

The technical support group does not have a direct role in the service/maintenance functions of the maintenance facility. This group has the shops that follow:

- Petroleum, Oil, and Lubricants (POL) store
- Ground Support Equipment (GSE) repair shop
- Tool and GSE store
- Spare parts store (shipping/receiving).

3.1 Petroleum, Oil, and Lubricants (POL) store

The POL store has four qualities:

- Good air supply and ease of movement
- Good ventilation
- Good fire alarm/suppression system
- The POL store, and its electrical power and heating systems, must be explosion-proof.

For safety, the POL store must be isolated from the maintenance hangar.

Keep dangerous waste in safe containers before you discard them.

Table 12 Petroleum, oil, and lubricants store

Nomenclature	Quantity
Vapor-Proof Lights	3
Storage Cabinet	1
Metal Shelves (Grounded)	A/R
Ground Wire	A/R
Fire Extinguisher	1
Vapor-Proof Ventilation Fan	1

POL store dimensions: 22.75 ft x 13.0 ft (7.0 m x 4.0 m). Total area 295.75 ft² (28.0 m²)

3.2 Ground Support Equipment (GSE) repair shop

The GSE shop can do repairs to or overhaul aircraft GSE and also to hangar equipment.

Table 13 Ground support equipment repair shop

Nomenclature	Quantity
Arc welder	1
Gas welding (acetylene, mig, tig)	1
Vent fan and filter	A/R
Work bench	1
Fire extinguisher	1
Lift (1 ton capacity)	1
Vise	1
Locked area that is safe	1
Oil waste container	1
Solvent wash tank	1
Parts shelves that are divided	1 set

Nomenclature	Quantity
Drip trays	A/R
Protective clothing: face shield, gloves, and coveralls	2 sets
Eye bath	1
Welding mask	1
Welding goggles	1
Garbage container	1
Desk	1
Chairs	2
First aid kit	1
Telephone	1

GSE repair shop dimensions: 26.0 ft x 19.5 ft (8.0 m x 6.0 m). Total area 507.0 ft² (48.0 m²)

3.3 Tool and GSE store

The tool and GSE store keeps a master inventory of all the equipment in the hangar, the support shops, and the administrative departments.

The store must be able to do the functions that follow:

- Distribute, monitor, and replace lost or worn tools for the support departments
- Do the maintenance of tools and/or GSE spares.

Make sure to keep the tool and GSE store safely locked.

Table 14 Tool and GSE store

Nomenclature	Quantity
Work bench	1
Storage cabinets	A/R
Tool boards	2
Desks	2
Chairs	2
Telephone	1
Filing cabinet	1
Hardware bin	1
Holder for bubble wrap	1

Nomenclature	Quantity
Shelves	A/R
Garbage container	1
Fire extinguisher	1

Tool and GSE store dimensions: 26.0 ft x 22.75 ft (8.0 m x 7.0 m). Total area 591.5 ft² (56.0 m²)

3.4 Spare parts store (shipping/receiving)

The spare parts store receives parts, consumable items, and fasteners for aircraft maintenance.

The spare parts store keeps the spares inventory to operate the line maintenance functions for the aircraft. The spares inventory includes items for the aircraft structure, systems, power plant, and the APU.

The store also sends spare parts to customers.

Table 15 Spare parts store

Nomenclature	Quantity
Work bench	1
Storage cabinets	A/R
Shelves for parts	A/R
Desks	2
Chairs	2
Telephone	1
Filing cabinets	2
Hardware bin	1
Holders for bubble wrap	2
Shelves	A/R
Garbage containers	2
Waste paper containers	2
Photocopier	1
First aid kit	1

Spare parts store dimensions: 58.5 ft x 26.0 ft (18.0 m x 8.0 m). Total area 1521.0 ft² (144.0 m²)

4 Administrative group

The primary functions of the administrative group are to schedule the operations of the service departments. In addition, a function of the administrative group is to keep records for the maintenance facility, and to be the liaison with Airbus for technical data.

The administrative group has the offices/departments that follow:

- Human resources/administration office
- Waste management office
- Hazardous material management office
- Documentation control office
- Documentation library
- Maintenance supervisor’s office
- Quality Control (QC) inspection office
- Training classroom
- Customer service representative’s office
- Cafeteria
- Planning/scheduling
- Sales office
- Finance department
- Telecommunications/copy room
- Information service’s office
- Main entrance
- Customer lounge
- Building maintenance office.

4.1 Human resources/administration office

This office keeps personnel records, hires new employees as necessary, and administers employee benefits.

4.2 Waste management office

WARNINGS

- **Every component removed from the waste system should be considered as a biohazard. Obey the local handling procedures for biohazard. Components exposed to waste water can be poisonous and/or abrasive and can cause sickness to persons and damage to equipment.**

- **Waste water should be considered as a biohazard. Obey the local health and safety precautions when working in the waste system. Waste water can be poisonous and/or abrasive and can cause sickness to persons and damage to equipment.**

- **When you do the servicing of the waste water system, use rubber gloves. Waste water can get on your hands and cause an infection.**

CAUTIONS

- **Make sure that there is no leakage of the cleaning agent from the waste system during this procedure. To prevent leakage, a person must have access to the waste system area. Leakage of the toilet cleaning agent can cause damage to the interior of the aircraft.**

- **Make sure that the container used to collect the drained lubrication oil is 10 quarts (9,5 liters) or more, and is safety-approved for waste collection and storage.**

The waste management office has a minimum of one employee with a primary function of waste management. The tasks of the office include:

- To know and apply all the regulations that tell how to control and treat waste material
- To make sure that there is a program to recycle or safely discard all waste products (e.g. plastic sheeting, oil, fuel, and Skydrol).

4.3 Hazardous materials management office

The hazardous materials management office is considered isolated work areas. To work in one of these areas, an individual must abide by the isolated work policy of the maintenance shop.

The hazardous materials office include the following four (4) rooms:

- Chemical storage room
- Part storage room
- Storage containers
- Freezer

The hazardous materials management office has a minimum of one employee with a primary function of store and handle hazardous materials management. The tasks of these rooms include:

- To train personnel on how to treat dangerous material
- To ensure the material to be stored is tagged
- To archive laboratory reports
- To store the material in their dedicated spaces
- To ensure the requests for the retrieval of storage container is filled
- To maintain track of the products stored
- To order the products
- To update the chemical inventory list on a monthly basis
- To discard expired products.

4.4 Documentation control office

This office writes and keeps the documents that are necessary for the continued airworthiness of the aircraft. Some of the documents the documentation control office is responsible for includes:

- Service orders

- Technical reports on component conditions
- Reports on errors/omissions in technical manuals
- Service parts tags
- Daily turnover log
- Final inspection status
- Completing Airbus and vendor forms
- Flight logs and aircraft roadblock entries.

4.5 Documentation library

The primary function of the documentation library is as a storage facility, where the aircraft technicians can have fast access to reference material. The documentation library has all Airbus and vendor manuals that apply to the aircraft. There is a viewer/reproduction machine or computer terminals for the technicians to look at Engineering drawings and often printers to make hard copies of drawings and reports.

The documentation library also receives, sorts, and supplies new data to Quality Control (QC) and other sections/departments.

4.6 Maintenance supervisor’s office

The maintenance supervisor’s office has easy access to the maintenance hangar. The maintenance supervisor can keep copies of the aircraft maintenance planning documents in the office.

4.7 Quality Control (QC) inspection office

The QC supervisor and the inspector(s) share the QC inspection office. This office also has easy access to the hangar. The office has the quality documents that inspectors use to make sure that maintenance/repairs done on the aircraft are correct.

The QC supervisor also keeps records of the snags, rejected items, and repairs to the aircraft systems and equipment in the QC inspection office.

4.8 Training classroom

The training classroom is used to give refresher courses to service/maintenance technicians.

4.9 Customer service representative’s office

Three or four service representatives can use this office. They are the liaison between the maintenance facility and its customers.

4.10 Cafeteria

The employees of the maintenance facility use the cafeteria for coffee breaks and at meal times. Employees usually eat and drink only in the cafeteria. Thus, the cafeteria must have sufficient space to let all the employees on a given shift to be together at the same time.

4.11 Planning/Scheduling

The planning and scheduling department has two main functions. To control the flow of work on maintenance tasks and to make a schedule of the future maintenance tasks. The department also makes sure that the technical and non−technical groups have the correct technical forms and documentation.

4.12 Sales office

One or more salespersons use this office. Their task is to find new customers who must have maintenance work done on their aircraft.

4.13 Finance department

The finance department does the Accounts Receivable, Accounts Payable, and Payroll functions.

4.14 Telecommunications/Copy room

Put the facsimile and telecopier machines in the telecommunications/copy room.

4.15 Information service’s office

This is the office of the maintenance facility’s computer system administrator. The system administrator does the maintenance of the computer system and also makes sure that the system security is correct. Additional computer personnel are sometimes necessary for a larger hangar when there are many on−line computer terminals installed at various locations in the facility.

4.16 Main entrance

Customers, visitors, vendors, and other personnel come into the maintenance facility at the main entrance. The receptionist is found in this area.

4.17 Customer lounge

The customer lounge is for the aircraft operators, which can be designed to not be attached to the hangar.

The lounge has comfortable chairs, a number of tables, and two or three telephone booths for private conversations.

4.18 Building maintenance office.

The maintenance facility has a building maintenance supervisor who makes sure that the maintenance facility stays in good repair.

Utilities - Technical data

Applicability:
50001-54999, 55001-59999

Table of contents

Page

Utilities - Technical data 1
References 1
Description 1
1 General 1
1.1 Electrical power 2
1.2 Lighting 2
1.2.1 Hangar lighting 2
1.2.2 Shop lighting 2
1.3 Heating, ventilation, and air conditioning 2
1.3.1 Heating 2
1.3.2 Air conditioning 3
1.3.3 Ventilation 3
1.4 Fuel 3
1.5 Compressed air 3
1.6 Vacuum 3
1.7 Telecommunications 3
1.8 Fire protection 3
1.9 Water, sewage and drainage 3
1.9.1 Water 3
1.9.2 Sewage 3
1.9.3 Drainage 4
1.10 Removal of hazardous waste 4

List of tables

Page

1 References 1

References

Table 1 References

Data Module/Technical Publication	Title
None	

Description

1 General

A full range of utilities are necessary to do the maintenance of the A220 aircraft. When you design a maintenance facility, it is important to include the utilities that follow:

- Electrical power
- Lighting
- Heating, ventilation, and air conditioning

- Compressed air
- Fuel
- Vacuum
- Telecommunications.

In addition to the utilities necessary to operate the maintenance facility, you should also include the fire safety, environmental and health safety concerns that follow:

- Fire protection
- Water, sewage and drainage
- Removal of hazardous waste.

1.1 Electrical power

A supply of both 115 volts AC and 220/240 volts AC, 60/50 Hz, or as locally applicable, should be made available. Portable power units in the shops should supply both 28 volts DC and 200/115 volts AC, 400 Hz aircraft power. Electrical power outlets shall be provided at all aircraft positions (voltage and current contingent upon site standards and equipment requirements) :

- One (1) quad outlet (115 VAC 60 HZ 20 amp)
- One (1) 600 VAC 60 Hz 30 amp
- One (1) 220 VAC 60 Hz 30 amp
- One 220 VAC 60 Hz 10 amp
- One (1) 220 VAC 3 phase outlet for avionics/instrumentation
- One (1) standard 200/230/460/575 volt single phase power for welding equipment

If possible, the hangars should be equipped with 200/115 volts AC, 400 Hz underground cables leading to electrical outlets in the hangar floor and/or walls. Although expensive to install, this type of setup will help keep the area clear around the aircraft.

1.2 Lighting

1.2.1 Hangar lighting

It is recommended that hangars have 75 footcandles (fc) (807 lumens/meter²) lighting levels. The near natural color spectrum and high efficiency of the metal halide lamps makes them highly recommended. The light from high pressure sodium lamps makes it impossible to have proper color discrimination and thus the use of these lamps is not recommended. Mercury lamps are also not recommended because of their low efficiency as well as the cold color spectrum that they give.

1.2.2 Shop lighting

It is recommended that shops have 50 fc (538 lumens/meter²) lighting levels with local lighting of 100 fc (1076 lumens/meter²) for detailed work and inspection. An equal distribution of light (without local hot spots) is only possible with the correct lighting system.

1.3 Heating, ventilation, and air conditioning

1.3.1 Heating

Where necessary, there must be heating in the hangar and in areas where dusty conditions can occur the hangar must have a positive-pressure ventilation system.

1.3.2 Air conditioning

Air conditioning is necessary in some repair shops, such as the avionics and electronics shops, which are temperature controlled. Instrument shops also need a supply of clean, filtered air and the main entrance, the offices, and the cafeteria should also have air conditioning for employee comfort.

1.3.3 Ventilation

Instrument shops need a supply of clean, filtered air and the main entrance, the offices, and the cafeteria must also have sufficient ventilation to make sure that you keep a safe and healthy working environment. It is recommended that a composite fiber venting system be installed in the composite room, if applicable.

1.4 Fuel

The hangar must have a minimum of one fuel venting/purging system equipped with a large blower and explosimeter. It is recommended that the size of the blower outlet is a minimum of 8 in. to 14 in. (203 mm to 355 mm). It is recommended that a fuel disposal pit with the capacity for the A220 full fuel load be planned.

1.5 Compressed air

A supply of 100 psig (689.5 kPa) shop air should be provided along with 100/250 psig (689.5/1724.7 kPa) clean, dry pneumatic test air for the overhaul shops. The mass−air flow of the compressor should be sufficient to meet or exceed the air requirements of the air tools. This will depend on the rating of the tool, the quantity of tools used at any one time and the frequency of use.

1.6 Vacuum

A vacuum source of 20 inches of Mercury (Hg) (67.73 kPa) is necessary for an overhaul shop.

1.7 Telecommunications

Separate line, cable or satellite connections are usually necessary for communication equipment such as telephone, fax machines and computers.

1.8 Fire protection

The hangar, repair shops, storage areas, offices, and all other areas of the maintenance facilities must have an approved fire alarm and fire control system. The hangars should be equipped with a deluge-type of fire extinguishing system which includes under-aircraft water cannons.

1.9 Water, sewage and drainage

1.9.1 Water

A pressurized water supply is necessary for washrooms and hangar use. If kitchen facilities are also necessary, the supplied water must be potable.

1.9.2 Sewage

Oil separation and wasterwater treatment facilities are sometimes necessary to agree with the local waste management laws. Special handling procedures are necessary for the disposal of plating shop waste fluids and materials. Washrooms must have sewage disposal facilities, which usually includes a connection to the local municipal sewage system.

1.9.3 Drainage

It is recommended that floors be designed with a gentle slope to a sewer drain, usually located in the middle of a hangar. The hangar floor is usually higher than the immediate surrounding land to prevent possible flooding in the event of a heavy rain or melting snow.

1.10 Removal of hazardous waste

Discard hazardous waste material in agreement with local environmental regulations. The waste management supervisor is responsible for correct removal procedures.

A220

A220 Aircraft Characteristics - Introduction

Applicability:
50001-54999, 55001-59999

Table of contents

Page

A220 Aircraft Characteristics - Introduction 1
References 1
Description 1
1 General 1
2 Dimensions and weight 2
3 Correspondence 2
4 Translation of publication 2
5 Acronyms 2

List of tables

Page

1 References 1

References

Table 1 References

Data Module/Technical Publication	Title
None	

Description

1 General

The A220 Aircraft Characteristics, prepared by Airbus, contains information necessary to support the Airbus aircraft models BD-500-1A10 (A220-100) and BD-500-1A11 (A220-300) during ramp operations. The information provided here includes aircraft dimensions, servicing access, emergency access and equipments, routine fluid replenishment procedure and general servicing of the aircraft.

This publication agrees with the international specification for technical publications (S1000D) issue 4.0.1 dated 2009-05-12 and is written in simplified technical english.

The content of this publication will change as options and aircraft changes occur. Make sure that you refer to the latest release of this publication.

If there is a difference between the data contained in this publication and that given by the local regulatory authority, the data from the local regulatory authority must be obeyed.

All the procedures in the A220 Aircraft Characteristics can be performed by Aircraft Maintenance Engineers (AME). However, ramp personnel may be authorized to perform (RSP) procedures, if they are trained and certified by the operator.

2 Dimensions and weight

Linear dimensions given in this publication are in inches or feet with the metric equivalence in parentheses.

Weight measures is given in pounds with the metric equivalence in parentheses.

3 Correspondence

Send all correspondence about this publication to:

AIRBUS

CUSTOMER SUPPORT

13100 HENRI-FABRE BLVD, MIRABEL, QUEBEC

CANADA J7N 3C6

4 Translation of publication

If all or part of this publication is translated, the official version is the English language version produced by Airbus.

5 Acronyms

The first time an acronym is used it will be defined, and all subsequent uses will be in blue. When you mouse over the acronym, the definition will appear. Acronyms are not plural in this publication.

A220

Aircraft description - Technical data

Applicability:
50001-54999

Table of contents

Page

Aircraft description - Technical data 1
References 2
Description 2
1 Aircraft characteristics 2
1.1 Introduction 2
1.2 Aircraft characteristics 3
1.3 System fluid capacities 4
1.4 Service fluid capacities 4
2 Aircraft dimensions 4
2.1 General aircraft dimensions 4
2.2 General aircraft area 7
3 Ground clearances 7
3.1 Ground clearances 7
3.2 Ground clearances for evacuation slides 10
4 Layout of passenger compartment accommodation 12
5 Passenger cross-section 14
6 Cargo compartment 18
6.1 Cargo door nets 18
6.2 Volumes – Cargo compartment 18
7 Door clearances and clear opening dimensions 26
7.1 Passenger/Crew 26
7.2 Emergency exit 26
7.3 Flight compartment emergency exit 26
7.4 Cargo doors 26
7.5 Cargo doors 27
7.6 Service doors 27
7.7 Forward avionics bay door 28
7.8 Mid avionics bay door 28
7.9 Aft equipment bay door 28
7.10 Doors identification 28
7.11 Access and exit doors dimensions 31
7.12 Door distance from nose 32
7.13 Door opening and clearance 34

List of tables

Page

1 References 2
2 Aircraft characteristics 3
3 Aircraft characteristics 3
4 System fluid capacities 4
5 Service fluid capacities 4
6 General aircraft area 7
7 Ground clearances 7
8 Ground clearances for evacuation slides 10
9 Cargo compartment volumes 18
10 Cargo compartment volumes 18
11 Access and exit doors dimensions 31

12 Access and exit doors dimensions 31

List of figures

Page

1 General aircraft dimensions 5
2 Ground clearances 9
3 Ground clearances for evacuation slides 11
4 Layout Of Passenger Accommodation (LOPA) 13
5 Passenger cross-section (economy class) 15
6 Passenger cross-section (optional business class) 16
7 Overhead stowage bins 17
8 Aircraft cargo side view 19
9 Cargo nets 23
10 General door location 29
11 Door distance from nose 33
12 Forward passenger door opening and clearances 35
13 Aft passenger door opening and clearances 36
14 Forward cargo compartment door opening and clearances 37
15 Aft cargo compartment door opening and clearances 38
16 Auxiliary Center Tank Access (ACTA) opening and clearances 39
17 Forward service door opening and clearance 40
18 Aft service door opening and clearances 41

References

Table 1 References

Data Module/Technical Publication	Title
None	

Description

1 Aircraft characteristics

1.1 Introduction

This data module contains general data about the Airbus model BD-500-1A10 (A220-100) characteristics. The structural weight limits, such as maximum ramp weight, and zero fuel weight are dependent on configuration. Refer to each aircraft's specified Weight and Balance Manual (WBM) BD500-3AB48-22100-00 and weight and balance report for structural limits and other weight information.

Refer to Table 2 and Table 3 for the aircraft characteristics.

Refer to Table 4 for the system fluid capacities.

Refer to Table 5 for the service fluid capacities.

1.2 Aircraft characteristics

Applicability:
50001-50061, 50063-50065, 50068, 50070, 50072-50077, 50079-50084, 50087-54887, 54889-54999

Table 2 Aircraft characteristics

Description	A220-100
Engines	2 Pure Power™ PW1519G[1]
Mode	Passenger
Standard seating capacity	120
Maximum Ramp Weight (MRW)	141,500 lb (64,183 kg)
Maximum Take-Off Weight (MTOW)	140,500 lb (63,730 kg)
Maximum Landing Weight (MLW)	120,500 lb (54,658 kg)
Maximum Zero Fuel Weight (MZFW)	116,000 lb (52,617 kg)
Minimum Flight Weight (MFW)	77,000 lb (34,927 kg)
Maximum fuel tank capacity	5,756 US gal (21 805 L)
Unusable fuel	220.5 lb (100 kg)
Maximum cargo volume - Overhead bins	280 ft³ (7,93 m³)
1 Optional engine models: PW1521G and PW1524G	

Applicability:
50062, 50066-50067, 50069, 50071, 50078, 50085-50086, 54888

Table 3 Aircraft characteristics

Description	A220-100
Engines	2 Pure Power™ PW1519G[1]
Mode	Passenger
Maximum Ramp Weight (MRW)	135,000 lb (61,235 kg)
Maximum Take-Off Weight (MTOW)	134,000 lb (60,781 kg)
Maximum Landing Weight (MLW)	112,500 lb (51,029 kg)
Maximum Zero Fuel Weight (MZFW)	108,000 lb (48,987 kg)
Minimum Flight Weight (MFW)	77,000 lb (34,927 kg)
1 Optional engine models: PW1521G and PW1524G	

1.3 System fluid capacities

Table 4 System fluid capacities

Description	Volume	Weight
Engine fluids calculated with 8.24 lb/US gal (0,987 kg/L)		
Engine oil tank at 60 °F	6.5 US gal (24.4 L)	53.1 lb (24.1 kg)
Lines and internal engine oil	7.7 US gal (29.2 L)	63.5 lb (28.8 kg)
APU fluids calculated with 7.98 lb/US gal (0.956 kg/L)		
APU oil tank	1.94 US gal (7.3 L)	15.4 lb (7.0 kg)
APU lines and internal oil	0.84 US gal (3.2 L)	6.7 lb (3.0 kg)
Hydraulic fluids at 77 °F (25 °C) low density 8.20 lb/US gal (0.983 kg/L)		
System No. 1 reservoir	5.0 US gal (18.8 L)	40.8 lb (18.5 kg)
System No. 2 reservoir	4.33 US gal (16.4 L)	35.50 lb (16.1 kg)
System No. 3 reservoir	4.33 US gal (16.4 L)	35.50 lb (16.1 kg)
Systems and lines	34.6 US gal (131.0 L)	283.8 lb (128.7 kg)

1.4 Service fluid capacities

Table 5 Service fluid capacities

Description	Volume	Weight
Potable water at 60 °F (15,5 °C)		
Galley/Lavatory tank level 100%	41.9 US gal (158.8 L)	350.0 lb (158.8 kg)
Chemical toilet fluid at 60 °F (15,5 °C)		
Waste tank level 100%	38 US gal (143.8 L)	317.1 lb (143.8 kg)

2 Aircraft dimensions

2.1 General aircraft dimensions

This section contains general data about the aircraft dimensions.

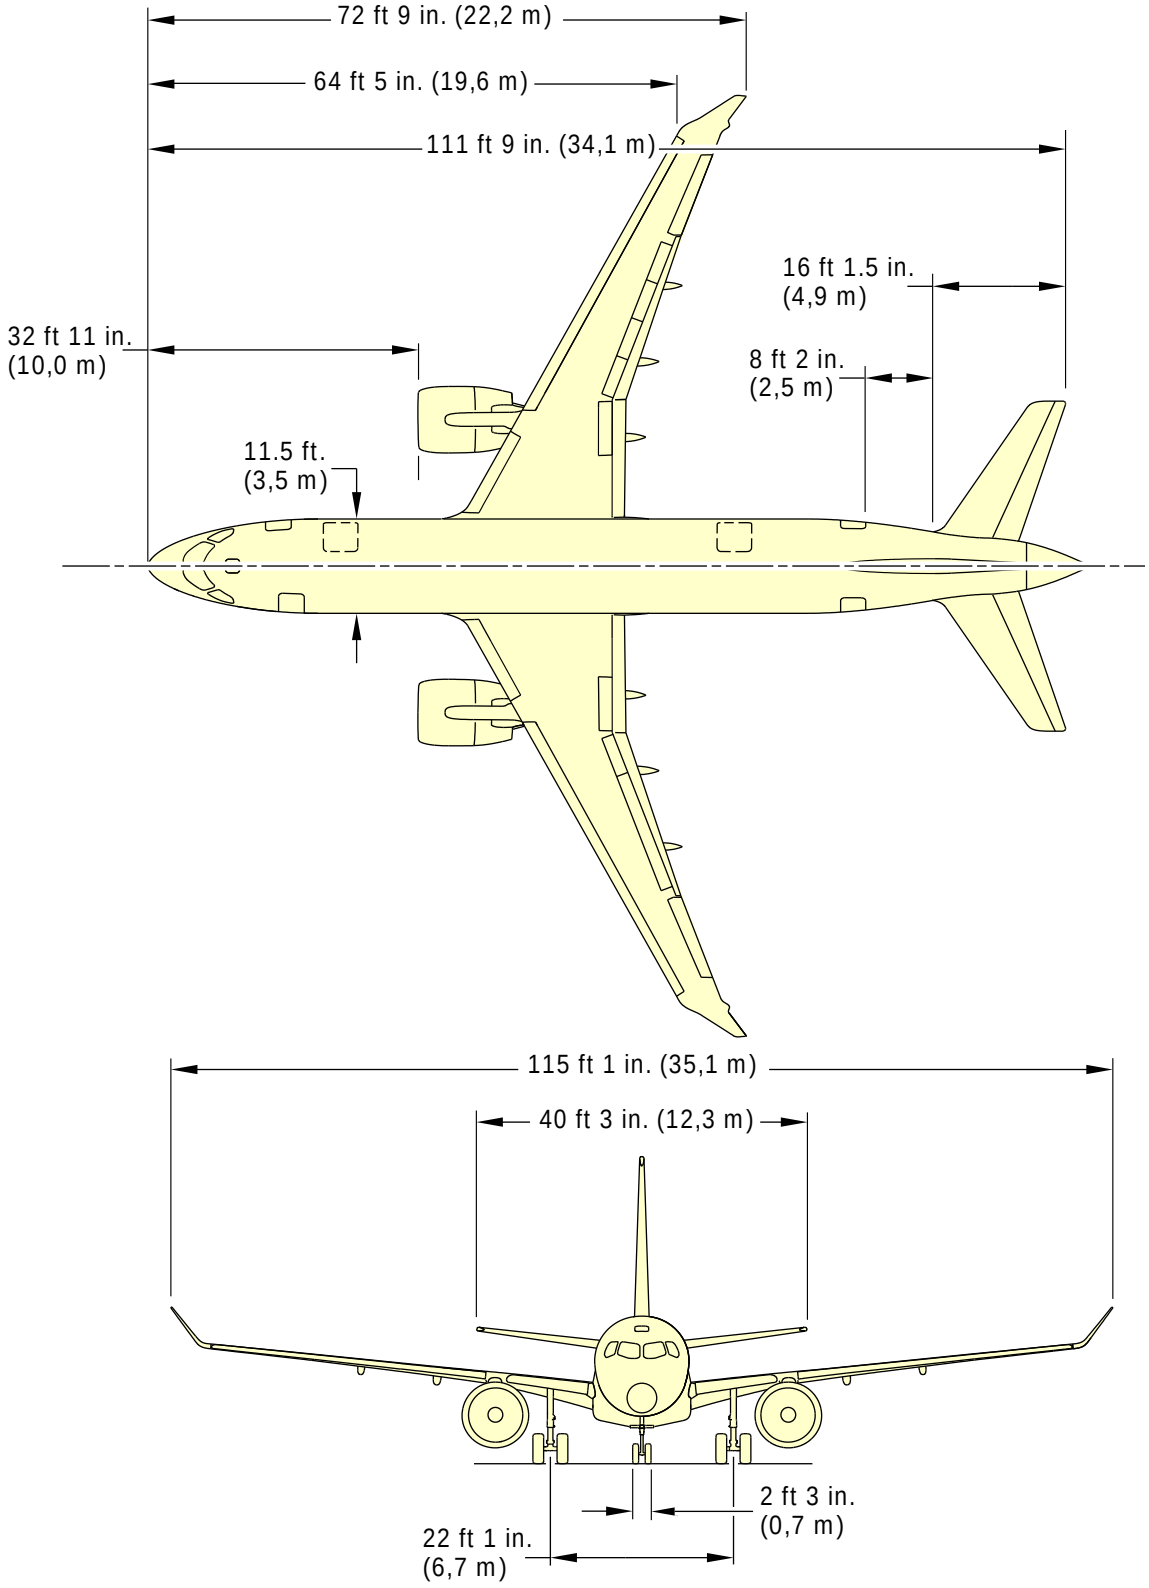

ICN-BD500-A-J000000-A-3AB48-22469-A-002-01

Figure 1 General aircraft dimensions - (Sheet 1 of 2)

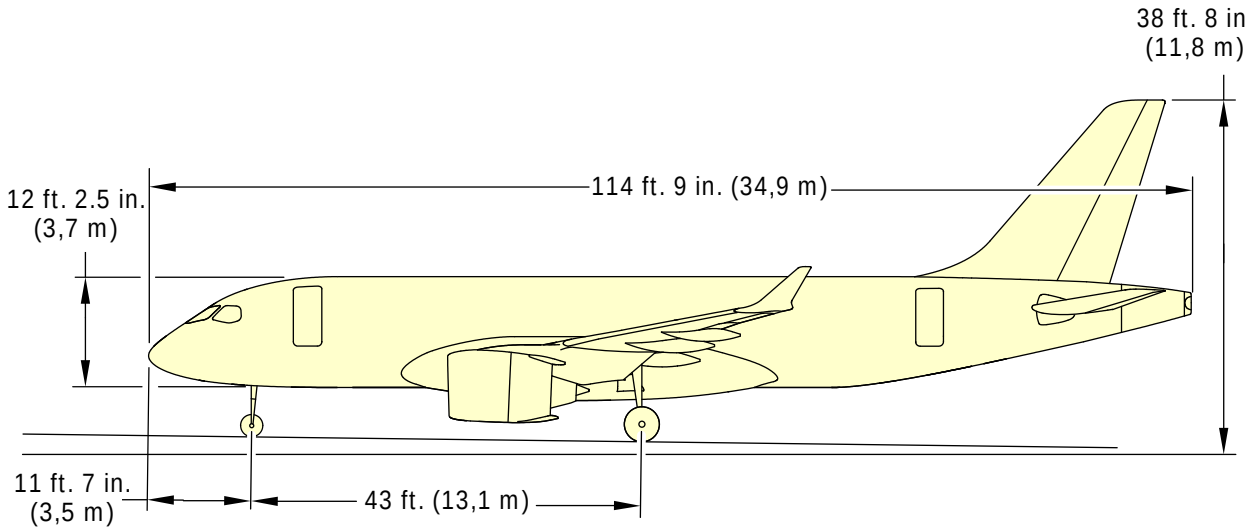

ICN-BD500-A-J000000-A-3AB48-22470-A-003-01

Figure 1 General aircraft dimensions - (Sheet 2 of 2)

2.2 General aircraft area

Table 6 General aircraft area

Description	A220-100
ESDU wing area (including ailerons, flaps, spoilers and area within the fuselage)	1209 ft² (112.3 m²)
Total horizontal stabilizer area (horizontal tail area and elevator area)	395 ft² (36.6 m²)
Total vertical stabilizer area (vertical tail area and rudder area)	304 ft² (28.2 m²)

3 Ground clearances

This section gives the height of various points of the aircraft, above the ground.

Dimensions in the tables are approximate and will vary with tire type, weight and balance and other special conditions.

3.1 Ground clearances

Table 7 Ground clearances

Locator	Description	Minimum	Maximum
A	Fuselage top	209.3 in. (531.62 cm)	214.4 in. (544.58 cm)
B	Pilot escape hatch	188.2 in. (478.02 cm)	193.4 in. (491.24 cm)
C	Forward avionic equipment bay door	63.2 in. (160.53 cm)	67.7 in. (171.96 cm)
D	Forward service door (RHS)	117.5 in . (298.45 cm)	122.6 in. (311.40 cm)
E	Forward passenger door (LHS)	117.8 in. (299.21 cm)	122.8 in. (311.91 cm)
F	Forward cargo compartment door (RHS)	66.8 in. (169.67 cm)	71.7 in. (182.12 cm)
G	Nacelle	19.7 in. (50.04 cm)	24.0 in. (60.96 cm)
H	Overwing emergency exit (LHS & RHS)	138.6 in. (352.04 cm)	143.1 in. (363.48 cm)
J	Mid avionic equipment bay door	56.2 in. (142.75 cm)	61.6 in. (156.46 cm)
K	Aft cargo compartment door (RHS)	72.9 in. (185.17 cm)	79.8 in. (202.70 cm)
L	Wing tip (No deflection)	229.2 in. (582.17 cm)	236.2 in. (600.20 cm)

Locator	Description	Minimum	Maximum
M	Aft service door (RHS)	126.2 in (320.55 cm)	134.7 in. (342.14 cm)
N	Aft passenger door (LHS)	126.2 in. (320.55 cm)	134.7 in. (342.14 cm)
P	Aft avionic equipment door	111.7 in. (283.72 cm)	121.3 in. (308.10 cm)
Q	APU door	140.4 in. (356.62 cm)	151.2 in. (384.05 cm)
R	Tail	452.7 in. (1149.86 cm)	463.8 in. (1178.05 cm)
S	Winglet	168 in. (426.72 cm)	176.4 in. (448.06 cm)

Note

Vertical clearances shown are the greatest possible variations in attitude due to the variation of aircraft weight and center of gravity.

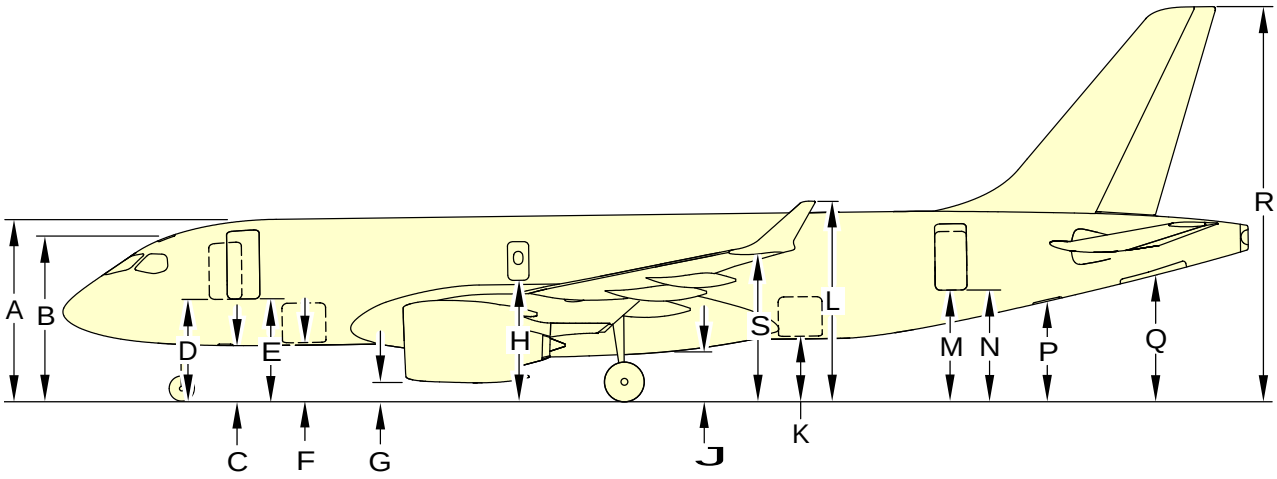

ICN-BD500-A-J000000-A-3AB48-21709-A-004-01

Figure 2 Ground clearances

3.2 Ground clearances for evacuation slides

This section gives ground clearances for evacuation slides. Refer to Table 8 and Fig. 3.

Table 8 Ground clearances for evacuation slides

Description	Dimensions
Forward Passenger Door (FPD) Slide	240 in. (6096 mm)
Forward Service Door (FSD) Slide	240 in. (6096 mm)
Aft Passenger Door (APD) Slide	200 in. (5080 mm)
Aft Service Door (ASD) Slide	200 in. (5080 mm)
Overwing Emergency Exit Door (OWEED) Slides (Left & Right sides)	119 in. (3022.60 mm)

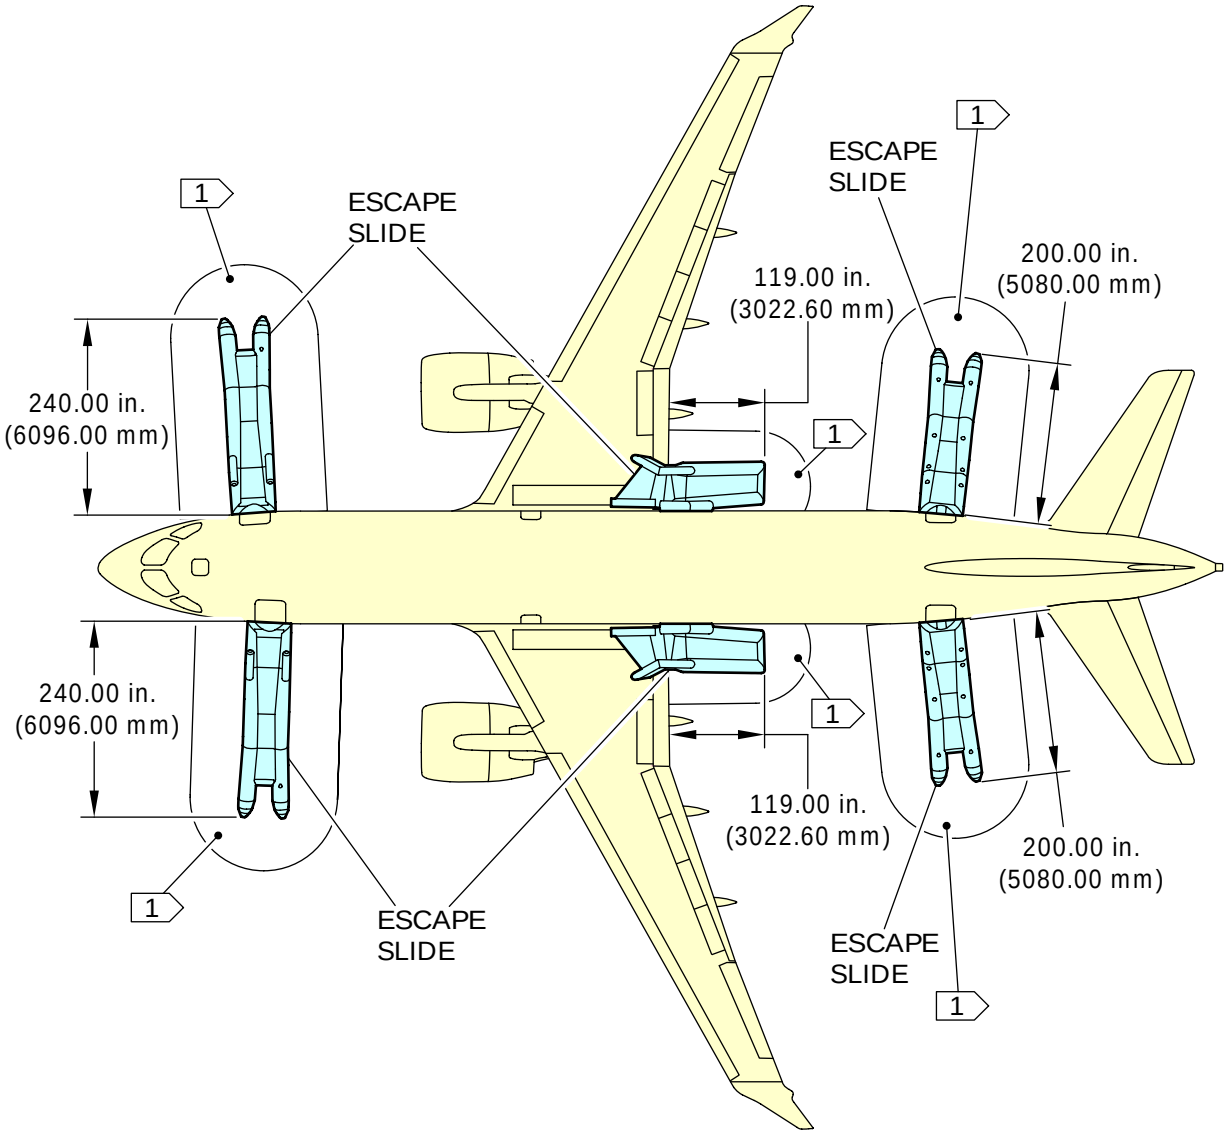

NOTE

1 Emergency evacuation ground area.

ICN-BD500-A-J000000-C-3AB48-52580-A-002-01

Figure 3 Ground clearances for evacuation slides

4 Layout of passenger compartment accommodation

The passenger compartment includes the galley area, lavatory, and passenger seating area. The galleys and utility areas are isolated from the passenger area by partitions and curtains. Refer to Fig. 4.

(Sheet) Applicability:
50001-50065, 50067-50085, 50087-54987

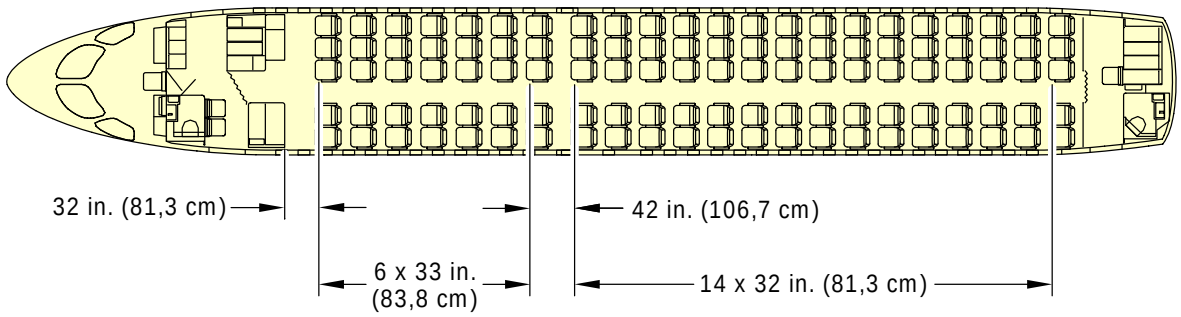

ICN-BD500-A-J061200-A-3AB48-00007-A-001-01

Figure 4 Layout Of Passenger Accommodation (LOPA)

5 Passenger cross-section

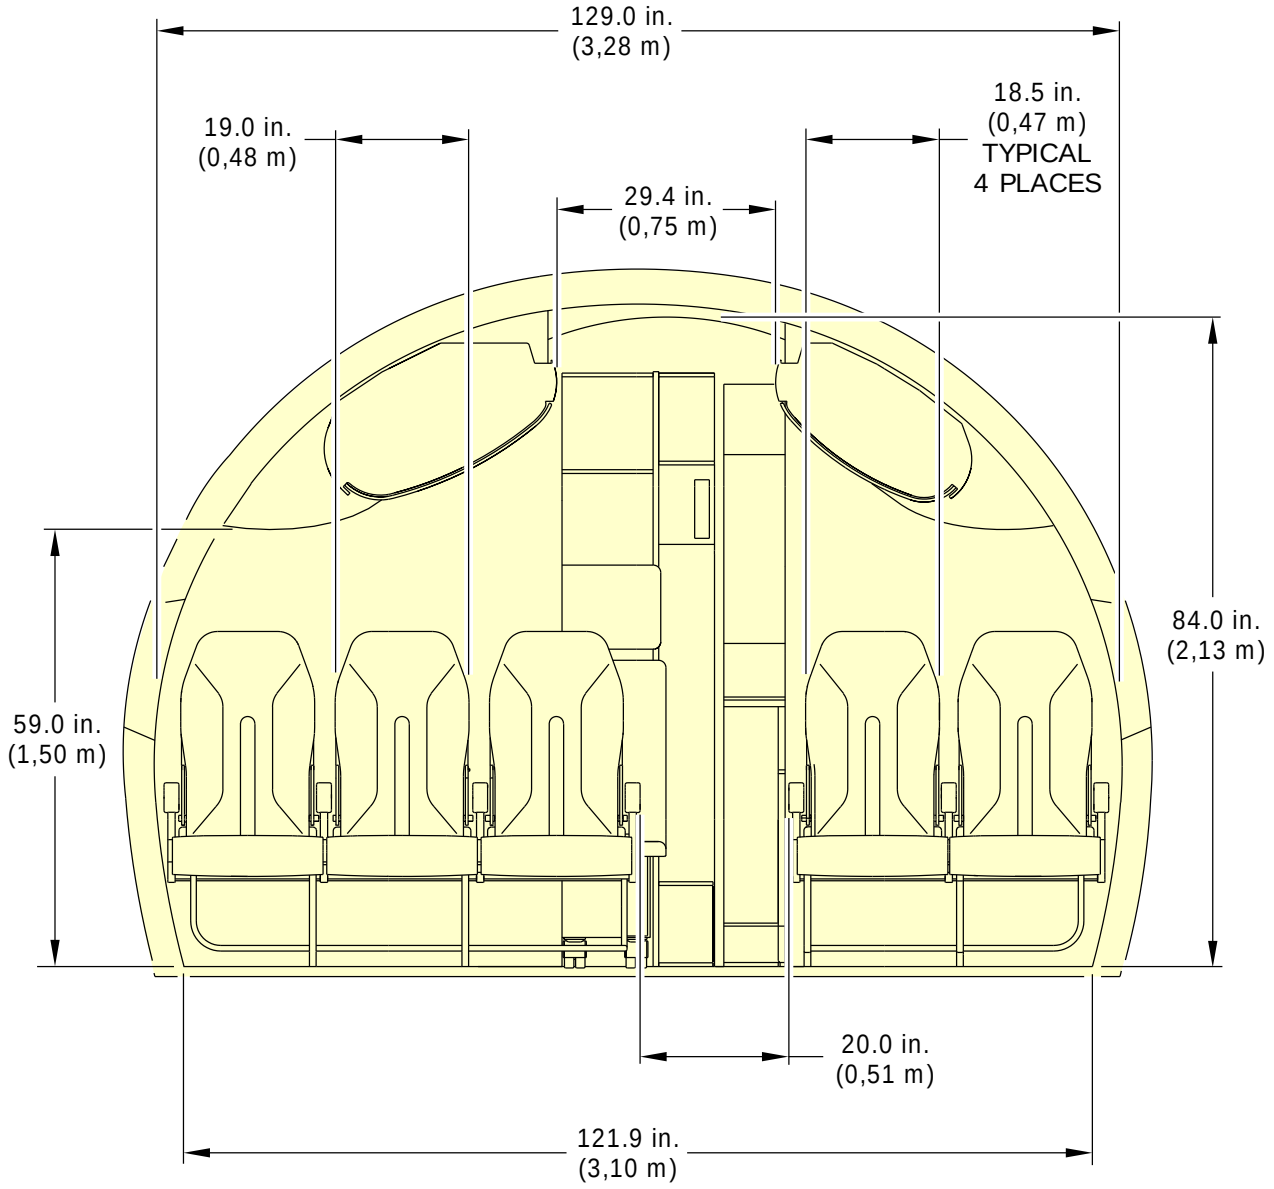

ICN-BD500-A-J061200-A-3AB48-00010-A-001-01

Figure 5 Passenger cross-section (economy class)

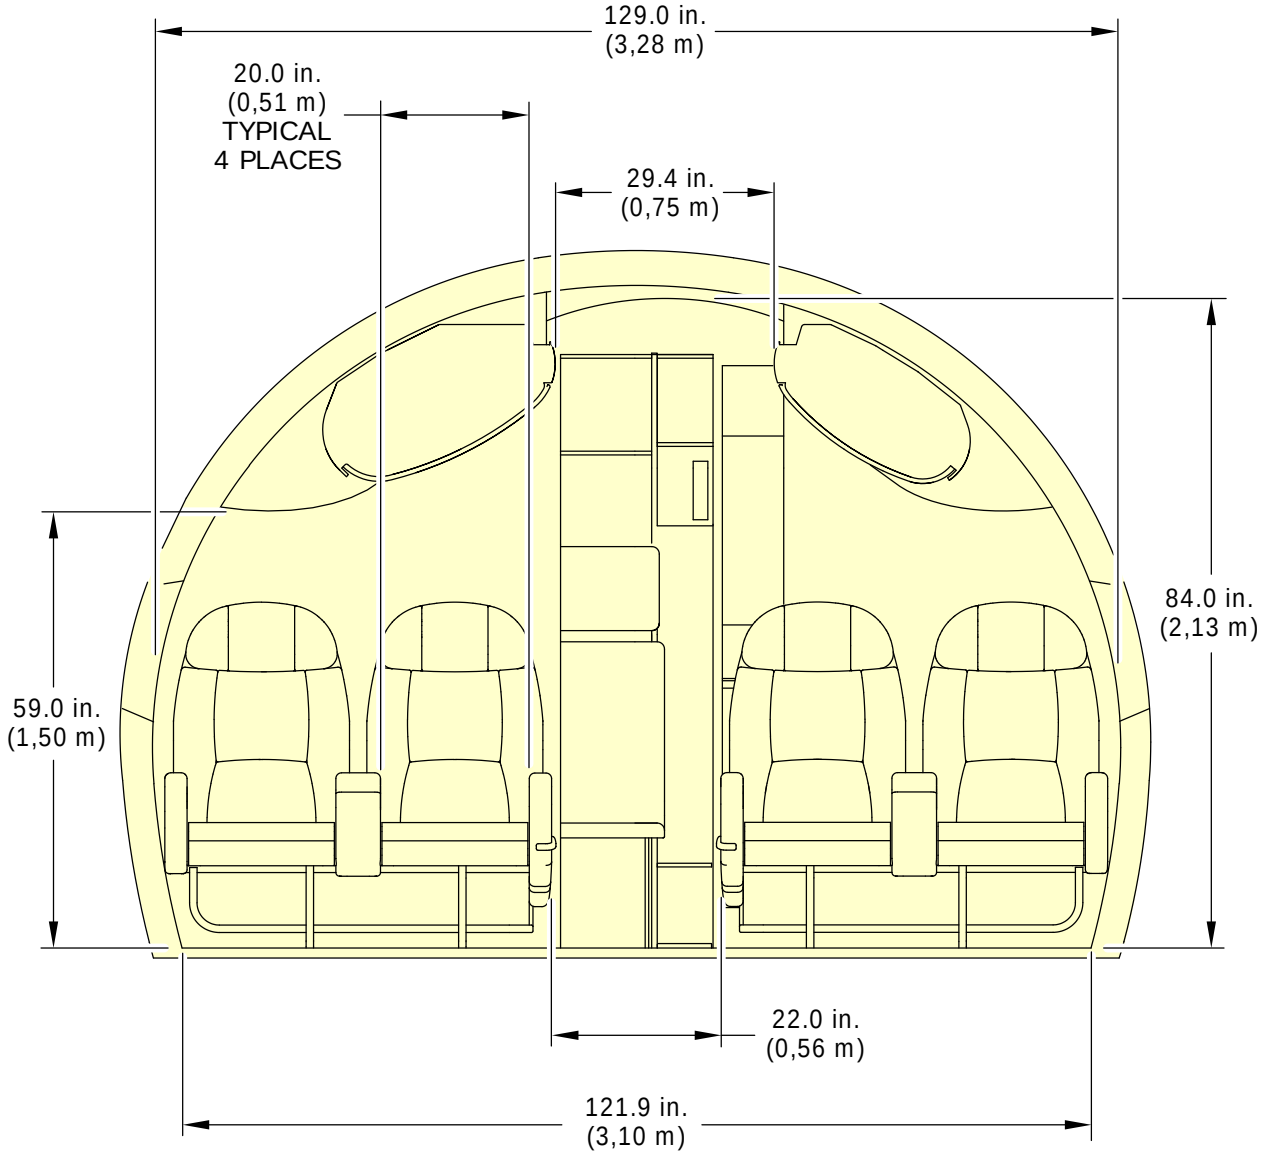

ICN-BD500-A-J061200-A-3AB48-00011-A-001-01

Figure 6 Passenger cross-section (optional business class)

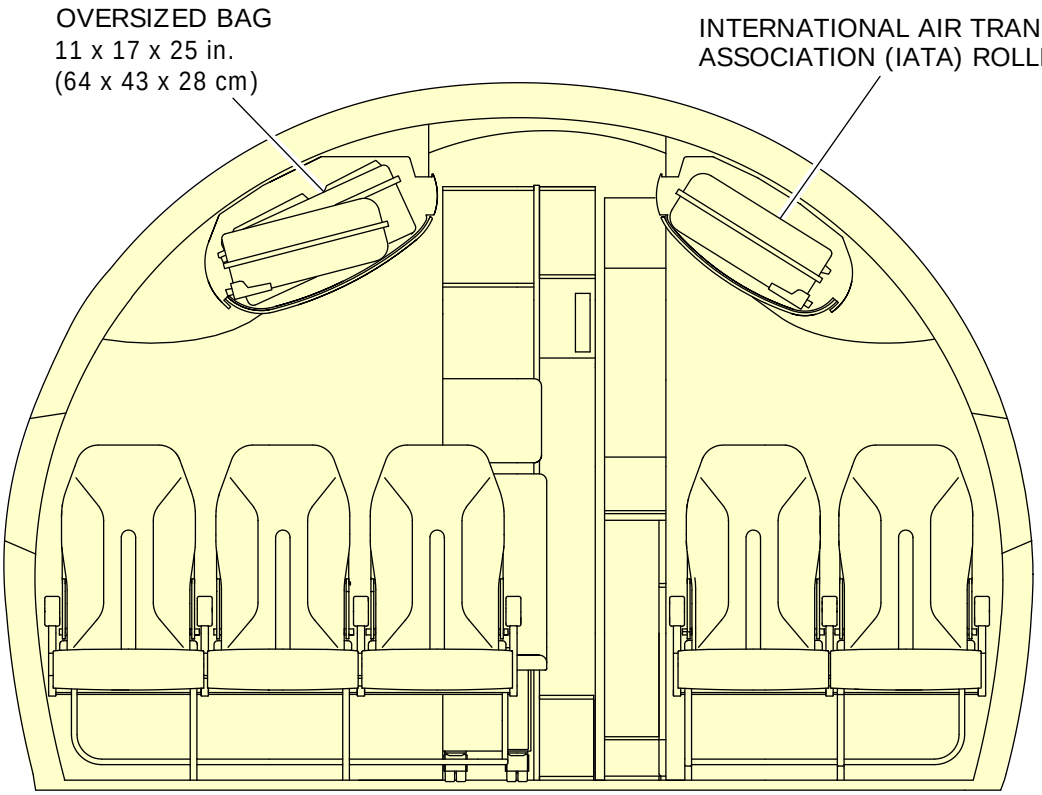

ICN-BD500-A-J061200-A-3AB48-00012-A-001-01

Figure 7 Overhead stowage bins

6 Cargo compartment

Two under-floor cargo compartments are provided, each with a dedicated outward-opening access door. The forward compartment is positioned between the forward equipment compartment and the Environmental Control System (ECS) distribution bay. The aft compartment is positioned between the mid equipment compartment and the water system bay. Refer to Fig. 8.

Both compartments are furnished with heavy duty floor panels and sidewall linings and are sealed to meet the requirements of a Class C compartment. Decompression and ventilation panels are provided as well. The compartment linings also incorporate provisions for compartment lighting, smoke detector, and fire extinguish.

The combined maximum weight loading of the cargo compartment is 8,290 lb (3 760 kg).

6.1 Cargo door nets

Protective nets are provided at the door area of each cargo compartment to prevent baggage from fouling the door due to in-flight shifting of the loads. Refer to Fig. 9.

6.2 Volumes – Cargo compartment

The estimated volume of the cargo compartments is based on geometric volume and accounts for the unusable area in the vicinity of the cargo doors. Table 9 lists the estimated wet volume of the cargo compartments.

Applicability:
50001-50065, 50067-50085, 50087-54987

Table 9 Cargo compartment volumes

Description	Usable Volume		Maximum load	
	ft^3	m^3	lb	kg
Fwd cargo compartment	311	8.80	3742	1697
Aft cargo compartment	422	11.95	4548	2063

Applicability:
50066, 50086

Table 10 Cargo compartment volumes

Description	Usable Volume		Maximum load	
	ft^3	m^3	lb	kg
Fwd cargo compartment	311	8.80	3742	1697

(Sheet) Applicability:
50001-50065, 50067-50085, 50087-54987

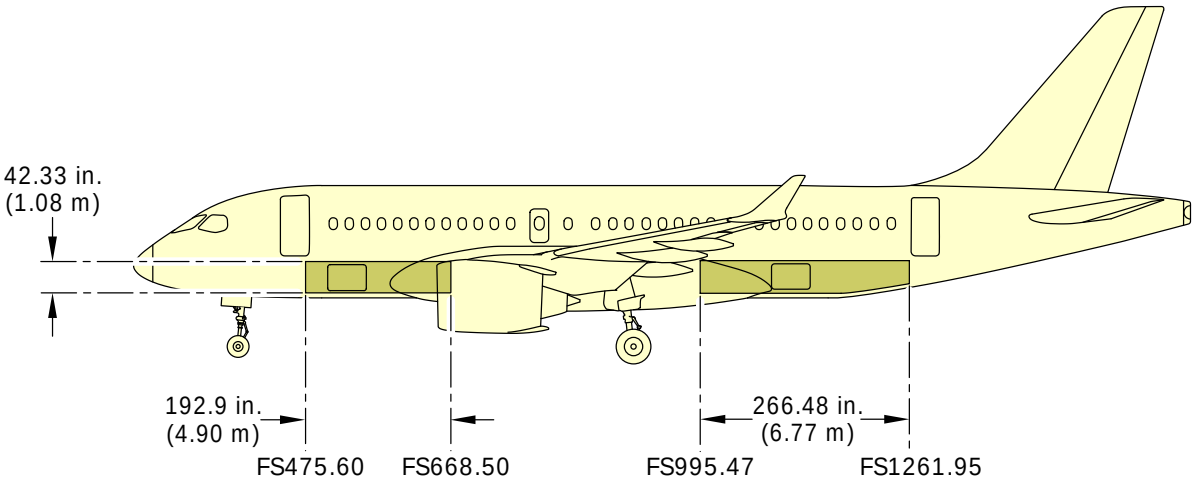

ICN-BD500-A-J084305-A-3AB48-10441-A-001-01

Figure 8 Aircraft cargo side view - (Sheet 1 of 4)

(Sheet) Applicability:
50066, 50086

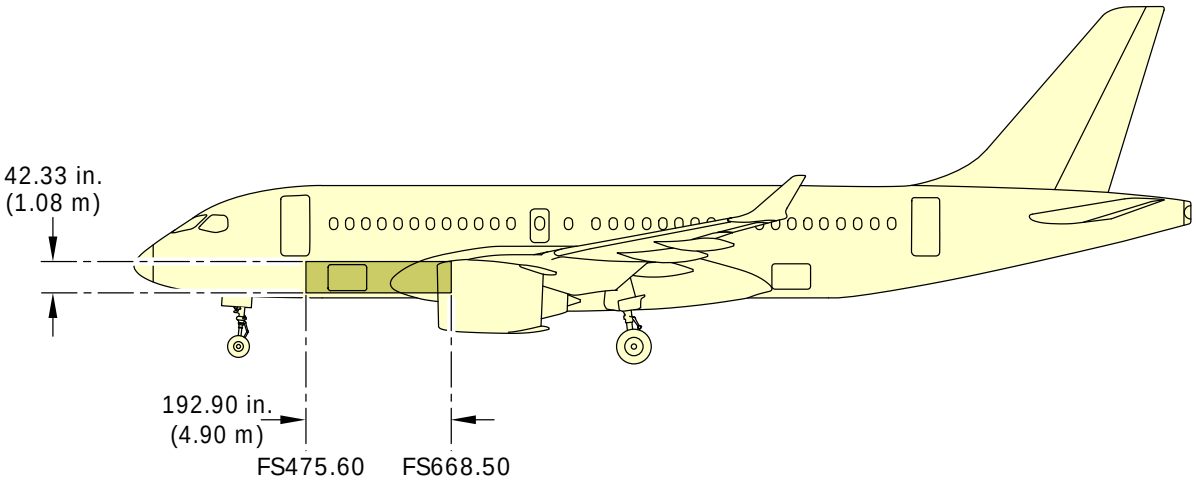

LEGEND

Cargo compartment region.

ICN-BD500-A-J000000-C-3AB48-79175-A-001-01

Figure 8 Aircraft cargo side view - (Sheet 2 of 4)

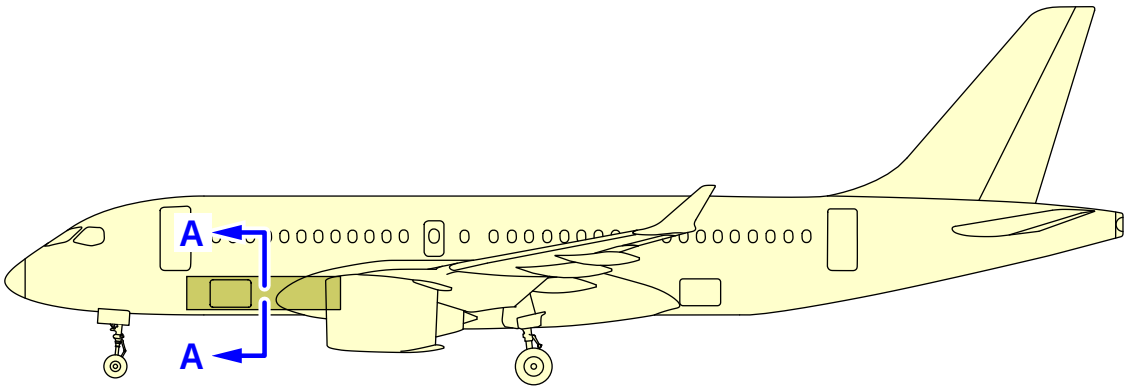

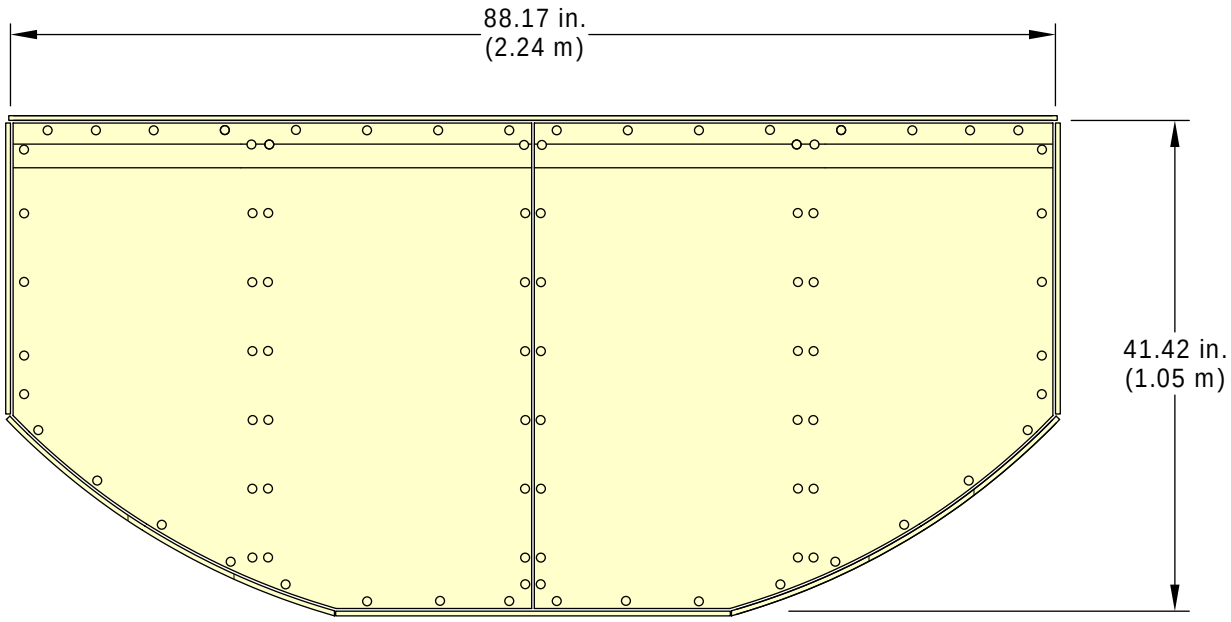

A-A

ICN-BD500-A-J084305-A-3AB48-10438-A-001-01

Figure 8 Aircraft cargo side view - (Sheet 3 of 4)

(Sheet) Applicability:
50001-50065, 50067-50085, 50087-54987

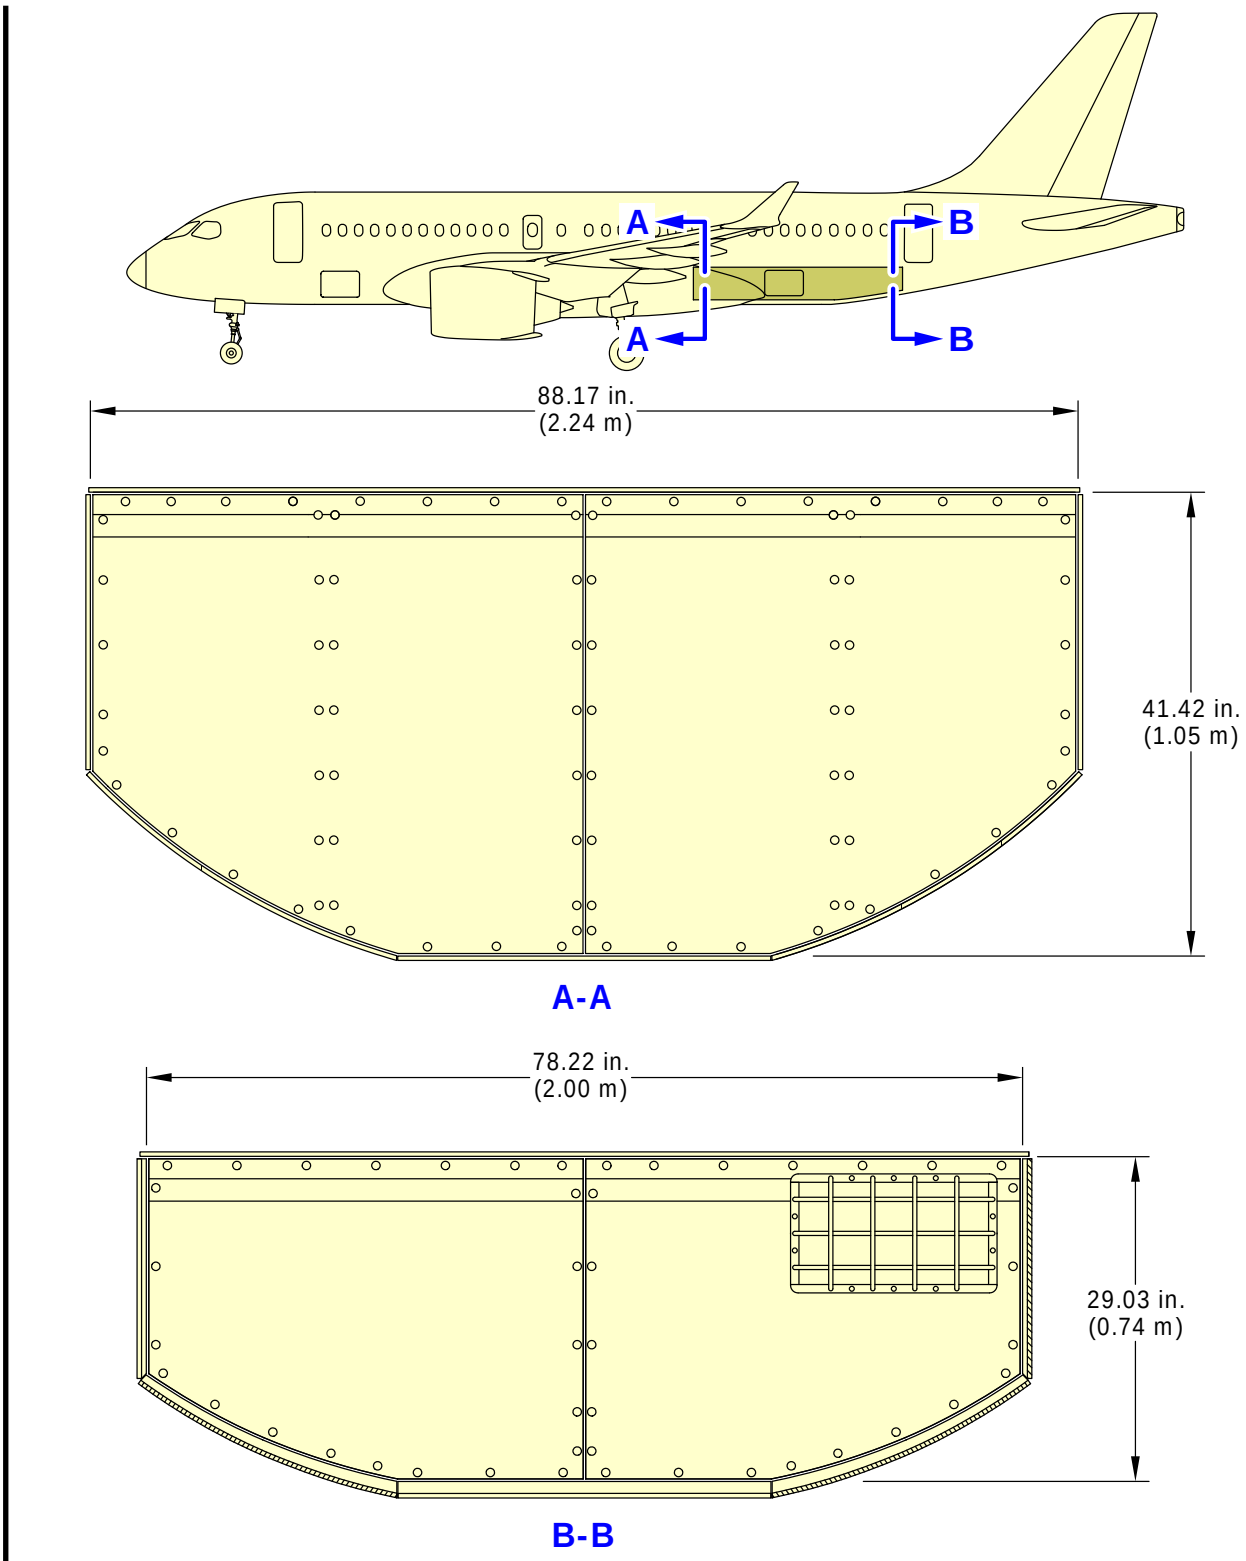

ICN-BD500-A-J084305-A-3AB48-10440-A-001-01

Figure 8 Aircraft cargo side view - (Sheet 4 of 4)

(Sheet) Applicability:
50001-50065, 50067-50085, 50087-54987

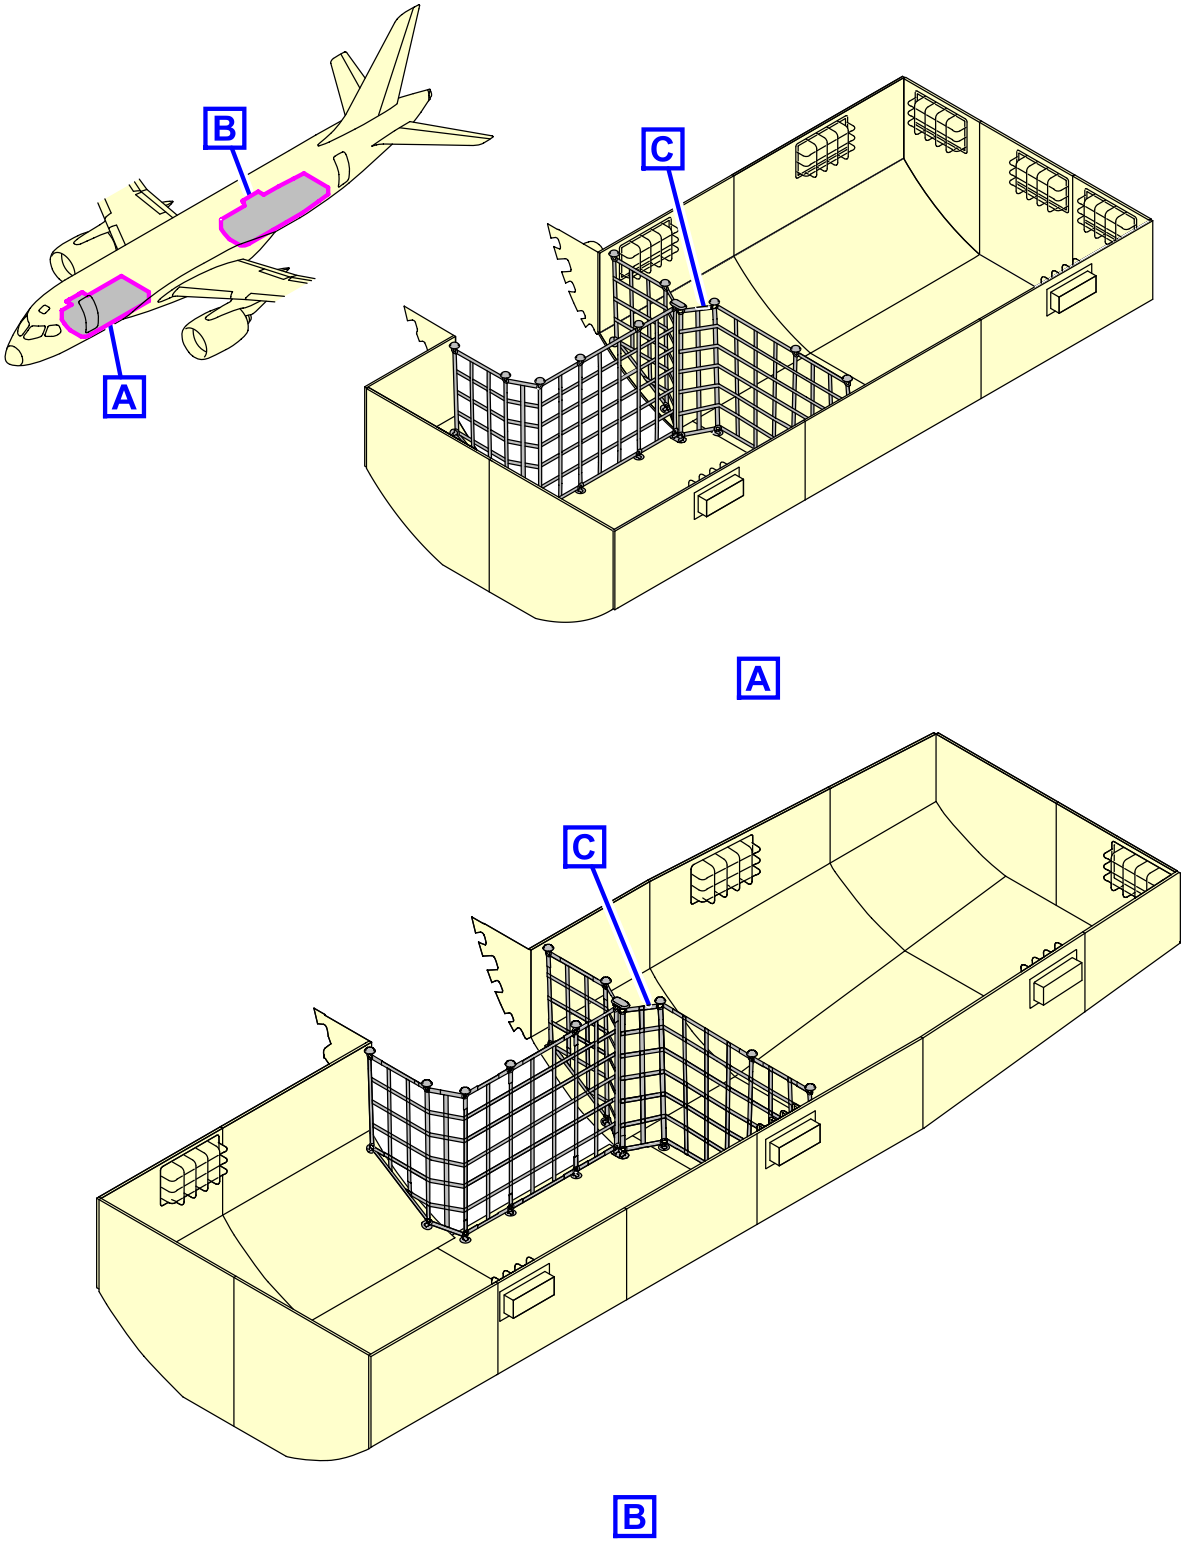

ICN-BD500-A-J502200-C-3AB48-17798-A-001-01
Figure 9 Cargo nets - (Sheet 1 of 3)

(Sheet) Applicability:
50001-50065, 50067-50085, 50087-54987

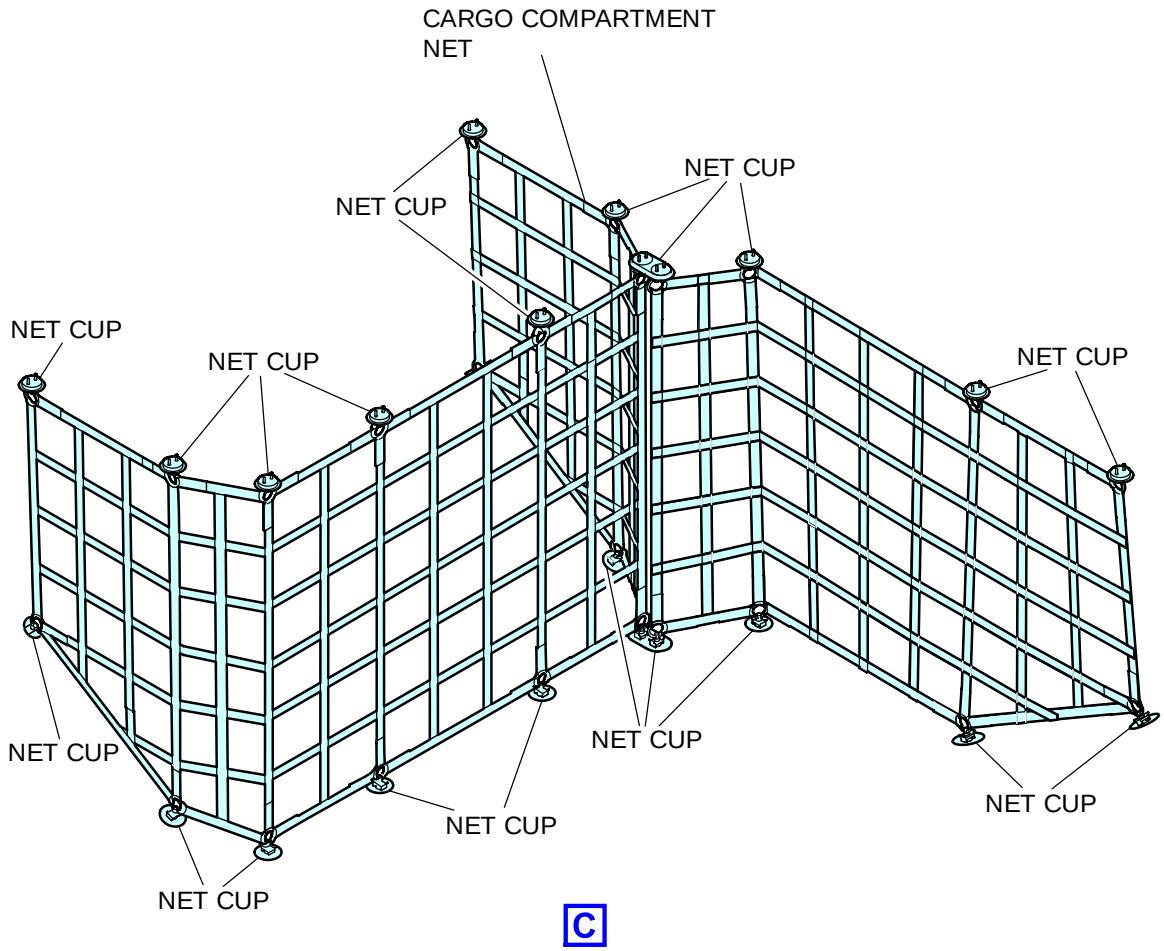

ICN-BD500-A-J502200-C-3AB48-17809-A-001-01

Figure 9 Cargo nets - (Sheet 2 of 3)

(Sheet) Applicability:
50066, 50086

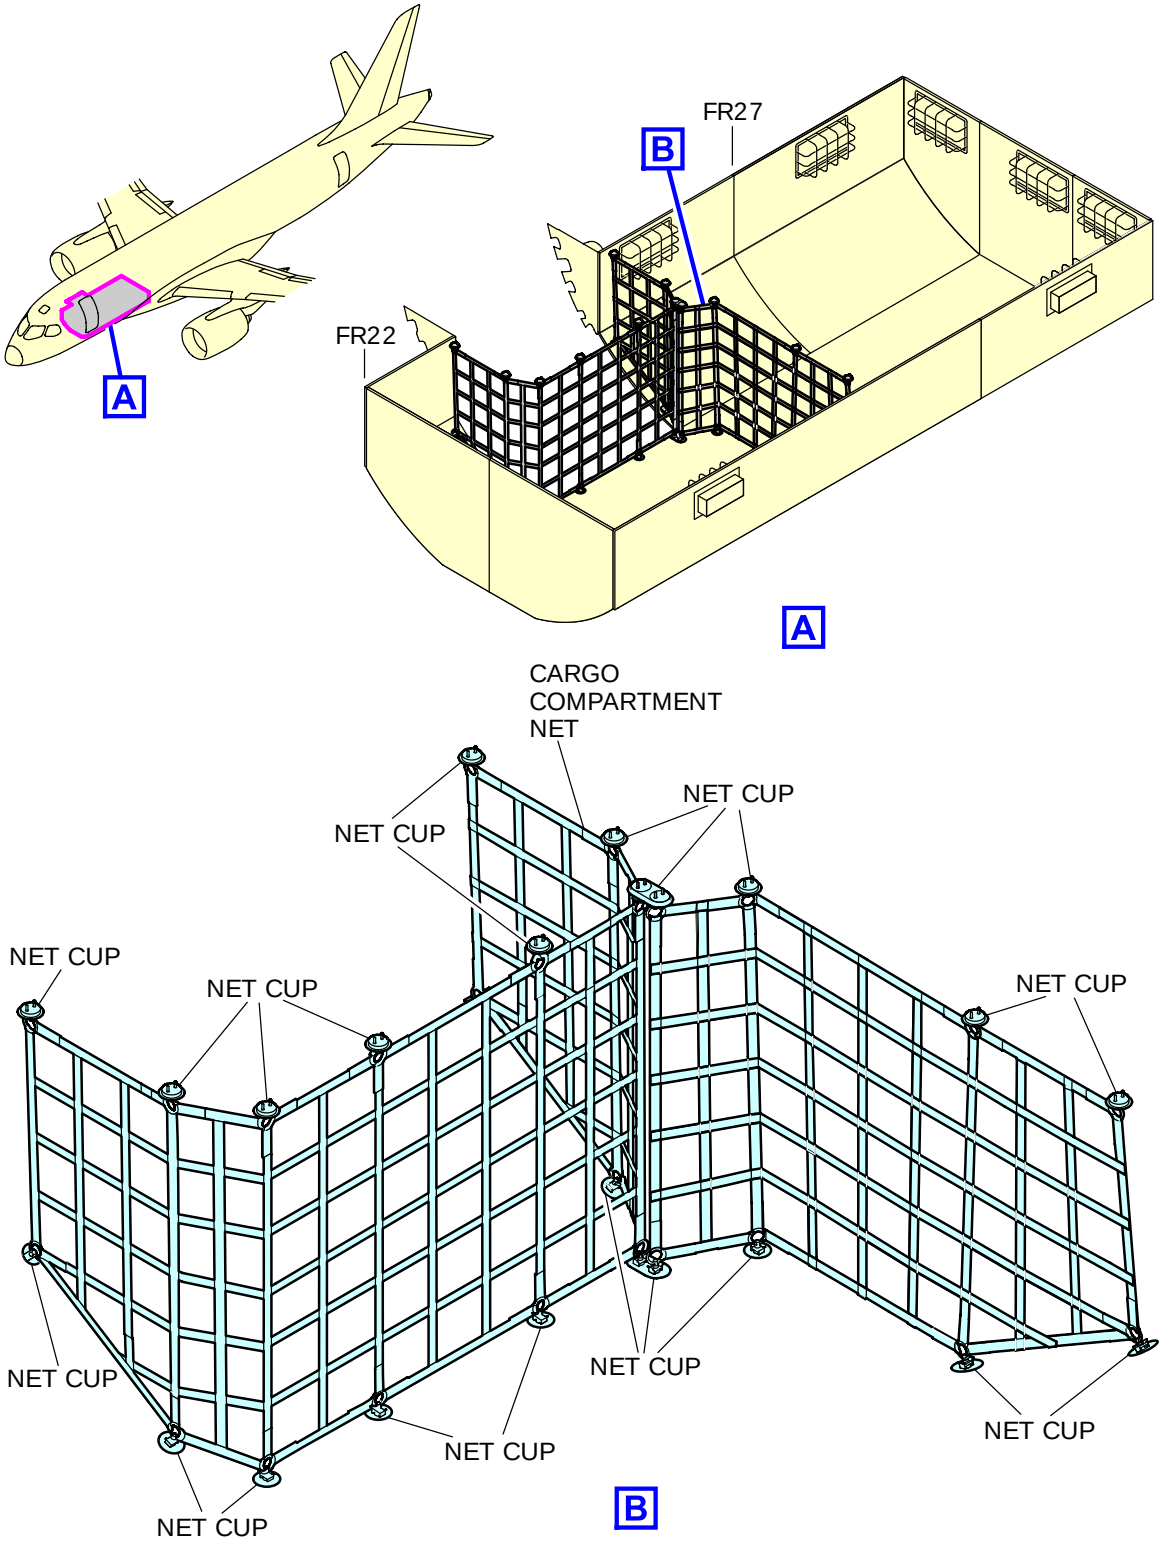

ICN-BD500-A-J000000-C-3AB48-79171-A-001-01
Figure 9 Cargo nets - (Sheet 3 of 3)

7 Door clearances and clear opening dimensions

A general description of the doors is as follows:

7.1 Passenger/Crew

Two semi-plug type doors on the left side of the aircraft provide access for passengers and crew. Door 1L is considered the primary entrance while door 2L provides a secondary entrance available for passenger loading/unloading as well as ground servicing.

Each door is classified as a type C floor level exit. Due to the sill height, every door incorporates an emergency evacuation slide system. In addition each one translates outwards from closed position, supported by a hinged arm to rest in open position.

Every door is operable from the exterior and interior of the aircraft and features an inspection window to allow verification of the outside conditions from the interior. The exterior operating handle has a linear motion and is interconnected to a vent flap system to provide pressure equalization between the aircraft and the ambient air prior to be opened.

Each door is fully lined and insulated to meet thermal and noise performance requirements.

For Passenger/Crew doors distance from the nose, refer to Fig. 11Fig. 12. For aft passenger door opening and clearances, refer to Fig. 13.

7.2 Emergency exit

The over-wing emergency exits are type III semi-plug type doors.

The exits are provided with an operating handle with removable cover and are fitted with a standard sized passenger compartment window. Each door is fully lined and insulated to meet thermal and noise performance requirements.

The door rotates upwards from the closed position, supported by a hinged arm to rest in open position. The door opening sequence is automatically supported by the energy stored in its own mechanism.

For emergency access to the passenger compartment, the doors may be opened from an exterior handle.

Due to the exit path height from the ground, an off-wing evacuation slide system is provided.

For over-wing emergency exits distance from the nose, refer to Fig. 11. For doors dimensions, refer to Table 10.

7.3 Flight compartment emergency exit

The flight compartment is outfitted with a single, inward-opening overhead escape hatch.

Applicability:
50001-50065, 50067-50085, 50087-54987

7.4 Cargo doors

Access doors are provided to allow cargo compartment loading and unloading.

The semi-plug forward and aft cargo doors are identical components, each hinged along the top edge of its frame.

Each door incorporates an exterior lock/unlock handle with linear motion that is interconnected to a vent flap system and provide pressure equalization between the aircraft and the ambient air prior to be opened.

An electrical actuation system with a switch panel, installed on the fuselage near each door, is provided to open and close the door.

Each door is fully lined and insulated to meet thermal and noise performance requirements.

For cargo doors distance from the nose, refer to Fig. 11. For doors dimensions, refer to Table 11. For forward cargo door opening and clearances, refer to Fig. 14. For aft cargo door opening and clearances, refer to Fig. 15.

Applicability:
50066, 50086

7.5 Cargo doors

Access doors are provided to allow cargo compartment loading and unloading.

The semi-plug forward cargo and Auxiliary Center Tank Access (ACTA) doors are identical components, each hinged along the top edge of its frame.

Each door incorporates an exterior lock/unlock handle with linear motion that is interconnected to a vent flap system and provide pressure equalization between the aircraft and the ambient air prior to be opened.

An electrical actuation system with a switch panel, installed on the fuselage near each door, is provided to open and close the door.

Each door is fully lined and insulated to meet thermal and noise performance requirements.

For cargo doors distance from the nose, refer to Fig. 11. For doors dimensions, refer to Table 12. For forward cargo door opening and clearances, refer to Fig. 14. For ACTA opening and clearances, refer to Fig. 16.

7.6 Service doors

Two semi-plug type doors are provided on the right side of the aircraft to provide access for the forward (door 1R) and aft (door 2R) galley service areas.

Each door is classified as a type C floor level exit. Due to the sill height, each door incorporates an emergency evacuation slide system.

Each door translates outwards from the closed position, supported by a hinged arm and stabilizing system, to rest parallel to the fuselage in the open position.

Each door is operable from the exterior and interior of the aircraft and features an inspection window to allow verification of the outside conditions from the interior. The exterior operating handle has a linear motion and is interconnected to a vent flap system to provide pressure equalization between the aircraft and the ambient air prior to be opened.

Each door is fully lined and insulated to meet thermal and noise performance requirements.

For service doors distance from the nose, refer to Fig. 11. For service doors dimensions, refer to Table 10. For forward service door opening and clearances, refer to Fig. 17. For aft service door opening and clearances, refer to Fig. 18.

7.7 Forward avionics bay door

A plug-type door is provided in the forward fuselage to gain access to the pressurized forward equipment compartment. The door is fitted with a stowable operating handle.

For forward equipment compartment door distance from the nose, refer to Fig. 11. For dimensions, refer to Table 10.

7.8 Mid avionics bay door

A plug-type door is provided in the mid fuselage to gain access to the pressurized mid equipment compartment. The door is fitted with a stowable operating handle.

For mid equipment compartment door distance from the nose, refer to Fig. 11. For dimensions, refer to Table 10.

7.9 Aft equipment bay door

A door is provided in the aft fuselage to gain access to the unpressurized aft equipment compartment.

For aft equipment compartment door distance from the nose, refer to Fig. 11. For dimensions, refer to Table 10.

7.10 Doors identification

This section shows a general overview of the doors

(Sheet) Applicability:
50001-50065, 50067-50085, 50087-54987

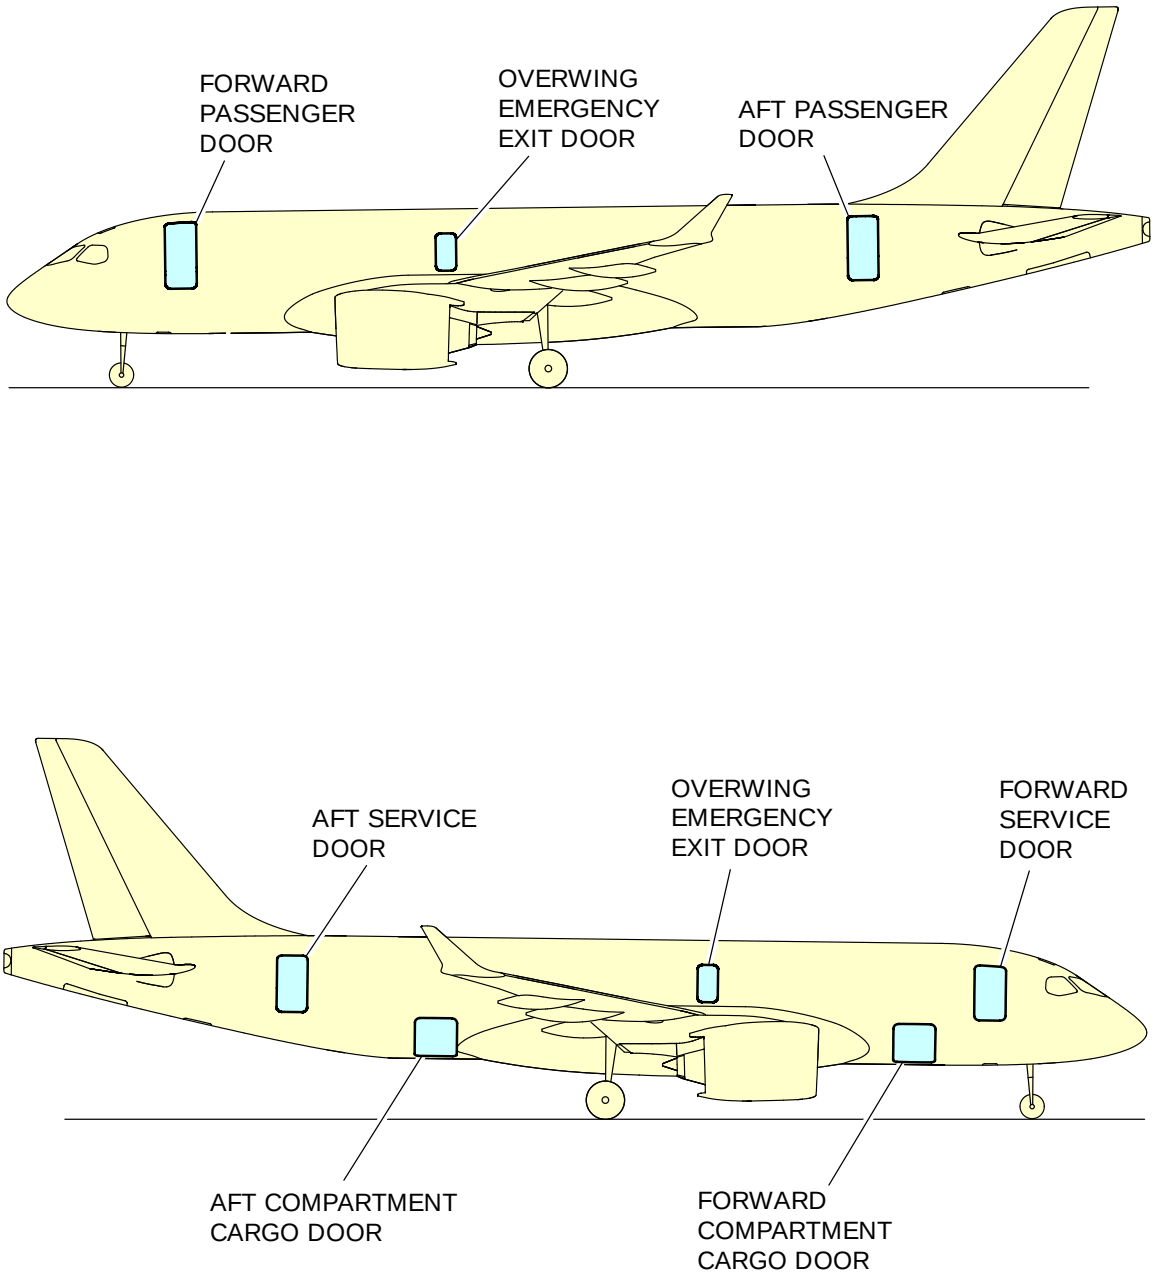

ICN-BD500-A-J000000-A-3AB48-23216-A-001-01

Figure 10 General door location - (Sheet 1 of 2)

(Sheet) Applicability:
50066, 50086

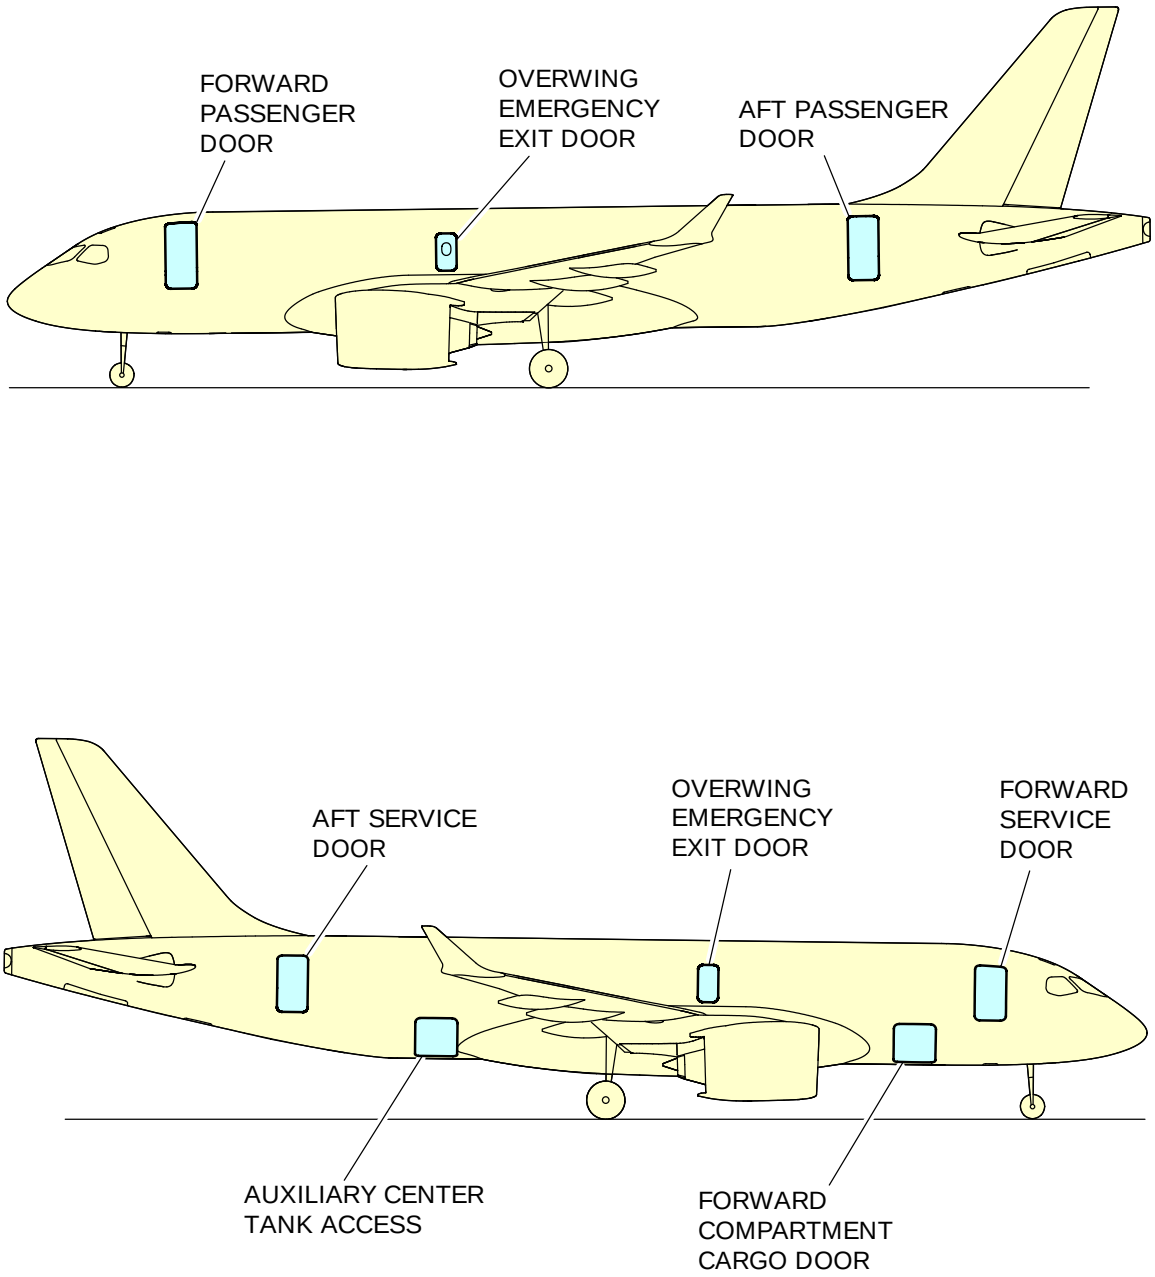

ICN-BD500-A-J000000-C-3AB48-79172-A-001-01

Figure 10 General door location - (Sheet 2 of 2)

7.11 Access and exit doors dimensions

Applicability:
50001-50065, 50067-50085, 50087-54987

Table 11 Access and exit doors dimensions

Door	Height	Width
Main entrance door - Type C exit (door 1L)	6 ft 3 in. (1,9 m)	2 ft 6 in. (0,8 m)
Service door - Type C exit (door 1R)	5 ft 0 in. (1,5 m)	2 ft 6 in. (0,8 m)
Aft entrance door - Type C exit (door 2L)	6 ft 0 in. (1,8 m)	2 ft 6 in. (0,8 m)
Service door - Type C exit (door 2R)	5 ft 0 in. (1,5 m)	2 ft 6 in. (0,8 m)
Forward avionics bay door	2 ft 8 in. (0,81 m)	3 ft 8 in. (1,1 m)
Mid avionics bay door	2 ft 8 in. (0,81 m)	3 ft 8 in. (1,1 m)
Aft equipment bay door	3 ft 6 in. (1,08 m)	1 ft 11 in. (0,6 m)
Forward cargo compartment door	2 ft 8 in. (0,81 m)	3 ft 8 in. (1,1 m)
Aft cargo compartment door	2 ft 8 in. (0,81 m)	3 ft 8 in. (1,1 m)
Over-wing emergency exit	3 ft 6 in. (1,08 m)	1 ft 11 in. (0,59 m)
Flight compartment emergency exit	22 in. (0,559 m)	20 in. (0,508 m)

Applicability:
50066, 50086

Table 12 Access and exit doors dimensions

Door	Height	Width
Main entrance door - Type C exit (door 1L)	6 ft 3 in. (1,9 m)	2 ft 6 in. (0,8 m)
Service door - Type C exit (door 1R)	5 ft 0 in. (1,5 m)	2 ft 6 in. (0,8 m)
Aft entrance door - Type C exit (door 2L)	6 ft 0 in. (1,8 m)	2 ft 6 in. (0,8 m)
Service door - Type C exit (door 2R)	5 ft 0 in. (1,5 m)	2 ft 6 in. (0,8 m)
Forward avionics bay door	2 ft 8 in. (0,81 m)	3 ft 8 in. (1,1 m)
Mid avionics bay door	2 ft 8 in. (0,81 m)	3 ft 8 in. (1,1 m)
Aft equipment bay door	3 ft 6 in. (1,08 m)	1 ft 11 in. (0,6 m)
Forward cargo compartment door	2 ft 8 in. (0,81 m)	3 ft 8 in. (1,1 m)
Auxiliary Center Tank Access	2 ft 8 in. (0,81 m)	3 ft 8 in. (1,1 m)

Door	Height	Width
Over-wing emergency exit	3 ft 6 in. (1,08 m)	1 ft 11 in. (0,59 m)
Flight compartment emergency exit	22 in. (0,559 m)	20 in. (0,508 m)

7.12 Door distance from nose

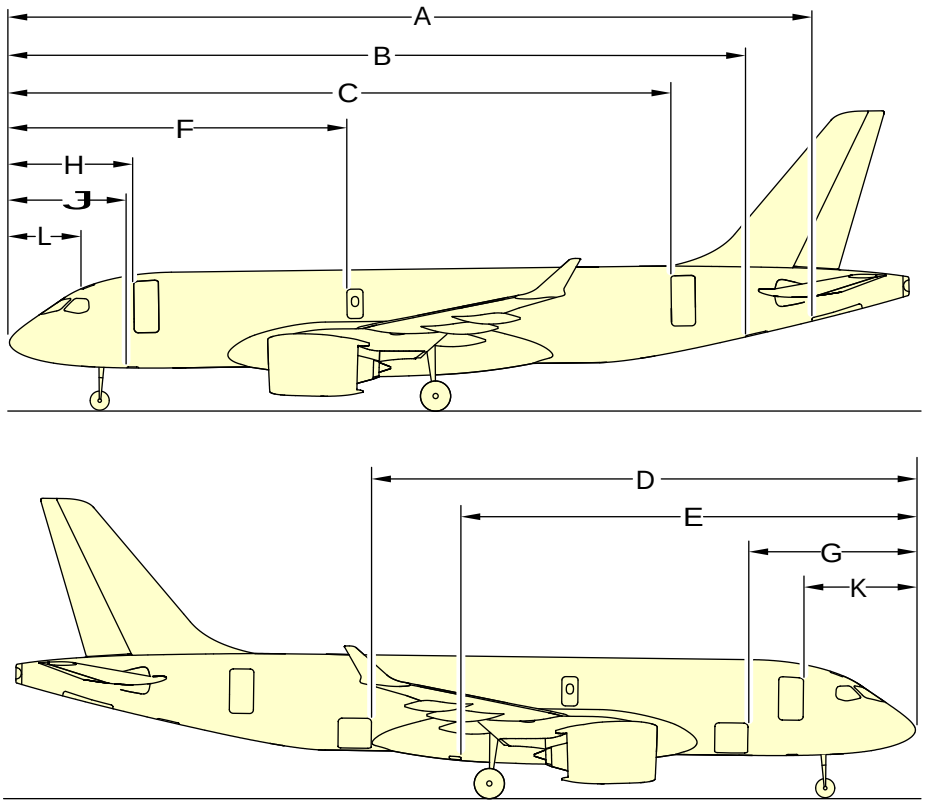

Dimensions	A220-100
A	102 ft 4 in. (31.2 m)
B	93 ft 10 in. (28.6 m)
C	84 ft 4 in. (25.7 m)
D	69 ft 4 in. (21.1 m)
E	58 ft 0 in. (17.7 m)
F	43 ft 0 in. (13.11 m)
G	21 ft 4 in. (6.5 m)
H	15 ft 10 in. (4.8 m)
J	15 ft 0 in. (4.6 m)
K	14 ft 3 in. (4.3 m)
L	9 ft 2 in. (2.8 m)

NOTE

The values shown are the greatest possible variations in attitude due to the variation of aircraft weight and gravity.

ICN-BD500-A-J000000-A-3AB48-21712-A-003-01

Figure 11 Door distance from nose

7.13 Door opening and clearance

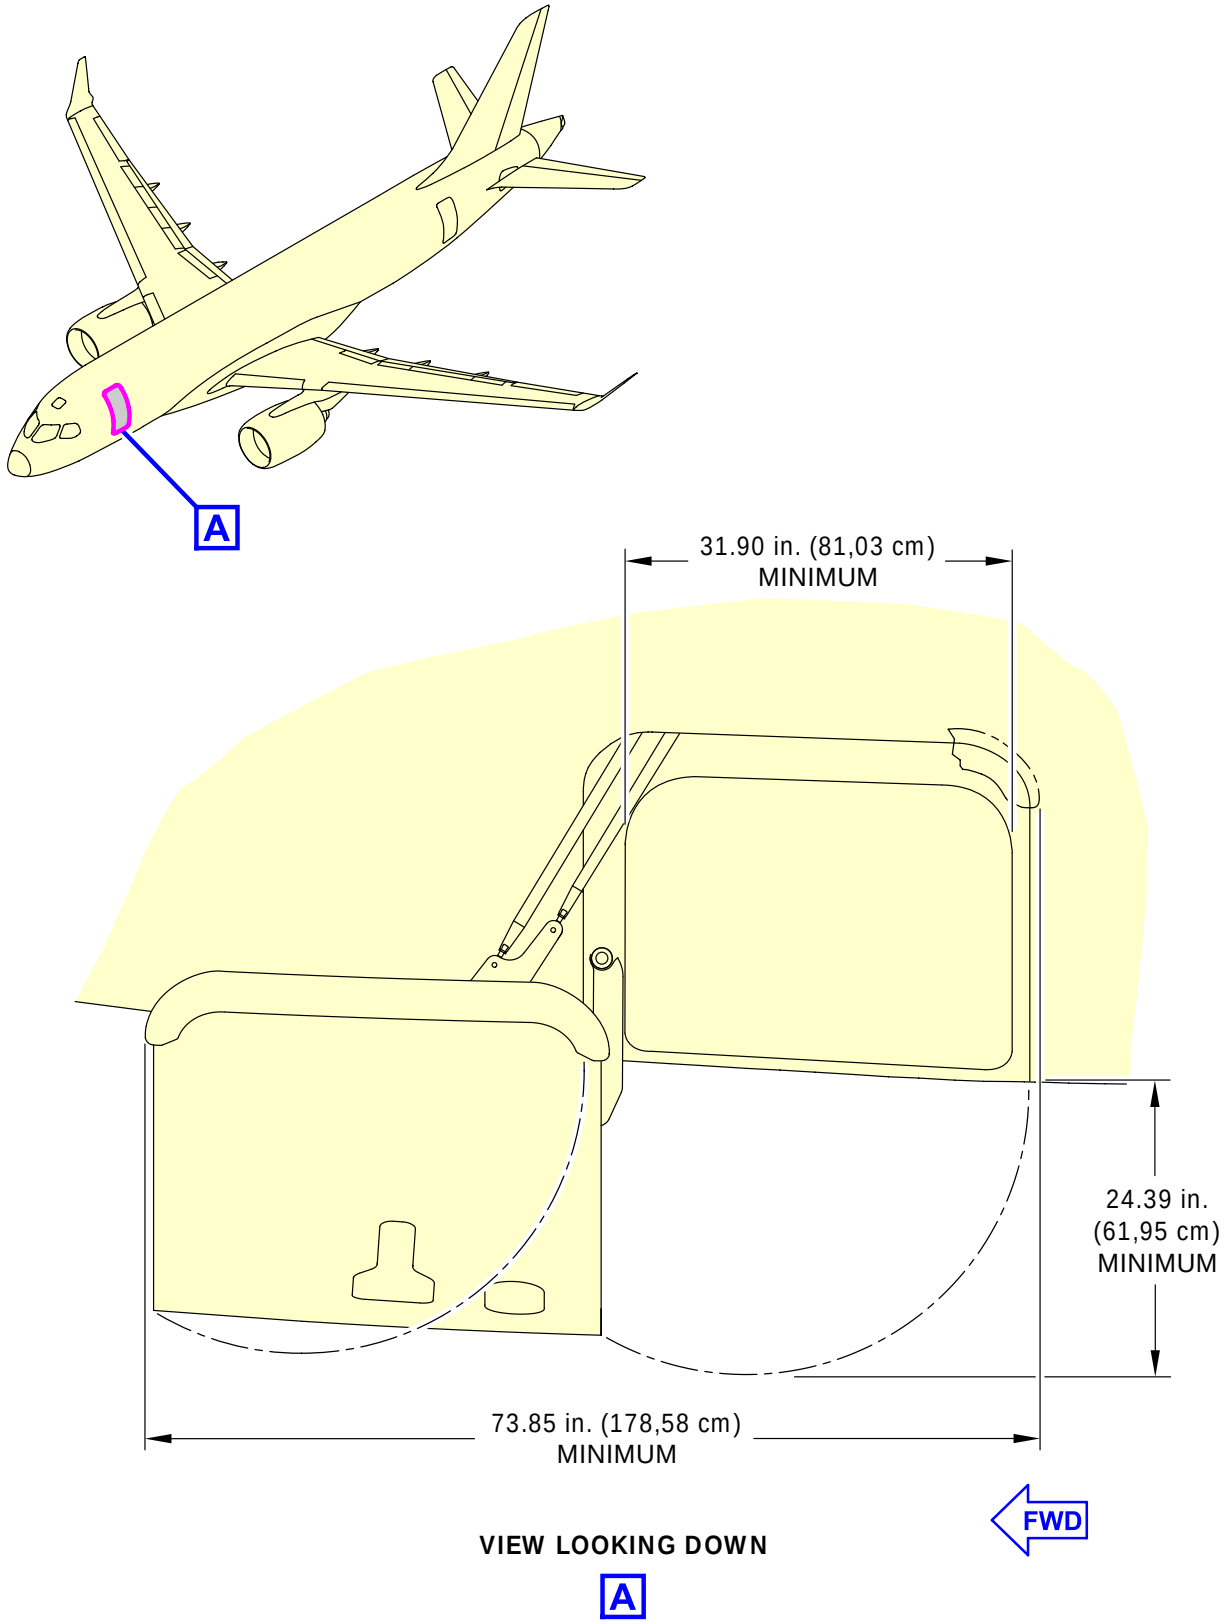

ICN-BD500-A-J061100-A-3AB48-00103-A-003-01

Figure 12 Forward passenger door opening and clearances

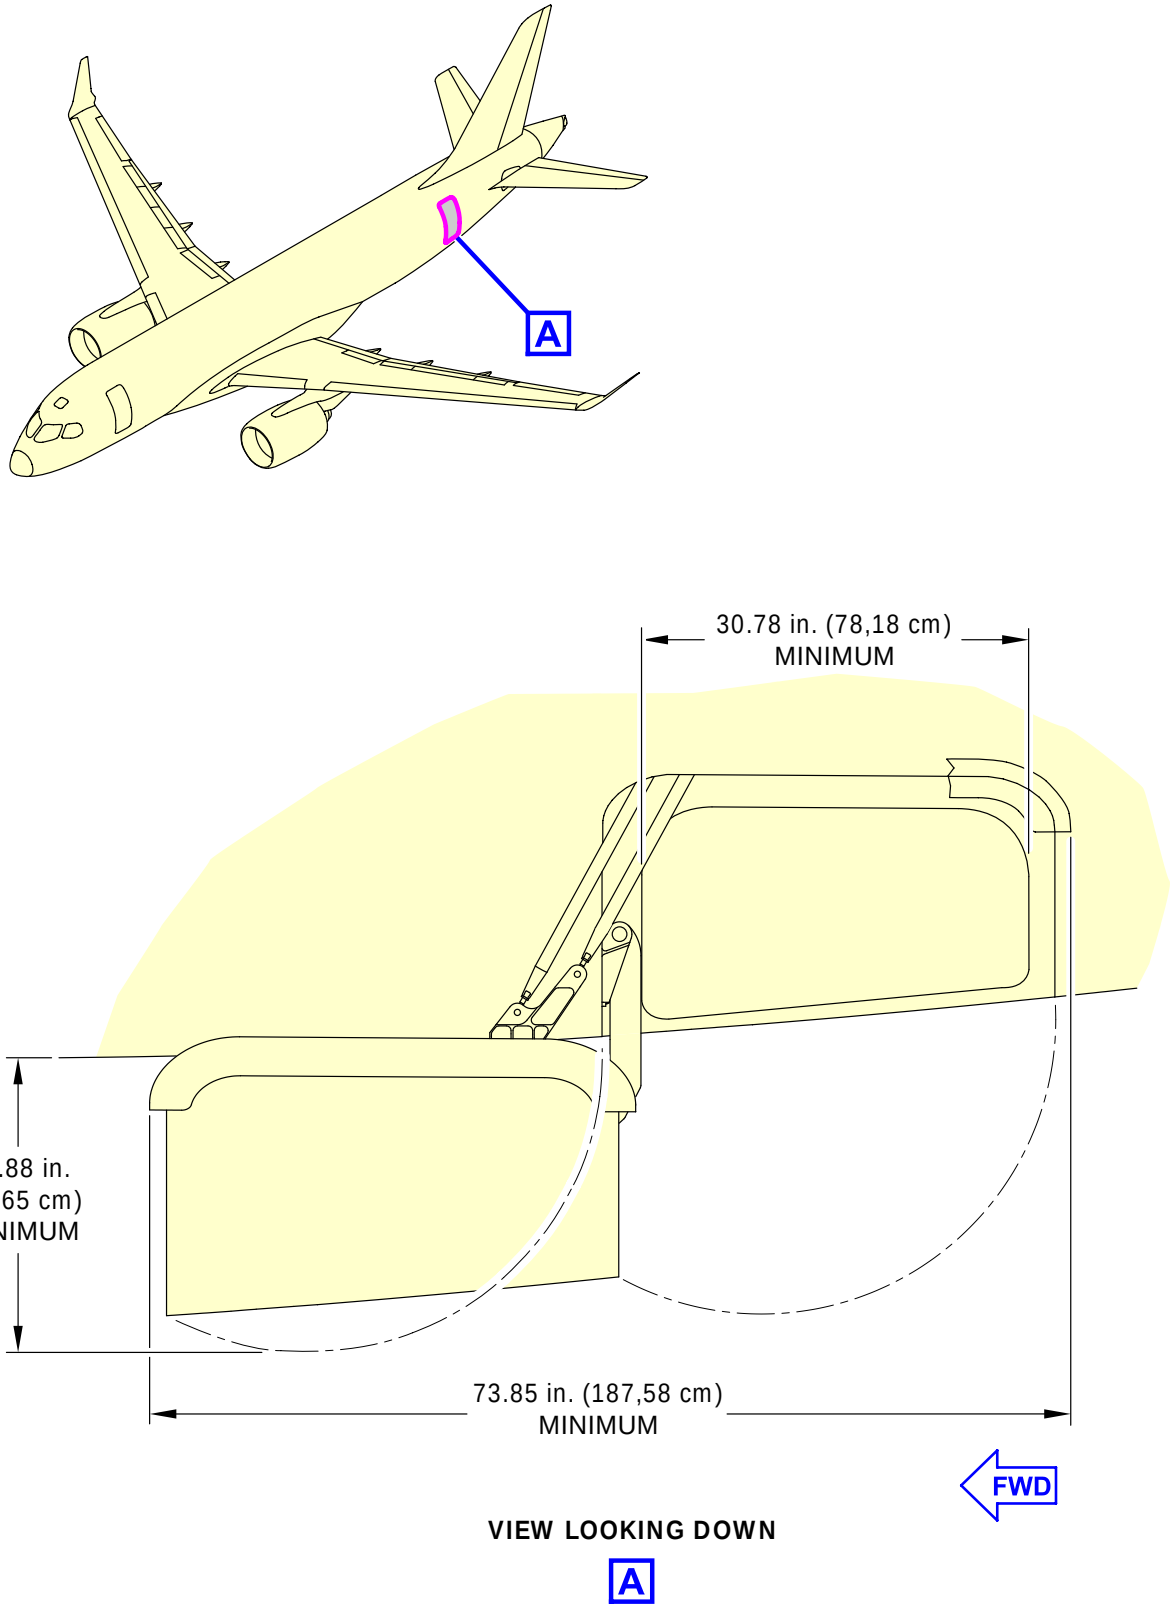

ICN-BD500-A-J061100-A-3AB48-00104-A-003-01

Figure 13 Aft passenger door opening and clearances

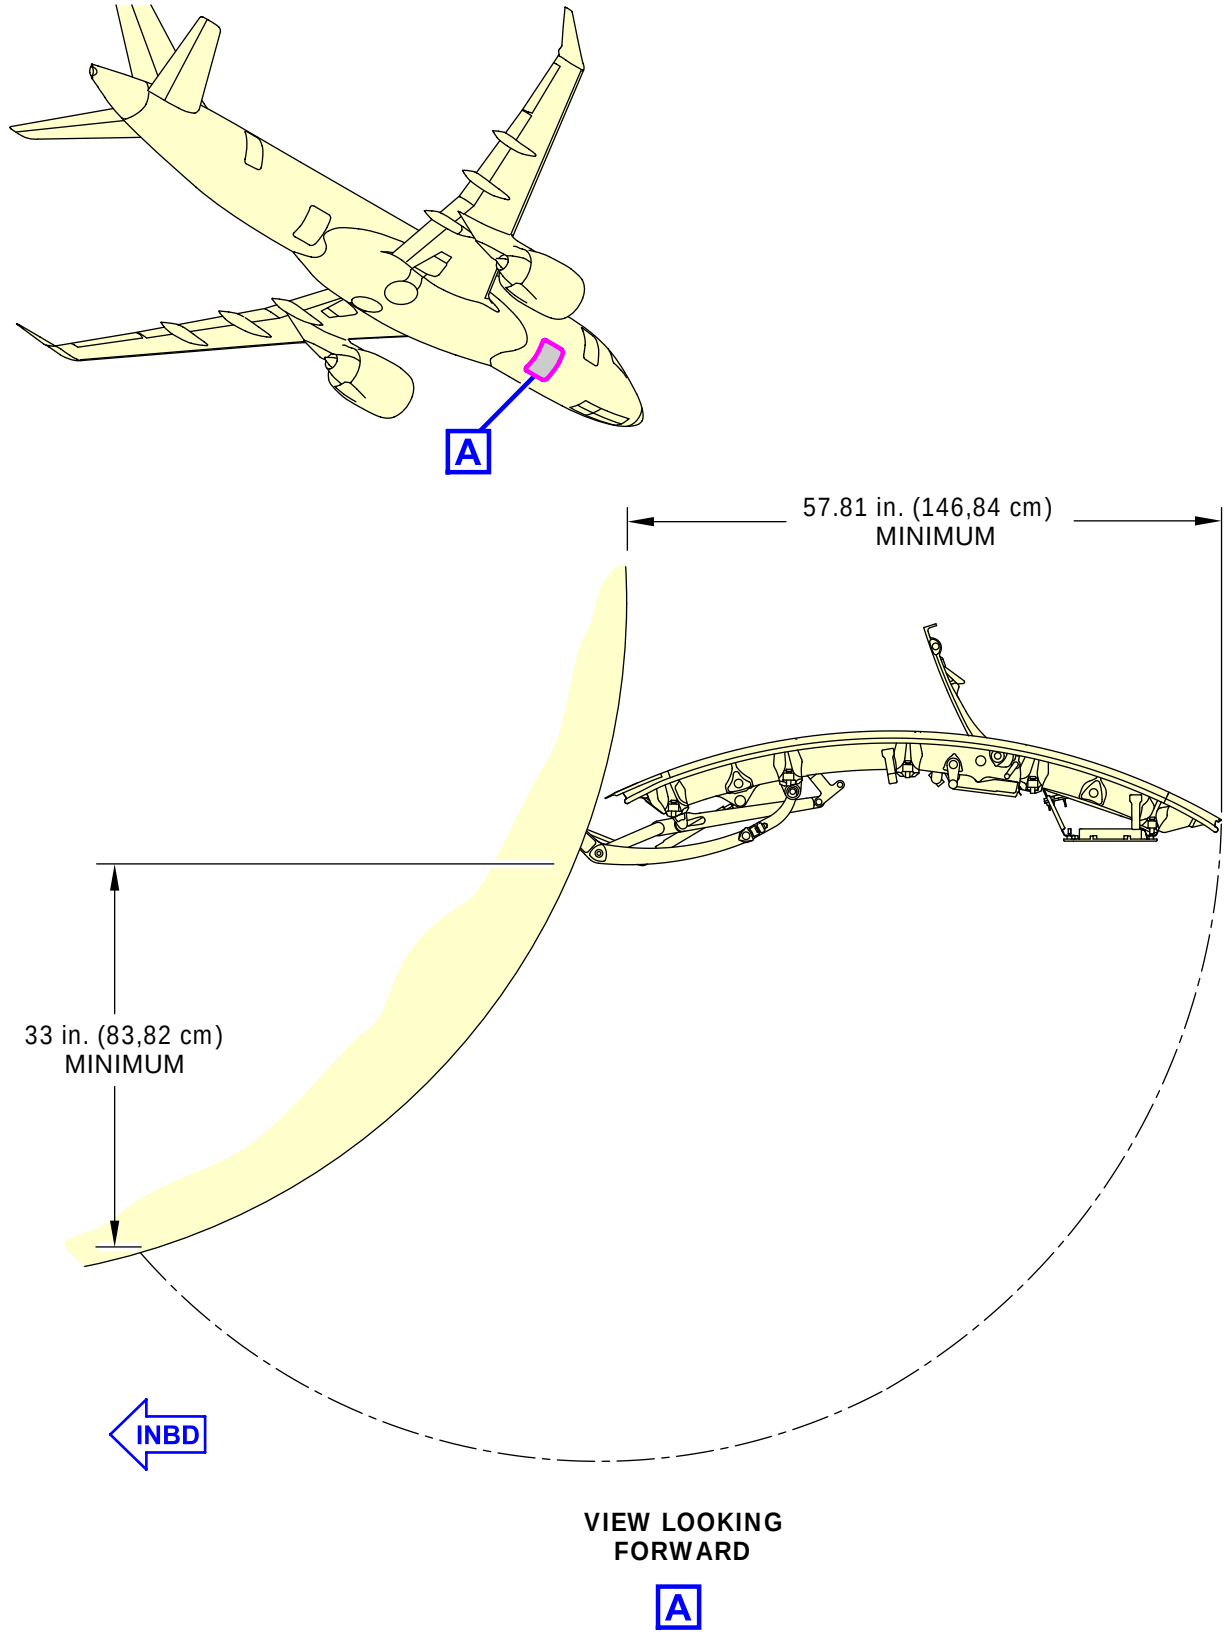

ICN-BD500-A-J061100-A-3AB48-00102-A-002-01

Figure 14 Forward cargo compartment door opening and clearances

(Sheet) Applicability:
50001-50065, 50067-50085, 50087-54987

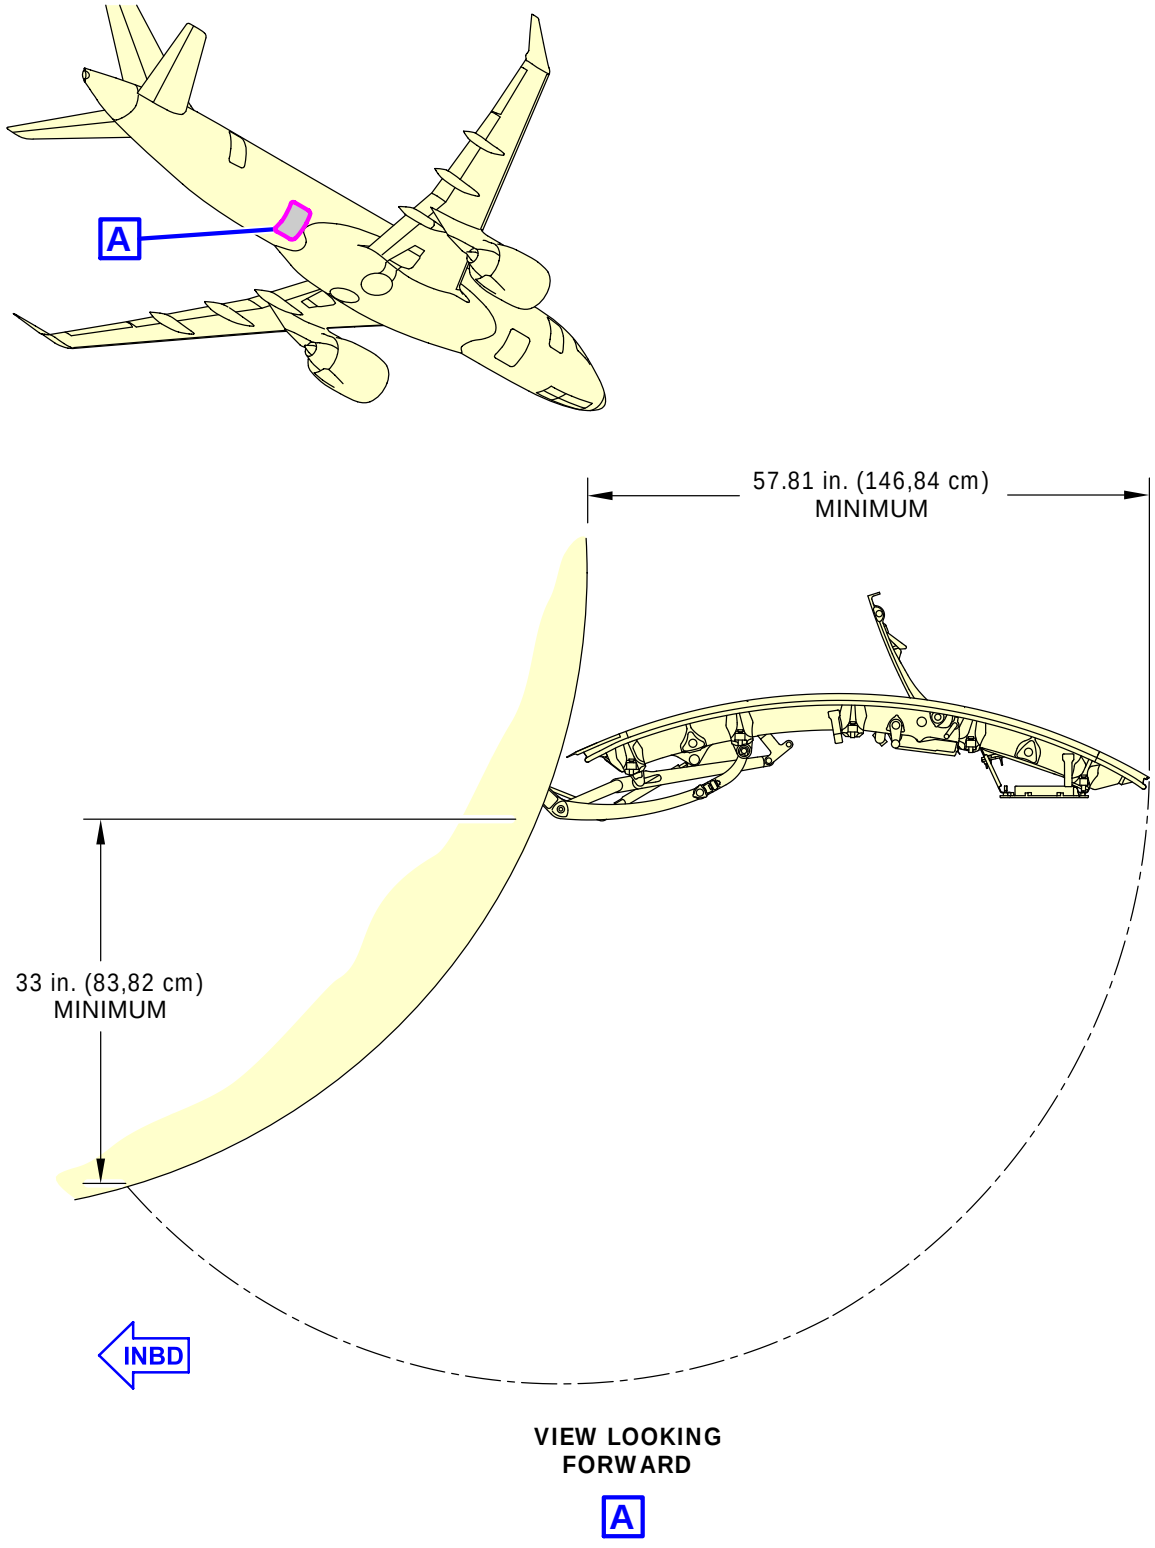

ICN-BD500-A-J061100-A-3AB48-00101-A-002-01

Figure 15 Aft cargo compartment door opening and clearances

(Sheet) Applicability:
50066, 50086

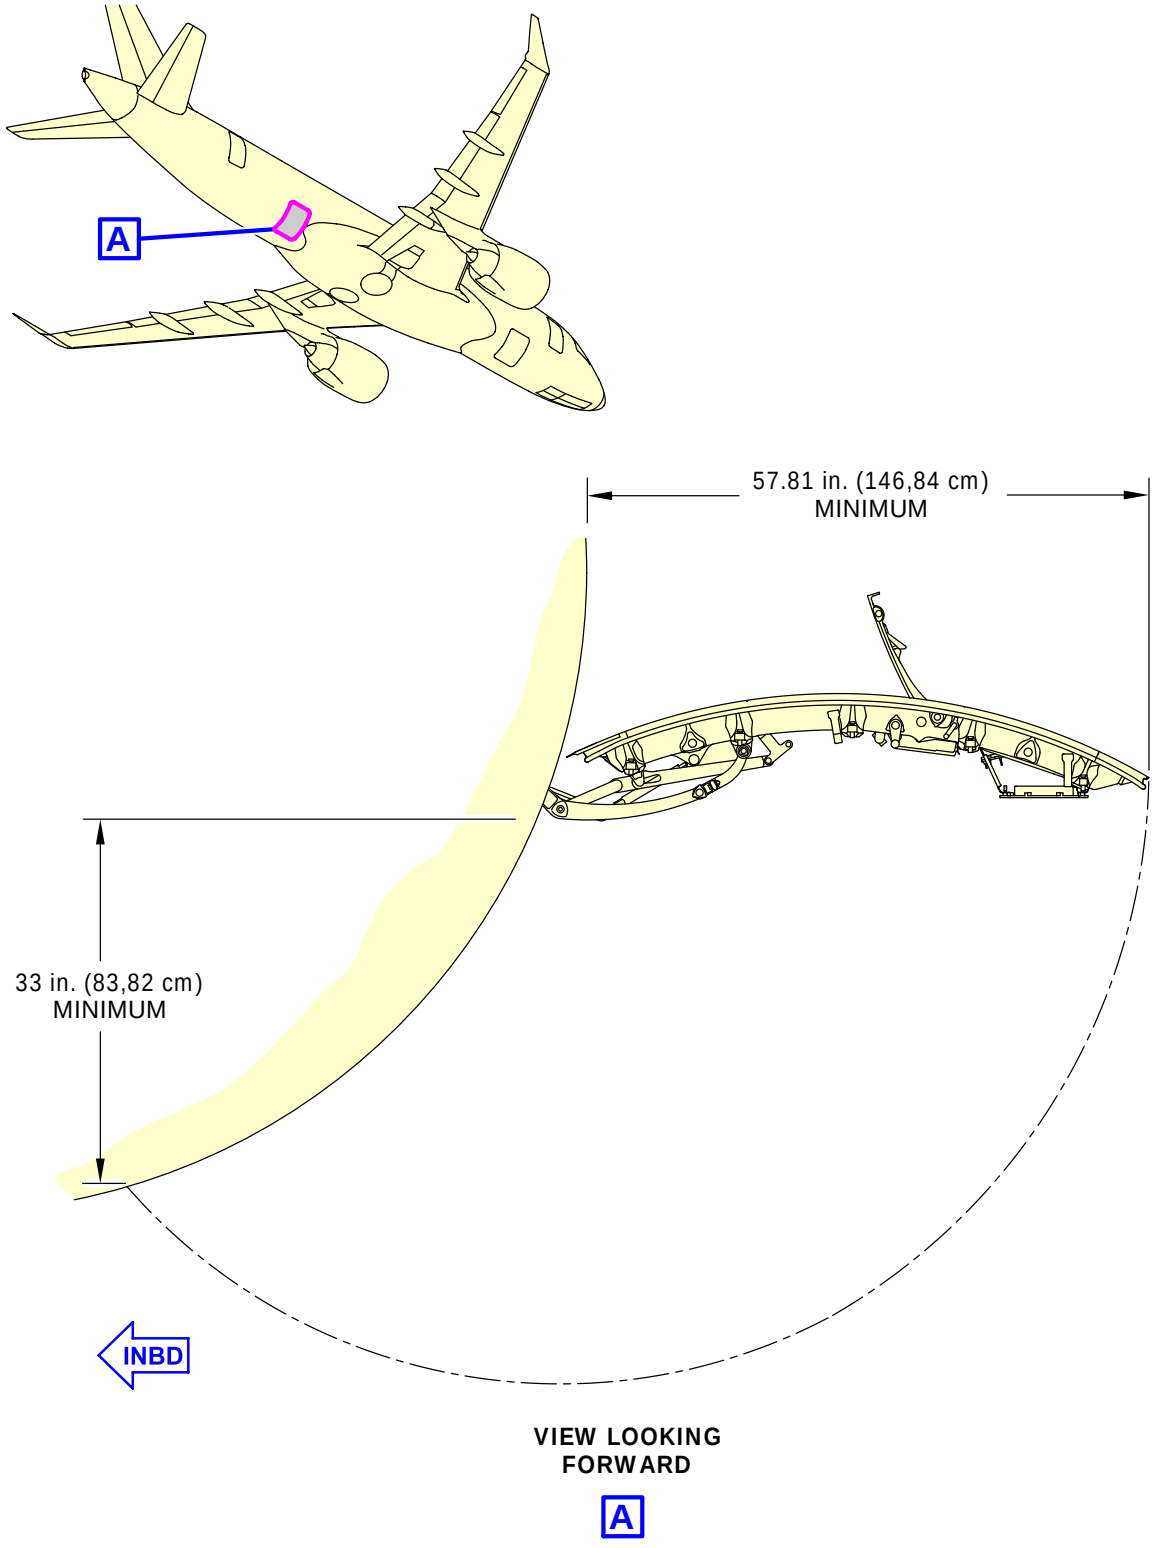

ICN-BD500-A-J061100-A-3AB48-00101-A-002-01

Figure 16 Auxiliary Center Tank Access (ACTA) opening and clearances

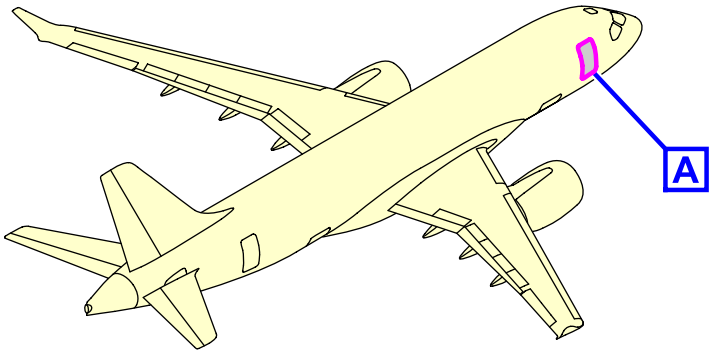

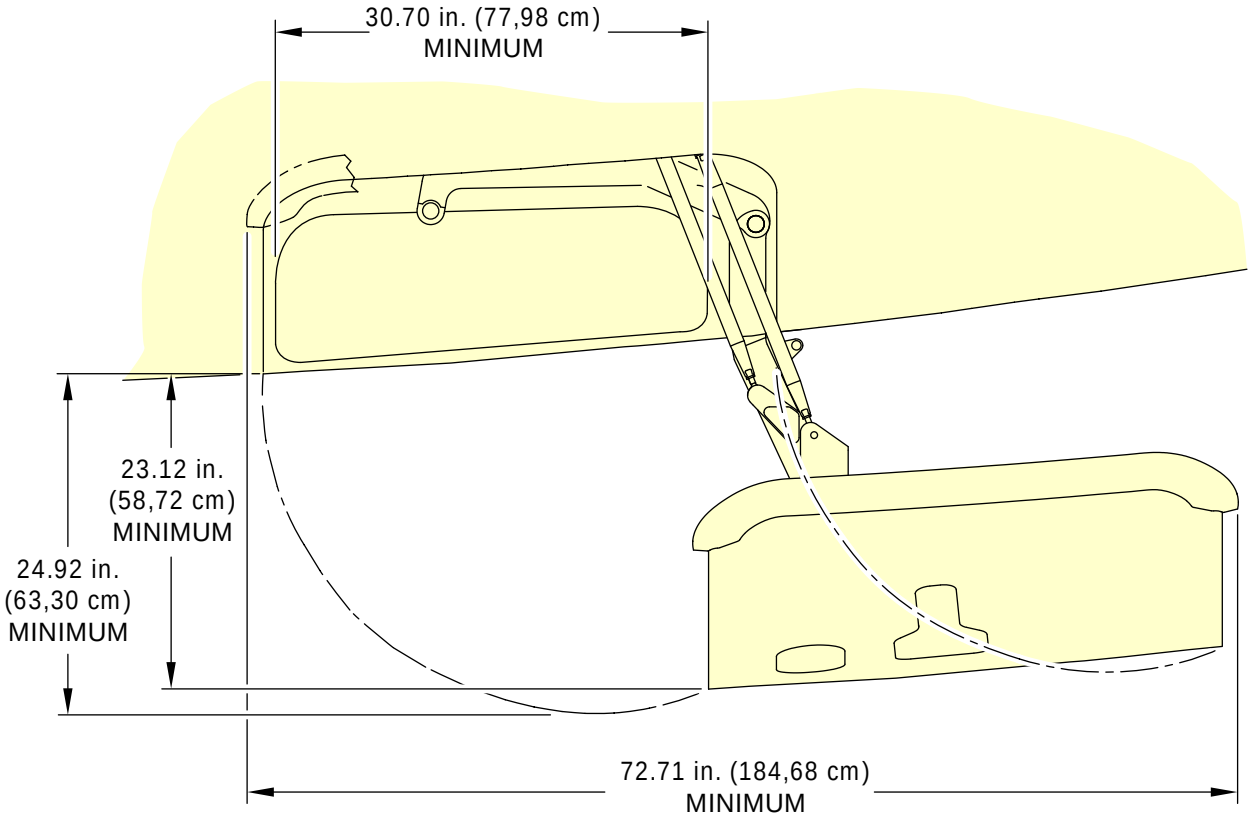

VIEW LOOKING DOWN

A

ICN-BD500-A-J061100-A-3AB48-00106-A-002-01

Figure 17 Forward service door opening and clearance

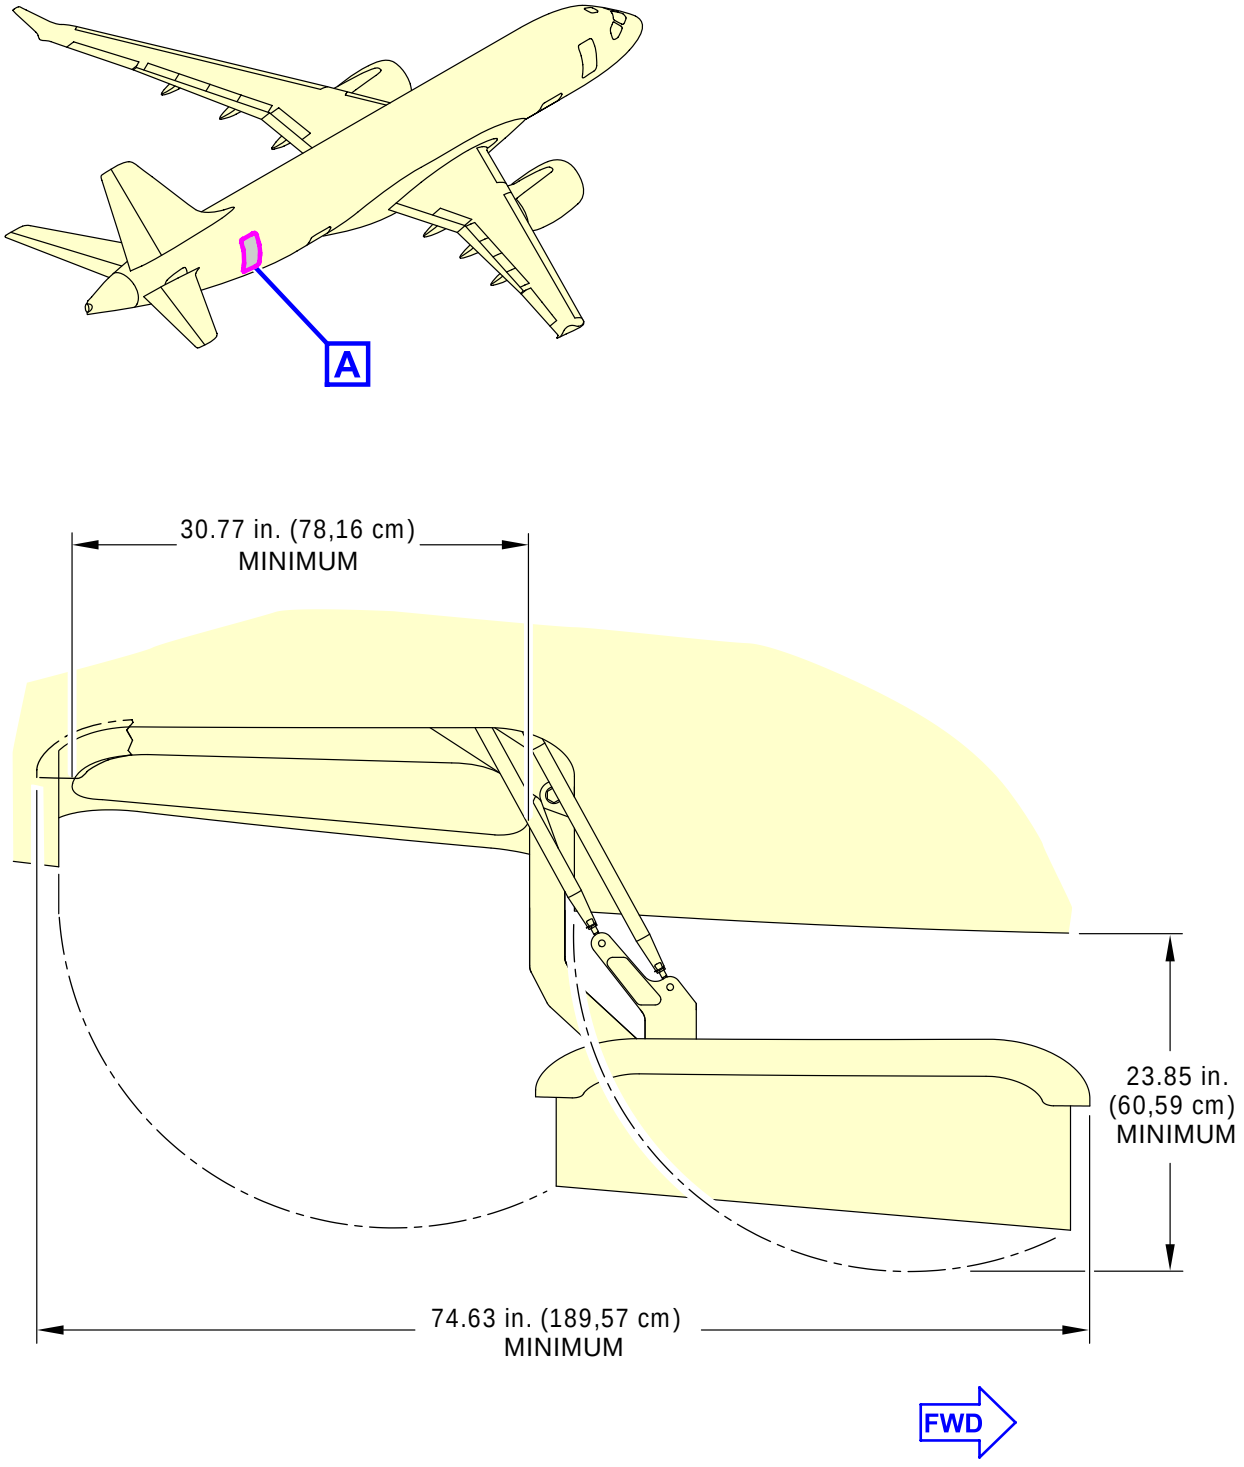

ICN-BD500-A-J061100-A-3AB48-00105-A-002-01

Figure 18 Aft service door opening and clearances

Intentionally left blank

A220

Aircraft description - Technical data

Applicability:
55001-59999

Table of contents

Page

Aircraft description - Technical data 1
References 2
Description 2
1 Aircraft characteristics 2
1.1 Introduction 2
1.2 Aircraft characteristics 3
1.3 System fluid capacities 3
1.4 Service fluid capacities 4
2 Aircraft dimensions 4
2.1 General aircraft dimensions 4
2.2 General aircraft area 9
3 Ground clearances 9
3.1 Ground clearances 9
3.2 Ground clearances for evacuation slides 12
4 Layout of passenger compartment accommodation 15
5 Passenger cross-section 17
6 Cargo compartment 21
6.1 Cargo door nets 21
6.2 Volumes – Cargo compartment 21
7 Door clearances and clear opening dimensions 28
7.1 Passenger/Crew 28
7.2 Emergency exit 28
7.3 Flight compartment emergency exit 28
7.4 Cargo doors 28
7.5 Service doors 29
7.6 Forward avionics bay door 29
7.7 Mid avionics bay door 29
7.8 Aft equipment bay door 29
7.9 Doors identification 29
7.10 Access and exit doors dimensions 31
7.11 Door distance from nose 31
7.12 Door opening and clearance 33

List of tables

Page

1 References 2
2 Aircraft characteristics 3
3 System fluid capacities 3
4 Service fluid capacities 4
5 General aircraft dimensions (A220-300) 4
6 General aircraft area 9
7 Ground clearances 9
8 Ground clearances for evacuation slides 12
9 Cargo compartment volumes 21
10 Access and exit doors dimensions 31

List of figures

Page

1 General aircraft dimensions..... 7
2 Ground clearances..... 11
3 Ground clearances for evacuation slides..... 13
4 Layout Of Passenger Accommodation (LOPA)..... 16
5 Passenger cross-section (economy class)..... 18
6 Passenger cross-section (optional business class)..... 19
7 Overhead stowage bins..... 20
8 Aircraft cargo side view..... 22
9 Cargo nets..... 25
10 General door location..... 30
11 Door distance from nose..... 32
12 Forward passenger door opening and clearances..... 34
13 Aft passenger door opening and clearances..... 35
14 Forward cargo compartment door opening and clearances..... 36
15 Aft cargo compartment door opening and clearances..... 37
16 Forward service door opening and clearance..... 38
17 Aft service door opening and clearances..... 39

References

Table 1 References

Data Module/Technical Publication	Title
None	

Description

1 Aircraft characteristics

1.1 Introduction

This data module contains general data about the Airbus model BD-500-1A11 (A220-300) characteristics. The structural weight limits, such as maximum ramp weight, and zero fuel weight are dependent on configuration. Refer to each aircraft's specified Weight and Balance Manual (WBM) BD500-3AB48-32100-00 and weight and balance report for structural limits and other weight information.

Refer to Table 5 for general aircraft dimension.

Refer to Table 2 for the aircraft characteristics.

Refer to Table 3 for the system fluid capacities.

Refer to Table 4 for the service fluid capacities.

1.2 Aircraft characteristics

Table 2 Aircraft characteristics

Description	A220-300
Engines	2 Pure Power™ PW1521G[1]
Mode	Passenger
Standard seating capacity	140
Maximum Ramp Weight (MRW)	157,000 lb (71,214 kg)
Maximum Take-Off Weight (MTOW)	156,300 lb (70,896 kg)
Maximum Landing Weight (MLW)	134,500 lb (61,008 kg)
Maximum Zero Fuel Weight (MZFW)	128,000 lb (58,060 kg)
Minimum Flight Weight (MFW)	80,000 lb (36,287 kg)
Maximum fuel tank capacity	5,681 US gal (21 508 L)
Unusable fuel	220.5 lb (100 kg)
Maximum cargo volume - Overhead bins	332 ft³ (9,40 m³)
1 Optional engine model: PW1524G	

1.3 System fluid capacities

Table 3 System fluid capacities

Description	Volume	Weight
Engine fluids calculated with 8.24 lb/US gal (0.987 kg/L)		
Engine oil tank at 60 °F	6.5 US gal (24.4 L)	53.1 lb (24.1 kg)
Engine lines and internal engine oil	7.7 US gal (29.2 L)	63.5 lb (28.8 kg)
APU fluids calculated with 7.98 lb/US gal (0.956 kg/L)		
APU oil tank	1.94 US gal (7.3 L)	15.4 lb (7.0 kg)
APU lines and internal oil	0.84 US gal (3.2 L)	6.7 lb (3.0 kg)
Hydraulic fluids at 77 °F (25 °C) low density 8.20 lb/US gal (0.983 kg/L)		
System No. 1 reservoir	5.0 US gal (18.8 L)	40.8 lb (18.5 kg)
System No. 2 reservoir	4.3 US gal (16.4 L)	35.5 lb (16.55 kg)
System No. 3 reservoir	4.3 US gal (16.4 L)	35.5 lb (16.55 kg)
Systems and lines	39.8 US gal (150.6 L)	326.2 lb (147.9 kg)

1.4 Service fluid capacities

Table 4 Service fluid capacities

Description	Volume	Weight
Potable water at 60 °F (15,5 °C)		
Galley/Lavatory tank	42.0 US gal (159,0 L)	350.5 lb (159.0 kg)
Chemical toilet fluid at 60 °F (15,5 °C)		
Waste tank	38 US gal (143.84 L)	316.54 lb (143.58 kg)

2 Aircraft dimensions

2.1 General aircraft dimensions

This section contains general data about the aircraft dimensions.

Table 5 General aircraft dimensions (A220-300)

Locator (refer to Fig. 1)	Value in. (cm)
A	1523.2 38689.28
B	146.500 (372.11)
C	461.900 (1173.23)
D	482.800 (1226.31)
E	Baseline 1377.300 (3498.34)
	Fuel loaded 1381.300 (3508.50)
F	961.4 (2441.96)
G	857.9 (2179.06)
H	1489.2 (3782.57)

Locator (refer to Fig. 1)	Value in. (cm)
J	783.2 (1989.33)
K	479.0 (1216.66)
L	172.4 (437.90)
M	513.3 (1303.78)
P	263.000 (668.02)
Q	96.500 (245.11)
R	162.2 (411.99)
S	198.5 (504.19)
T	267.900 (680.47)
U	97.7 (248.16)
V	194.6 (494.28)
W	133.4 (338.83)
X	27.200 (69.09)
Y	265.000 (673.10)
Z	602.6 (1530.60)

Locator (refer to Fig. 1)	Value in. (cm)
AA	0.477 Deg Nose down
BB	138.000 (350.52)

This data module contains data on the landing gear footprint.

Note

The values given change due to the variation of aircraft weight and gravity.

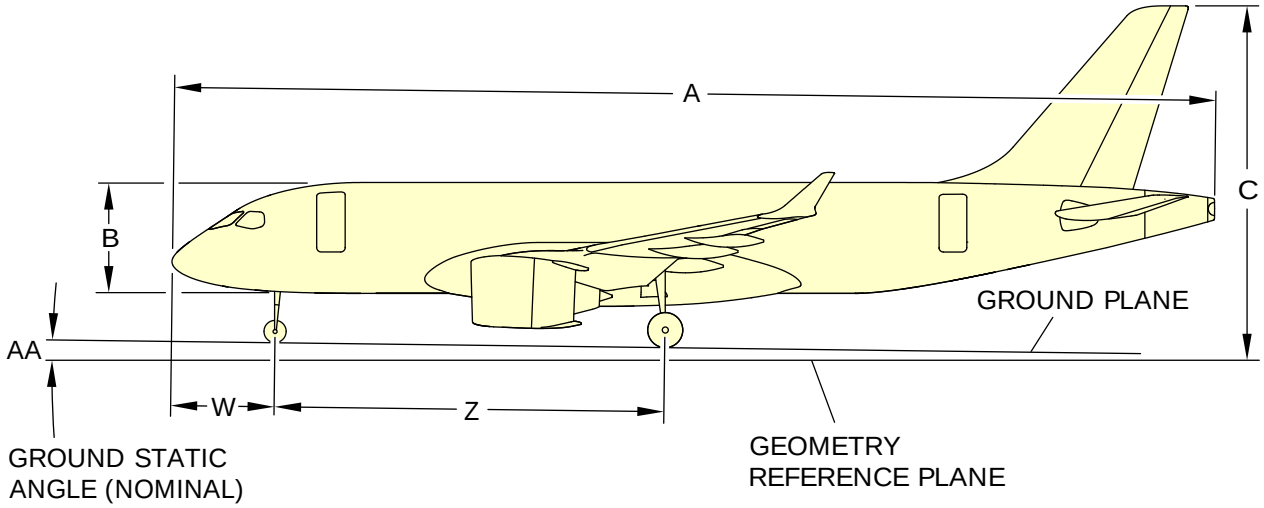

ICN-BD500-A-J061000-A-3AB48-00005-A-001-01

Figure 1 General aircraft dimensions - (Sheet 1 of 2)

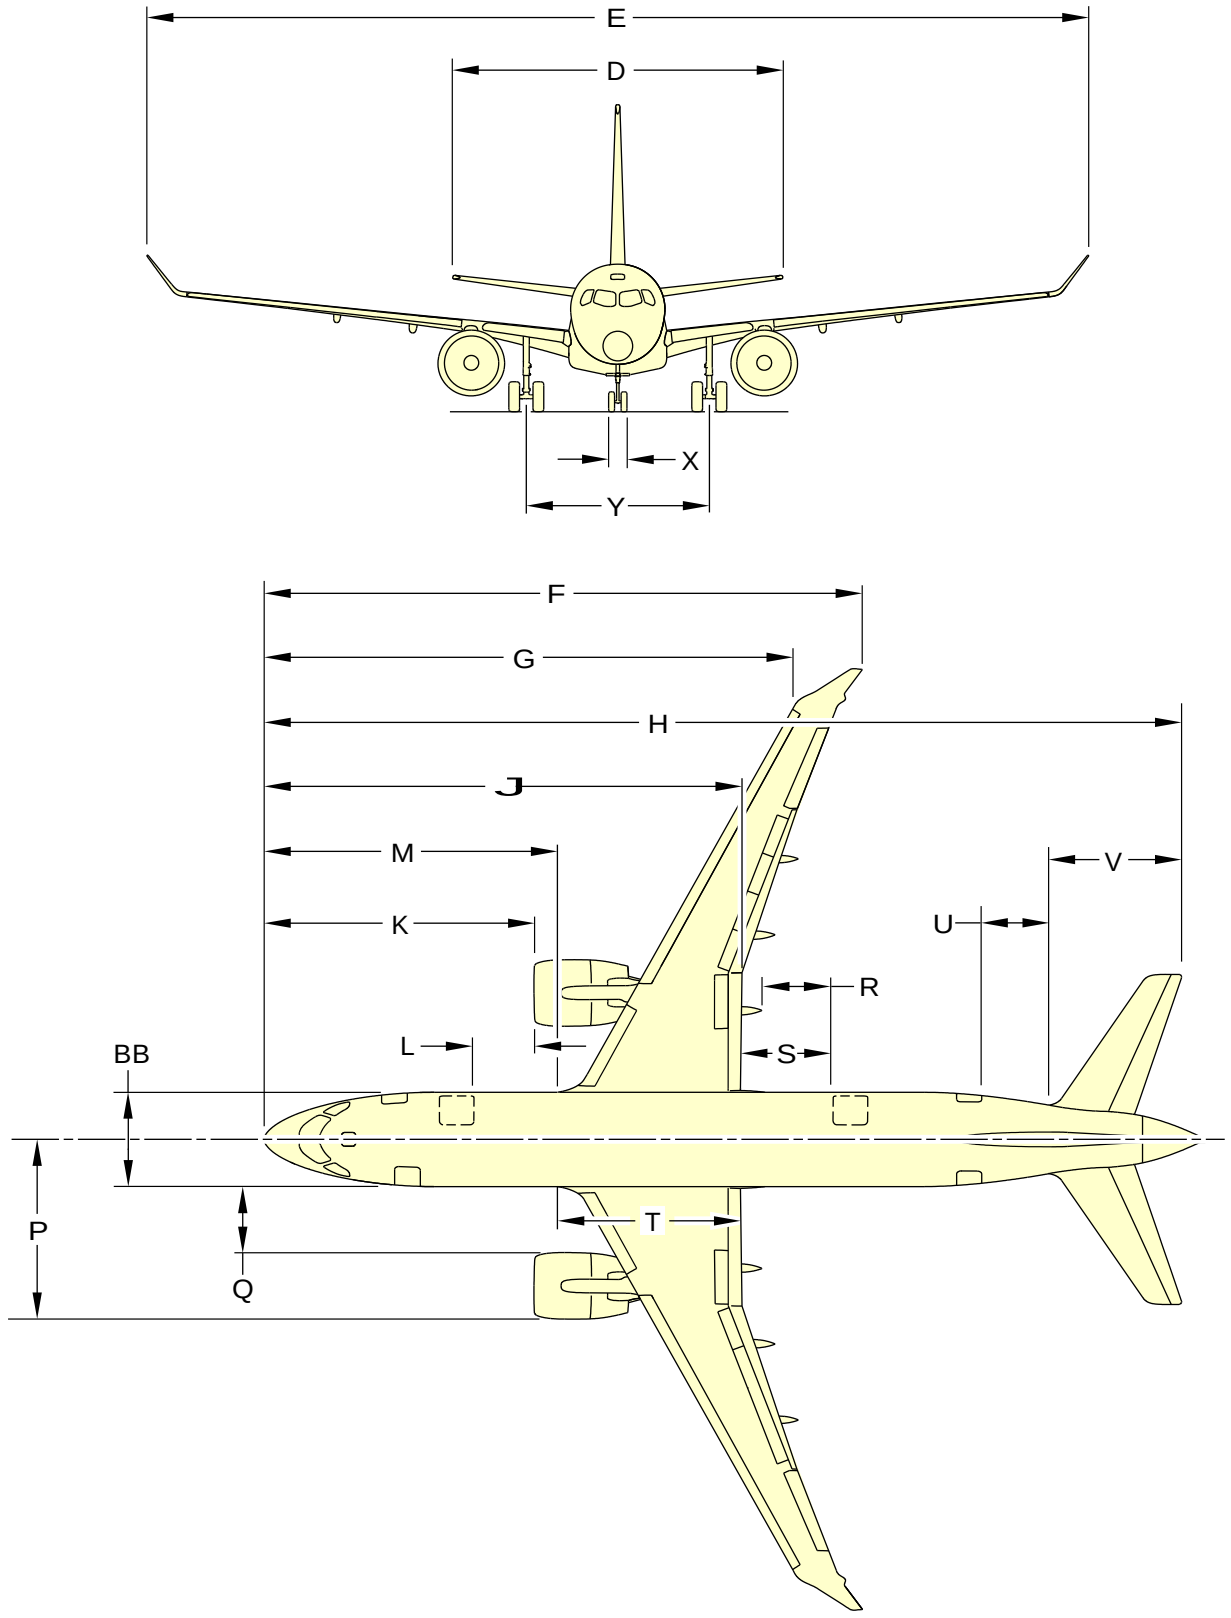

ICN-BD500-A-J061000-A-3AB48-00004-A-003-01

Figure 1 General aircraft dimensions - (Sheet 2 of 2)

2.2 General aircraft area

Table 6 General aircraft area

Description	A220-300
ESDU wing area (including ailerons, flaps, spoilers and area within the fuselage)	1209 ft² (112.3 m²)
Total horizontal stabilizer area (horizontal tail area and elevator area)	395 ft² (36.6 m²)
Total vertical stabilizer area (vertical tail area and rudder area)	304 ft² (28.2 m²)

3 Ground clearances

This section gives the height of various points of the aircraft, above the ground.

Dimensions in the tables are approximate and will vary with tire type, weight and balance and other special conditions.

3.1 Ground clearances

Table 7 Ground clearances

Locator	Description	Minimum	Maximum
A	Fuselage top	212.0 in. (538.48 cm)	215.7 in. (547.88 cm)
B	Pilot escape hatch	191.2 in. (485.65 cm)	195.1 in. (495.55 cm)
C	Forward avionic equipment bay door	65.3 in. (165.86 cm)	69.1 in. (175.51 cm)
D	Forward service door (RHS)	121.4 in . (308.36 cm)	125.2 in. (318.01 cm)
E	Forward passenger door (LHS)	121.5 in. (308.61 cm)	125.3 in. (318.26 cm)
F	Forward cargo compartment door (RHS)	69.2 in. (175.77 cm)	72.8 in. (184.91 cm)
G	Nacelle	22.9 in. (58.17 cm)	25.9 in. (665.79 cm)
H	Overwing emergency exit (LHS & RHS)	140.9 in. (357.89 cm)	143.8 in. (365.25 cm)
J	Mid avionic equipment bay door	58.5 in. (148.59 cm)	61.8 in. (156.97 cm)
K	Aft cargo compartment door (RHS)	75.7 in. (192.28 cm)	79.9 in. (202.95 cm)
L	Wing tip (No deflection)	230.4 in. (585.22 cm)	234.3 in. (595.12 cm)

Locator	Description	Minimum	Maximum
M	Aft service door (RHS)	128.1 in (325.37cm)	133 in. (337.82 cm)
N	Aft passenger door (LHS)	128.1 in. (325.37 cm)	133 in. (337.82 cm)
P	Aft avionic equipment door	114.6 in. (291.08 cm)	119.9 in. (304.55 cm)
Q	APU door	142.2 in. (361.19 cm)	148.0 in. (375.92 cm)
R	Tail	455.8 in. (1157.73 cm)	461.9 in. (1173.23 cm)
S	Winglet	168 in. (426.72 cm)	176.4 in. (448.06 cm)

Note

Vertical clearances shown are the greatest possible variations in attitude due to the variation of aircraft weight and center of gravity.

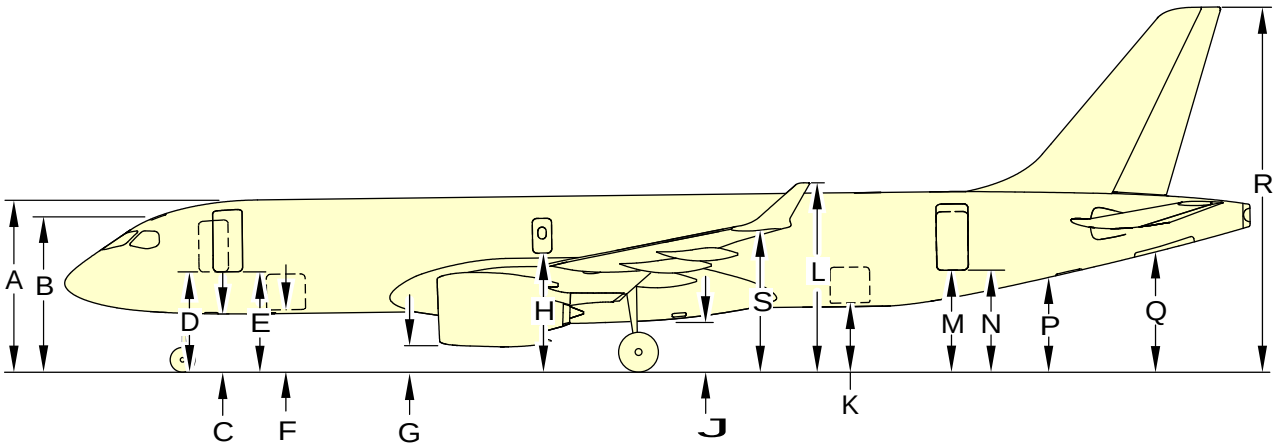

ICN-BD500-A-J000000-A-3AB48-21710-A-004-01

Figure 2 Ground clearances

3.2 Ground clearances for evacuation slides

This section gives ground clearances for evacuation slides. Refer to Table 8 and Fig. 3 .

Table 8 Ground clearances for evacuation slides

Description	Dimensions
Forward Passenger Door (FPD) Slide	240 in. (6096 mm)
Forward Service Door (FSD) Slide	240 in. (6096 mm)
Aft Passenger Door (APD) Slide	200 in. (5080 mm)
Aft Service Door (ASD) Slide	200 in. (5080 mm)
Overwing Emergency Exit Door (OWEED) Single Lane Slides (Left & Right sides)	119 in. (3022.60 mm)
OWEED Dual Lane Slides (Left & Right sides)	139 in. (3530.60 mm)

(Sheet) Applicability:
55001-55002, 55010-55015, 55017-55033, 55035-55037, 55040, 55044-55049, 55058-55063, 55067-55070, 55074-55085, 55087-55093, 55096-55113, 55115-55120, 55122-55125, 55128, 55130, 55132, 55135-55138, 55142-55145, 55147-55148, 55150-55153, 55156, 55158, 55160-55161, 55164, 55166-55167, 55169-55170, 55172, 55175, 55178-55179, 55181, 55184, 55186, 55188-55190, 55192, 55194-55195, 55199, 55201-55209, 55211-55212, 55214, 55217, 55220, 55222, 55225-55226, 55228, 55231, 55234, 55236-55237, 55239, 55241, 55246, 55249-55254, 55256-55263, 55265-55269, 55271-55274, 55276-55277, 55279-55280, 55282, 55284-55285, 55287-55289, 55292-55298, 55300-55301, 55303, 55306-55307, 55309-55310, 55312-55316, 55318-55322, 55325-55326, 55328, 55331-55337, 55339-55343, 55345, 55348-55349, 55351-55352, 55354-55356, 55359-55362, 55364-55366, 55369-55374, 55376-55378, 55381-55384, 55386-55389, 55391-55392, 55394-55396, 55398, 55400-55404, 55406, 55408-55411, 55414, 55417-55418, 55421-55422, 55425, 55429, 55431-55433, 55437, 55439, 55442, 55444-55452, 55454-55455, 55457-55459, 55462-55464, 55466-55472, 55474-55477, 55479-55480, 55483-55490, 55493-55497, 55499-55500, 55502-55506, 55509-55512, 55515-55519, 55521-55526, 55528-55532, 55534-55537, 55539, 55541, 55543-55544, 55546-55550, 55552-55554, 55556, 55559, 55561-55564, 55567-55570, 55572, 55575-55576, 55578-55579, 55581-55583, 55585, 55587-55588, 55590, 55593, 55595, 55597, 55603-55605, 55607, 55610, 55612-55614, 55641 and 55056-55057, 55065-55066, 55072-55073 PRE BD500-256002

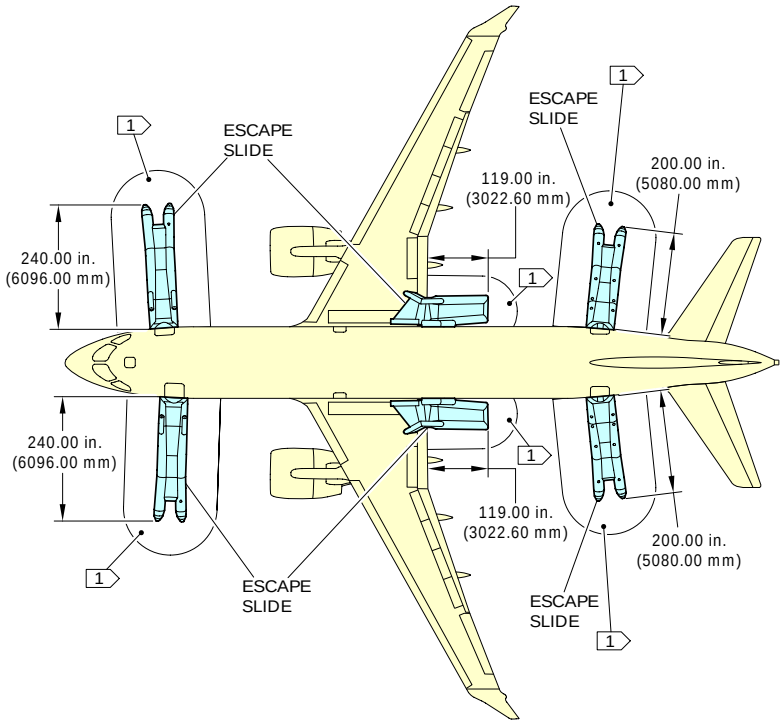

NOTE

1 Emergency evacuation ground area.

ICN-BD500-A-J000000-C-3AB48-52580-A-002-01

Figure 3 Ground clearances for evacuation slides - (Sheet 1 of 2)

(Sheet) Applicability:
55086, 55094-55095, 55114, 55121, 55126-55127, 55129, 55131, 55133-55134, 55139-55141, 55146, 55149, 55154-55155, 55157, 55159, 55162-55163, 55165, 55168, 55171, 55173-55174, 55176-55177, 55180, 55182-55183, 55185, 55187, 55191, 55193, 55196-55198, 55200, 55210, 55213, 55215-55216, 55218-55219, 55221, 55223-55224, 55227, 55229-55230, 55232-55233, 55235, 55238, 55240, 55242-55245, 55247-55248, 55255, 55264, 55270, 55275, 55278, 55281, 55283, 55286, 55290-55291, 55299, 55302, 55304-55305, 55308, 55311, 55317, 55323-55324, 55327, 55329-55330, 55338, 55344, 55346-55347, 55350, 55353, 55357-55358, 55363, 55367-55368, 55375, 55379-55380, 55385, 55390, 55393, 55397, 55399, 55405, 55407, 55412-55413, 55415-55416, 55419-55420, 55423-55424, 55426-55428, 55430, 55434-55436, 55438, 55440-55441, 55443, 55453, 55456, 55460-55461, 55465, 55473, 55478, 55481-55482, 55491-55492, 55498, 55501, 55507-55508, 55513-55514, 55520, 55527, 55533, 55538, 55540, 55542, 55545, 55551, 55555, 55557-55558, 55560, 55565-55566, 55571, 55573-55574, 55577, 55580, 55584, 55586, 55589, 55591-55592, 55594, 55596, 55598-55602, 55606, 55608-55609, 55611, 55615, 55617, 55620-55622 and 55003-55009, 55016, 55034, 55038-55039, 55041-55043, 55050-55057, 55064-55066, 55071-55073 POST BD500-256002

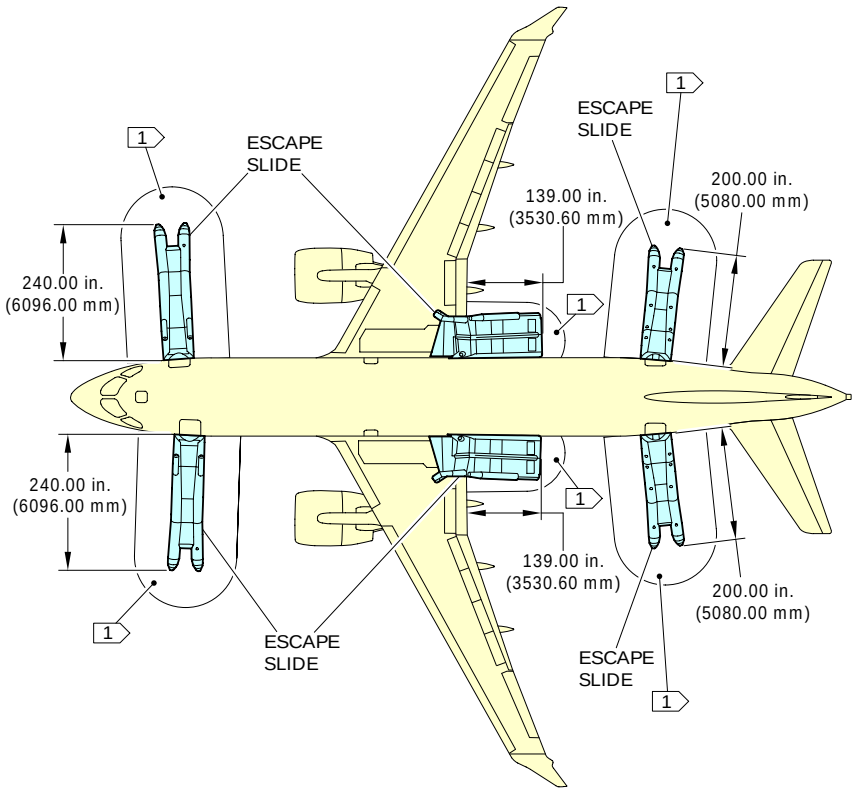

NOTE

1 Emergency evacuation ground area.

ICN-BD500-A-J000000-C-3AB48-73481-A-002-01

Figure 3 Ground clearances for evacuation slides - (Sheet 2 of 2)

4 Layout of passenger compartment accommodation

The passenger compartment includes the galley area, lavatory, and passenger seating area. The galleys and utility areas are isolated from the passenger area by partitions and curtains. Refer to Fig. 4 .

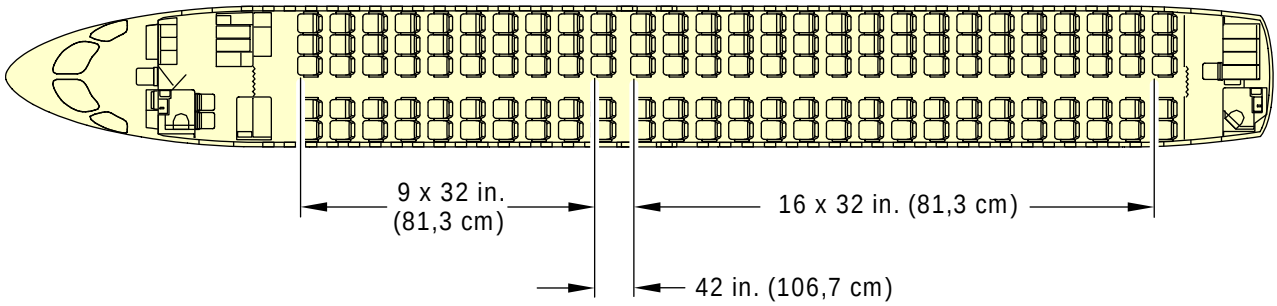

ICN-BD500-A-J061200-A-3AB48-00008-A-001-01

Figure 4 Layout Of Passenger Accommodation (LOPA)

5 Passenger cross-section

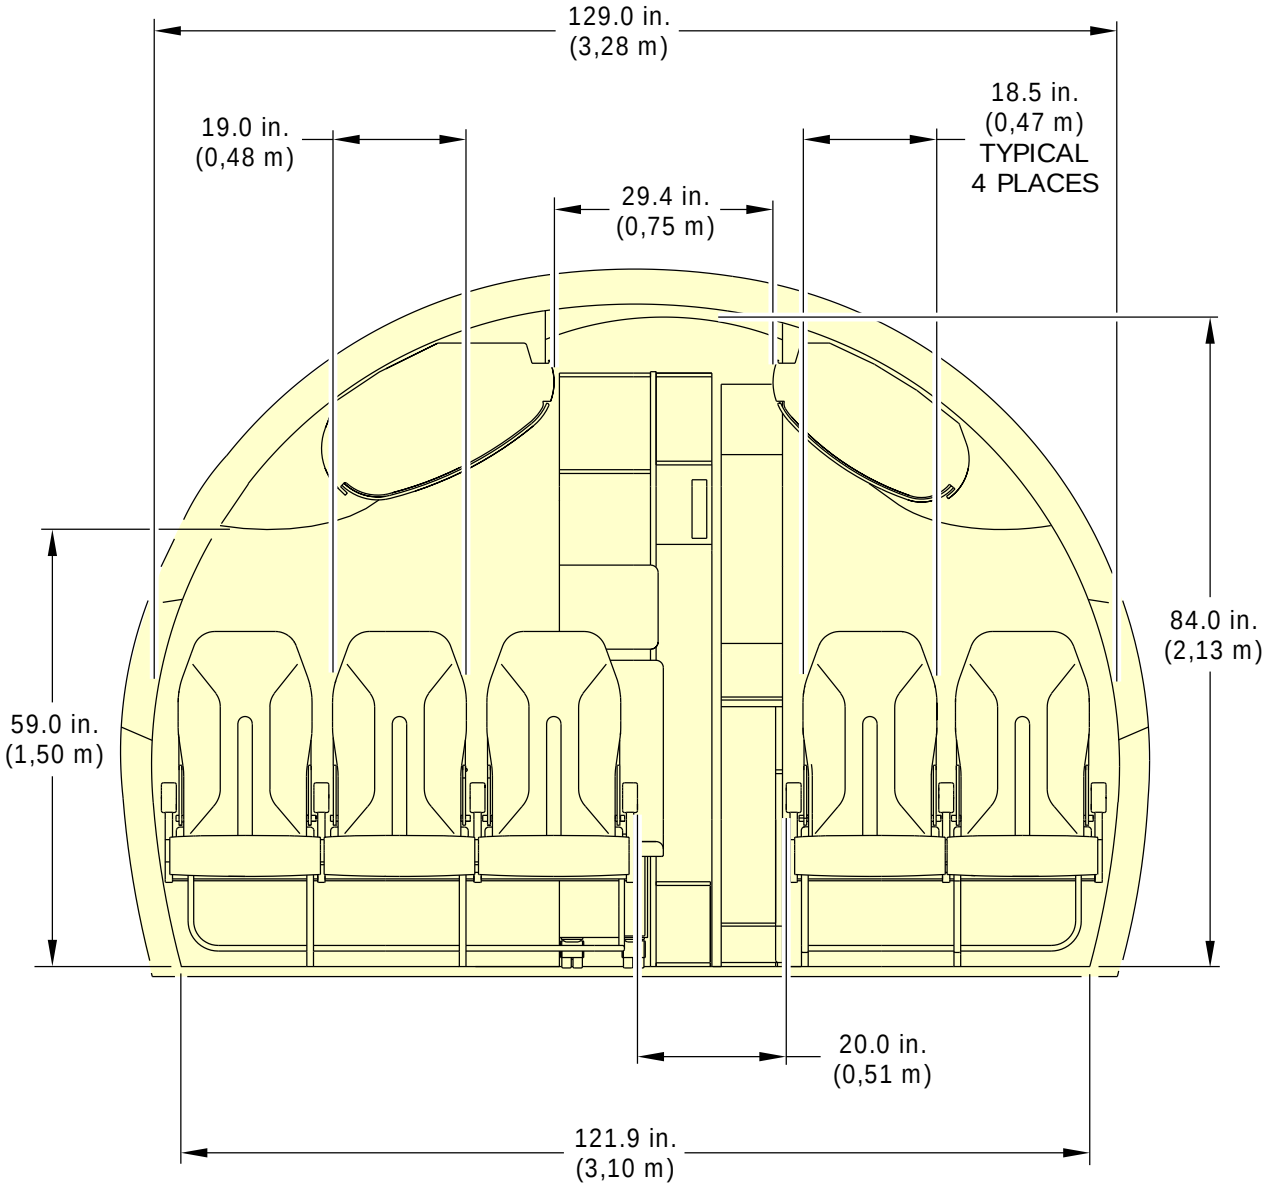

ICN-BD500-A-J061200-A-3AB48-00010-A-001-01

Figure 5 Passenger cross-section (economy class)

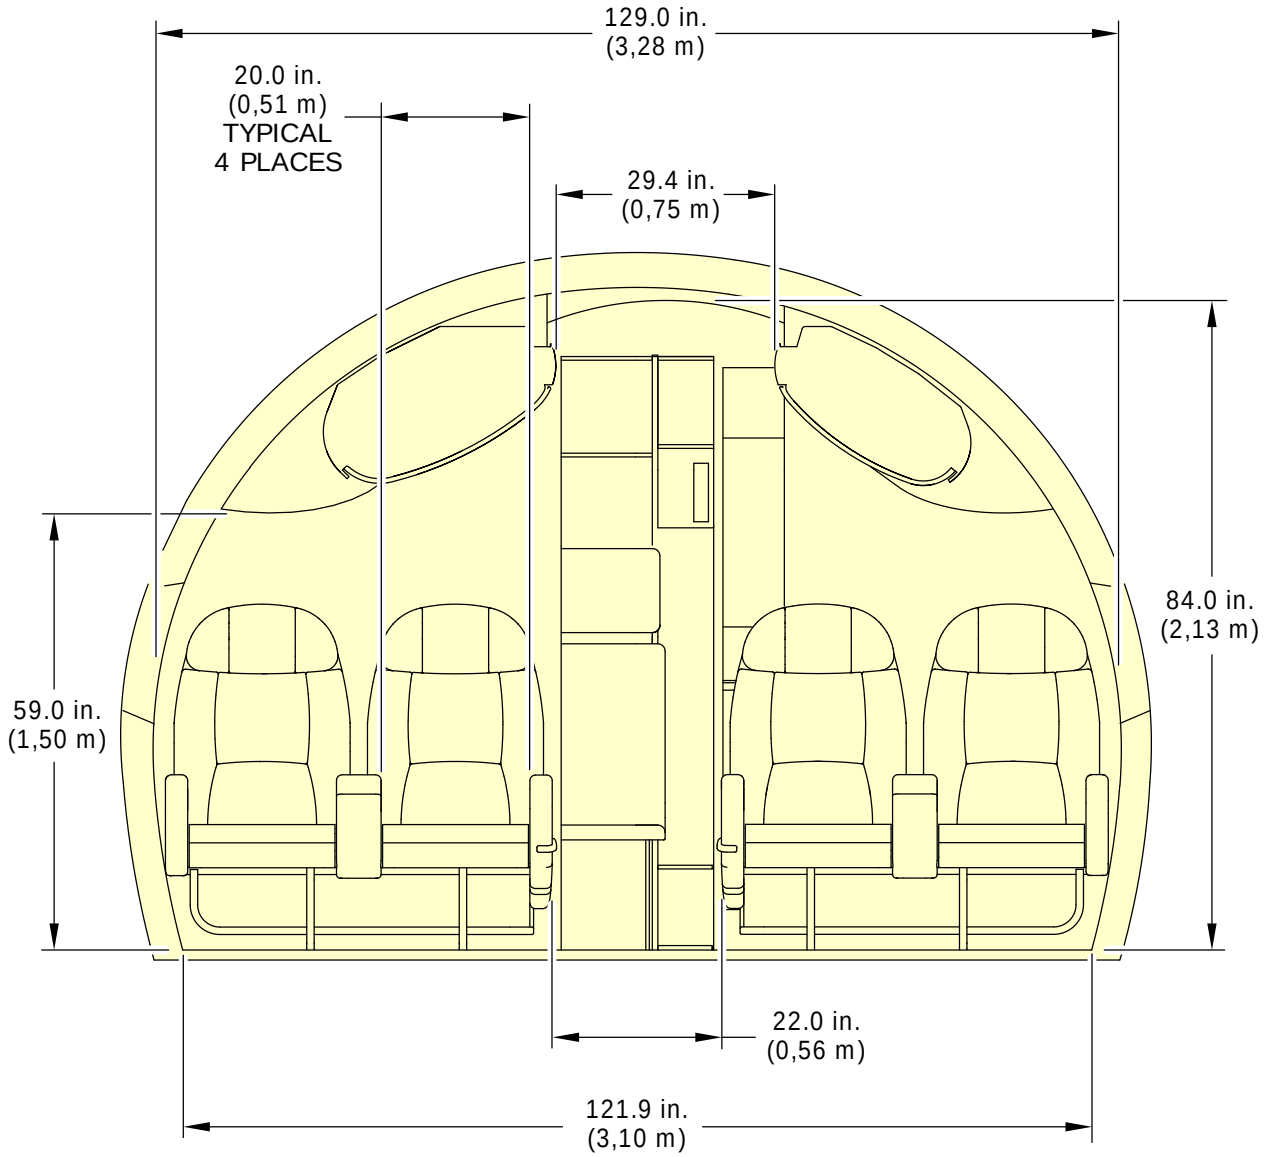

ICN-BD500-A-J061200-A-3AB48-00011-A-001-01

Figure 6 Passenger cross-section (optional business class)

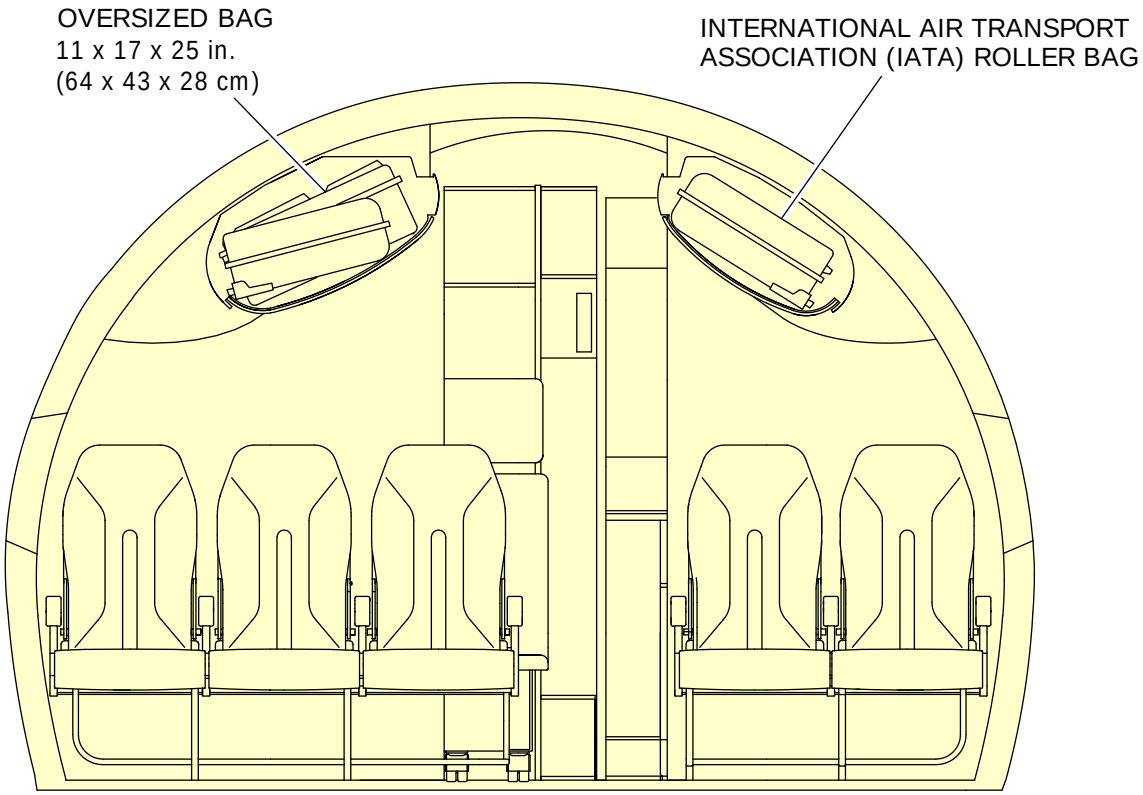

ICN-BD500-A-J061200-A-3AB48-00012-A-001-01

Figure 7 Overhead stowage bins

6 Cargo compartment

Two under-floor cargo compartments are provided, each with a dedicated outward-opening access door. The forward compartment is positioned between the forward equipment compartment and the Environmental Control System (ECS) distribution bay. The aft compartment is positioned between the mid equipment compartment and the water system bay. Refer to Fig. 8

Both compartments are furnished with heavy duty floor panels and sidewall linings and are sealed to meet the requirements of a Class C compartment. Decompression and ventilation panels are provided as well. The compartment linings also incorporate provisions for compartment lighting, smoke detector, and fire extinguish.

The combined maximum weight loading of the cargo compartment is 11 139 lb (5052 kg).

6.1 Cargo door nets

Protective nets are provided at the door area of each cargo compartment to prevent baggage from fouling the door due to in-flight shifting of the loads. Refer to Fig. 9 .

6.2 Volumes – Cargo compartment

The estimated volume of the cargo compartments is based on geometric volume and accounts for the unusable area in the vicinity of the cargo doors. Table 9 lists the estimated wet volume of the cargo compartments.

Table 9 Cargo compartment volumes

Description	Usable Volume		Maximum load	
	ft^3	m^3	lb	kg
Fwd cargo compartment	447	12.65	5393	2446
Aft cargo compartment	523	14.81	5746	2606

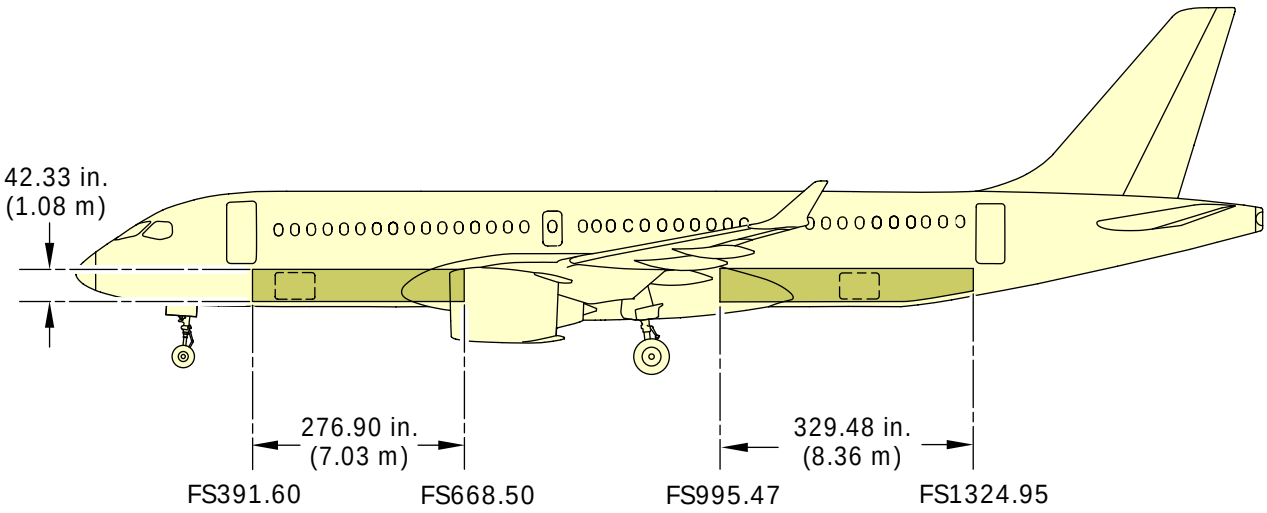

ICN-BD500-A-J000000-A-3AB48-23352-A-001-01

Figure 8 Aircraft cargo side view - (Sheet 1 of 3)

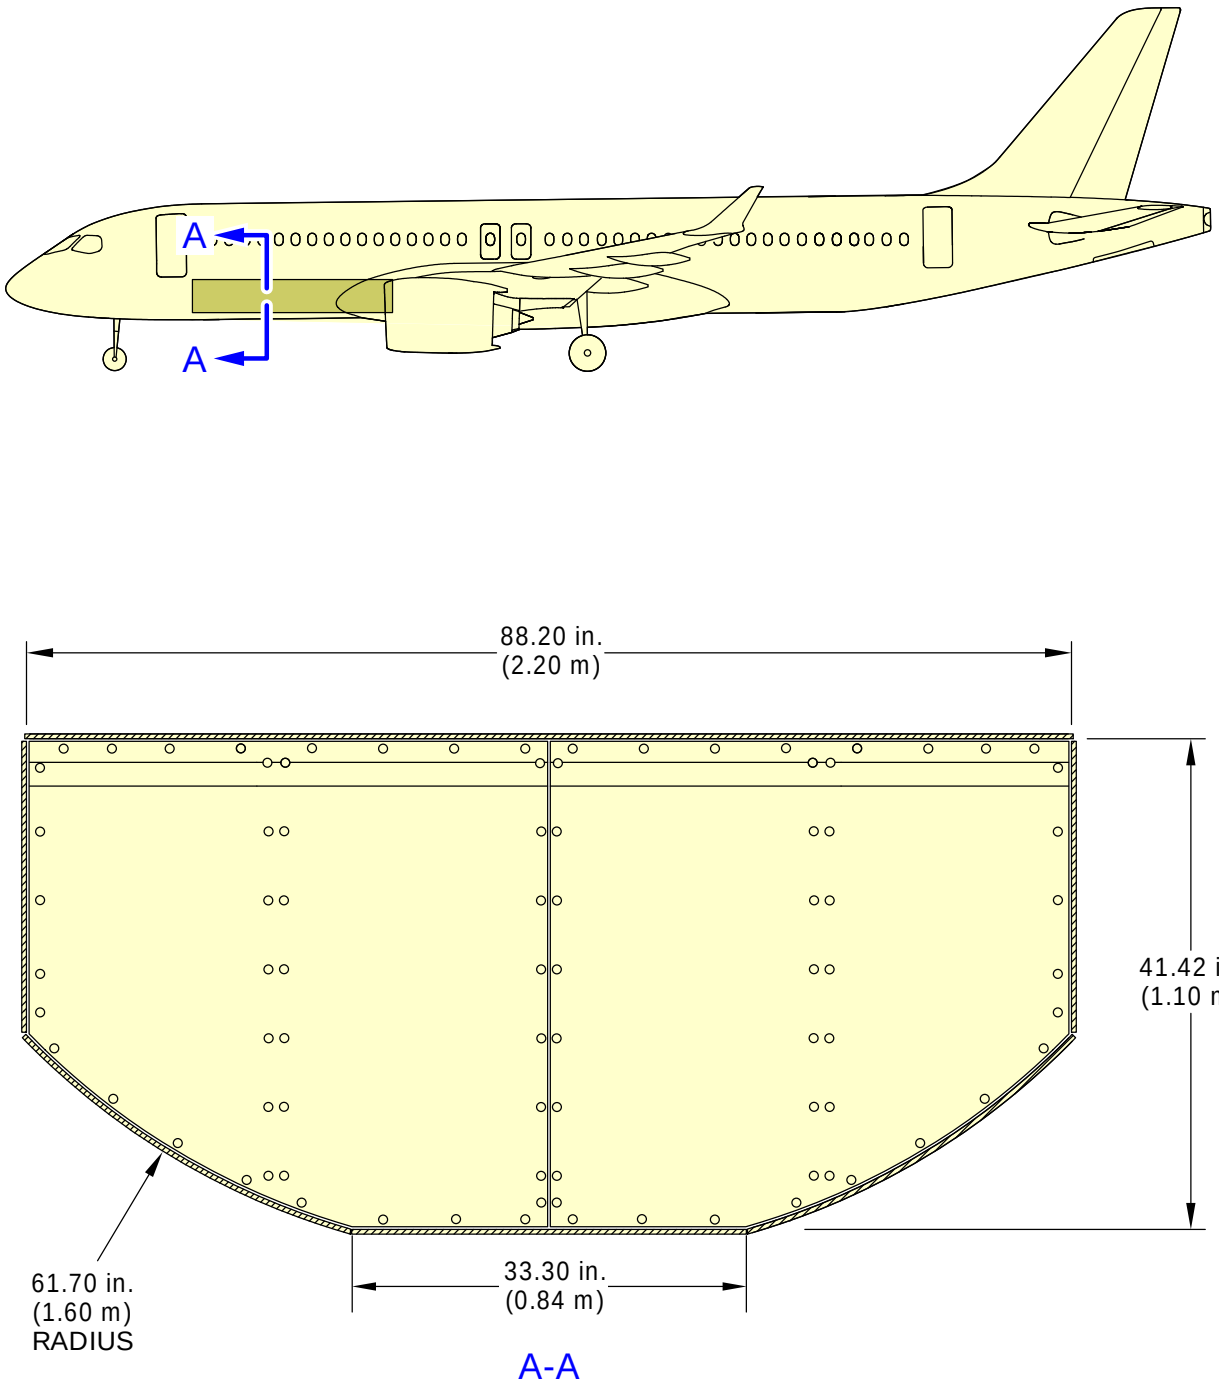

ICN-BD500-A-J084305-A-3AB48-24366-A-001-01

Figure 8 Aircraft cargo side view - (Sheet 2 of 3)

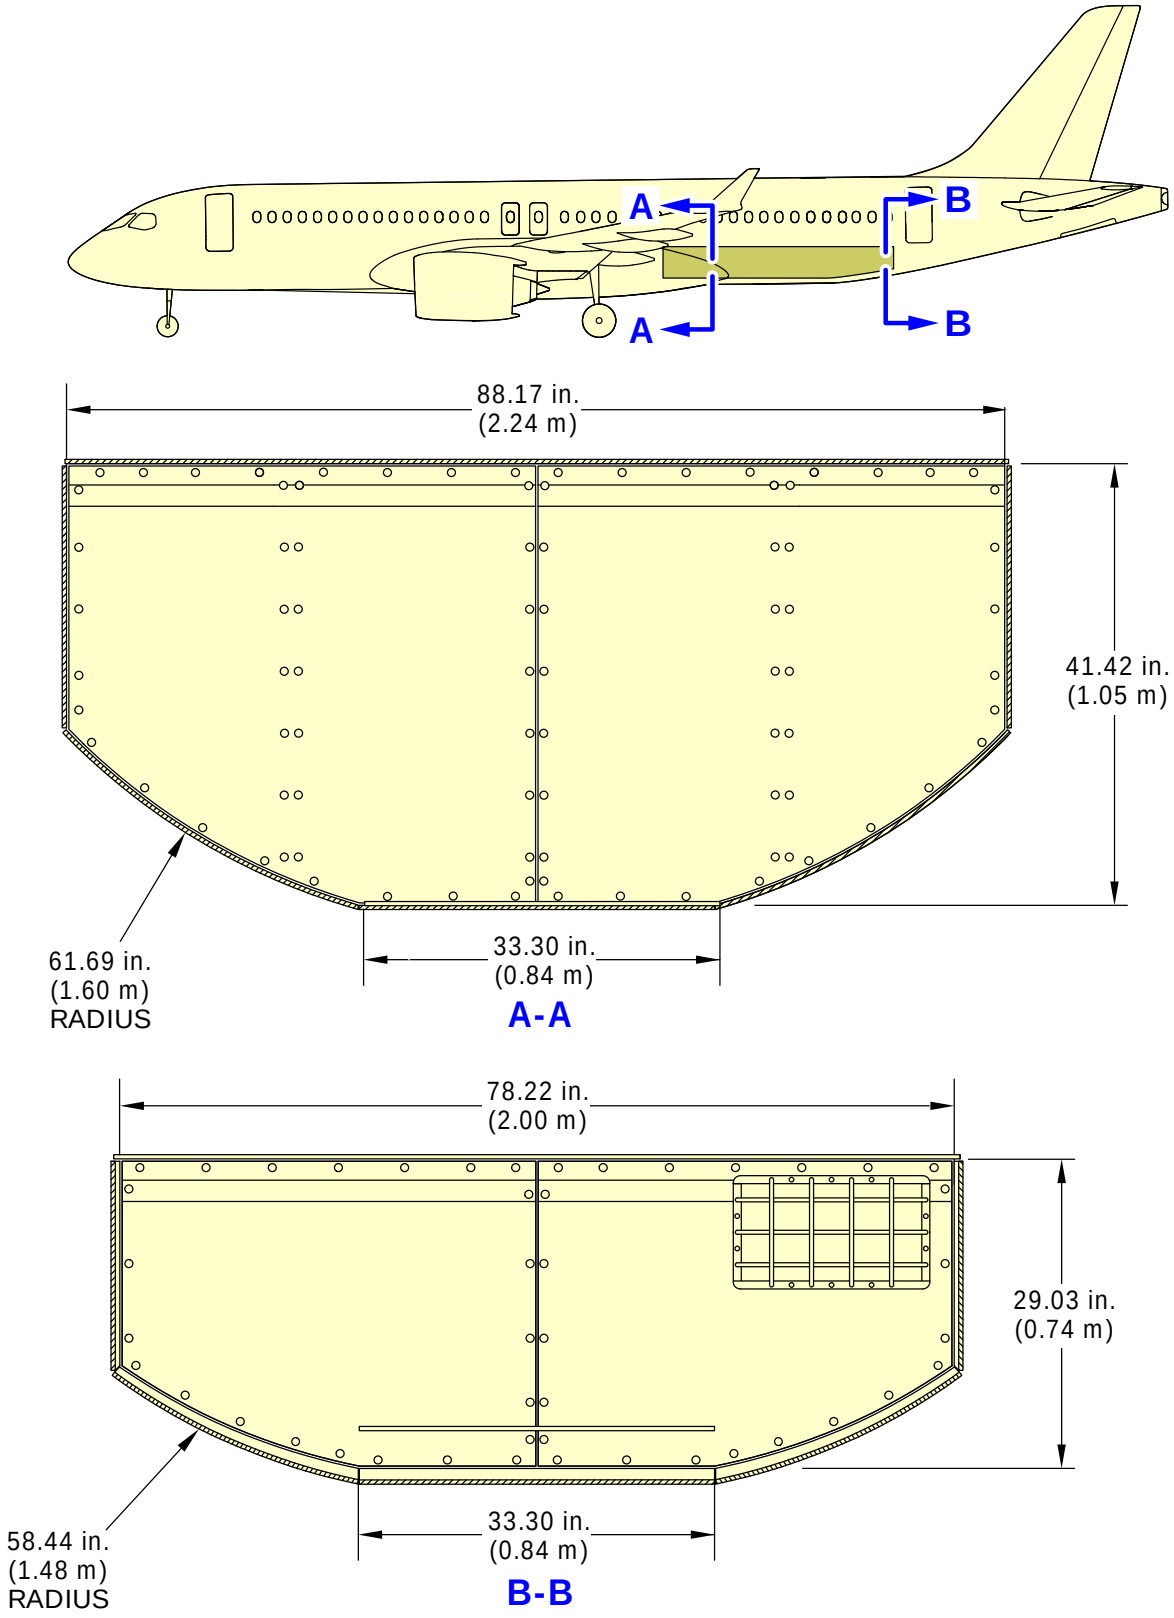

ICN-BD500-A-J084305-A-3AB48-24372-A-001-01

Figure 8 Aircraft cargo side view - (Sheet 3 of 3)

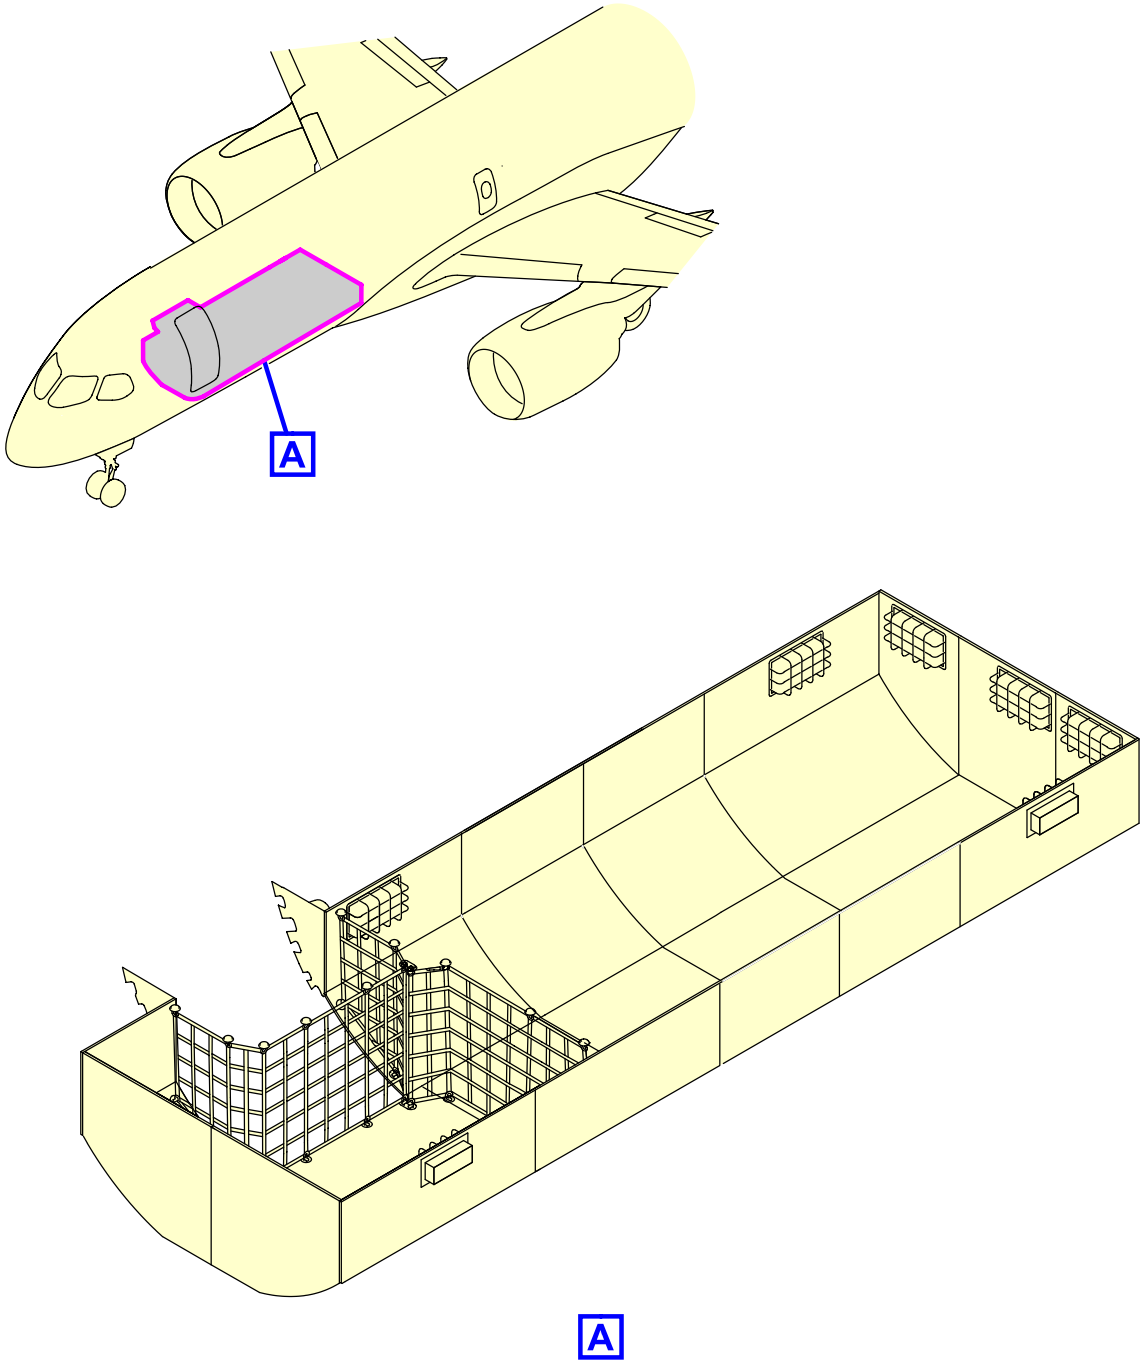

ICN-BD500-A-J084305-A-3AB48-24368-A-001-01

Figure 9 Cargo nets - (Sheet 1 of 3)

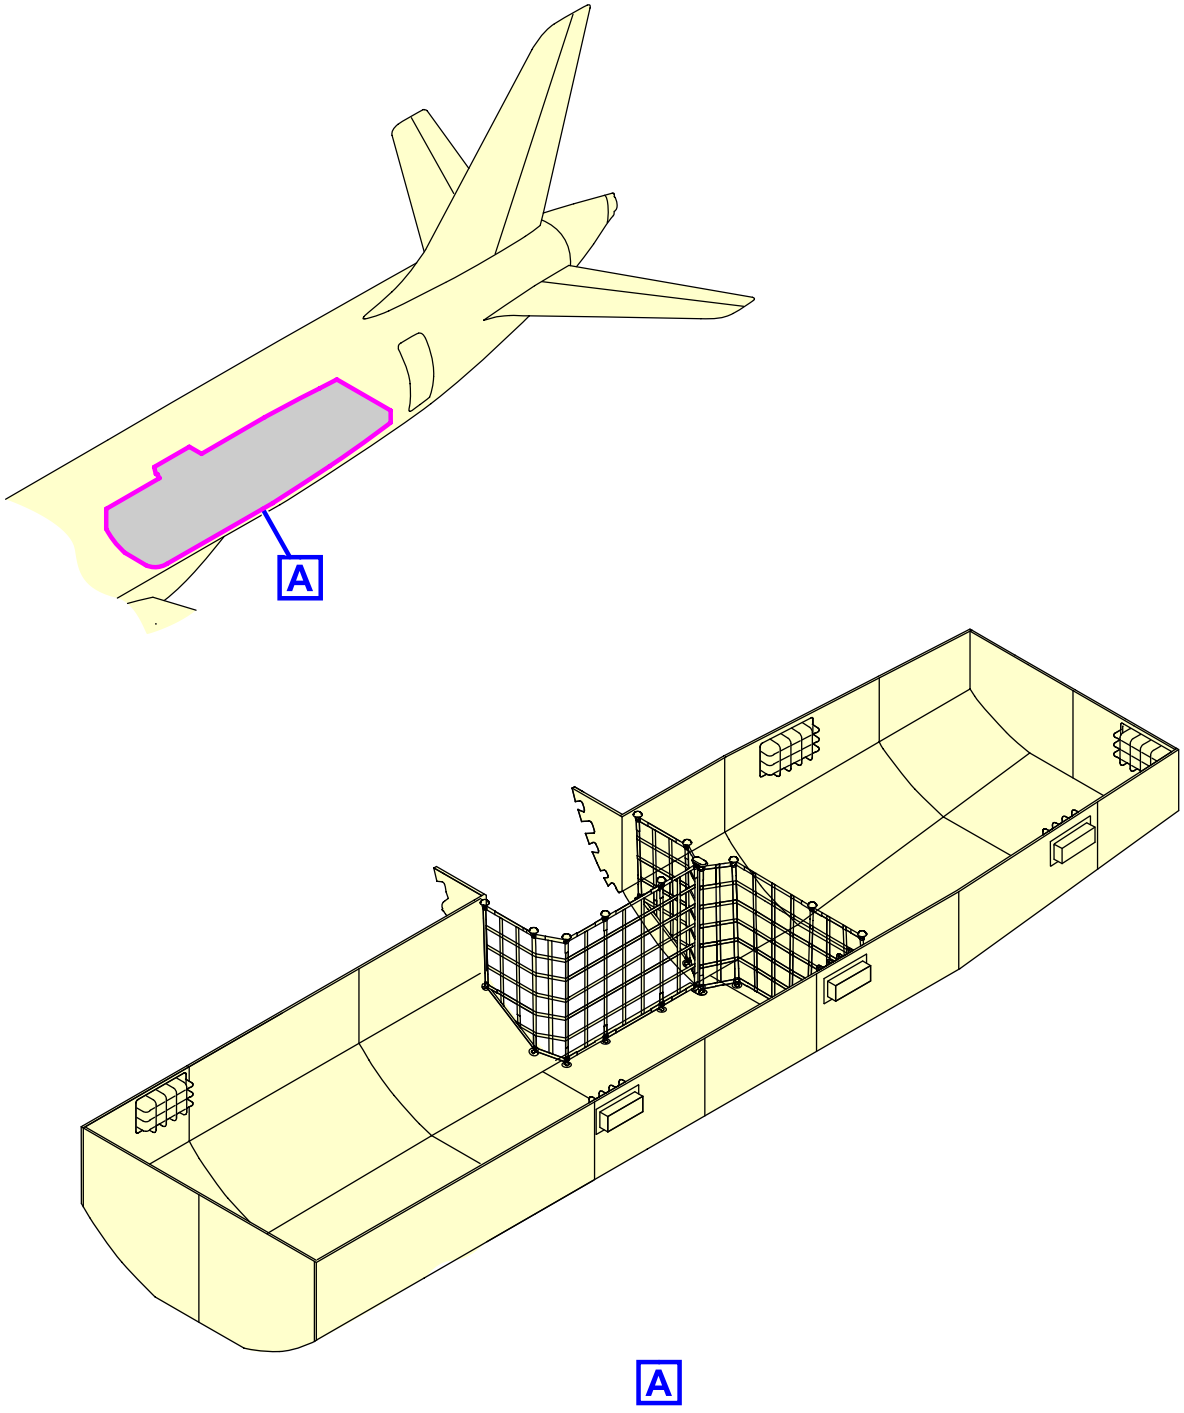

ICN-BD500-A-J084305-A-3AB48-24371-A-001-01

Figure 9 Cargo nets - (Sheet 2 of 3)

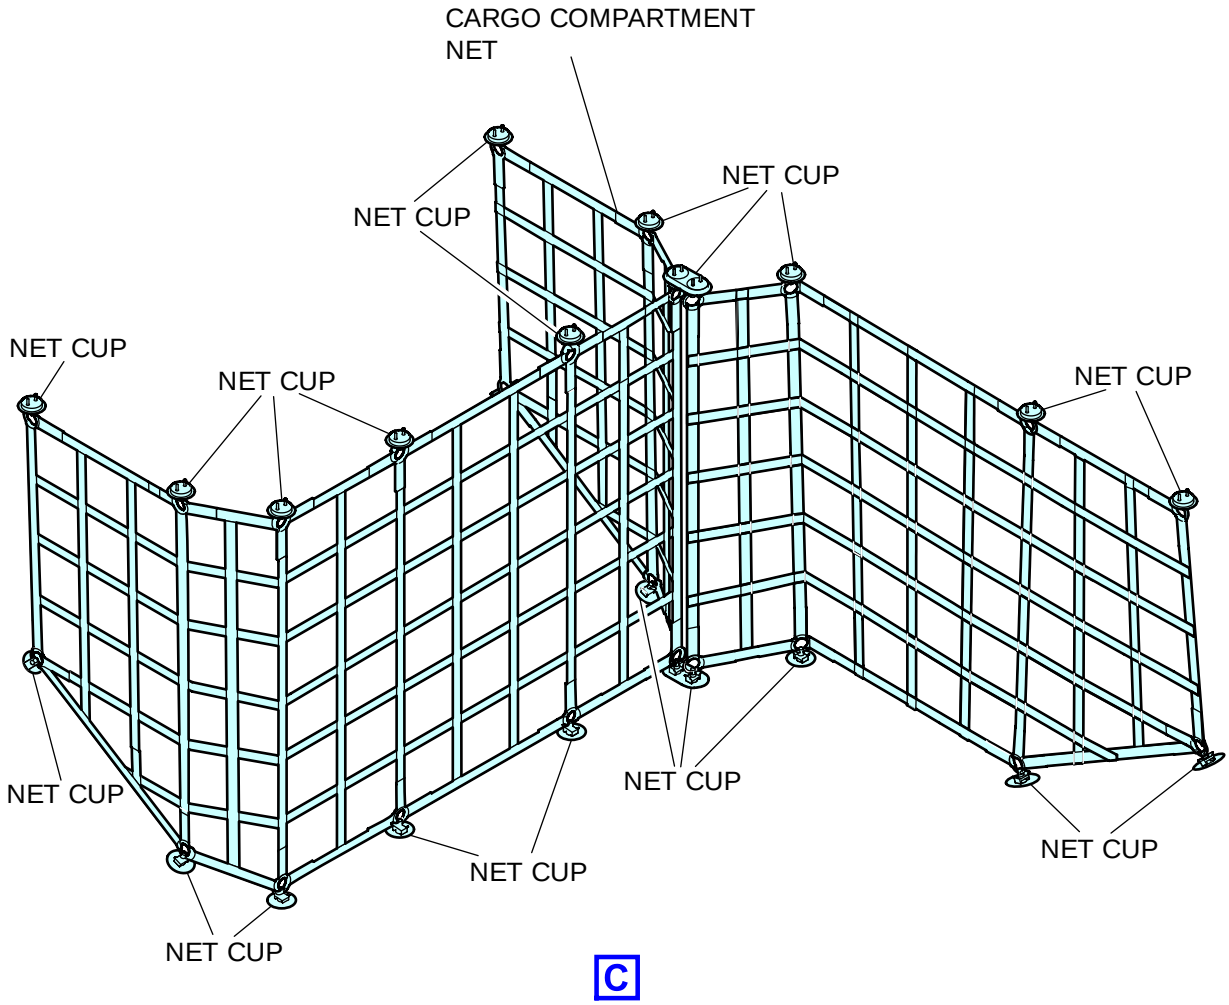

ICN-BD500-A-J502200-C-3AB48-17809-A-001-01

Figure 9 Cargo nets - (Sheet 3 of 3)

7 Door clearances and clear opening dimensions

A general description of the doors is as follows:

7.1 Passenger/Crew

Two semi-plug type doors on the left side of the aircraft provide access for passengers and crew. Door 1L is considered the primary entrance while door 2L provides a secondary entrance available for passenger loading/unloading as well as ground servicing.

Each door is classified as a type C floor level exit. Due to the sill height, every door incorporates an emergency evacuation slide system. In addition each one translates outwards from closed position, supported by a hinged arm to rest in open position.

Every door is operable from the exterior and interior of the aircraft and features an inspection window to allow verification of the outside conditions from the interior. The exterior operating handle has a linear motion and is interconnected to a vent flap system to provide pressure equalization between the aircraft and the ambient air prior to be opened.

Each door is fully lined and insulated to meet thermal and noise performance requirements.

For Passenger/Crew doors distance from the nose, refer to Fig. 11Fig. 12 . For aft passenger door opening and clearances, refer to Fig. 13 .

7.2 Emergency exit

The over-wing emergency exits are type III semi-plug type doors.

The exits are provided with an operating handle with removable cover and are fitted with a standard sized passenger compartment window. Each door is fully lined and insulated to meet thermal and noise performance requirements.

The door rotates upwards from the closed position, supported by a hinged arm to rest in open position. The door opening sequence is automatically supported by the energy stored in its own mechanism.

For emergency access to the passenger compartment, the doors may be opened from an exterior handle.

Due to the exit path height from the ground, an off-wing evacuation slide system is provided.

For over-wing emergency exits distance from the nose, refer to Fig. 11 . For doors dimensions, refer to Table 10 .

7.3 Flight compartment emergency exit

The flight compartment is outfitted with a single, inward-opening overhead escape hatch.

7.4 Cargo doors

Access doors are provided to allow cargo compartment loading and unloading.

The semi-plug forward and aft cargo doors are identical components, each hinged along the top edge of its frame.

Each door incorporates an exterior lock/unlock handle with linear motion that is interconnected to a vent flap system and provide pressure equalization between the aircraft and the ambient air prior to be opened.

An electrical actuation system with a switch panel, installed on the fuselage near each door, is provided to open and close the door.

Each door is fully lined and insulated to meet thermal and noise performance requirements.

For cargo doors distance from the nose, refer to Fig. 11 . For doors dimensions, refer to Table 10 . For forward cargo door opening and clearances, refer to Fig. 14 . For aft cargo door opening and clearances, refer to Fig. 15 .

7.5 Service doors

Two semi-plug type doors are provided on the right side of the aircraft to provide access for the forward (door 1R) and aft (door 2R) galley service areas.

Each door is classified as a type C floor level exit. Due to the sill height, each door incorporates an emergency evacuation slide system.

Each door translates outwards from the closed position, supported by a hinged arm and stabilizing system, to rest parallel to the fuselage in the open position.

Each door is operable from the exterior and interior of the aircraft and features an inspection window to allow verification of the outside conditions from the interior. The exterior operating handle has a linear motion and is interconnected to a vent flap system to provide pressure equalization between the aircraft and the ambient air prior to be opened.

Each door is fully lined and insulated to meet thermal and noise performance requirements.

For service doors distance from the nose, refer to Fig. 11 . For service doors dimensions, refer to Table 10 . For forward service door opening and clearances, refer to Fig. 16 . For aft service door opening and clearances, refer to Fig. 17 .

7.6 Forward avionics bay door

A plug-type door is provided in the forward fuselage to gain access to the pressurized forward equipment compartment. The door is fitted with a stowable operating handle.

For forward equipment compartment door distance from the nose, refer to and Fig. 11 . For dimensions, refer to Table 10 .

7.7 Mid avionics bay door

A plug-type door is provided in the mid fuselage to gain access to the pressurized mid equipment compartment. The door is fitted with a stowable operating handle.

For mid equipment compartment door distance from the nose, refer to Fig. 11 . For dimensions, refer to Table 10 .

7.8 Aft equipment bay door

A door is provided in the aft fuselage to gain access to the unpressurized aft equipment compartment.

For aft equipment compartment door distance from the nose, refer to Fig. 11 . For dimensions, refer to Table 10 .

7.9 Doors identification

This section shows a general overview of the doors

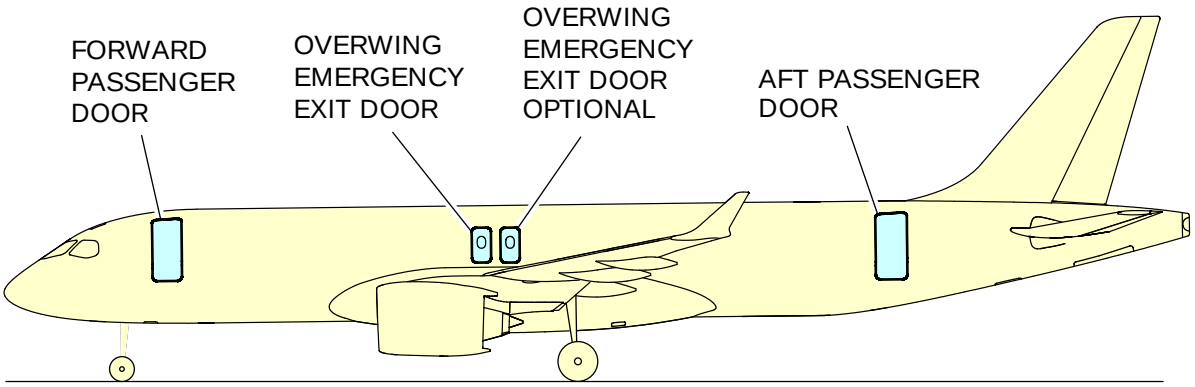

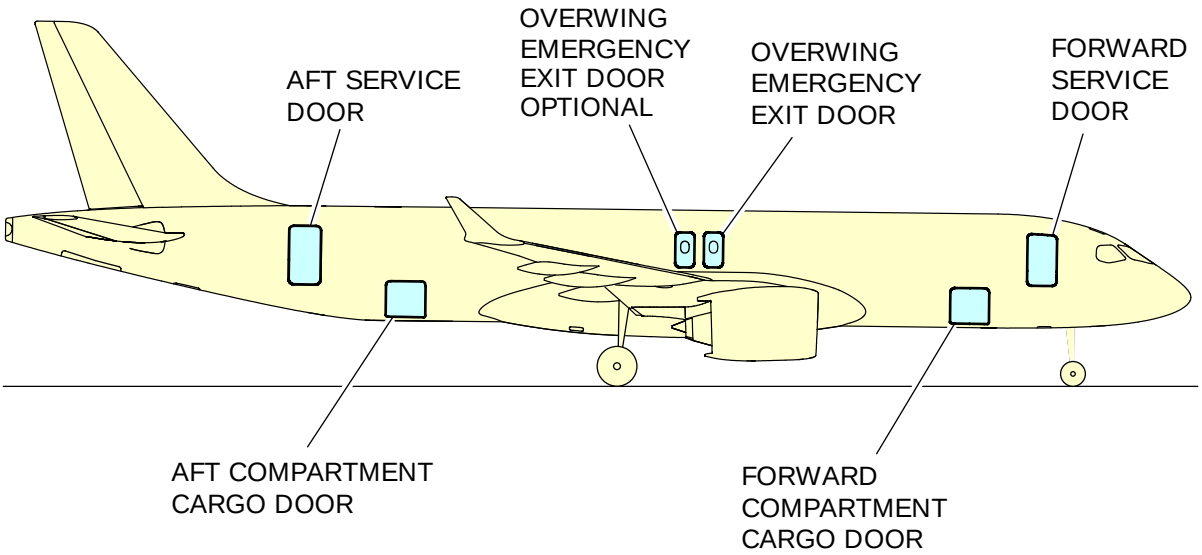

ICN-BD500-A-J000000-A-3AB48-23217-A-001-01

Figure 10 General door location

7.10 Access and exit doors dimensions

Table 10 Access and exit doors dimensions

Door	Height	Width
Main entrance door - Type C exit (door 1L)	6 ft 3 in. (1,9 m)	2 ft 6 in. (0,8 m)
Service door - Type C exit (door 1R)	5 ft 0 in. (1,5 m)	2 ft 6 in. (0,8 m)
Aft entrance door - Type C exit (door 2L)	6 ft 0 in. (1,8 m)	2 ft 6 in. (0,8 m)
Service door - Type C exit (door 2R)	5 ft 0 in. (1,5 m)	2 ft 6 in. (0,8 m)
Forward avionics bay door	2 ft 8 in. (0,81 m)	3 ft 8 in. (1,1 m)
Mid avionics bay door	2 ft 8 in. (0,81 m)	3 ft 8 in. (1,1 m)
Aft equipment bay door	3 ft 6 in. (1,08 m)	1 ft 11 in. (0,6 m)
Forward cargo compartment door	2 ft 8 in. (0,81 m)	3 ft 8 in. (1,1 m)
Aft cargo compartment door	2 ft 8 in. (0,81 m)	3 ft 8 in. (1,1 m)
Over-wing emergency exit	3 ft 6 in. (1,08 m)	1 ft 11 in. (0,59 m)
Flight compartment emergency exit	22 in. (0,559 m)	20 in. (0,508 m)

7.11 Door distance from nose

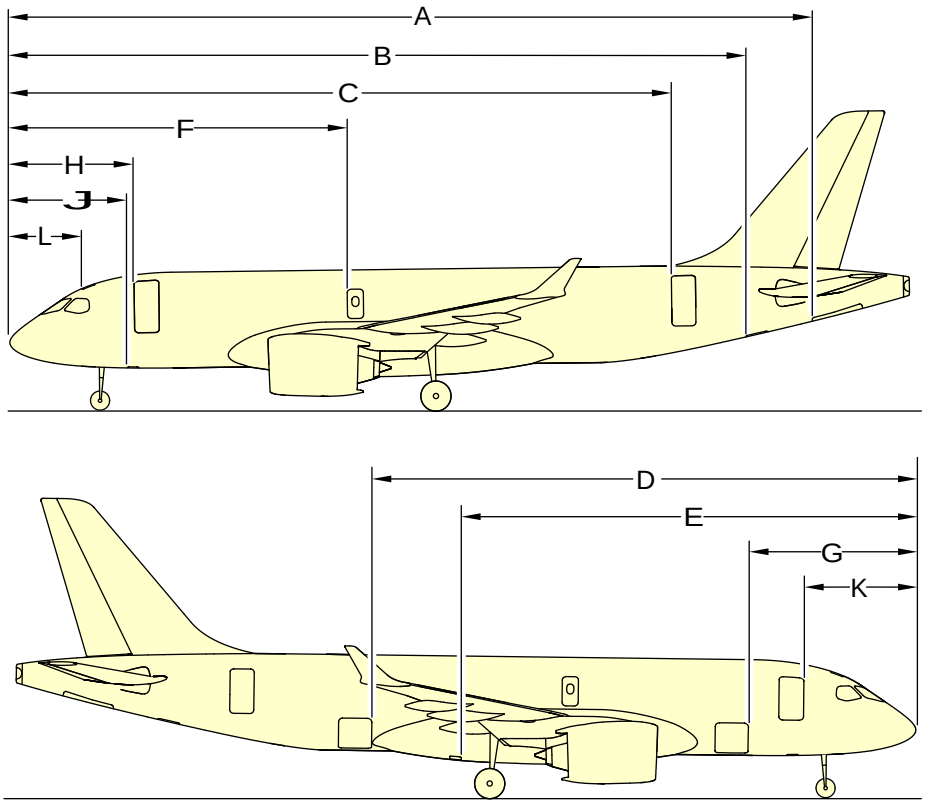

Dimensions	A220-300
A	114 ft 4 in. (34,85 m)
B	106 ft 1 in. (32,33 m)
C	96 ft 8 in. (29,46 m)
D	81 ft 7 in. (24,86 m)
E	64 ft 9 in. (19,74 m)
F	50 ft 1 in. (15,26 m)
G	21 ft 4 in. (6,5 m)
H	15 ft 10 in. (4,8 m)
J	15 ft 0 in. (4,6 m)
K	14 ft 3 in. (4,3 m)
L	9 ft 2 in. (2,8 m)

NOTE

The values shown are the greatest possible variations in attitude due to the variation of aircraft weight and gravity.

ICN-BD500-A-J000000-A-3AB48-21713-A-003-01

Figure 11 Door distance from nose

7.12 Door opening and clearance

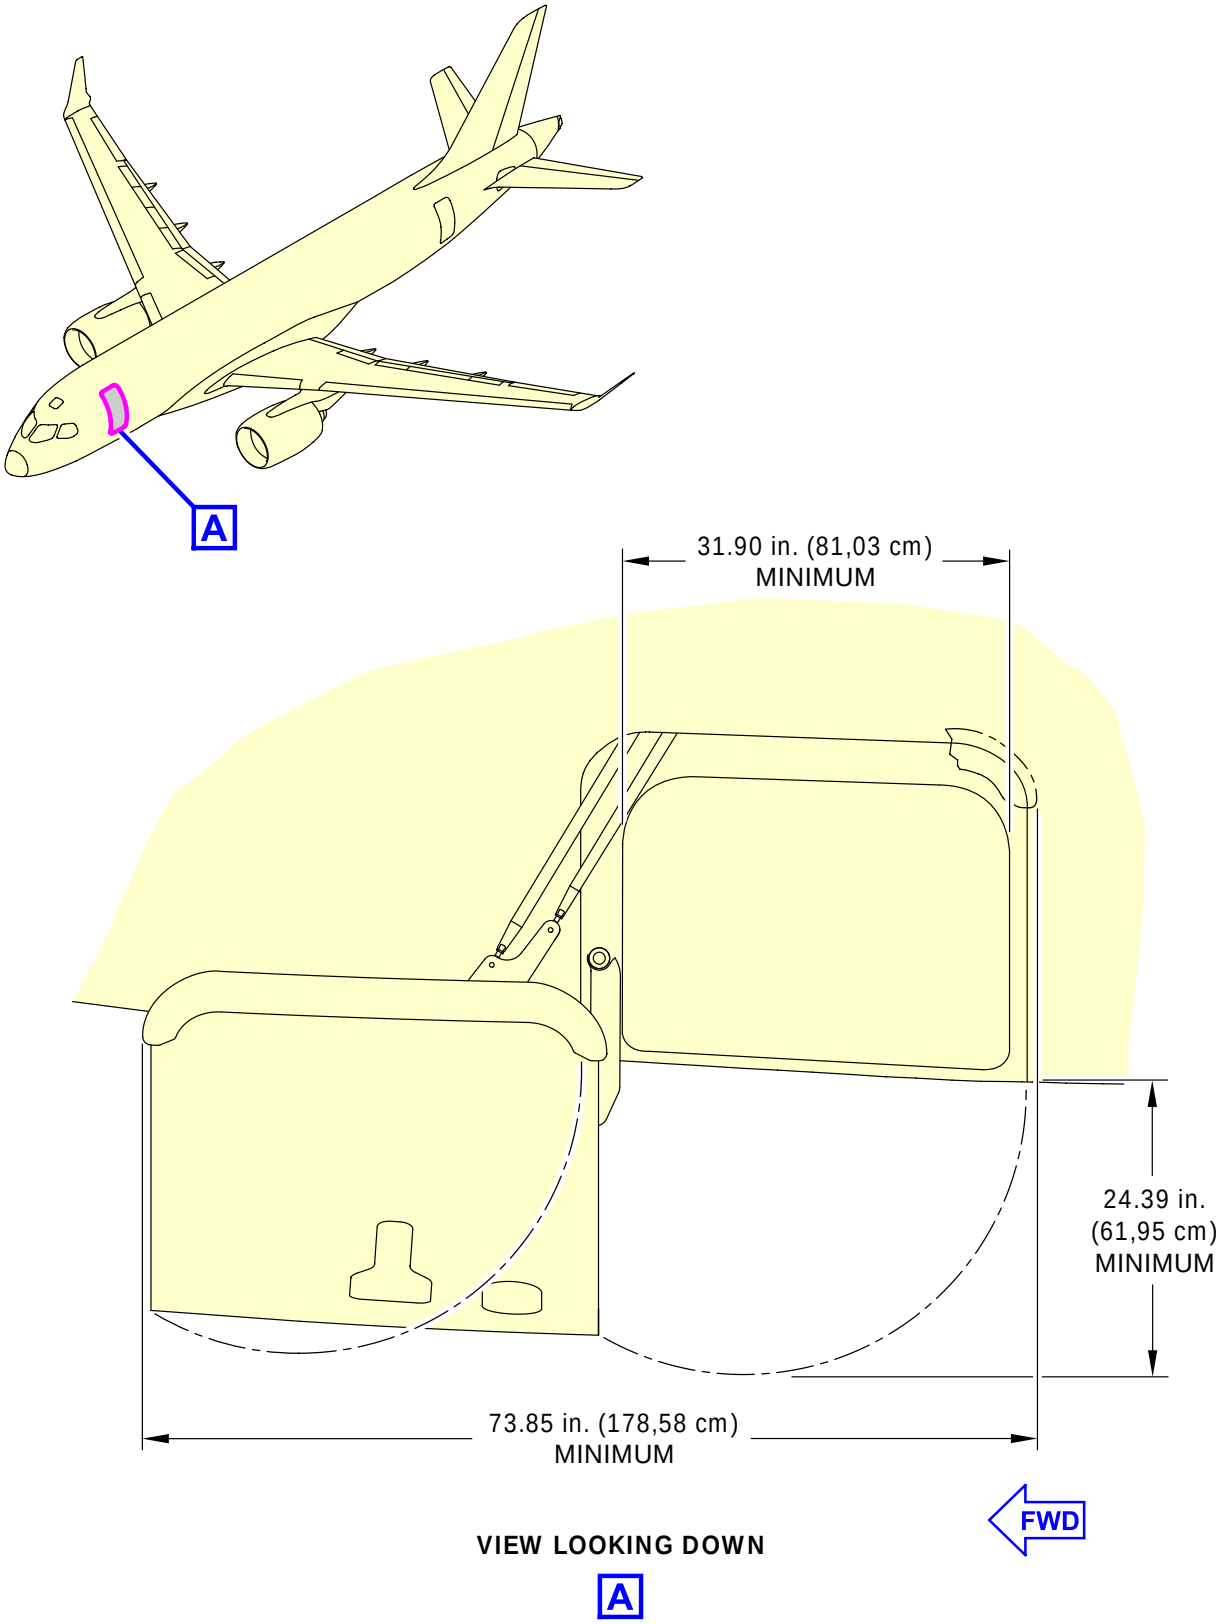

ICN-BD500-A-J061100-A-3AB48-00103-A-003-01

Figure 12 Forward passenger door opening and clearances

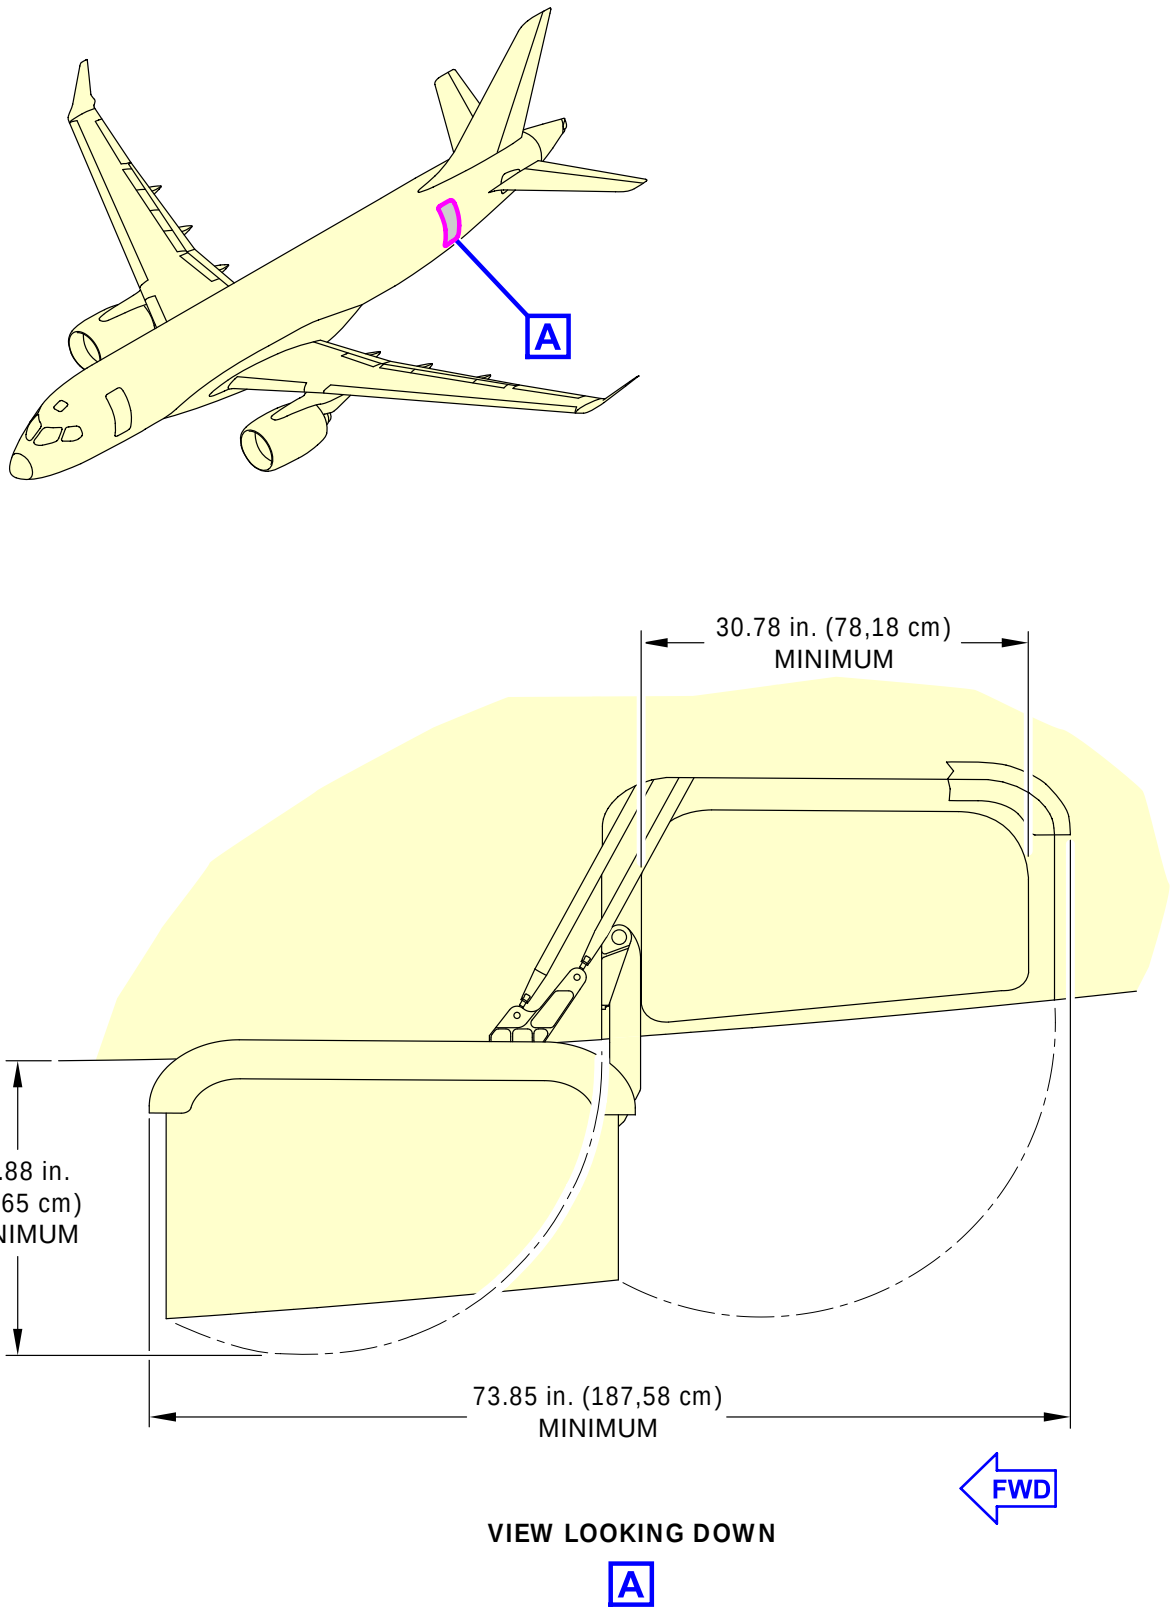

ICN-BD500-A-J061100-A-3AB48-00104-A-003-01

Figure 13 Aft passenger door opening and clearances

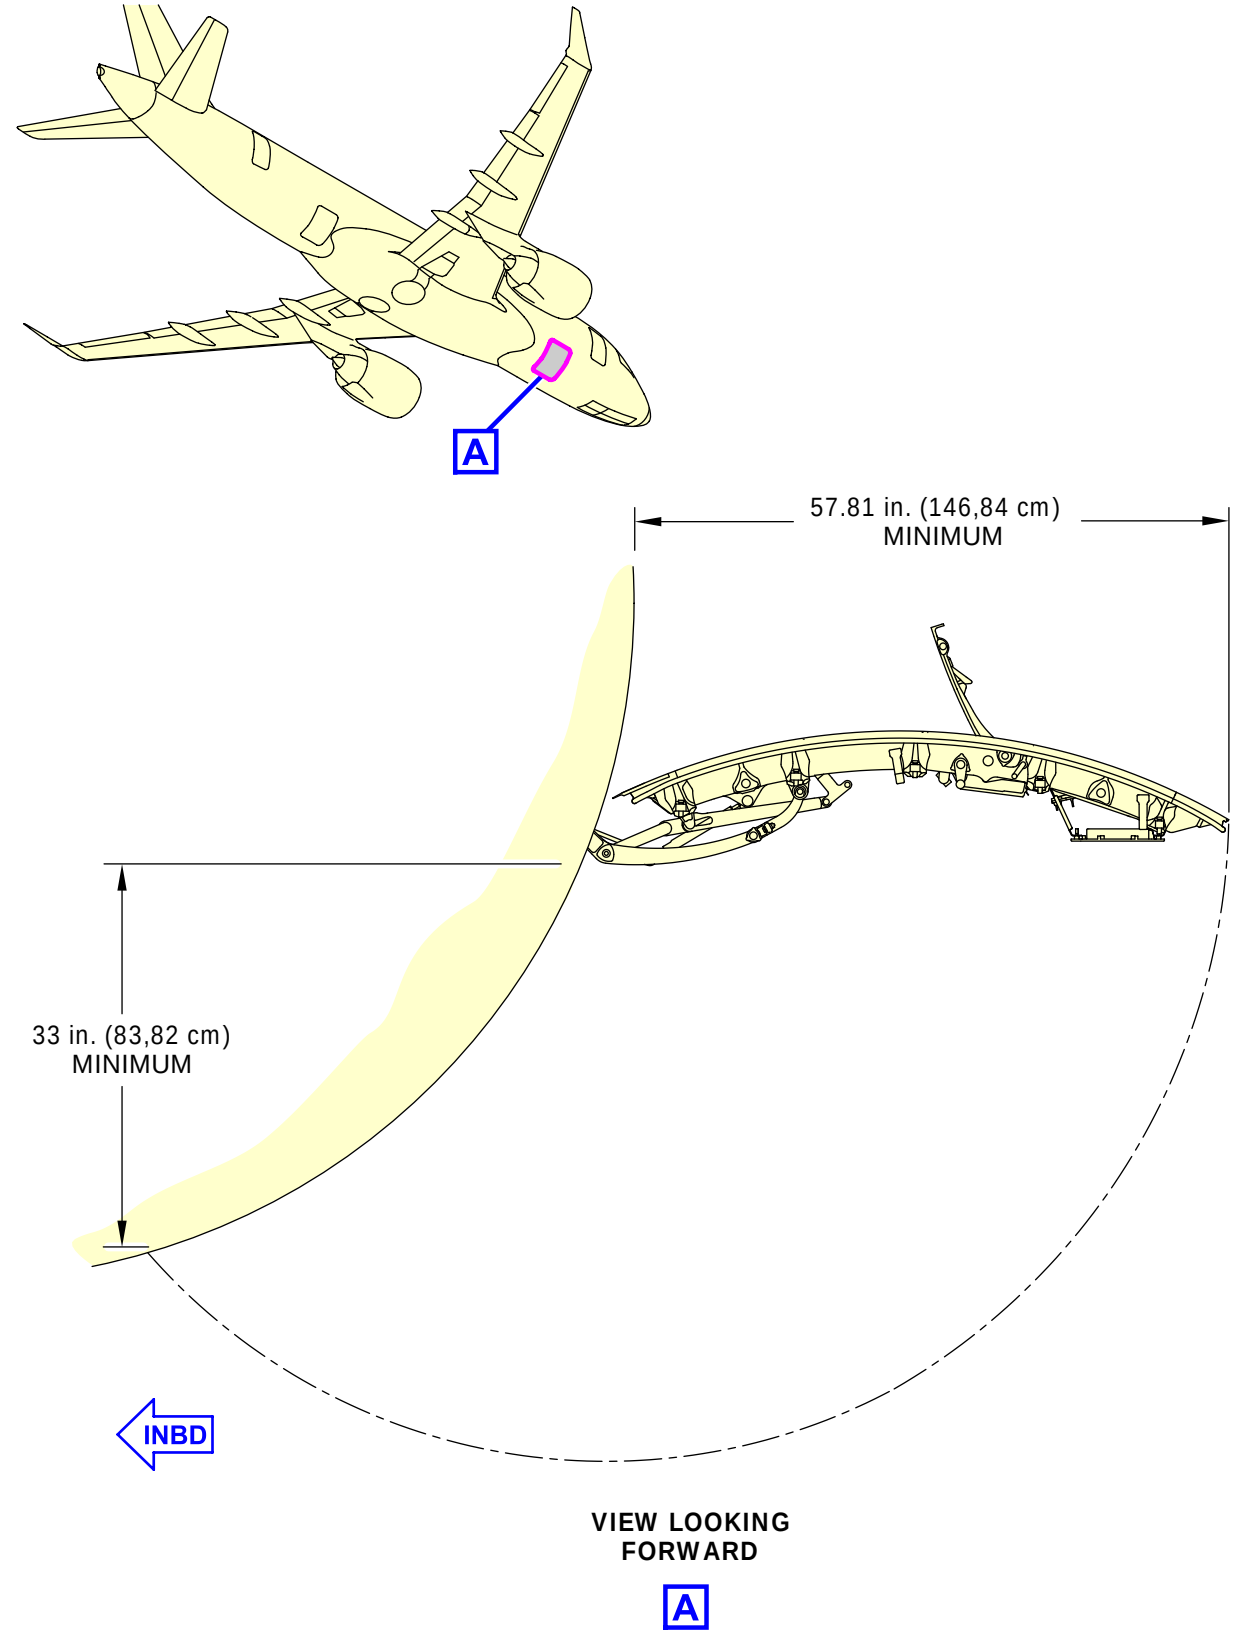

ICN-BD500-A-J061100-A-3AB48-00102-A-002-01

Figure 14 Forward cargo compartment door opening and clearances

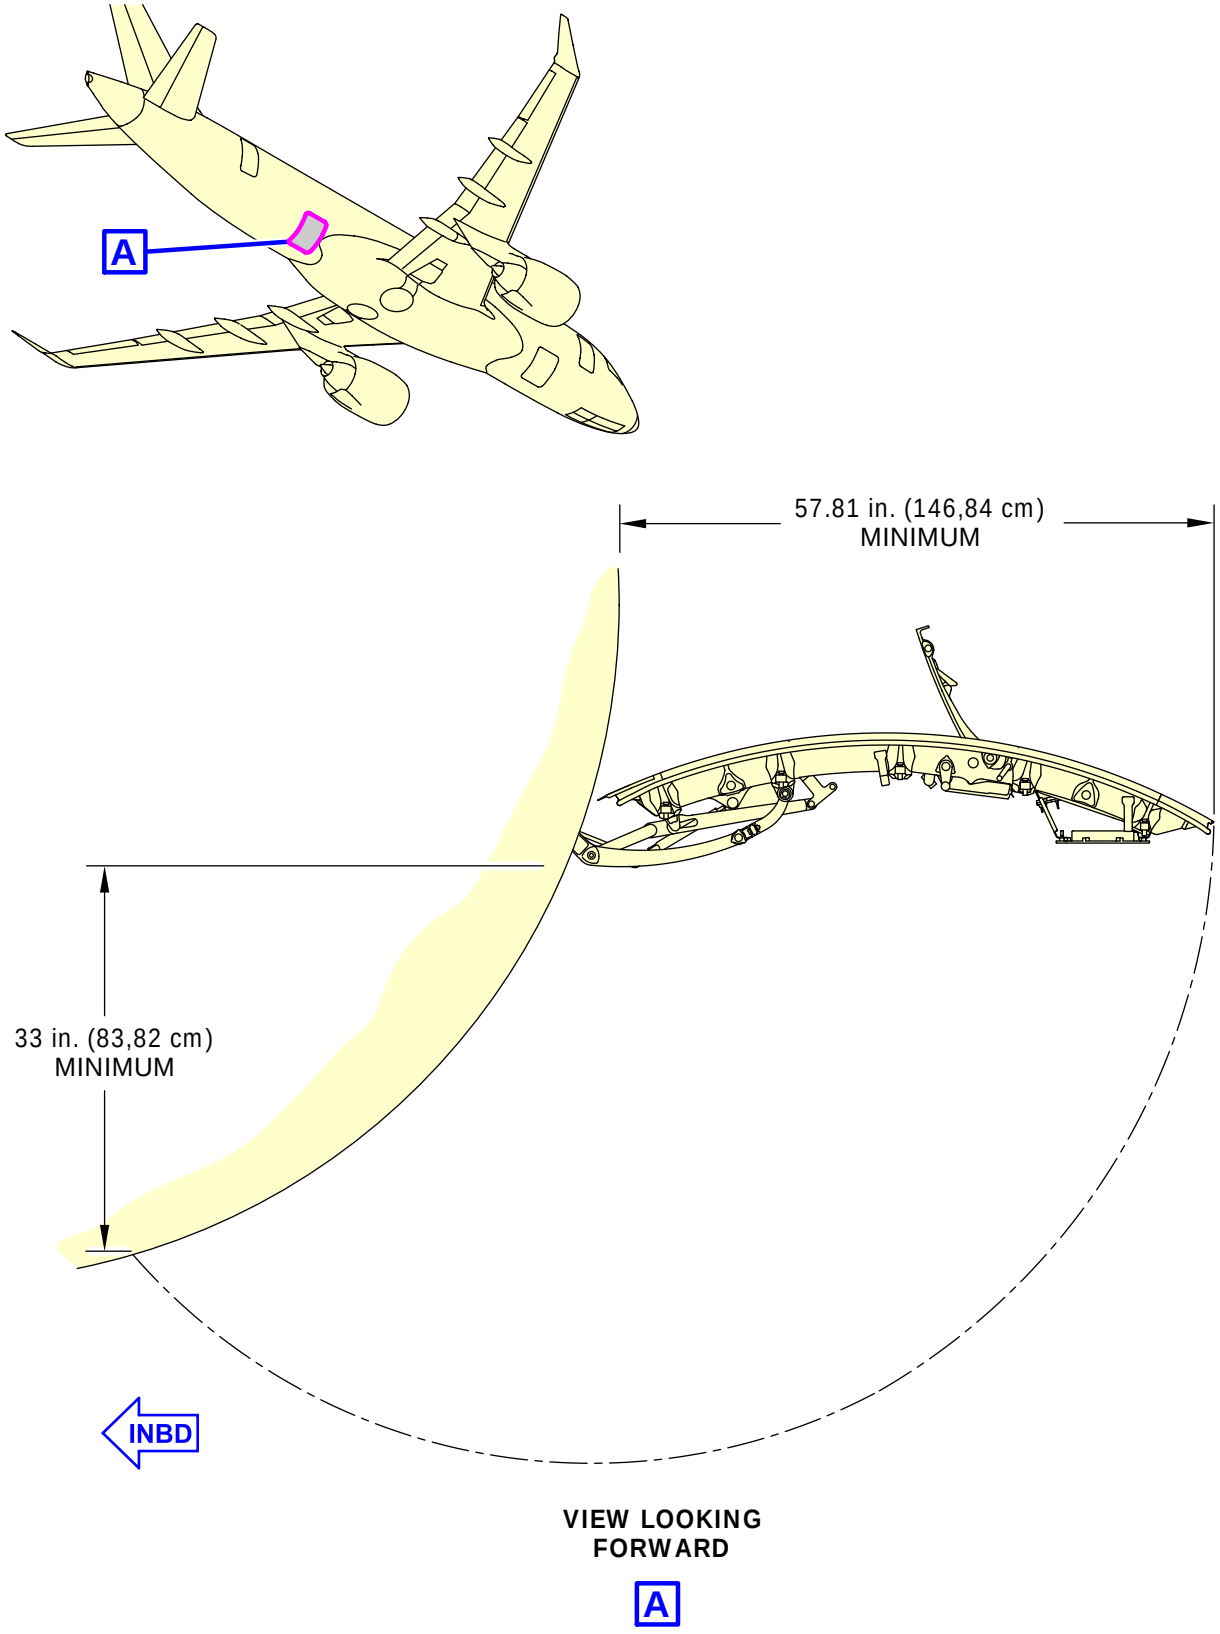

ICN-BD500-A-J061100-A-3AB48-00101-A-002-01

Figure 15 Aft cargo compartment door opening and clearances

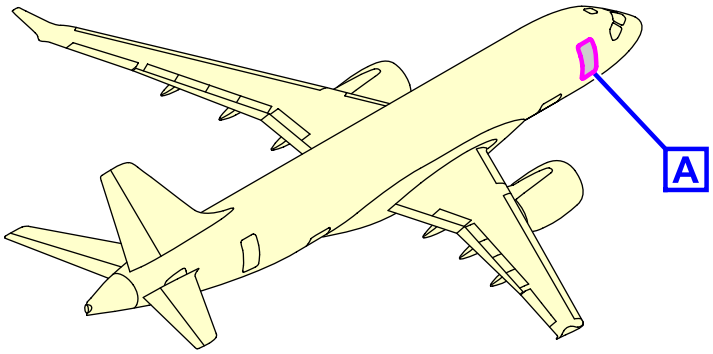

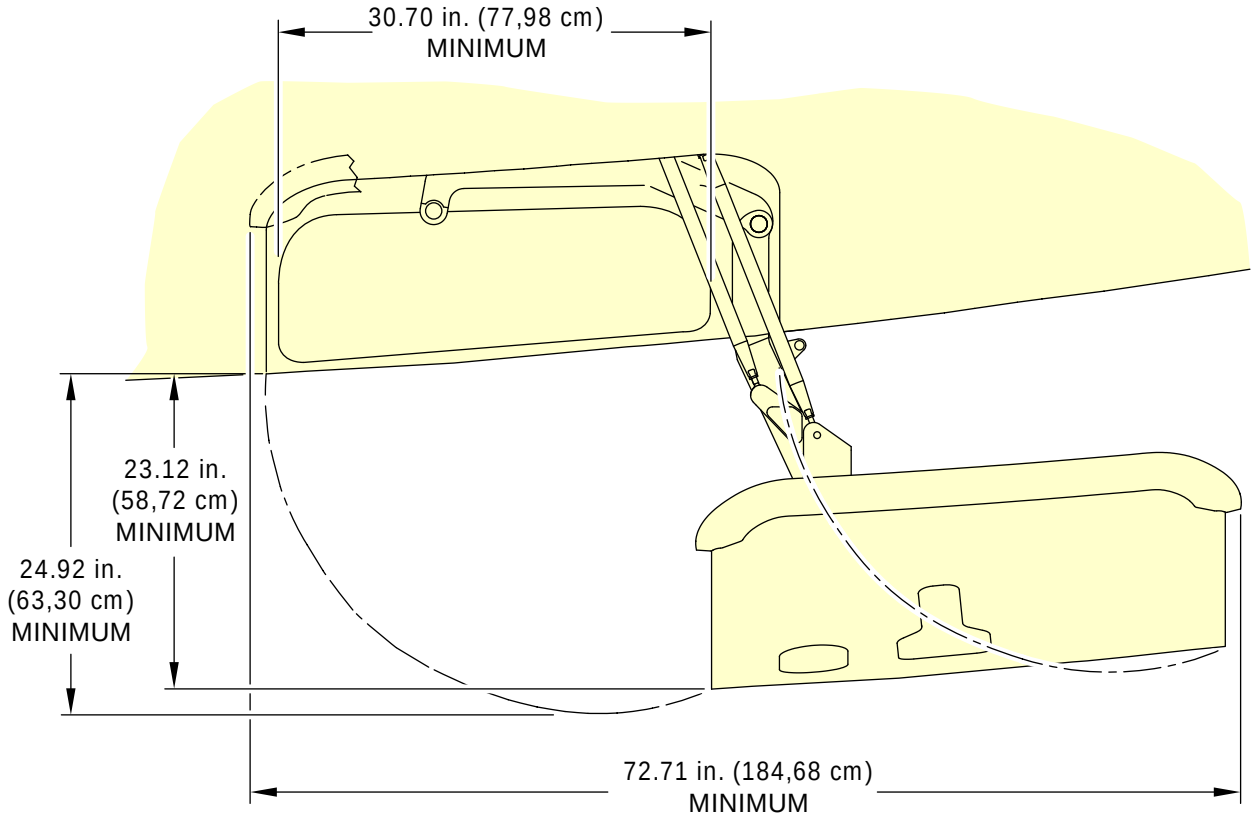

VIEW LOOKING DOWN

A

ICN-BD500-A-J061100-A-3AB48-00106-A-002-01

Figure 16 Forward service door opening and clearance

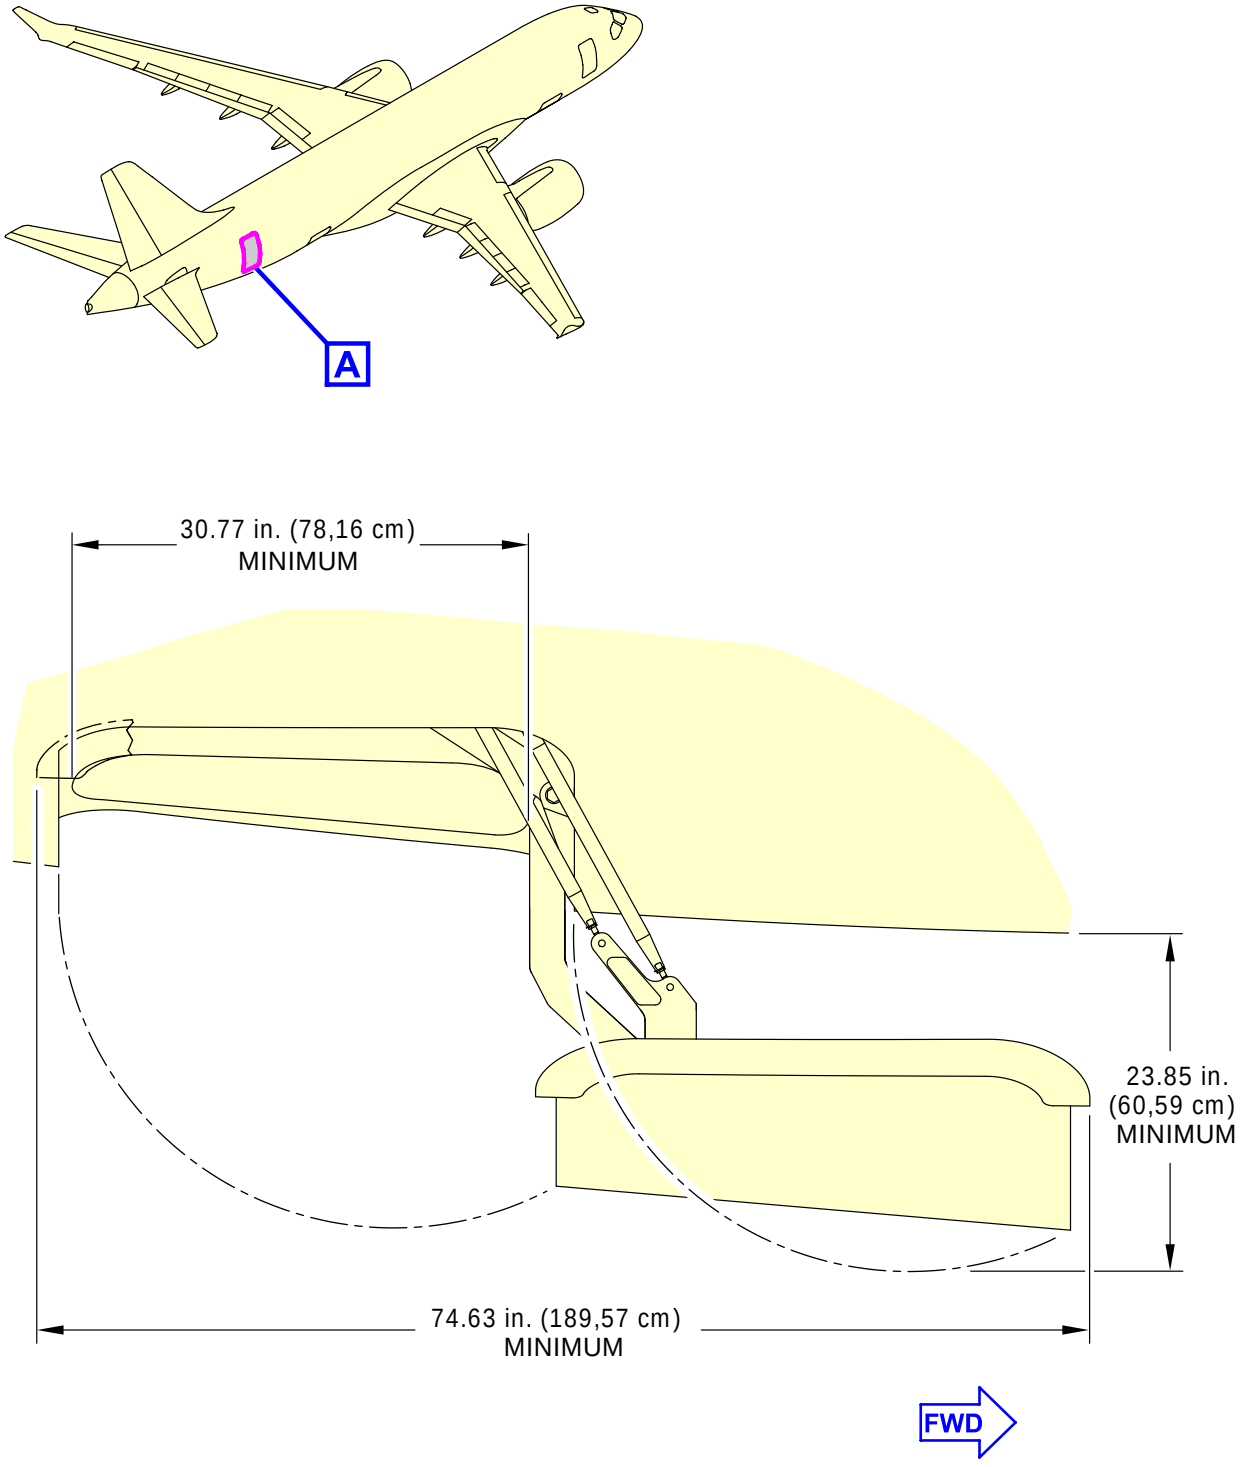

ICN-BD500-A-J061100-A-3AB48-00105-A-002-01

Figure 17 Aft service door opening and clearances

Intentionally left blank

A220

Aircraft dimensions - Technical data

Applicability:
50001-54999, 55001-59999

Table of contents

Page

Aircraft dimensions - Technical data 1
References 1
Description 1
1 Introduction 1
2 General aircraft dimensions 2
3 Landing gear footprint dimensions 9
4 General aircraft area 11
5 Pressure refueling and pilots eye position 11

List of tables

Page

1 References 1
2 General aircraft dimensions (A220-100) 2
3 General aircraft dimensions (A220-300) 4
4 Landing gear footprint dimensions (A220-100) 9
5 Landing gear footprint dimensions (A220-300) 9
6 General aircraft area 11
7 Pilots eye position (A220-100) 11
8 Pressure refueling connection position (A220-100) 12
9 Pilots eye position (A220-300) 12
10 Pressure refueling connection position (A220-300) 12

List of figures

Page

1 General aircraft dimensions 7
2 Landing gear footprint dimensions 10
3 Pressure refueling and pilots eye position 14

References

Table 1 References

Data Module/Technical Publication	Title
None	

Description

1 Introduction

This data module contains general data about the aircraft dimensions and clearances. The structural weight limits, such as maximum ramp weight, landing weight and zero fuel weight are dependent on configuration. Refer to Weight and Balance Manual (WBM) BD500-3AB48-22100-00 (A220-100), BD500-3AB48-22100-00 (A220-300) and weight and balance report for structural limits and other weight information.

2 General aircraft dimensions

Applicability:
50001-54999

Table 2 General aircraft dimensions (A220-100)

Locator (refer to Fig. 1)	Value in. (cm)
A	1377.000 (3497.58)
B	146.500 (372.11)
C	Minimum 452.700 (1149.86)
	Maximum 463.800 (1178.05)
D	482.850 (1226.44)
E	Baseline 1377.320 (3498.39)
	Fuel loaded 1381.320 (3508.55)
F	873.500 (2218.69)
G	773.200 (1963.93)
H	1341.000 (3406.14)
J	698.900 (1775.21)
K	395.000 (1003.30)
L	87.800 (223.01)

Locator (refer to Fig. 1)	Value in. (cm)
M	429.400 (1090.68)
P	263.000 (668.02)
Q	96.500 (245.11)
R	103.800 (263.65)
S	134.900 (342.65)
T	267.900 (680.47)
U	98.300 (249.68)
V	193.500 (490.22)
W	135.200 (33.41)
X	27.200 (69.09)
Y	265.000 (673.10)
Z	515.700 (1309.88)
AA	0.38 Deg Nose down
BB	138.000 (350.52)

Note
The values given change due to the variation of aircraft weight and gravity.

Applicability:
55001-59999

Table 3 General aircraft dimensions (A220-300)

Locator (refer to Fig. 1)	Value in. (cm)
A	1523.200 (3868.93)
B	146.500 (372.11)
C	minimum 455.800 (1157.73)
	Maximum 461.900 (1173.23)
D	482.800 (1226.31)
E	Baseline 1377.320 (3498.39)
	Fuel loaded 1381.320 (3508.55)
F	961.400 (2441.96)
G	857.900 (2179.07)
H	1489.200 (3782.57)
J	783.200 (1989.33)
K	479.000 (1216.66)
L	172.400

Locator (refer to Fig. 1)	Value in. (cm)
	(437.90)
M	513.300 (1303.78)
P	262.900 (667.77)
Q	96.500 (245.11)
R	162.200 (411.99)
S	198.500 (504.19)
T	268.000 (680.72)
U	97.700 (248.16)
V	194.600 (494.28)
W	133.920 (340.16)
X	27.200 (69.09)
Y	265.000 (673.10)
Z	599.700 (1523.24)
AA	0.477 Deg Nose down
BB	138.000 (350.52)

This data module contains data on the landing gear footprint.

Note

The values given change due to the variation of aircraft weight and gravity.

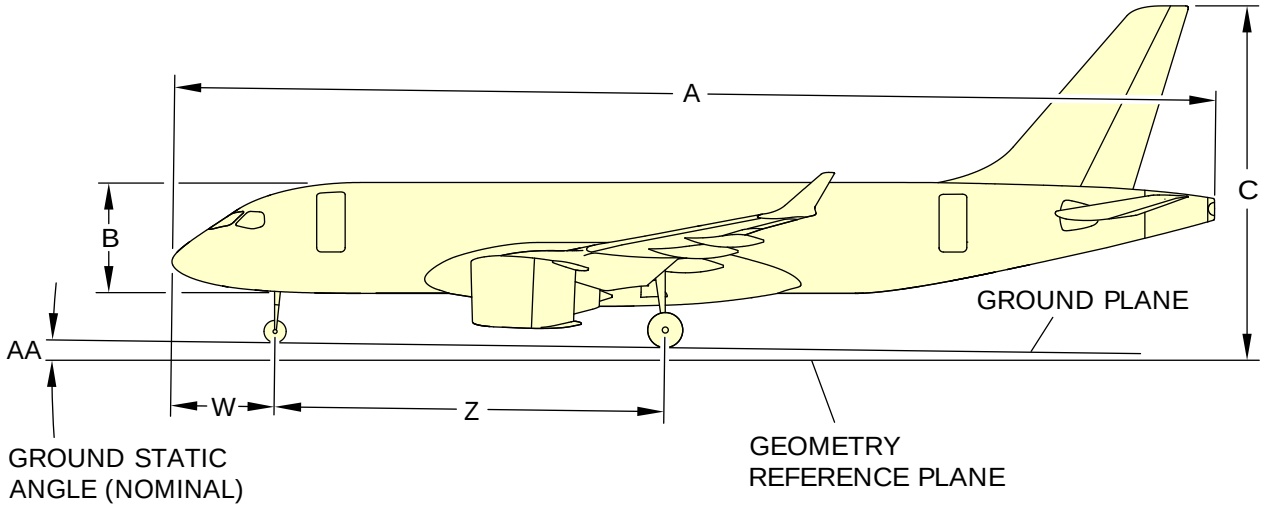

ICN-BD500-A-J061000-A-3AB48-00005-A-001-01

Figure 1 General aircraft dimensions - (Sheet 1 of 2)

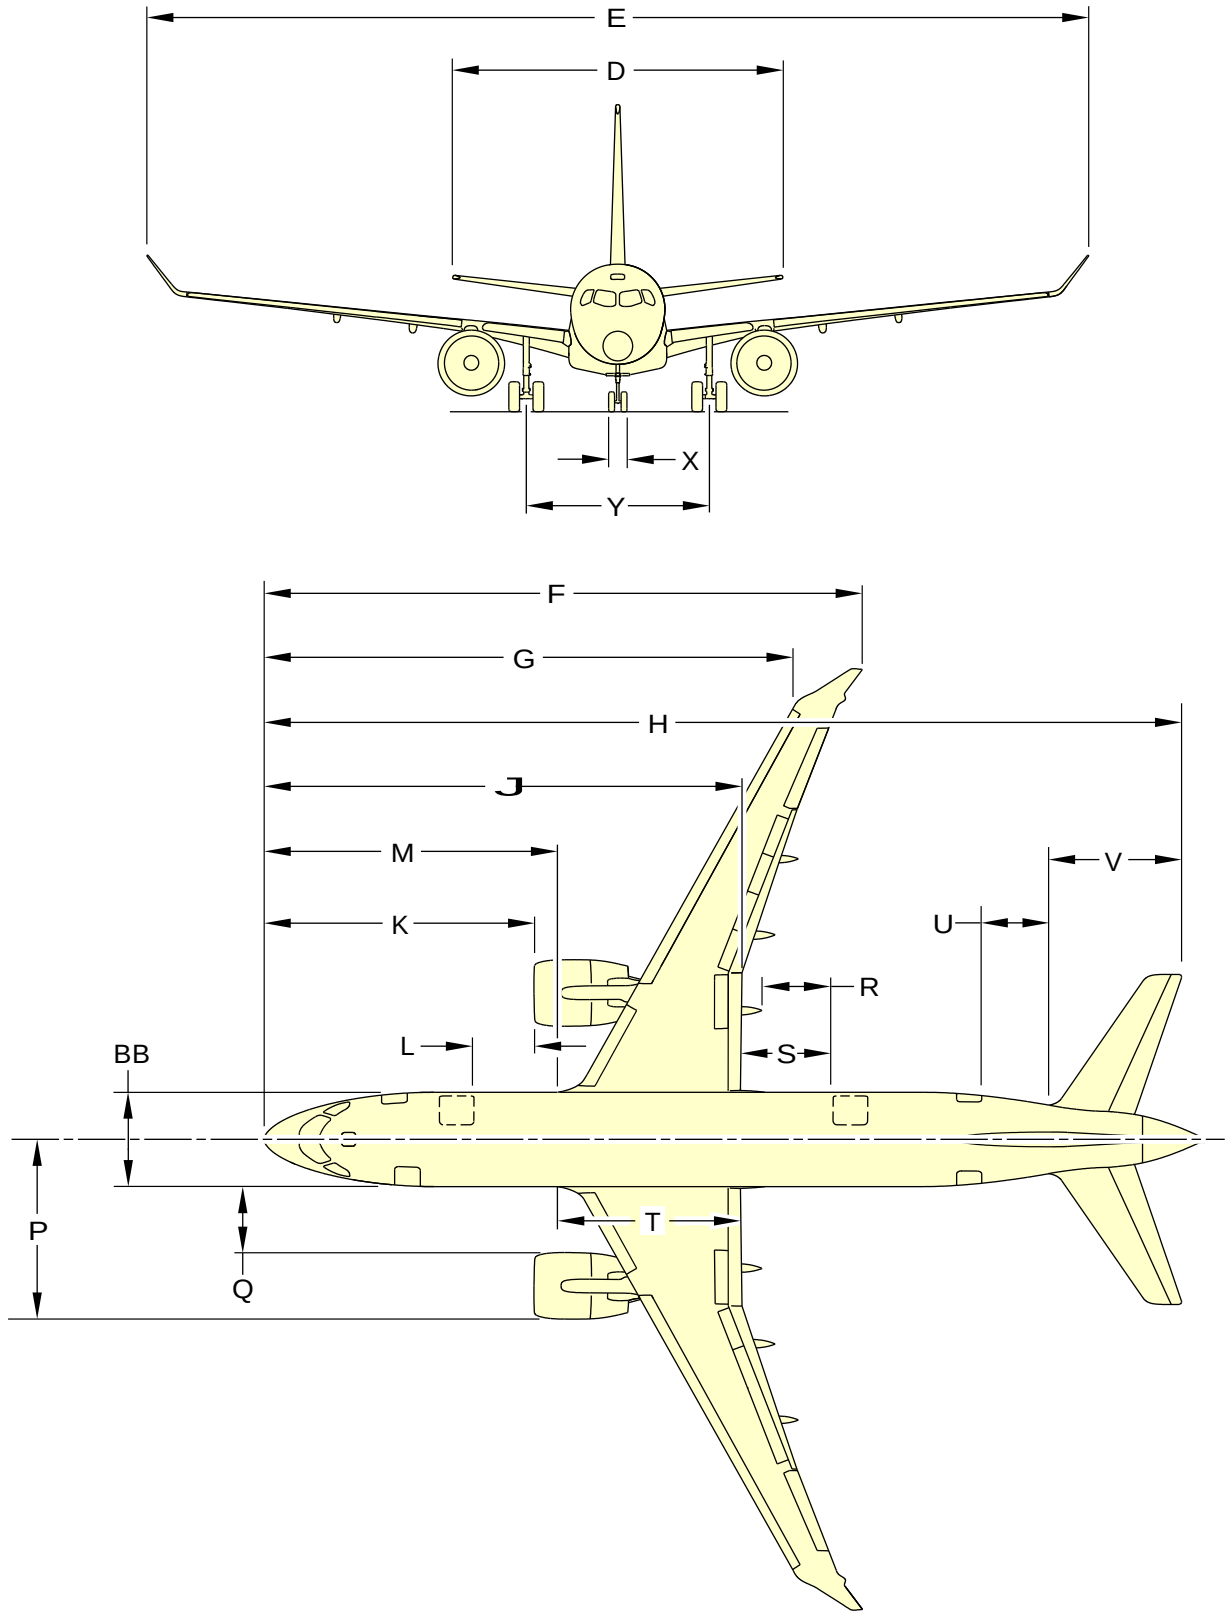

ICN-BD500-A-J061000-A-3AB48-00004-A-003-01

Figure 1 General aircraft dimensions - (Sheet 2 of 2)

3 Landing gear footprint dimensions

This data module contains data on the landing gear footprint.

Applicability:
50001-54999

Table 4 Landing gear footprint dimensions (A220-100)

Locator	Value in. (cm)
A	18.571 (47.17)
B	35.000 (88.90)
C	265.000 (673.10)
D	515.700 (1309.88)

Applicability:
55001-59999

Table 5 Landing gear footprint dimensions (A220-300)

Locator	Value in. (cm)
A	18.571 (47.17)
B	35.000 (88.90)
C	265.000 (673.10)
D	599.700 (1523.24)

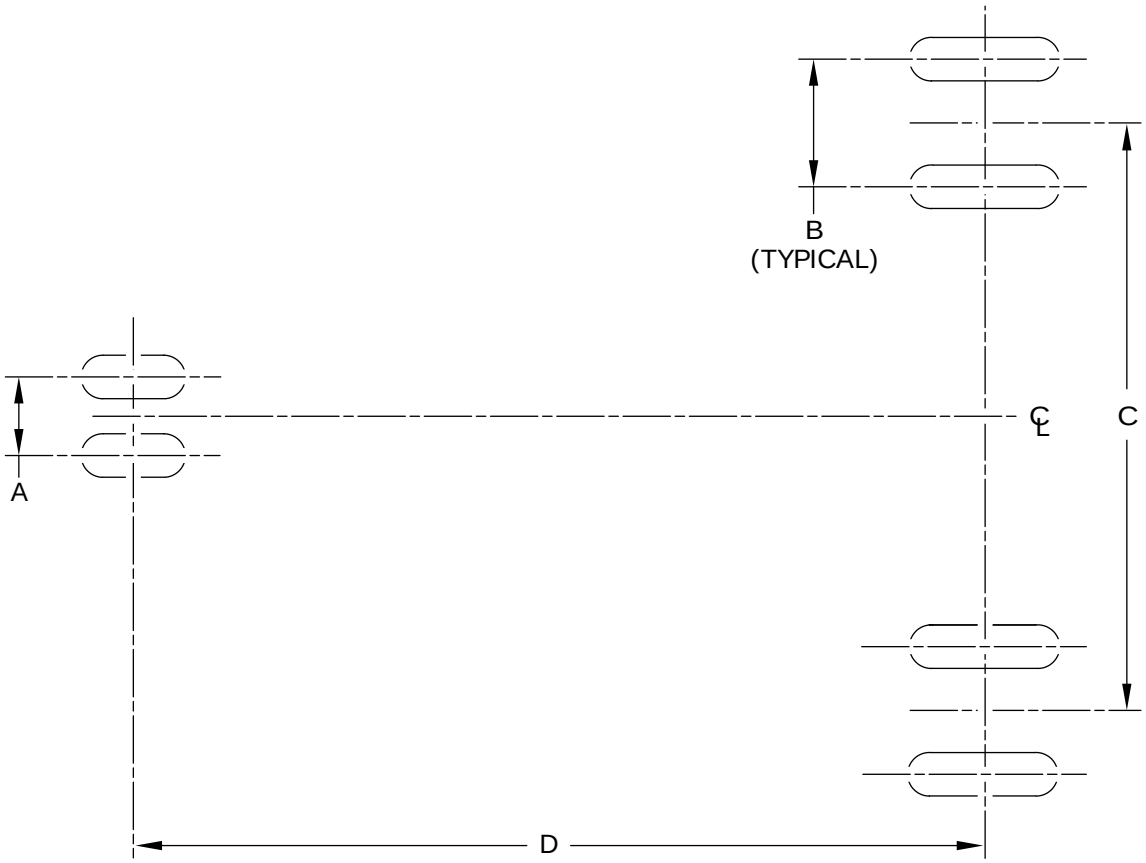

NOTE

Not to scale.

ICN-BD500-A-J061032-A-3AB48-00118-A-001-01

Figure 2 Landing gear footprint dimensions

4 General aircraft area

Table 6 General aircraft area

Description	Value sq. ft. (sq. m)
ESDU wing area (including ailerons, flaps, spoilers and area within the fuselage)	1208.880 (112.31)
Total horizontal stabilizer area (horizontal tail area and elevator area)	313.500 (29.13)
Total vertical stabilizer area (vertical tail area and rudder area)	223.600 (20.77)

5 Pressure refueling and pilots eye position

Applicability:
50001-54999

Table 7 Pilots eye position (A220-100)

Locator (refer to Fig. 3)	Value in. (cm)
A	FS = 354.000 (899.16) BL ± 20.000 (50.80) WL = 196.000 (497.80)
D	29.20°
E	17.10°

Applicability:
50001-54999

Table 8 Pressure refueling connection position (A220-100)

Locator (refer to Fig. 3)	Value in. (cm)
B	615.900 (1564.39)
C	600.210 (1524.53)

Applicability:
55001-59999

Table 9 Pilots eye position (A220-300)

Locator (refer to Fig. 3)	Value in. (cm)
A	FS = 270.000 (685.80) BL ± 20.000 (50.80) WL = 196.000 (497.80)
D	29.20°
E	17.10°

Applicability:
55001-59999

Table 10 Pressure refueling connection position (A220-300)

Locator (refer to Fig. 3)	Value in. (cm)
B	615.900 (1564.39)

Locator (refer to Fig. 3)	Value in. (cm)
C	684.210 (1737.89)

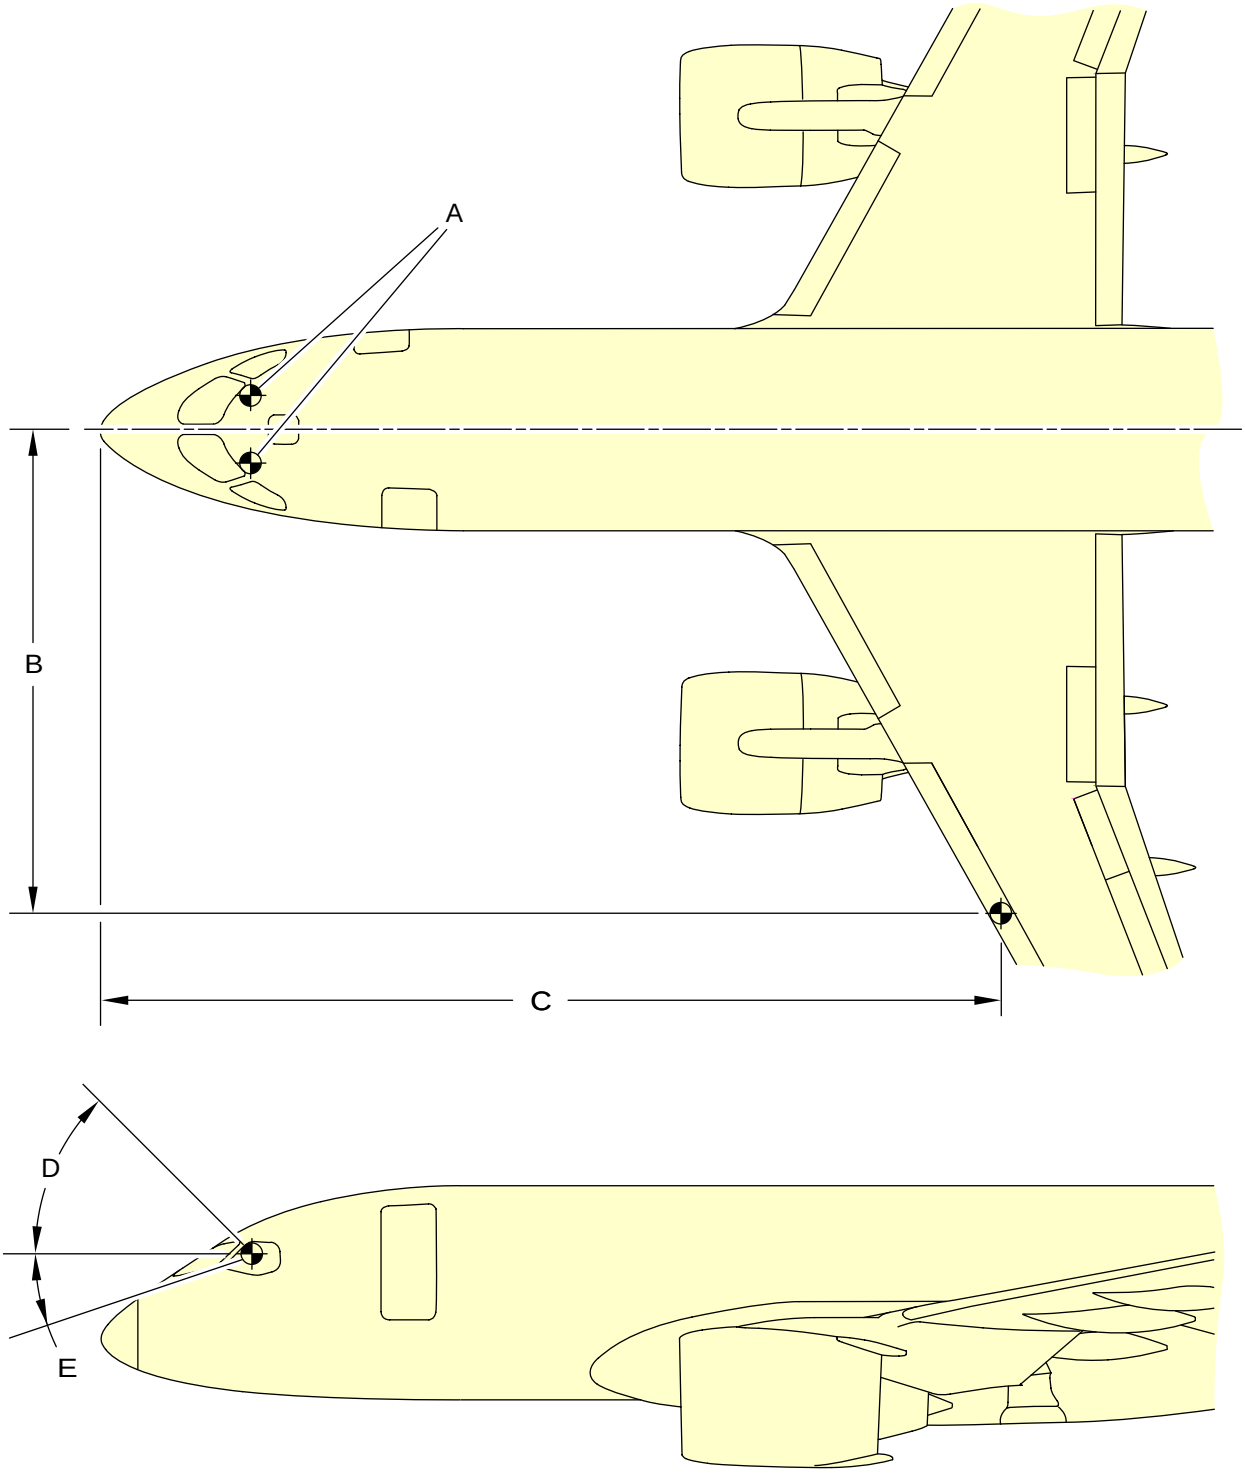

ICN-BD500-A-J061000-A-3AB48-10809-A-001-01

Figure 3 Pressure refueling and pilots eye position

A220

Nacelle and pylon stations - Technical data

Applicability:
50001-54999, 55001-59999

Table of contents

Page

Nacelle and pylon stations - Technical data 1
References 1
Description 1
1 General 1
2 Pylon stations 1
3 Nacelle stations 1

List of tables

Page

1 References 1

List of figures

Page

1 Pylon stations 2
2 Nacelle stations 3

References

Table 1 References

Data Module/Technical Publication	Title
None	

Description

1 General

- This section shows the stations along the pylon and the nacelle.

2 Pylon stations

- Fig. 2 shows the pylon with reference to the Fuselage Station (FS) .
- The FS references in this manual are used to measure or specify distances along the pylon.

3 Nacelle stations

- Fig. 1 shows the nacelle with reference to the FS .
- The FS references in this manual are used to measure or specify distances along the nacelle.

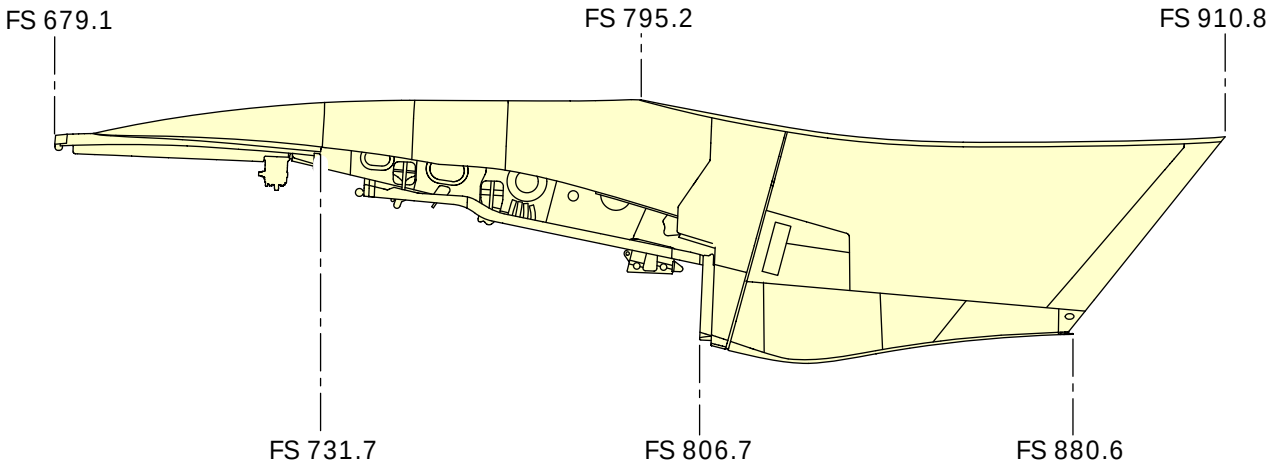

ICN-BD500-A-J062003-A-3AB48-11221-A-001-01

Figure 1 Pylon stations

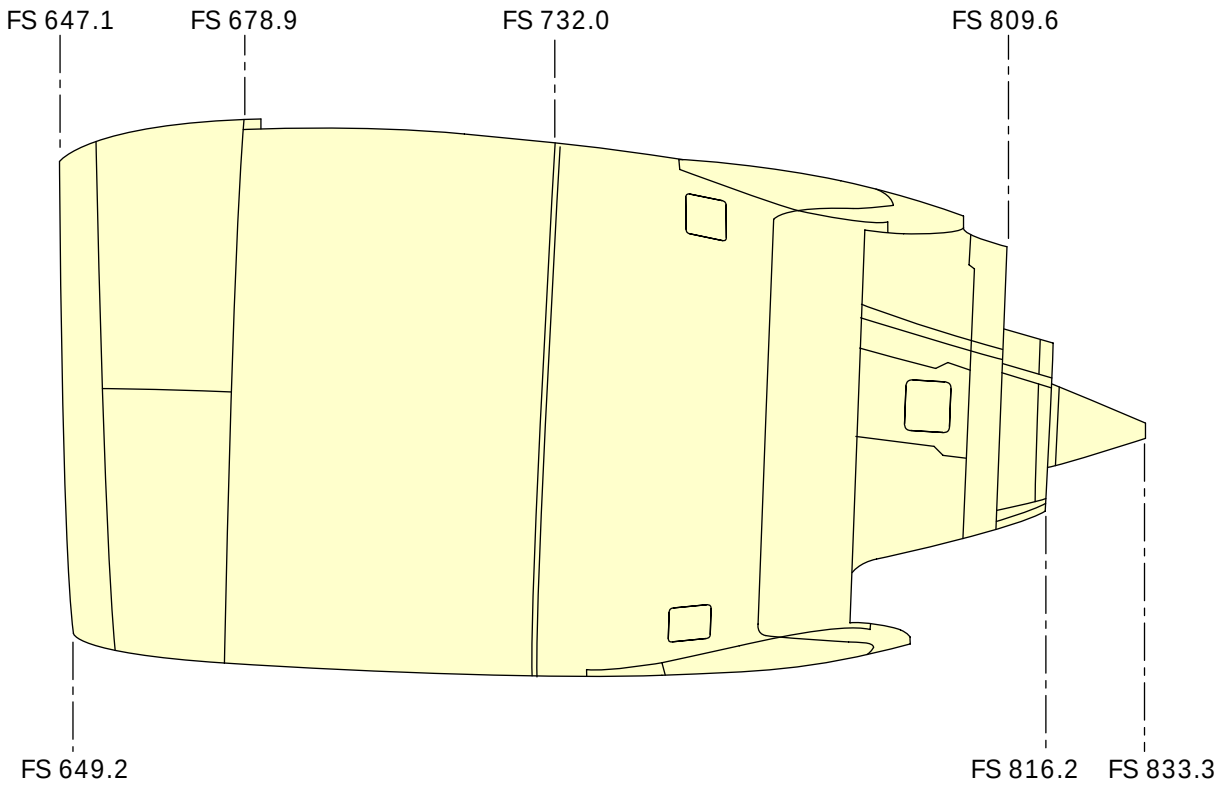

ICN-BD500-A-J062003-A-3AB48-11220-A-001-01

Figure 2 Nacelle stations

Intentionally left blank

A220

Jacking for maintenance - Technical data

Applicability:
50001-54999, 55001-59999

Table of contents

Page

Jacking for maintenance - Technical data 1
References 1
Description 1
1 Introduction 1
2 Aircraft jacking points for maintenance 1
2.1 Jacking points location 2
2.1.1 Rear fuselage support 2
2.1.2 Landing gear jacking 9

List of tables

Page

1 References 1
2 Jacking points location 2
3 Jacking points location 2

List of figures

Page

1 Jacking for maintenance 3
2 Landing gear jacking clean wing 10
3 Nose landing gear jacking - Flap/slats deployed 12
4 Nose landing gear jacking 15

References

Table 1 References

Data Module/Technical Publication	Title
None	

Description

1 Introduction

This data module gives the information to jack the aircraft for maintenance.

2 Aircraft jacking points for maintenance

The A220 can be jacked:

- At no more than 135000 lb,
- Within the limits of the permissible wind speed when the aircraft is jacked outside a closed environment.

2.1 Jacking points location

The aircraft is provided with three primary jacking points. Refer to Table 2, Fig. 1 and Fig. 2.

Applicability:
50001-54999

Table 2 Jacking points location

Jack position	A220-100		
	Fuselage Station in. (m)	**Buttock Line in. (m)**	**Water Line in. (m)**
Fwd fuselage	480 (12.19)	0.0 (0.00)	97.9 (2.49)
Left Wing	889.3 (22.59)	-203 (-5.20)	140.2 (3.56)
Right Wing	889.3 (22.59)	203 (5.20)	140.2 (3.56)

Applicability:
55001-59999

Table 3 Jacking points location

Jack position	A220-300		
	Fuselage Station in. (m)	**Buttock Line L in. (m)**	**Water Line in. (m)**
Fwd fuselage	396 (10.06)	0.0 (0.00)	97.9 (2.49)
Left Wing	889.3 (22.59)	-203 (-5.20)	140.2 (3.56)
Right Wing	889.3 (22.59)	203 (5.20)	140.2 (3.56)

2.1.1 Rear fuselage support

Refer to Fig.1Sheet. 5.

- When the aircraft is on jacks, a rear fuselage support is placed under the fuselage at FR 79 to prevent tail tipping caused by accidental displacement of the aircraft center of gravity.
- The rear fuselage support must not be used for lifting the aircraft.

(Sheet) Applicability:
50001-54999

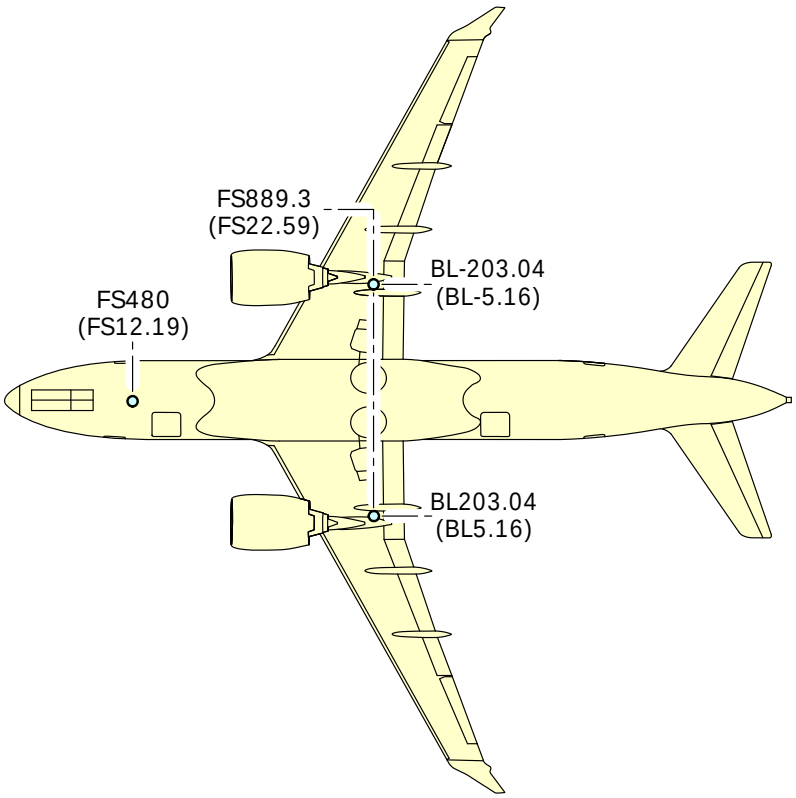

ICN-BD500-A-J071100-A-3AB48-80950-A-001-01
Figure 1 Jacking for maintenance - (Sheet 1 of 6)

(Sheet) Applicability:
55001-59999

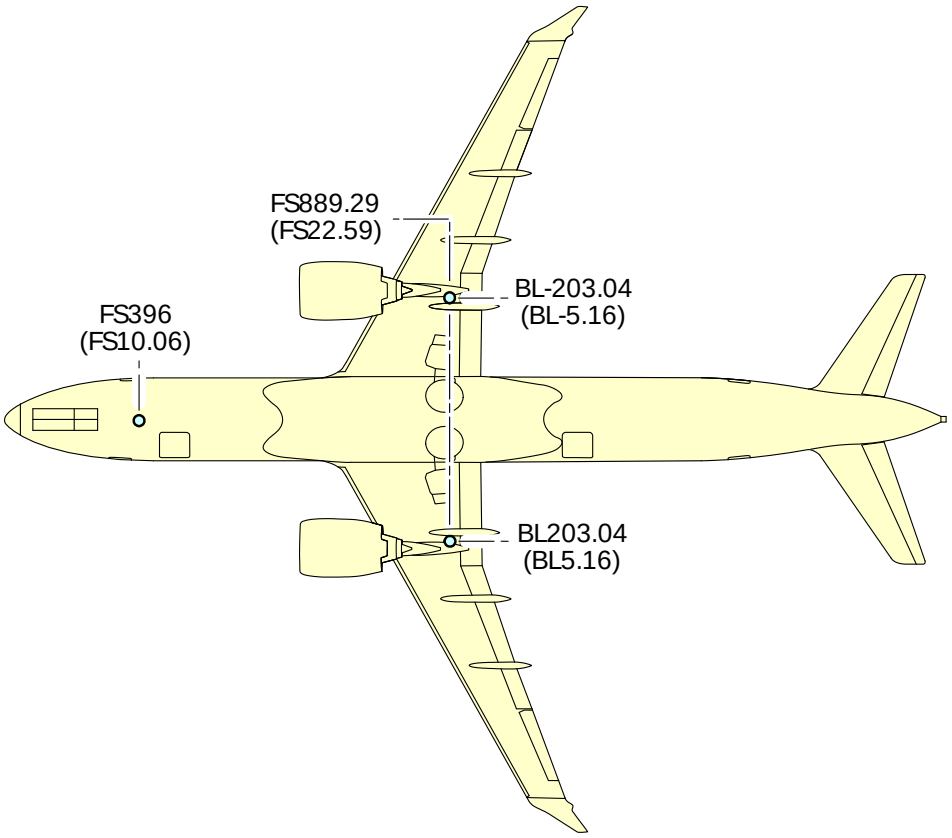

ICN-BD500-A-J071100-A-3AB48-80949-A-001-01
Figure 1 Jacking for maintenance - (Sheet 2 of 6)

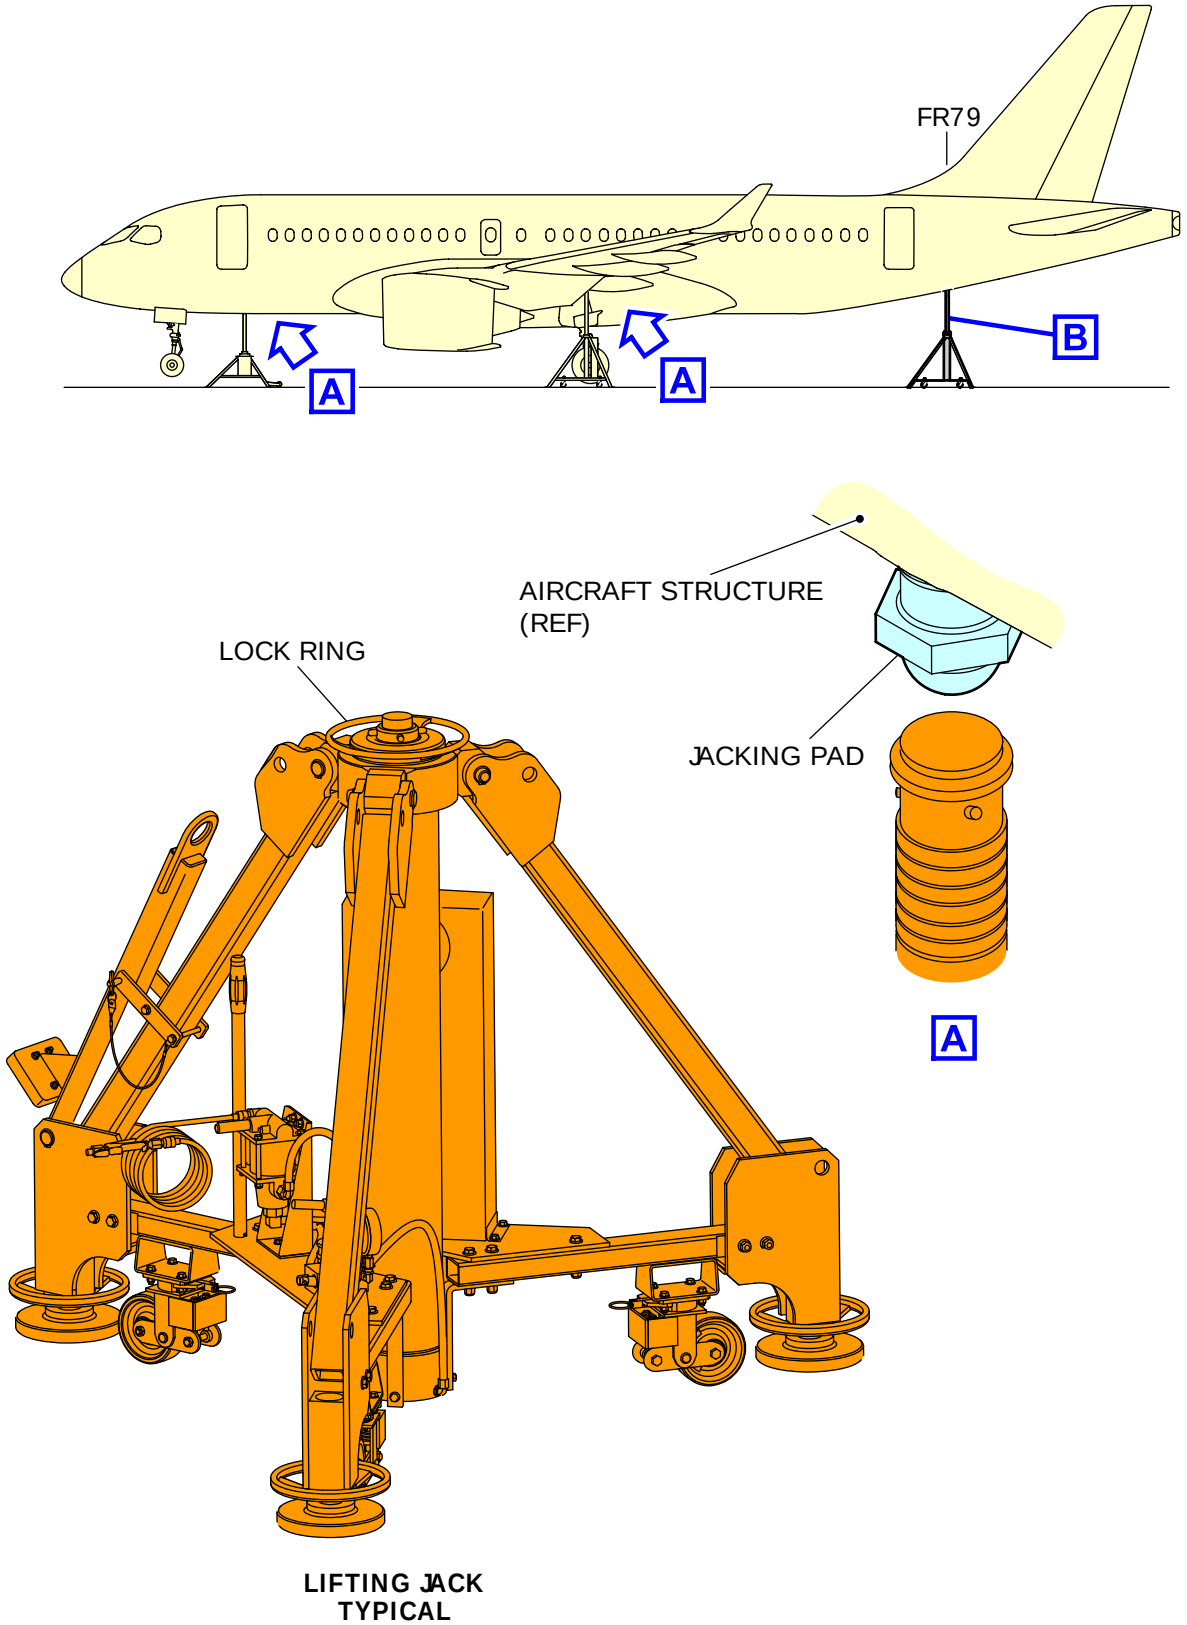

LIFTING JACK
TYPICAL

ICN-BD500-A-J071102-A-3AB48-25019-A-002-01

Figure 1 Jacking for maintenance - (Sheet 3 of 6)

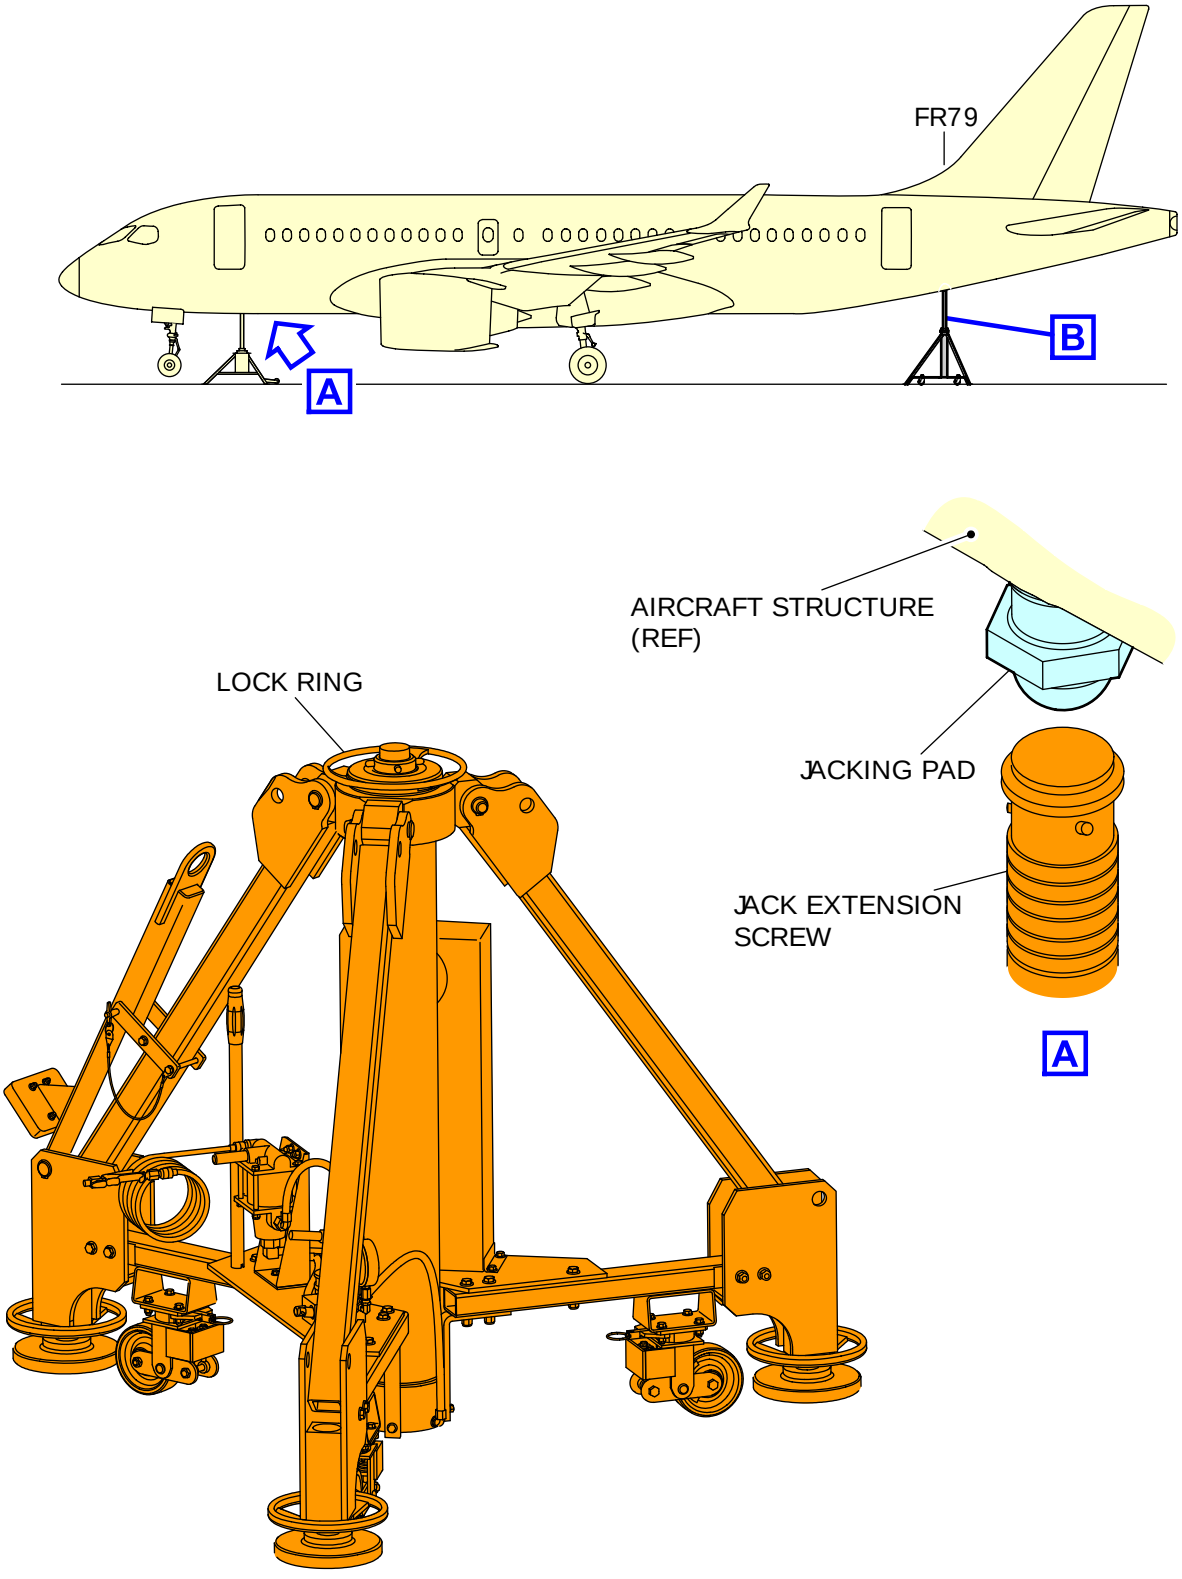

LIFTING JACK

ICN-BD500-A-J071103-C-3AB48-47758-A-001-01

Figure 1 Jacking for maintenance - (Sheet 4 of 6)

B

ICN-BD500-A-J071101-C-3AB48-44571-A-001-01

Figure 1 Jacking for maintenance - (Sheet 5 of 6)

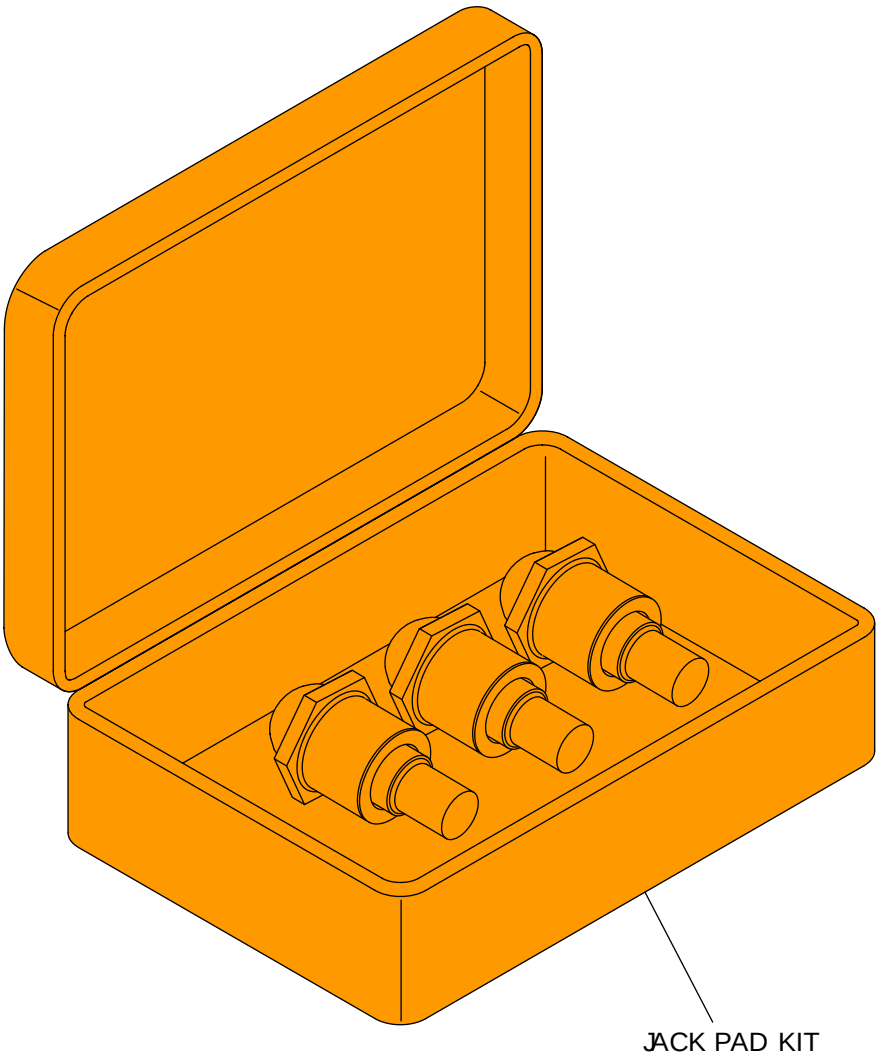

ICN-BD500-A-J071000-A-3AB48-15767-A-002-01

Figure 1 Jacking for maintenance - (Sheet 6 of 6)

2.1.2 Landing gear jacking

The can be lifted within the acceptable wind and gust limits. The wind and gust jacking limits are based on parking surface condition, aircraft weight and aircraft Center of Gravity (CG). Refer to Fig. 2.

(Sheet) Applicability:
50001-54999

		Wind + Gust Limits (any direction) for Jacking by gear [knots]						
Weight [lb]	Pavement Condition	CG (%mac)						
		10	15	20	25	30	35	40
1,41,500	Dry uncontaminated concrete or asphalt	45	42	39	37	34	30	26
1,40,500		45	42	39	37	34	30	26
1,35,000		44	41	39	36	33	29	25
1,34,000		44	41	39	35	33	29	25
1,20,500		41	39	36	34	31	28	24
1,16,000		40	39	36	33	30	27	23
1,15,500		40	38	35	33	30	27	22
1,11,000		39	34	32	29	27	23	19
95,000		37	34	32	29	27	23	18
78,500		34	31	29	27	25	22	18
77,000		33	31	29	27	24	22	18
70,000		31	29	28	26	23	21	17
60,000		29	28	26	23	22	19	15
1,41,500	Wet concrete or asphalt	39	36	34	31	28	26	22
1,40,500		38	36	34	31	28	25	22
1,35,000		38	35	33	30	28	25	22
1,34,000		37	35	33	30	28	25	22
1,20,500		35	34	31	28	26	23	20
1,16,000		34	33	30	28	26	23	20
1,15,500		34	33	30	28	26	23	20
1,11,000		34	32	30	28	25	22	19
95,000		31	29	28	26	23	21	18
78,500		28	27	25	23	21	19	17
77,000		28	27	25	22	21	18	16
70,000		27	25	23	22	20	17	15
60,000		25	23	22	20	18	17	14
1,41,500	Snowed covered surface	32	30	28	26	24	22	18
1,40,500		32	30	28	26	24	22	18
1,35,000		31	29	28	26	23	21	18
1,34,000		31	29	28	26	23	21	18
1,20,500		29	28	26	24	22	20	17
1,16,000		29	28	26	23	22	19	17
1,15,500		29	28	26	23	22	19	17
1,11,000		28	27	25	23	21	19	17
95,000		26	25	23	22	19	17	15
78,500		23	22	21	19	17	16	13
77,000		23	22	21	19	17	16	13
70,000		22	21	20	18	17	15	12
60,000		21	19	18	17	15	14	11
1,41,500	Ice-covered surface with sand or salt	23	22	21	19	17	16	13
1,40,500		23	22	20	19	17	16	13
1,35,000		22	22	20	18	17	15	13
1,34,000		22	22	20	18	17	15	13
1,20,500		22	20	19	17	16	14	12
1,16,000		21	20	18	17	16	14	12
1,15,500		21	20	18	17	16	14	11
1,11,000		21	19	18	17	15	13	11
95,000		19	17	17	16	14	12	11
78,500		17	16	15	14	12	11	10
77,000		17	16	15	14	12	11	10
70,000		16	15	14	13	11	11	9
60,000		15	14	13	12	11	10	8

A220-100 JACKING BY GEAR LIMITS FOR CLEAN WING

ICN-BD500-A-J071103-C-3AB48-69844-A-001-01

Figure 2 Landing gear jacking clean wing - (Sheet 1 of 2)

(Sheet) Applicability:
55001-59999

Weight [lb]	Pavement Condition	Wind + Gust Limits (any direction) for Jacking by gear [knots]						
		CG (%mac)						
		10	15	20	25	30	35	40
1,41,500	Dry uncontaminated concrete or asphalt	46	44	40	38	34	31	27
1,40,500		46	44	40	38	34	31	27
1,35,000		45	43	39	37	34	30	26
1,34,000		45	42	39	37	34	30	26
1,20,500		43	40	38	34	32	28	24
1,16,000		42	39	37	34	31	28	24
1,15,500		41	38	35	33	30	26	22
1,11,000		40	34	32	29	27	22	18
95,000		37	34	32	29	26	22	17
78,500		33	31	29	27	24	22	17
77,000		33	31	28	27	24	22	17
70,000		30	28	27	25	22	20	16
60,000		28	27	25	23	21	17	13
1,41,500	Wet concrete or asphalt	39	37	34	31	29	26	22
1,40,500		39	37	34	31	29	26	22
1,35,000		38	36	34	31	28	25	22
1,34,000		38	36	34	31	28	25	22
1,20,500		36	34	32	29	27	24	21
1,16,000		35	34	31	29	27	23	20
1,15,500		35	34	31	28	26	23	20
1,11,000		34	33	30	28	26	22	18
95,000		31	29	28	25	23	21	17
78,500		28	27	24	22	21	18	16
77,000		28	26	24	22	21	18	16
70,000		26	24	22	21	19	17	15
60,000		24	22	21	19	17	16	13
1,41,500	Snowed covered surface	33	31	29	27	24	22	19
1,40,500		33	31	28	27	24	22	19
1,35,000		32	30	28	26	24	22	18
1,34,000		32	30	28	26	23	21	18
1,20,500		30	28	27	25	22	20	17
1,16,000		29	28	26	24	22	20	17
1,15,500		29	28	26	24	22	20	17
1,11,000		29	28	26	23	22	19	17
95,000		26	24	22	21	19	17	15
78,500		23	22	21	19	17	16	13
77,000		23	22	21	19	17	16	13
70,000		22	20	19	17	16	14	12
60,000		20	19	17	17	15	13	11
1,41,500	Ice-covered surface with sand or salt	23	22	21	19	17	16	13
1,40,500		23	22	21	19	17	16	13
1,35,000		23	22	21	19	17	16	13
1,34,000		23	22	20	19	17	16	13
1,20,500		22	21	19	18	17	15	12
1,16,000		22	20	19	17	16	14	12
1,15,500		22	20	19	17	16	14	12
1,11,000		21	20	18	17	16	14	12
95,000		19	17	17	15	14	12	11
78,500		17	16	15	14	12	11	10
77,000		17	16	15	13	12	11	10
70,000		16	15	14	12	11	11	9
60,000		14	13	12	11	11	10	8

A220-300 JACKING BY GEAR LIMITS FOR CLAEN WING

ICN-BD500-A-J071103-C-3AB48-69845-A-001-01

Figure 2 Landing gear jacking clean wing - (Sheet 2 of 2)

(Sheet) Applicability:
50001-54999

Weight [lb]	Pavement Condition	Wind + Gust Limits (any direction) for Jacking by gear [knots]						
		CG (%mac)						
		10	15	20	25	30	35	40
1,41,500	Dry uncontaminated concrete or asphalt	41	39	37	34	31	28	24
1,40,500		41	39	37	34	31	28	24
1,35,000		40	39	36	34	30	27	23
1,34,000		40	38	36	33	30	27	23
1,20,500		39	36	34	31	28	26	22
1,16,000		38	35	34	31	28	25	22
1,15,500		38	35	33	30	28	25	21
1,11,000		37	32	29	28	25	22	18
95,000		34	31	29	27	25	22	17
78,500		31	29	27	25	22	21	17
77,000		30	28	27	25	22	20	17
70,000		29	28	26	23	22	19	17
60,000		27	25	23	22	20	17	14
1,41,500	Wet concrete or asphalt	36	34	32	29	27	24	21
1,40,500		36	34	32	29	27	24	21
1,35,000		35	34	31	28	26	23	20
1,34,000		35	34	31	28	26	23	20
1,20,500		34	31	29	28	25	22	19
1,16,000		33	31	28	27	24	22	19
1,15,500		33	31	28	27	24	22	19
1,11,000		32	30	28	26	23	22	18
95,000		29	28	26	24	22	20	17
78,500		27	25	23	22	20	17	16
77,000		27	25	23	22	20	17	15
70,000		25	23	22	21	19	17	14
60,000		23	22	21	19	17	16	13
1,41,500	Snowed covered surface	30	28	27	25	22	20	17
1,40,500		30	28	27	25	22	20	17
1,35,000		30	28	26	24	22	20	17
1,34,000		29	28	26	24	22	20	17
1,20,500		28	27	25	23	21	19	17
1,16,000		28	26	24	22	21	18	16
1,15,500		28	26	24	22	21	18	16
1,11,000		27	25	23	22	20	18	16
95,000		25	23	22	20	18	17	14
78,500		22	21	20	18	17	15	13
77,000		22	21	20	18	17	15	13
70,000		21	20	19	17	16	14	12
60,000		20	18	17	16	15	13	11
1,41,500	Ice-covered surface with sand or salt	22	21	19	18	17	15	12
1,40,500		22	21	19	18	17	15	12
1,35,000		22	20	19	17	16	14	12
1,34,000		22	20	19	17	16	14	12
1,20,500		20	19	17	17	15	13	11
1,16,000		20	18	17	17	15	13	11
1,15,500		20	18	17	16	15	13	11
1,11,000		19	18	17	16	14	13	11
95,000		17	17	16	15	13	11	10
78,500		16	15	14	13	12	11	9
77,000		16	15	14	13	11	11	9
70,000		15	14	13	12	11	10	9
60,000		14	13	12	11	11	9	8

A220-100 JACKING BY GEAR LIMITS WITH FLAPS/SLATS DEPLOYED

ICN-BD500-A-J071103-C-3AB48-69846-A-001-01

Figure 3 Nose landing gear jacking - Flap/slats deployed - (Sheet 1 of 2)

(Sheet) Applicability:
55001-59999

Weight [lb]	Pavement Condition	Wind + Gust Limits (any direction) for Jacking by gear [knots]						
		CG (%mac)						
		10	15	20	25	30	35	40
1,41,500	Dry uncontaminated concrete or asphalt	42	39	37	34	32	28	24
1,40,500		42	39	37	34	31	28	24
1,35,000		41	39	36	34	31	28	23
1,34,000		41	39	36	34	31	28	23
1,20,500		39	37	34	32	29	26	22
1,16,000		38	36	34	31	28	25	22
1,15,500		38	34	32	30	28	24	20
1,11,000		37	31	29	27	24	21	17
95,000		34	31	28	27	24	21	17
78,500		30	28	27	24	22	20	17
77,000		30	28	26	24	22	20	17
70,000		28	26	24	22	21	18	14
60,000		26	24	22	21	19	17	12
1,41,500	Wet concrete or asphalt	37	34	33	30	28	24	21
1,40,500		36	34	32	30	28	24	21
1,35,000		36	34	32	29	27	24	21
1,34,000		35	34	31	29	27	23	21
1,20,500		34	32	30	28	25	22	19
1,16,000		34	31	29	27	25	22	19
1,15,500		33	31	29	27	24	22	19
1,11,000		32	30	28	27	24	21	17
95,000		29	28	26	23	22	19	17
78,500		26	25	23	22	19	17	15
77,000		26	24	22	21	19	17	15
70,000		24	22	22	20	18	16	14
60,000		22	21	20	18	17	15	12
1,41,500	Snowed covered surface	31	29	28	25	23	21	17
1,40,500		31	29	28	25	23	21	17
1,35,000		30	28	27	25	22	20	17
1,34,000		30	28	27	24	22	20	17
1,20,500		28	27	25	23	22	19	17
1,16,000		28	27	25	22	21	18	16
1,15,500		28	26	24	22	21	18	16
1,11,000		28	26	24	22	20	18	16
95,000		24	23	22	20	18	17	14
78,500		22	21	19	18	17	15	12
77,000		22	21	19	17	17	15	12
70,000		20	19	18	17	15	13	11
60,000		19	17	17	15	14	12	11
1,41,500	Ice-covered surface with sand or salt	22	21	20	18	17	15	12
1,40,500		22	21	20	18	17	15	12
1,35,000		22	21	19	17	17	14	12
1,34,000		22	21	19	17	16	14	12
1,20,500		21	19	18	17	15	14	11
1,16,000		20	19	17	17	15	13	11
1,15,500		20	19	17	17	15	13	11
1,11,000		20	18	17	16	15	13	11
95,000		17	17	16	14	13	11	10
78,500		16	15	14	13	11	11	9
77,000		16	15	14	12	11	11	9
70,000		15	14	13	11	11	10	8
60,000		13	12	11	11	10	9	7

A200-300 JACKING BY GEAR LIMITS WITH FLAPS/SLATS DEPLOYED

ICN-BD500-A-J071103-C-3AB48-69847-A-001-01

Figure 3 Nose landing gear jacking - Flap/slats deployed - (Sheet 2 of 2)

If the wheel tires are not deflated, use the single jack method. If the both wheel tires are deflated, use the jack and axle beam method. Refer to Fig. 4.

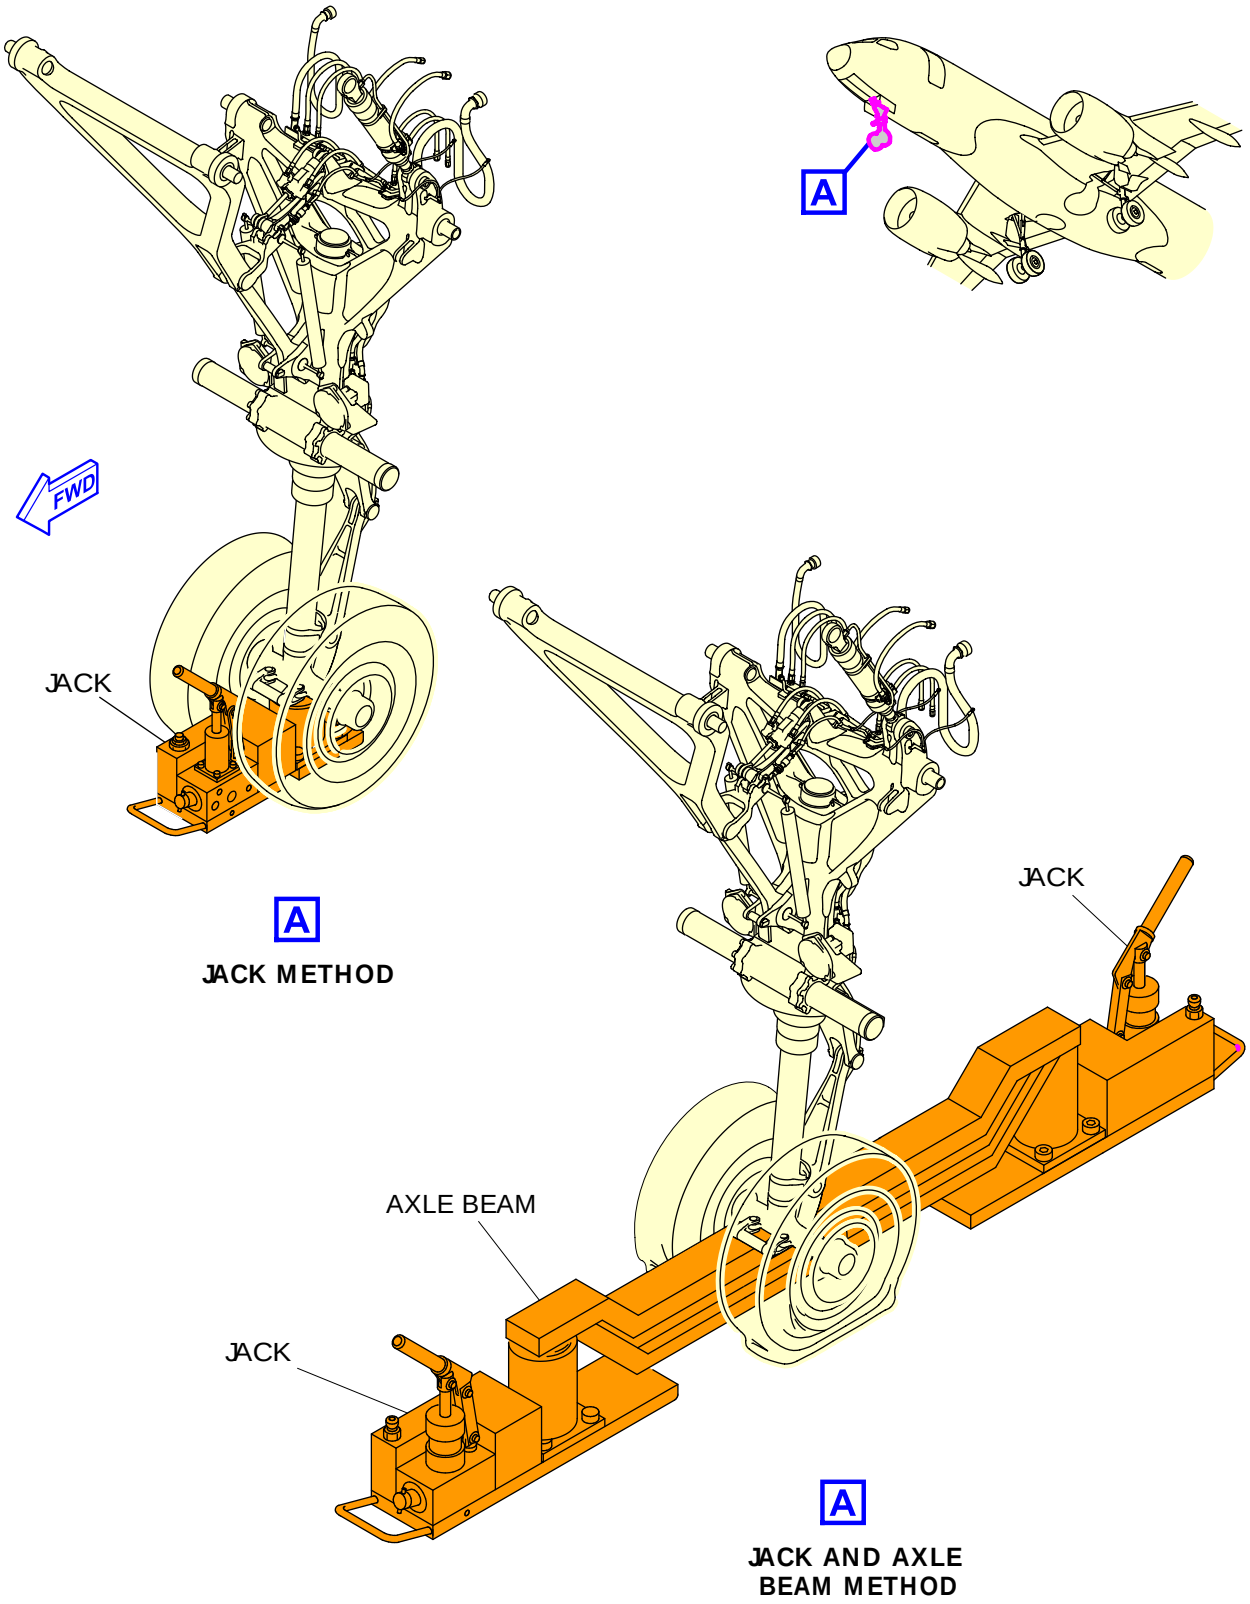

ICN-BD500-A-J071103-A-3AB48-25161-A-001-01

Figure 4 Nose landing gear jacking - (Sheet 1 of 2)

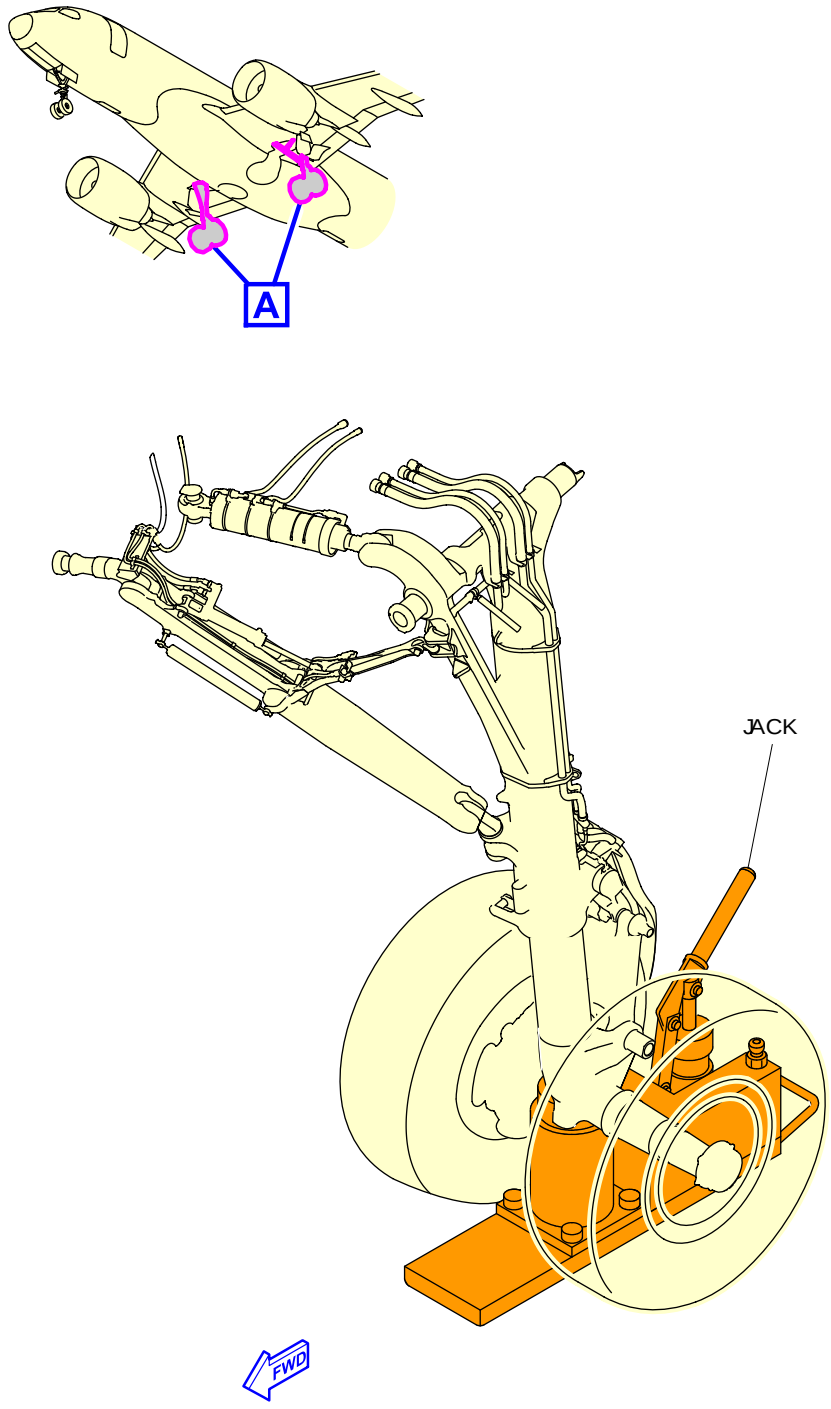

JACK METHOD

ICN-BD500-A-J071103-A-3AB48-25162-A-002-01

Figure 4 Nose landing gear jacking - (Sheet 2 of 2)

A220

Slinging and hoisting - Function, data for plans and description

Applicability:
50001-54999, 55001-59999

Table of contents

Page

Slinging and hoisting - Function, data for plans and description 1
References 1
Description 1
1 General 1
1.1 Slinging and hoisting 1

List of tables

Page

1 References 1

References

Table 1 References

Data Module/Technical Publication	Title
None	

Description

1 General

This data module gives the information to sling and hoist the procedures to lift the BD-500-1A10 (A220-100) and BD-500-1A11 (A220-300).

1.1 Slinging and hoisting

For slinging and hoisting procedures please refer to the latest revision of the Aircraft Recovery Publication (ARP), BD500-3AB48-10400-00.

A220

Intentionally left blank

Aircraft grounding - General maintenance procedure

Applicability:
50001-54999, 55001-59999

Table of contents

Page

Aircraft grounding - General maintenance procedure 1
References 1
Common information 1
Preliminary requirements 1
Procedure 3
Requirements after job completion 5

List of tables

Page

1 References 1
2 Required conditions 2
3 Support equipment 2
4 Consumables, materials, and expendables 2
5 Spares 2
6 Required conditions 5

List of figures

Page

1 Landing gears grounding points 4

References

Table 1 References

Data Module/Technical Publication	Title
BD500-A-J24-00-00-01AAA-913G-A	Electrical/Electronic safety precautions - General maintenance safety procedure
BD500-A-J24-00-00-02AAA-913G-A	Electrostatic discharge safety precautions - General maintenance safety procedure

Common information

This data module gives the procedure to ground the aircraft. The grounding points are located on the landing gears.

Preliminary requirements

Production maintenance data

Zones	711	Nose landing gear
	731	Main landing gear, left side
	741	Main landing gear, right side

Required conditions

Table 2 Required conditions

Action/Condition	Data Module/Technical publication
Obey all the electrical/electronic safety precautions.	BD500-A-J24-00-00-01AAA-913G-A
Obey all the electrostatic discharge safety precautions.	BD500-A-J24-00-00-02AAA-913G-A

Support equipment

Table 3 Support equipment

Name	Identification/Reference	Quantity	Remark
None			

Consumables, materials, and expendables

Table 4 Consumables, materials, and expendables

Name	Identification/Reference	Quantity	Remark
None			

Spares

Table 5 Spares

Name	Identification/Reference	Quantity	Remark
None			

Safety conditions

None

Procedure

WARNINGS

- **When the aircraft is parked for maintenance or during bad weather, make sure that it is grounded. Static electrical charges in the aircraft can cause injury to persons and/or damage to equipment.**

  It is not mandatory to ground the aircraft if you do not do maintenance, there is no bad weather and the tires are in direct contact with the ground. Some airports can apply non-conductive coating on the ramp, which can prevent release of the static charges to the ground. In such conditions, you must ground the aircraft.

- **Ground the aircraft before you connect the external electrical power. If you do not do this, you can cause injuries to persons and/or damage the equipment.**

1 To ground the aircraft do as follows:

Refer to Fig. 1.

1.1 Attach the alligator clamp to one of the grounding points located on the Nose Landing Gear (NLG) or the Main Landing Gear (MLG).

1.2 Attach the other end of the wire to a ground point off of the aircraft.

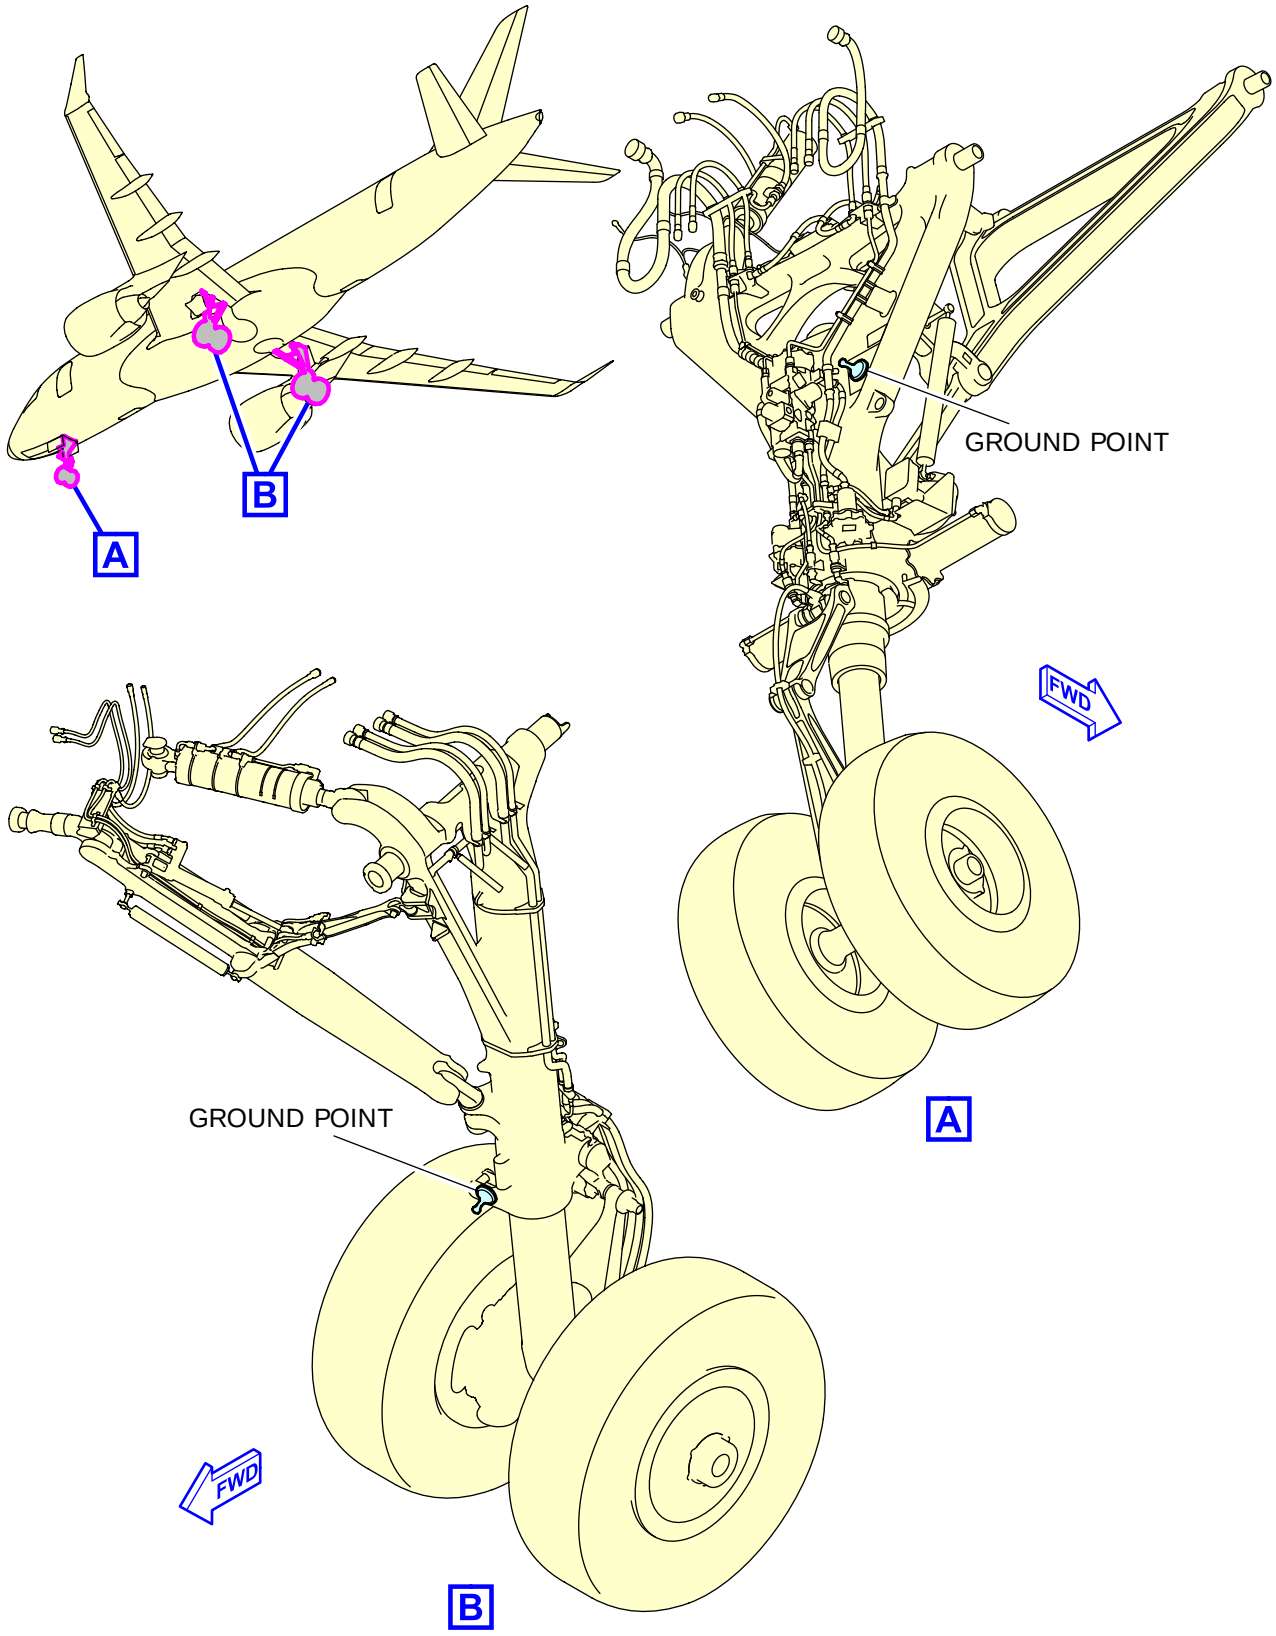

ICN-BD500-A-J000000-A-3AB48-22049-A-002-01

Figure 1 Landing gears grounding points

Requirements after job completion

Required conditions

Table 6 Required conditions

Action/Condition	Data Module/Technical publication
None	

Intentionally left blank

A220

Forward cargo compartment volume, weight and maximum item dimensions - Technical data

Applicability:
50001-54999, 55001-59999

Table of contents

Page

Forward cargo compartment volume, weight and maximum item dimensions - Technical data 1
References 1
Description 2
1 Information 2
2 Cargo door operation 2
4 Cargo compartment volume and weight 2
5 Maximum item dimensions 2
6 Maximum item dimensions 3
7 Maximum live animal and dry ice 3
7.1 Live animal 3
7.2 Dry ice 4
7.3 Combined maximum dry ice load in cargo with maximum passengers 4
7.4 Supplemental dry ice load with reduced occupants (less than 15 occupants) 7

List of tables

Page

1 References 1
2 Cargo compartment volumes 2
3 Cargo compartment volumes 2
4 Standard day (15 °C (59 °F) Outside Air Temperature (OAT) at sea level) operations 3
5 Standard day (40 °C (104 °F) Outside Air Temperature (OAT) at sea level) operations 4

List of figures

Page

1 Combined maximum dry ice load in cargo with maximum passengers 6
2 Supplemental dry ice load with reduced occupants (less than 15 occupants) 8
3 Forward cargo compartment - clearances 10

References

Table 1 References

Data Module/Technical Publication	Title
BD500-A-J14-20-00-03AAA-030A-A	Cargo nets and tie-downs - Technical data
BD500-A-J52-30-00-01AAA-540A-A	Cargo compartment door - Open for access procedure
BD500-A-J52-30-00-01AAA-740A-A	Cargo compartment door - Close after access procedure

Description

1 Information

This data module gives the volume, the weight and the maximum item dimensions for the forward cargo compartment.

2 Cargo door operation

Refer to BD500-A-J52-30-00-01AAA-540A-A, BD500-A-J52-30-00-01AAA-740A-A to open and close the cargo door.

4 Cargo compartment volume and weight

The forward cargo floor structure has a maximum load of 235 lb/ft (350 kg/m).

Refer to Table 2 and Table 3 for the estimate wet volume and weight of the forward cargo compartment.

Applicability:
50001-54999

Table 2 Cargo compartment volumes

Description	Usable Volume		Maximum load	
	ft^3	m^3	lb	kg
Fwd cargo compartment	311	8.80	3742	1697

Applicability:
55001-59999

Table 3 Cargo compartment volumes

Description	Usable Volume		Maximum load	
	ft^3	m^3	lb	kg
Fwd cargo compartment	447	12.65	5393	2446

Applicability:
50001-54999

5 Maximum item dimensions

Refer to the Weight and balance manual for the maximum item dimensions. Refer to BD500-A-J08-60-02AAA-030A-A.

Note

There must be no item near the cargo compartment door.

Divide the floor load equally in the cargo compartment.

The cargo door net and the cargo restraint net hold the items in their area, refer to BD500-A-J14-20-00-03AAA-030A-A for both cargo nets.

Use other cargo items to hold the items which are wider than the flat floor.

There must be no item above the “NO LOADING ABOVE THIS LINE“ placard. Refer to Fig.3Sheet. 2.

The cargo compartment door gives the clearances to load a human remains pallet in the forward cargo compartment.

Applicability:
55001-59999

6 Maximum item dimensions

Refer to the Weight and balance manual for the maximum item dimensions. Refer to BD500-A-J08-60-02AAB-030A-A.

Note

There must be no item near the cargo compartment door.

Divide the floor load equally in the cargo compartment.

The cargo door net and the cargo restraint net hold the items in their area, refer to BD500-A-J14-20-00-03AAA-030A-A for both cargo nets.

Use other cargo items to hold the items which are wider than the flat floor.

There must be no item above the “NO LOADING ABOVE THIS LINE“ placard. Refer to Fig.3Sheet. 2.

The cargo compartment door gives the clearances to load a human remains pallet in the forward cargo compartment.

7 Maximum live animal and dry ice

7.1 Live animal

CAUTION

Animal cages/boxes have to be located near to an cargo air supply and the dry Ice container near to the cargo air exhaust in order to ensure animal receive enough air to breathe adequately.

Table 4 Standard day (15 °C (59 °F) Outside Air Temperature (OAT) at sea level) operations

Aircraft	Maximum number of chicks	Maximum mass of chicks lbs (kg)	Maximum mass of dogs lbs (kg)
A220-100	3229	427 (194)	597 (271)

Aircraft	Maximum number of chicks	Maximum mass of chicks lbs (kg)	Maximum mass of dogs lbs (kg)
A220-300	5417	716 (325)	1349 (612)

Table 5 Standard day (40 °C (104 °F) Outside Air Temperature (OAT) at sea level) operations

Aircraft	Maximum number of chicks	Maximum mass of chicks lbs (kg)	Maximum mass of dogs lbs (kg)
A220-100	1208	158 (72)	299 (136)
A220-300	2291	302 (137)	328 (149)

The mass of chicks and dogs are exclusive, ie carry 302 lbs (137 kg) of chicks OR 328 lbs (149 kg) of dogs

It is allowed to carry mix baby chicks and dogs provided respecting the weight ration, e.g. 110 lbs (50 kg) of chicks plus 207 lbs (94 kg) of dogs.

7.2 Dry ice

For health and safety of ground handling personnel and all parties involved in dry ice handling, the access to any compartments which carry dry ice shall not be granted before sufficient venting has been performed by means of air supply equipment such as air conditioning packs, ground support equipment, opening the respective compartment door, etc. Alternatively, or in addition, the use of portable breathing equipment, oxygen masks and/or equivalent devices are recommended.

While occupants are on board, it is considered that all air conditioning packs or equivalent equipment are operating permanently (both air conditioning packs ON) during the transportation of dry ice. It is understood that aircraft ventilation may be reduced during aircraft de-icing. It is strongly recommended that this reduced ventilation period be minimized.

Avoid Pack-Off Take-Off (POTO). It is recommended to dispatch in dual bleed and dual pack configuration.

1000 lbs (453 kg) of dry ice can be carried in the forward cargo compartment, provided that no live animal carried in the forward cargo compartment.

700 lbs (317 kg) of dry ice can be carried in the forward cargo in addition to the live animal shown in Table 4 and Table 5.

The FWD CARGO VENT switch must not be selected OFF when dry ice is carried in the forward cargo compartment. Refer to Fig.3Sheet. 4.

7.3 Combined maximum dry ice load in cargo with maximum passengers

Refer to Fig. 1 for the maximum allowed amount of dry ice loaded in the aircraft cargo compartments assuming that the cabin is occupied with the maximum number of occupants and the cockpit with 3 flight crew.

The curve on the graph shows the maximum allowed concentration of CO2 in the cabin to be less than 0.5%. The calculation is based on single pack operation but the aircraft must be dis-

patched with two packs operating for this type of operation. In case of a loss of one pack in flight a diversion is not necessary.

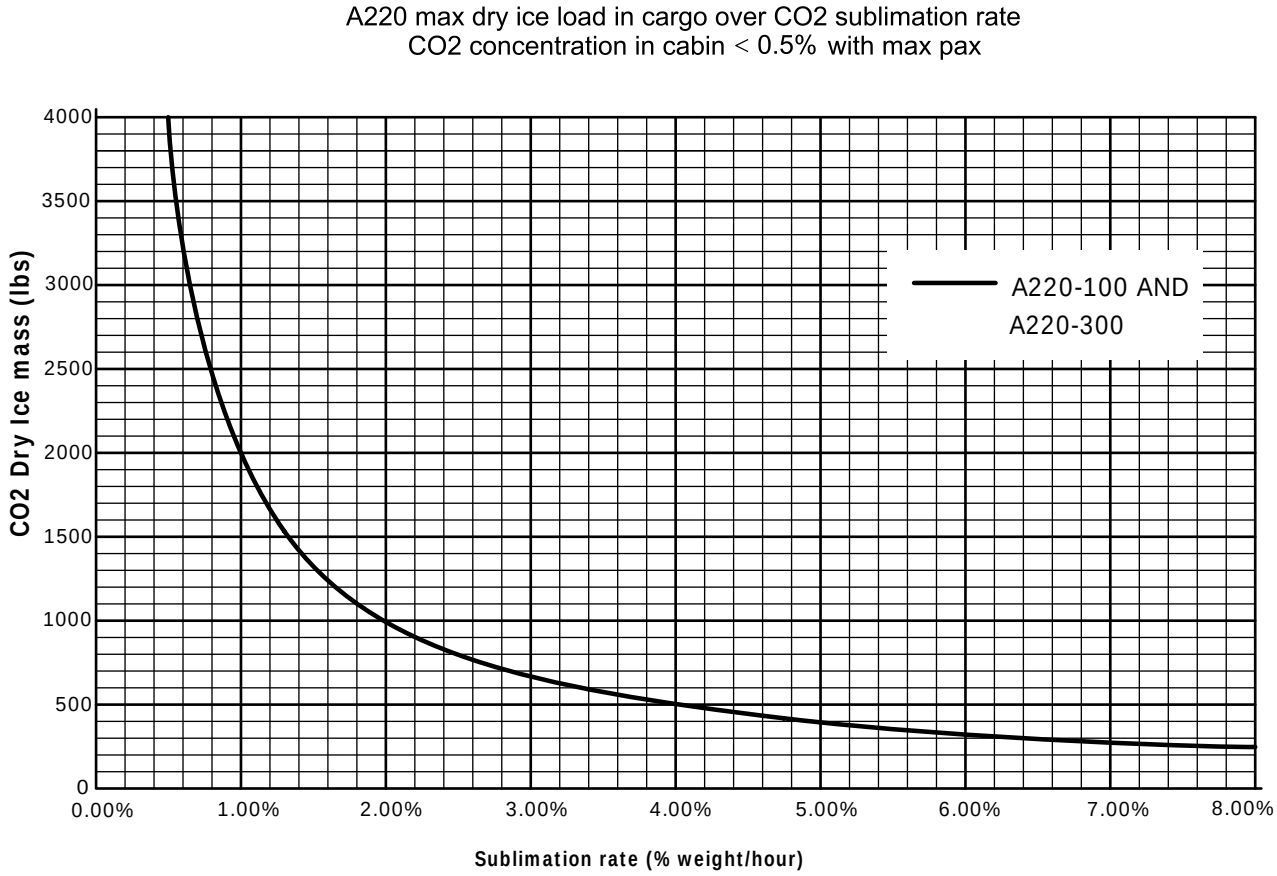

Subl. Rate (% weight /hour)	Dry Ice Mass (lbs)
0.50%	4000
1.00%	2000
1.50%	1333
2.00%	1000
3.00%	667
4.00%	500
5.00%	400
6.00%	333
7.00%	286
8.00%	250

ICN-BD500-A-J142000-A-3AB48-67632-A-001-01

Figure 1 Combined maximum dry ice load in cargo with maximum passengers

Note

The Fig. 1 represents the combined loading of both forward and aft cargo compartments. The individual limit of each cargo bay is 50% of this value.

If live animals are transported in the forward cargo, the forward cargo compartment limit becomes 35% of the value represented in Fig. 1.

The FWD CARGO VENT switch must not be selected OFF when dry ice is carried in the forward cargo compartment. Refer to Fig.3Sheet. 4.

Even with ventilation ON, CO_2 concentration in cargo could raise above 0.5%. Precaution should be taken prior to cargo access.

7.4 Supplemental dry ice load with reduced occupants (less than 15 occupants)

In addition to the cargo capacity shown in Fig. 1, dry ice transport allowance can be increased when operating with reduced number of occupants and maintaining less than 0.5% CO_2 concentration in the cabin.

Refer to Fig. 2 for the supplemental dry ice capacity that may be transported with equal or less than 15 occupants in the cabin and 3 flight crew in the cockpit. The curve on the graph shows the maximum allowed concentration of CO_2 in the cabin to be less than 0.5%. The calculation is based on single pack operation but the aircraft must be dispatched with two packs operating for this type of operation. In case of a loss of one pack in flight a diversion is not necessary.

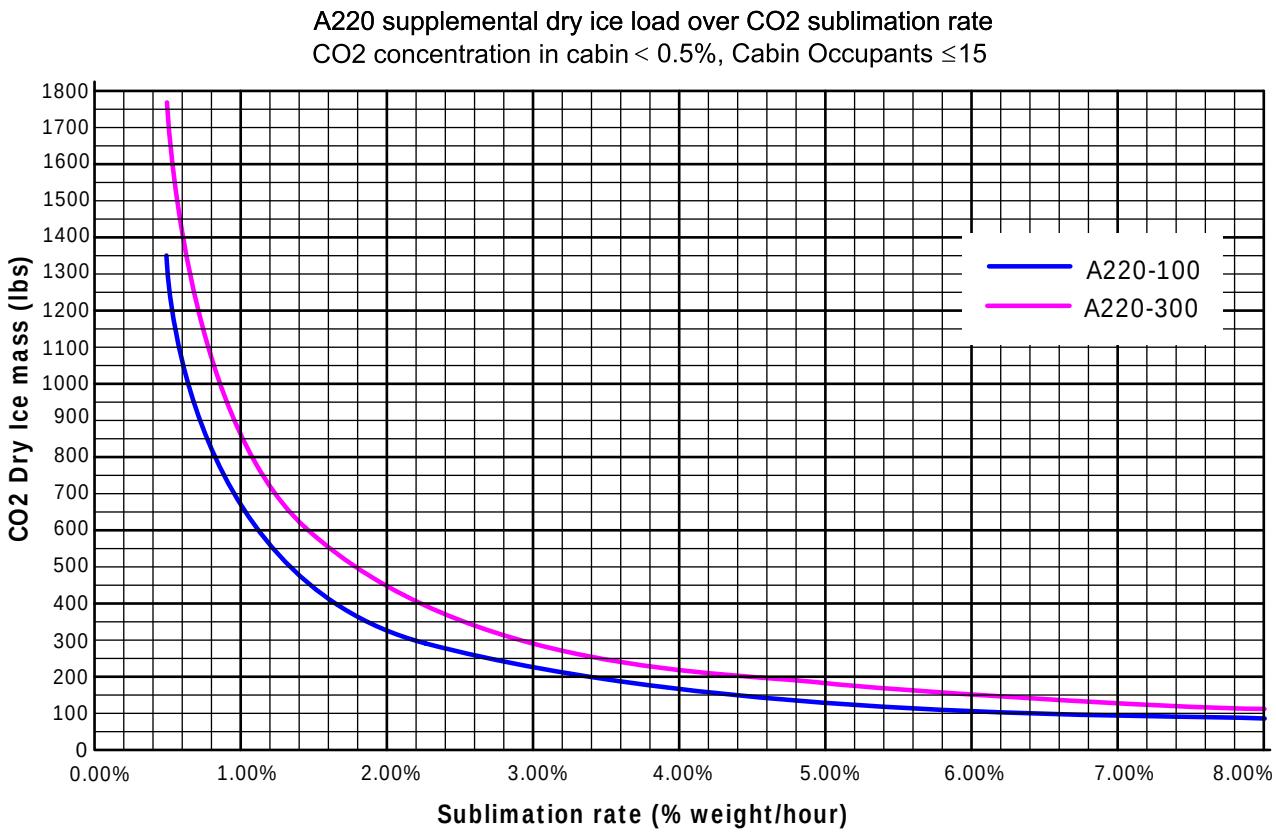

Subl. Rate (% weight /hour)	Dry Ice Mass	
	A220-100 (lbs)	A220-300 (lbs)
0.50%	1336	1758
1.00%	668	879
1.50%	445	586
2.00%	334	439
3.00%	223	293
4.00%	167	220
5.00%	134	176
6.00%	111	146
7.00%	95	126
8.00%	84	110

ICN-BD500-A-J142000-A-3AB48-67633-A-001-01

Figure 2 Supplemental dry ice load with reduced occupants (less than 15 occupants)

Note

The Fig. 2 represents the supplemental dry ice mass that can be transported in addition to the normal cargo loading (2) when operating with less than 15 occupants in the cabin.

The Fig. 2 represents the combined loading of the cabin, forward cargo and aft cargo compartments. No restriction applies regarding the distribution of this supplemental loading, except when transporting live animals. In this case, supplemental dry ice in the forward cargo compartment may be limited.

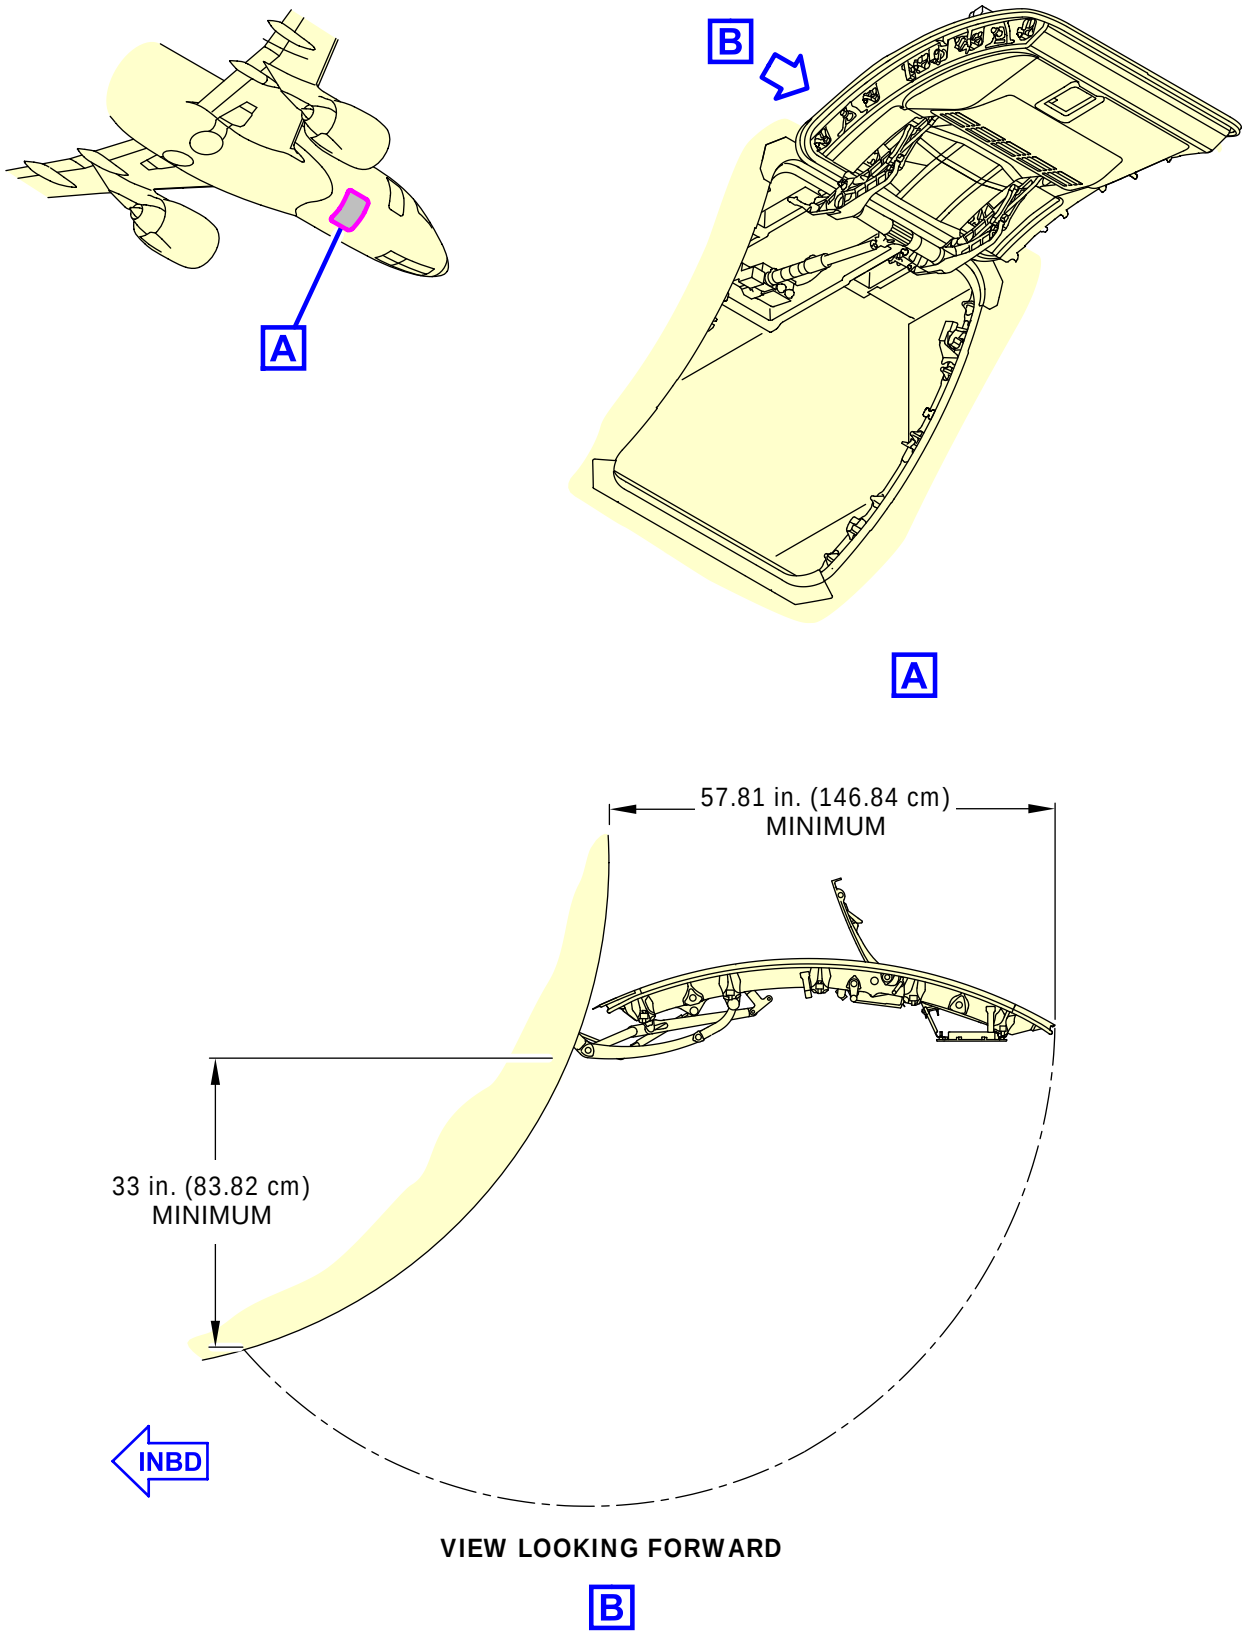

ICN-BD500-A-J142000-A-3AB48-31017-A-001-01

Figure 3 Forward cargo compartment - clearances - (Sheet 1 of 5)

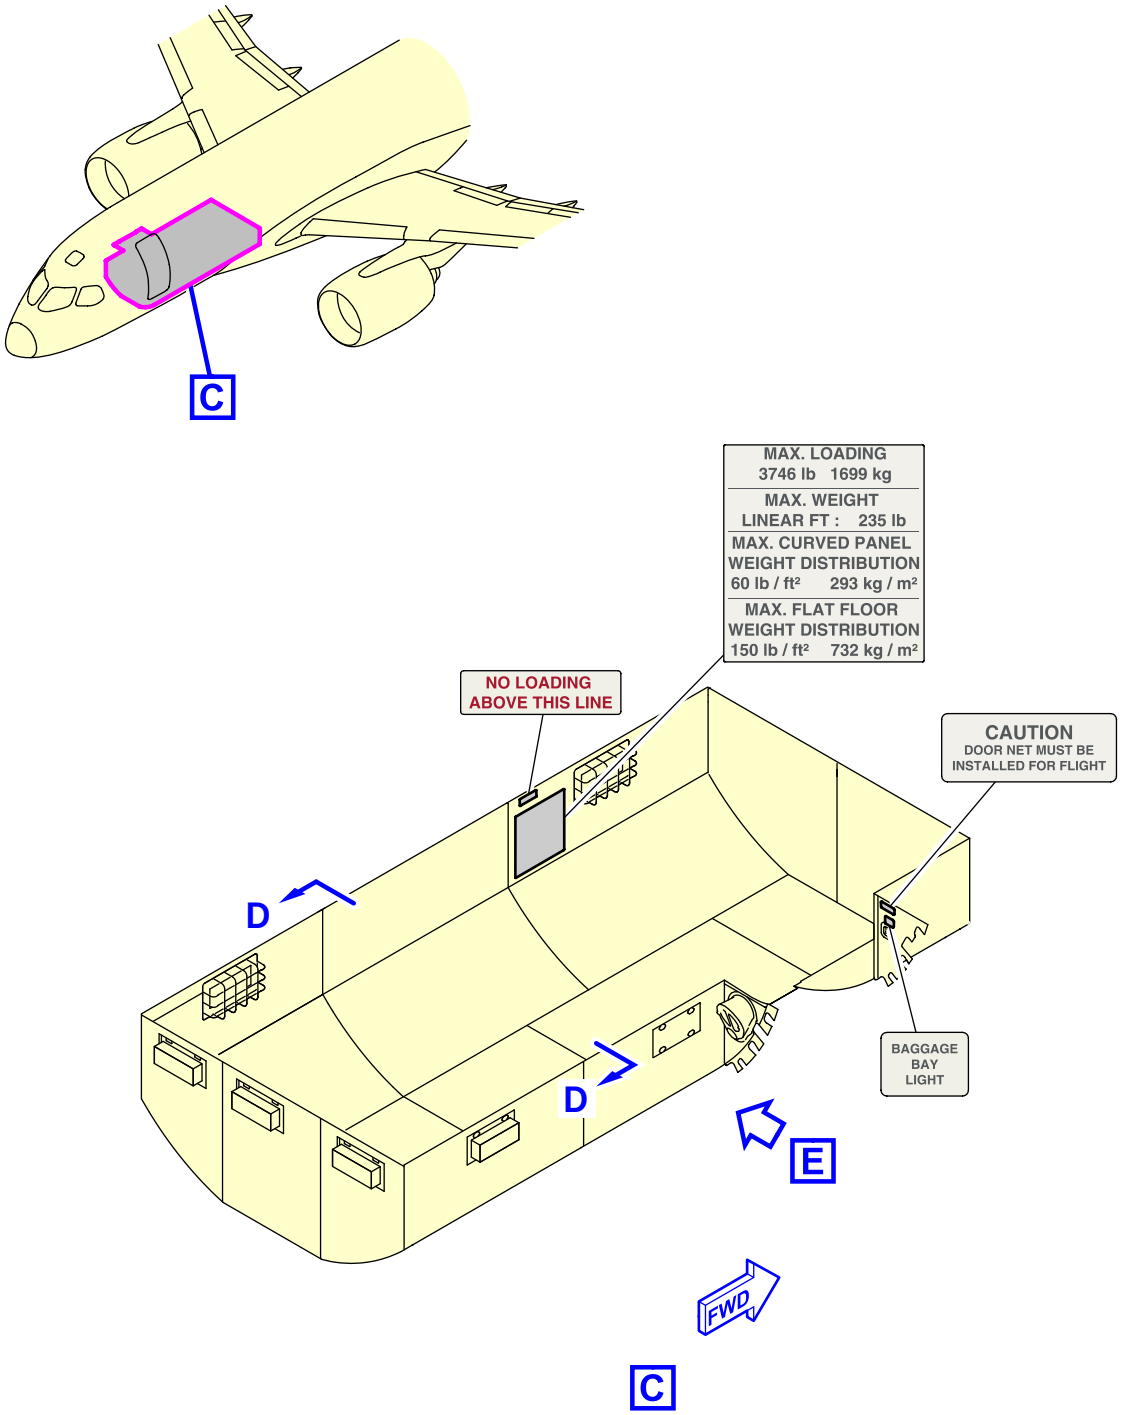

ICN-BD500-A-J142000-A-3AB48-31127-A-002-01

Figure 3 Forward cargo compartment - clearances - (Sheet 2 of 5)

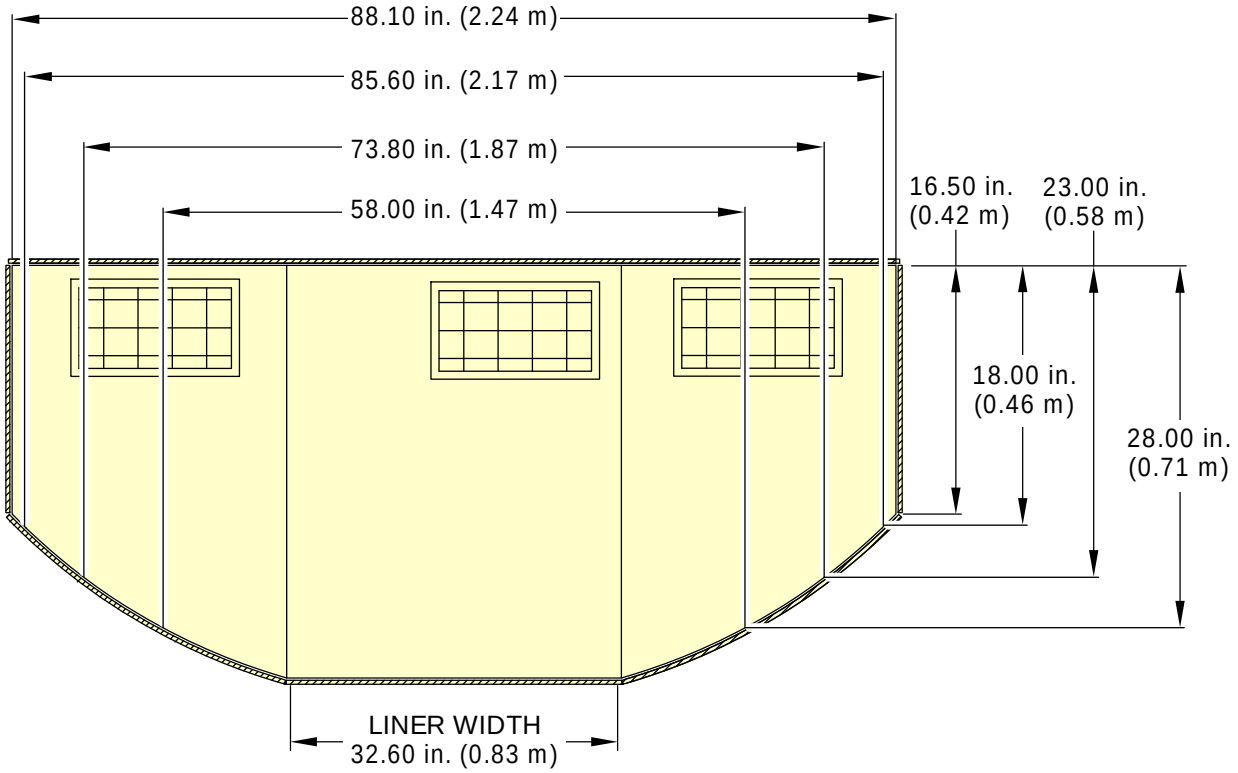

D-D

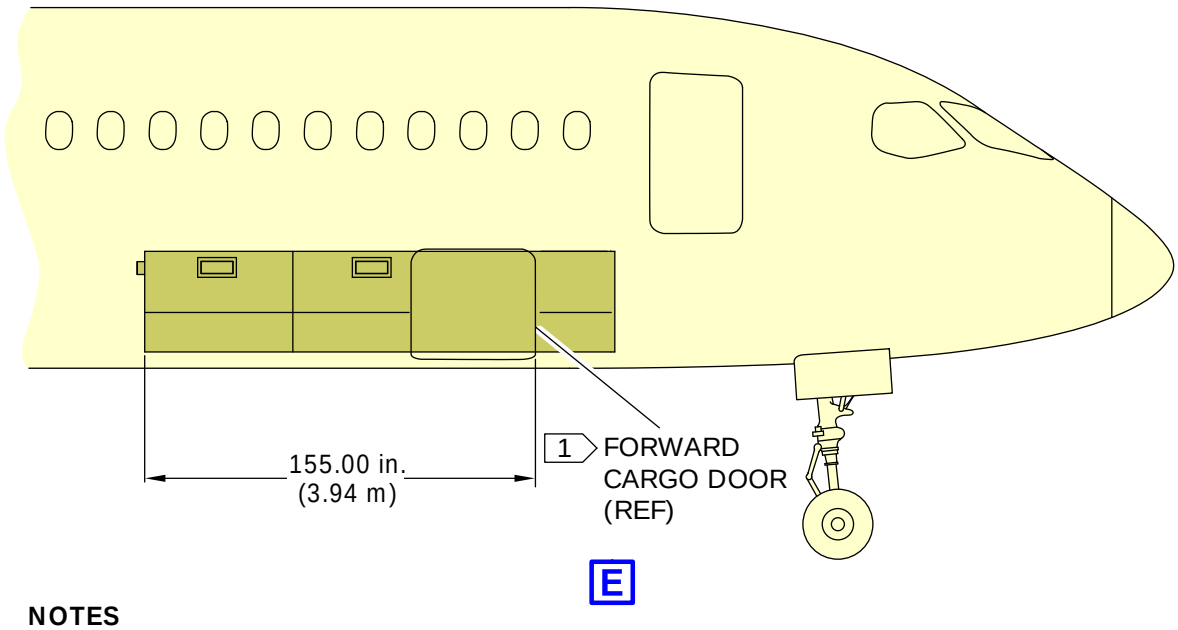

E

NOTES

1 Max Clear opening 46.4 in. x 32.6 in. (1.18 m x 0.83 m).

2. Max box length that can fit in cargo compartment: 155.00 in. (3.94 m).

ICN-BD500-A-J142000-A-3AB48-31128-A-001-01

Figure 3 Forward cargo compartment - clearances - (Sheet 3 of 5)

(Sheet) Applicability:
50001-50065, 50067-50085, 50087-54987, 55001-59999

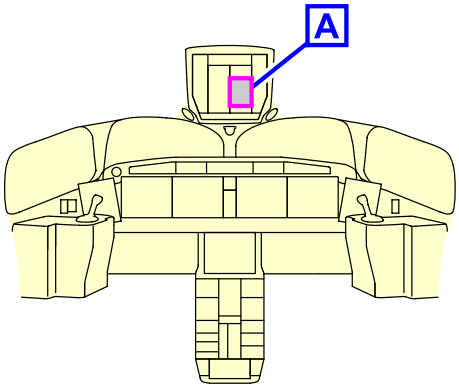

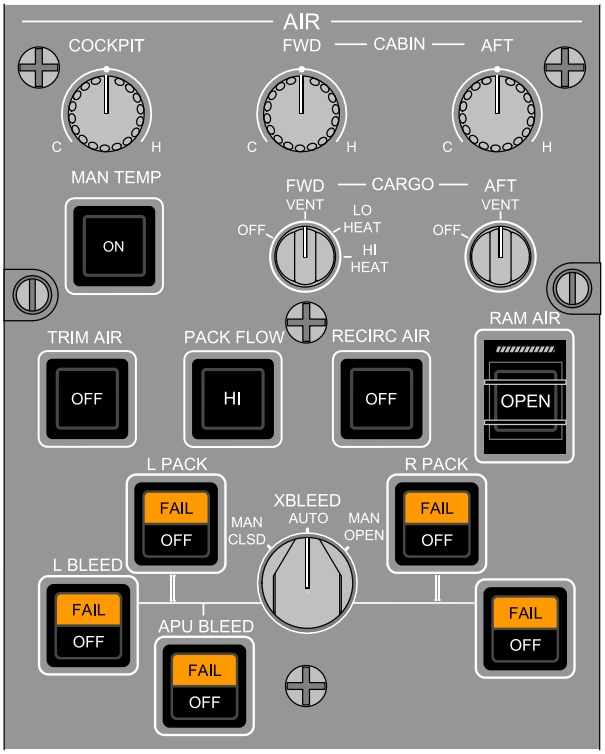

AIR PANEL

A

ICN-BD500-A-J210000-C-3AB48-06682-A-003-01

Figure 3 Forward cargo compartment - clearances - (Sheet 4 of 5)

(Sheet) Applicability:
50066, 50086

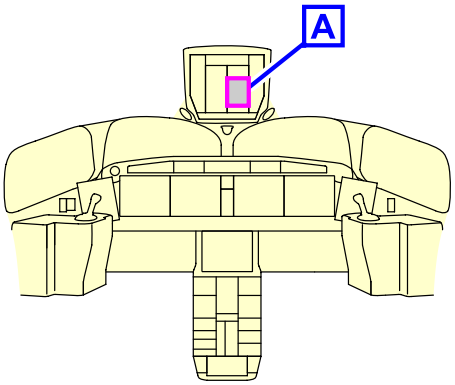

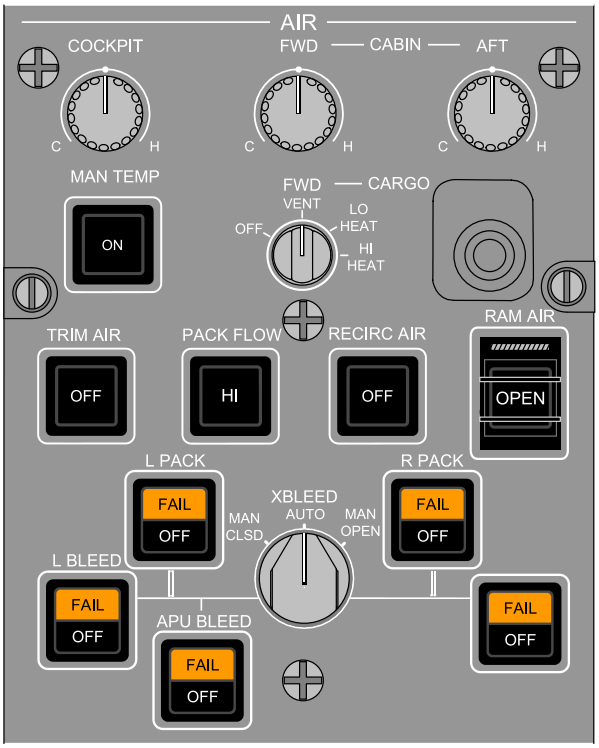

AIR PANEL

A

ICN-BD500-A-J142000-C-3AB48-79158-A-001-01

Figure 3 Forward cargo compartment - clearances - (Sheet 5 of 5)

A220

Aft cargo compartment volume, weight and maximum item dimensions - Technical data

Applicability:
50001-50065, 50067-50085, 50087-54987, 55001-59999

Table of contents

Page

Aft cargo compartment volume, weight and maximum item dimensions - Technical data..... 1
References..... 1
Description..... 1
1 Information..... 1
2 Cargo door operation..... 2
4 Cargo compartment volume and weight..... 2
5 Maximum item dimensions..... 2
6 Maximum item dimensions..... 3
7 Maximum dry ice..... 3
8 Combined maximum dry ice load in cargo with maximum passengers..... 3
9 Supplemental dry ice load with reduced occupants (less than 15 occupants)..... 6

List of tables

Page

1 References..... 1
2 Cargo compartment volumes..... 2
3 Cargo compartment volumes..... 2

List of figures

Page

1 Combined maximum dry ice load in cargo with maximum passengers..... 5
2 Supplemental dry ice load with reduced occupants (less than 15 occupants)..... 7
3 Aft cargo compartment – clearances..... 9

References

Table 1 References

Data Module/Technical Publication	Title
BD500-A-J14-20-00-03AAA-030A-A	Cargo nets and tie-downs - Technical data
BD500-A-J52-30-00-01AAA-540A-A	Cargo compartment door - Open for access procedure
BD500-A-J52-30-00-01AAA-740A-A	Cargo compartment door - Close after access procedure

Description

1 Information

This data module gives the volume, the weight and the maximum item dimensions for the aft cargo compartment.

2 Cargo door operation

Refer to BD500-A-J52-30-00-01AAA-540A-A, BD500-A-J52-30-00-01AAA-740A-A to open and close the cargo door.

4 Cargo compartment volume and weight

The aft cargo floor structure has a maximum load of 235lb/ft (350 kg/m).

Refer to Table 2 and Table 3 for the estimate wet volume and weight of the aft cargo compartment.

Applicability:
50001-54999

Table 2 Cargo compartment volumes

Description	Usable Volume		Maximum load	
	ft^3	m^3	lb	kg
Aft cargo compartment	422	11.95	4548	2063

Applicability:
55001-59999

Table 3 Cargo compartment volumes

Description	Usable Volume		Maximum load	
	ft^3	m^3	lb	kg
Aft cargo compartment	523	14.81	5746	2606

Applicability:
50001-54999

5 Maximum item dimensions

Refer to the Weight and balance manual for the maximum item dimensions. Refer to BD500-A-J08-60-02AAA-030A-A.

Note

There must be no item near the cargo compartment door.

Divide the floor load equally in the cargo compartment.

The cargo door net and the cargo restraint net hold the items in their area, refer to BD500-A-J14-20-00-03AAA-030A-A for both cargo nets.

Use other cargo items to hold the items which are wider than the flat floor.

There must be no item above the “NO LOADING ABOVE THIS LINE“ PLACARD. Refer to Fig.3Sheet. 2.

The cargo compartment door gives the clearances to load a human remains pallet in the aft cargo compartment.

Applicability:
55001-59999

6 Maximum item dimensions

Refer to the Weight and balance manual for the maximum item dimensions. Refer to BD500-A-J08-60-02AAB-030A-A.

Note

There must be no item near the cargo compartment door.

Divide the floor load equally in the cargo compartment.

The cargo door net and the cargo restraint net hold the items in their area, refer to BD500-A-J14-20-00-03AAA-030A-A for both cargo nets.

Use other cargo items to hold the items which are wider than the flat floor.

There must be no item above the “NO LOADING ABOVE THIS LINE“ PLACARD. Refer to Fig.3Sheet. 2.

The cargo compartment door gives the clearances to load a human remains pallet in the aft cargo compartment.

7 Maximum dry ice

For health and safety of ground handling personnel and all parties involved in dry ice handling, the access to any compartments which carry dry ice shall not be granted before sufficient venting has been performed by means of air supply equipment such as air conditioning packs, ground support equipment, opening the respective compartment door, etc. Alternatively, or in addition, the use of portable breathing equipment, oxygen masks and/or equivalent devices are recommended.

While occupants are on board, it is considered that all air conditioning packs or equivalent equipment are operating permanently (both air conditioning packs ON) during the transportation of dry ice. It is understood that aircraft ventilation may be reduced during aircraft de-icing. It is strongly recommended that this reduced ventilation period be minimized.

Avoid Pack-Off Take-Off (POTO). It is recommended to dispatch in dual bleed and dual pack configuration.

1000 lbs (453 kg) of dry ice can be carried in the aft cargo compartment.

AFT CARGO VENT switch must not be selected OFF when dry ice is carried in the aft cargo compartment. Refer to Fig.3Sheet. 4

8 Combined maximum dry ice load in cargo with maximum passengers

Refer to Fig. 1 for the maximum allowed amount of dry ice loaded in the aircraft cargo compartments assuming that the cabin is occupied with the maximum number of occupants and the cockpit with 3 flight crew.

The curve on the graph shows the maximum allowed concentration of CO_2 in the cabin to be less than 0.5%. The calculation is based on single pack operation but the aircraft must be dispatched with two packs operating for this type of operation. In case of a loss of one pack in flight a diversion is not necessary.

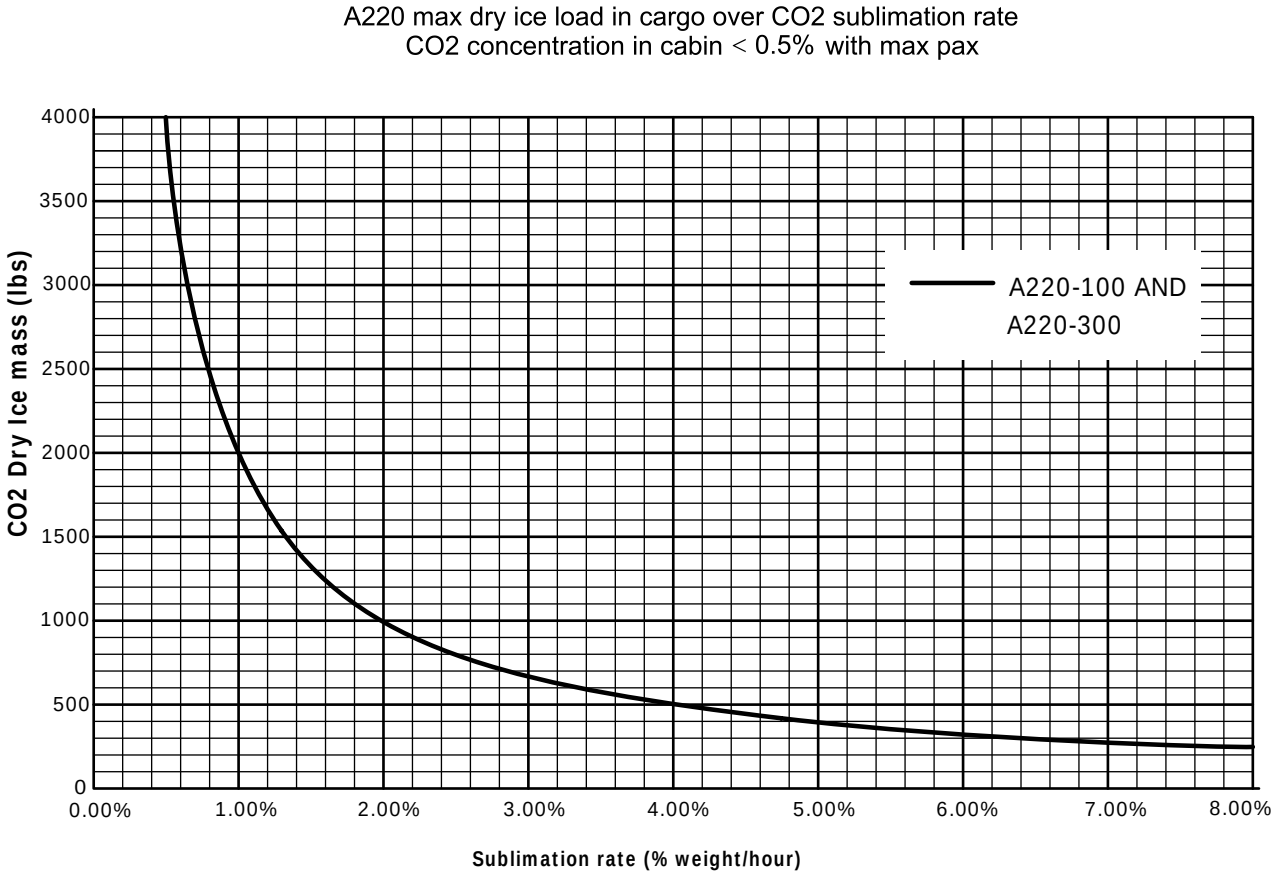

Subl. Rate (% weight /hour)	Dry Ice Mass (lbs)
0.50%	4000
1.00%	2000
1.50%	1333
2.00%	1000
3.00%	667
4.00%	500
5.00%	400
6.00%	333
7.00%	286
8.00%	250

ICN-BD500-A-J142000-A-3AB48-67632-A-001-01

Figure 1 Combined maximum dry ice load in cargo with maximum passengers

Note

The Fig. 1 represents the combined loading of both forward and aft cargo compartments. The individual limit of each cargo bay is 50% of this value.

If live animals are transported in the forward cargo, the forward cargo compartment limit becomes 35% of the value represented in Fig. 1.

The FWD CARGO VENT switch must not be selected OFF when dry ice is carried in the forward cargo compartment. Refer to Fig.3Sheet. 4.

Even with ventilation ON, CO_2 concentration in cargo could raise above 0.5%. Precaution should be taken prior to cargo access.

9 Supplemental dry ice load with reduced occupants (less than 15 occupants)

In addition to the cargo capacity shown in Fig. 1, dry ice transport allowance can be increased when operating with reduced number of occupants and maintaining less than 0.5% CO_2 concentration in the cabin.

Refer to Fig. 2 for the supplemental dry ice capacity that may be transported with equal or less than 15 occupants in the cabin and 3 flight crew in the cockpit. The curve on the graph shows the maximum allowed concentration of CO_2 in the cabin to be less than 0.5%. The calculation is based on single pack operation but the aircraft must be dispatched with two packs operating for this type of operation. In case of a loss of one pack in flight a diversion is not necessary.

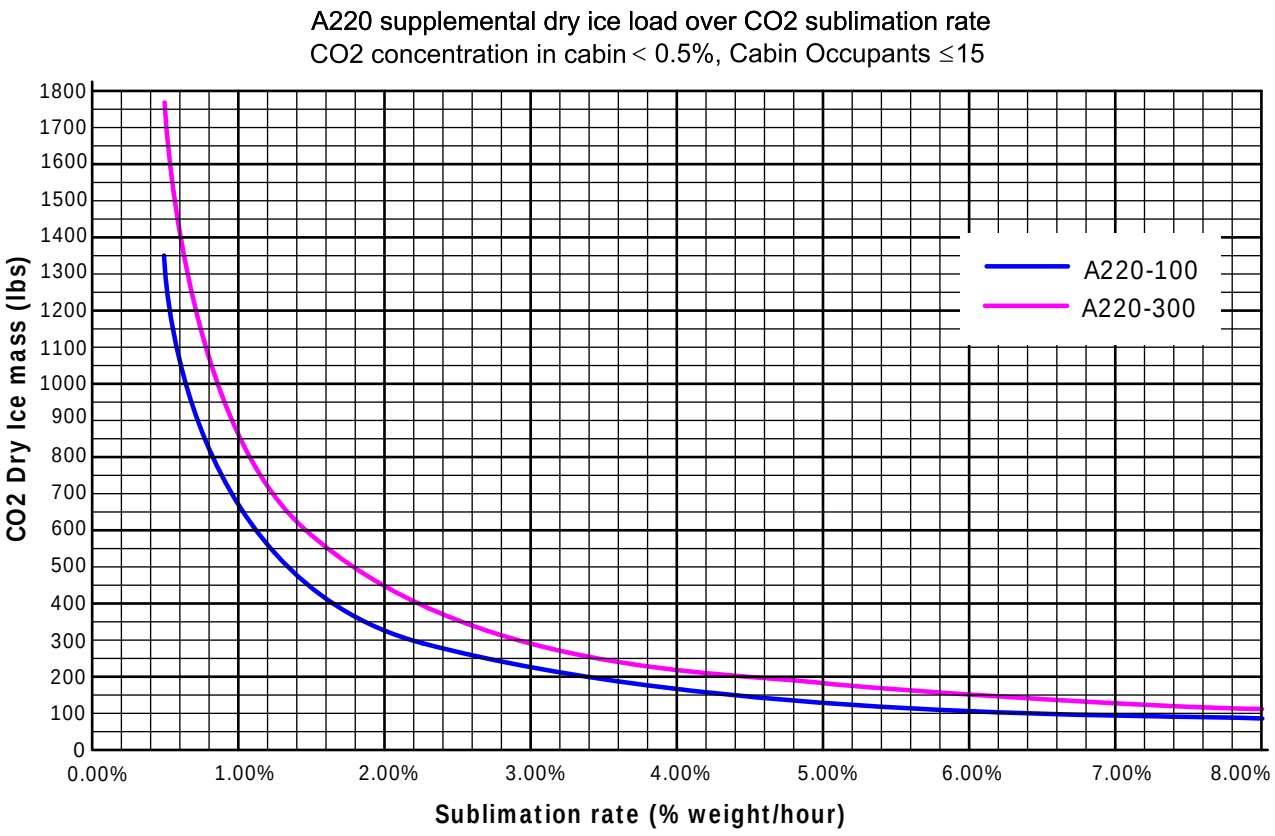

Subl. Rate (% weight /hour)	Dry Ice Mass	
	A220-100 (lbs)	A220-300 (lbs)
0.50%	1336	1758
1.00%	668	879
1.50%	445	586
2.00%	334	439
3.00%	223	293
4.00%	167	220
5.00%	134	176
6.00%	111	146
7.00%	95	126
8.00%	84	110

ICN-BD500-A-J142000-A-3AB48-67633-A-001-01

Figure 2 Supplemental dry ice load with reduced occupants (less than 15 occupants)

Note

The Fig. 2 represents the supplemental dry ice mass that can be transported in addition to the normal cargo loading (2) when operating with less than 15 occupants in the cabin.

The Fig. 2 represents the combined loading of the cabin, forward cargo and aft cargo compartments. No restriction applies regarding the distribution of this supplemental loading, except when transporting live animals. In this case, supplemental dry ice in the forward cargo compartment may be limited.

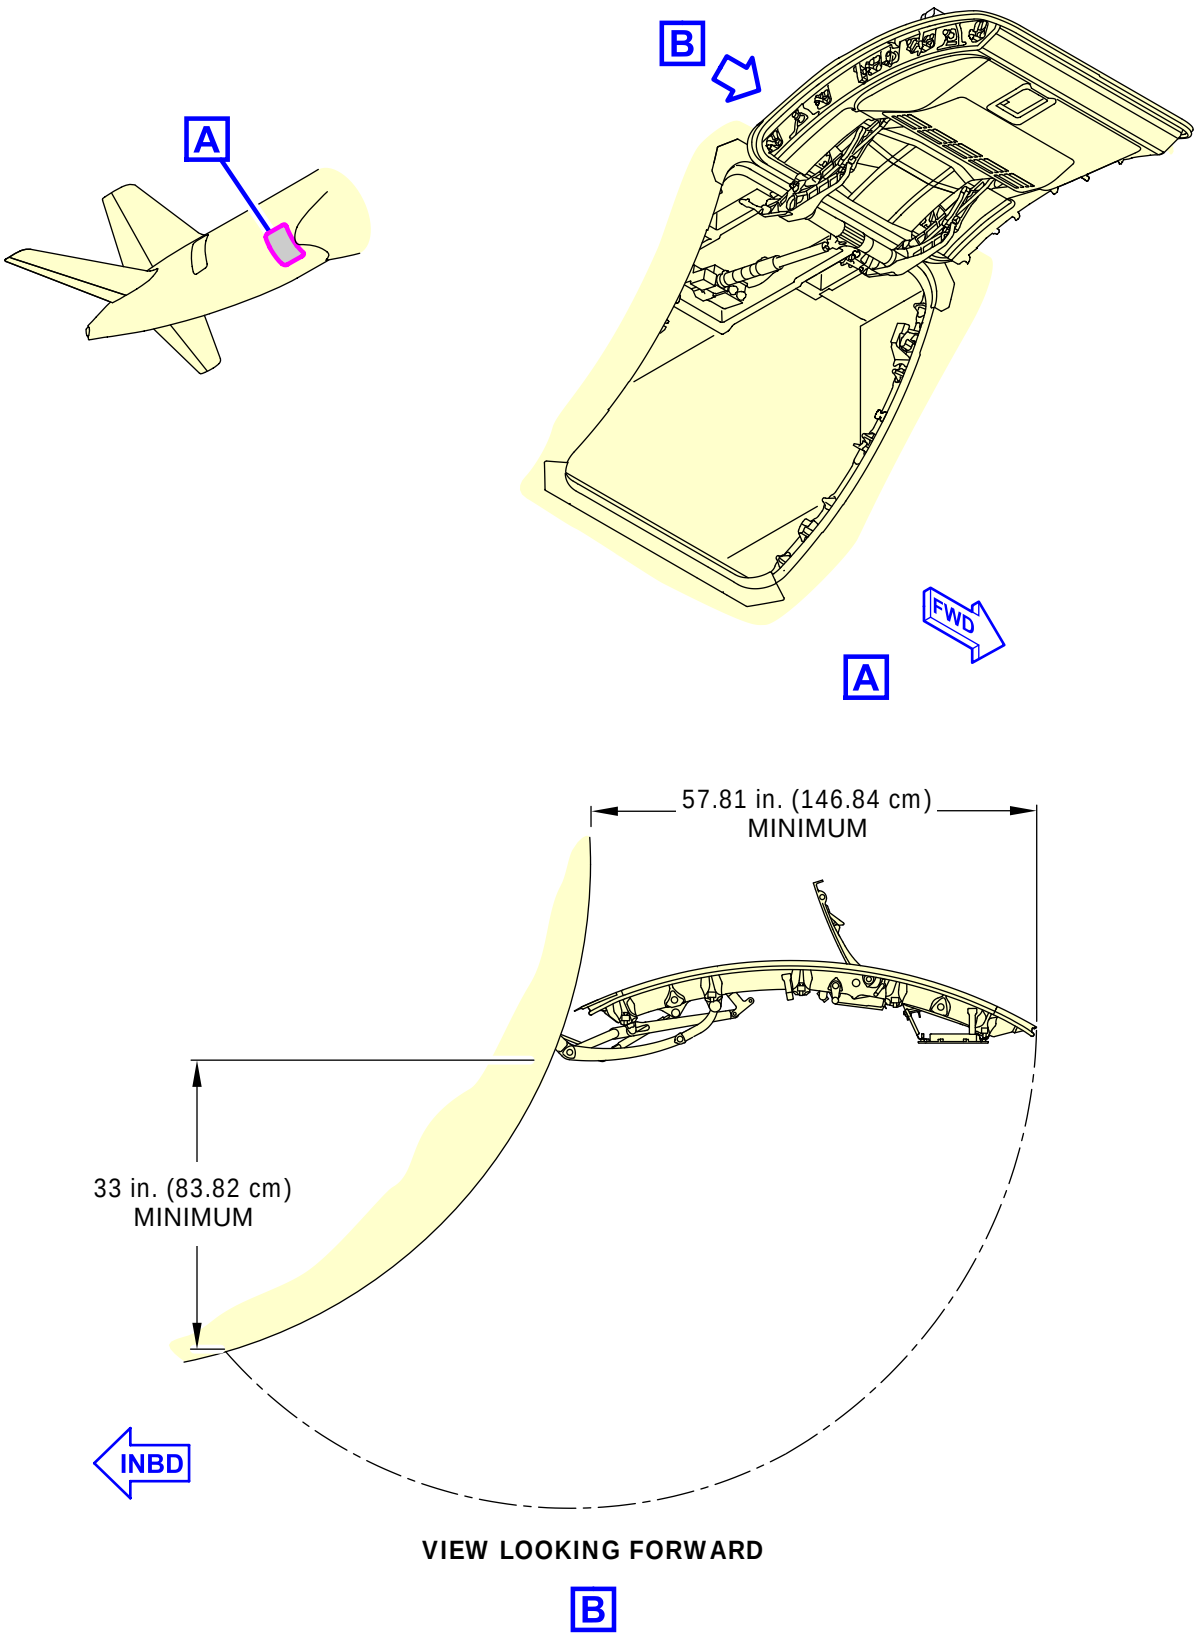

ICN-BD500-A-J142000-A-3AB48-31018-A-001-01

Figure 3 Aft cargo compartment – clearances - (Sheet 1 of 4)

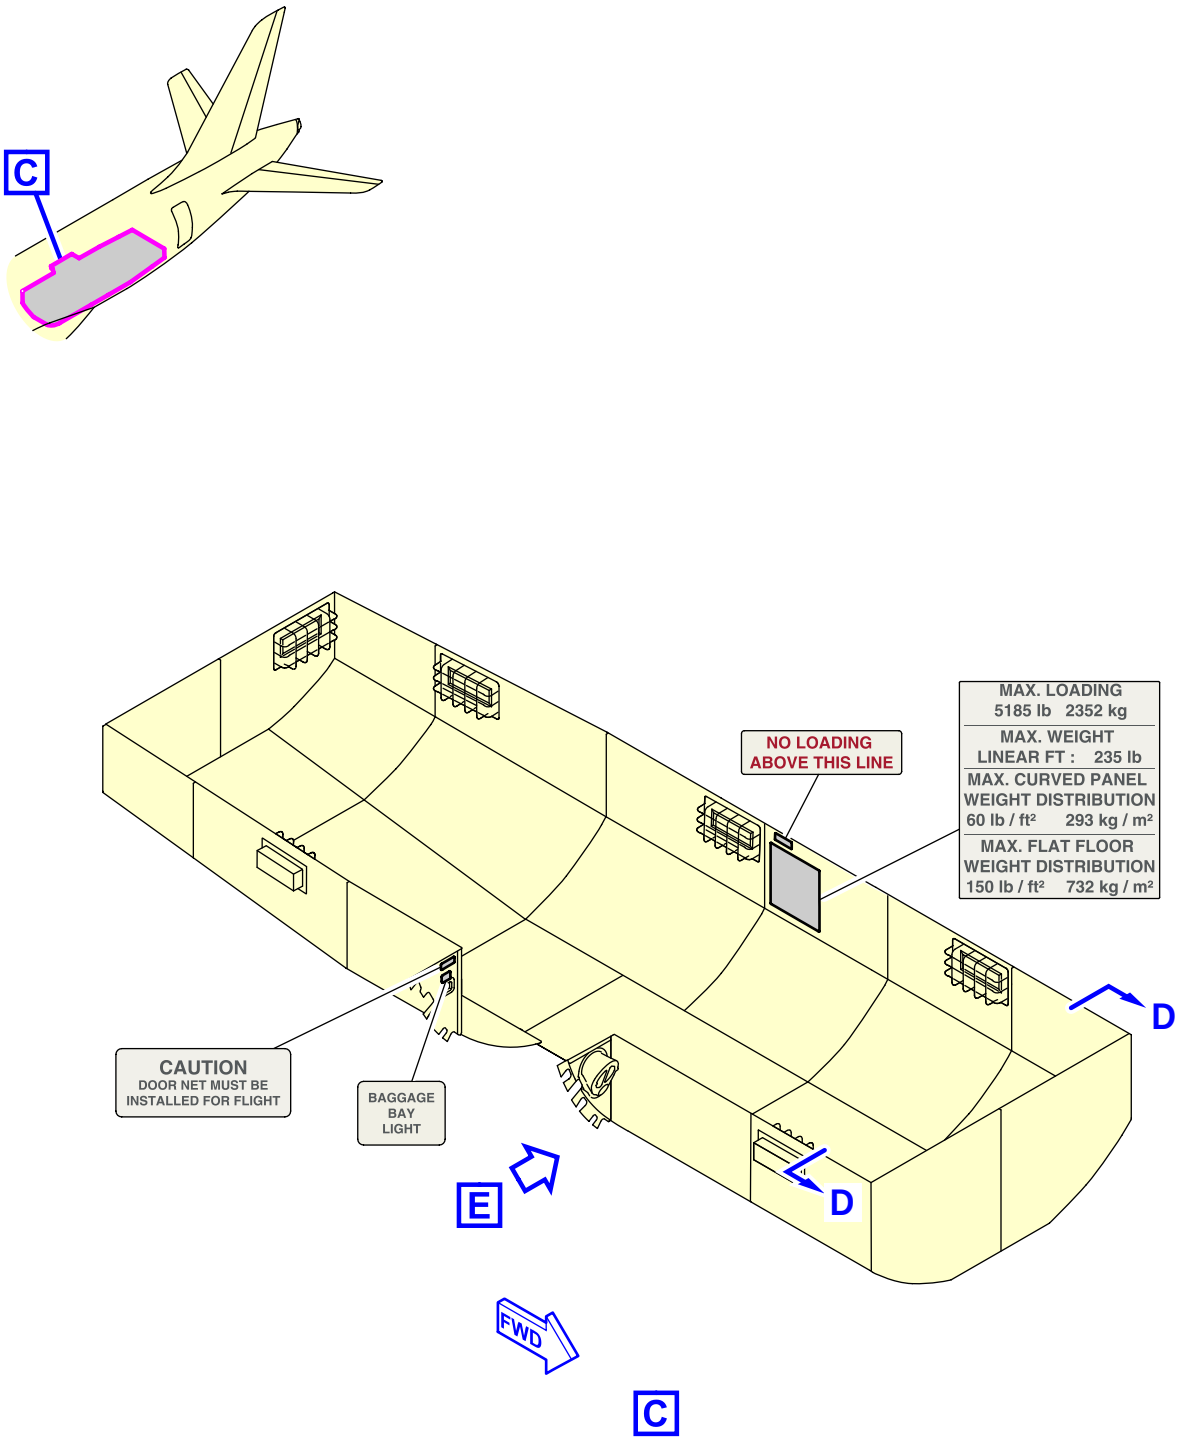

ICN-BD500-A-J142000-A-3AB48-31129-A-002-01

Figure 3 Aft cargo compartment – clearances - (Sheet 2 of 4)

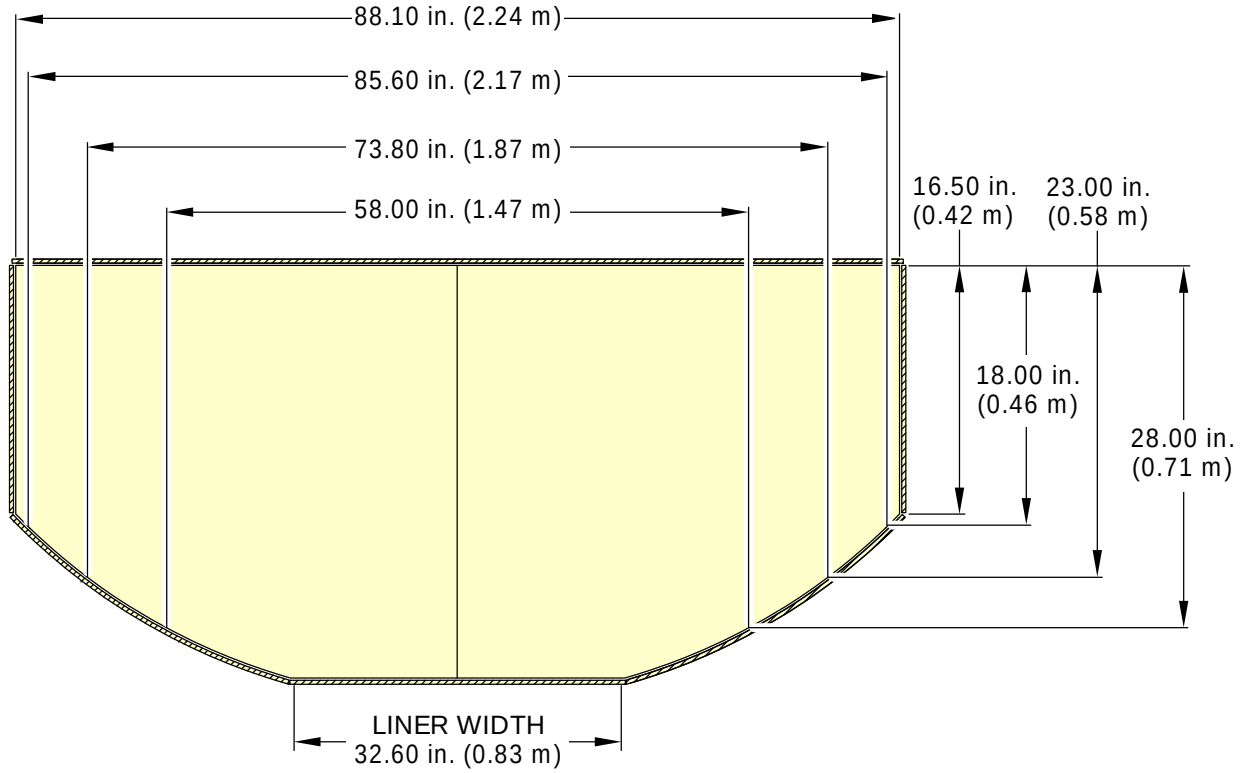

D-D

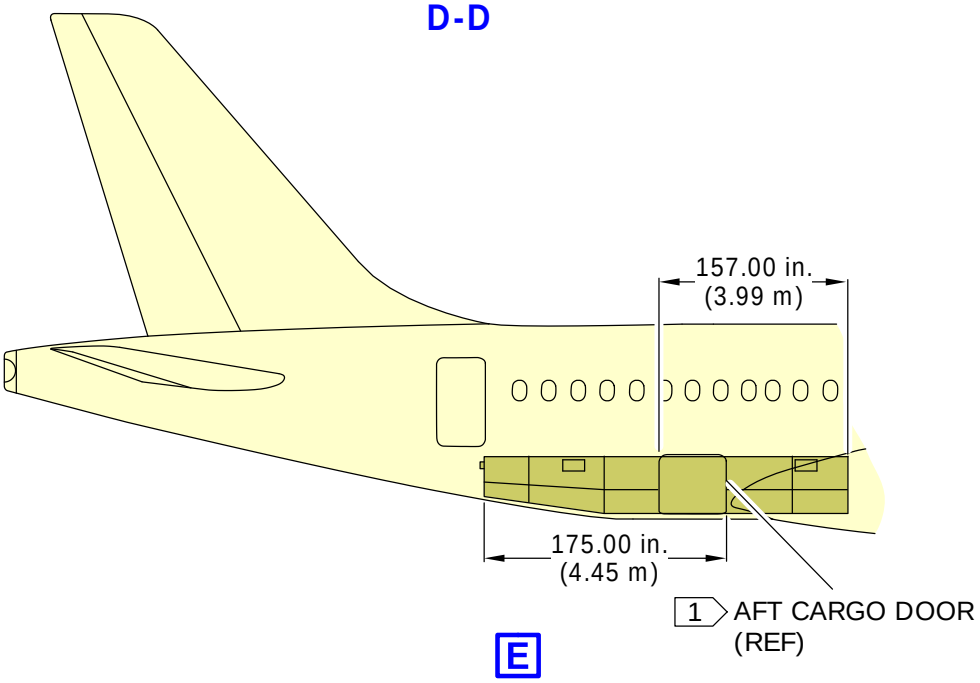

E

NOTES

1. Max Clear opening 46.4 in. x 32.6 in. (1.18 m x 0.83 m).
2. Max box length that can fit in cargo compartment FWD: 157.00 in. (3.99 m).
3. Max box length that can fit in cargo compartment AFT: 175.00 in. (4.45 m).

ICN-BD500-A-J142000-A-3AB48-31130-A-001-01

Figure 3 Aft cargo compartment – clearances - (Sheet 3 of 4)

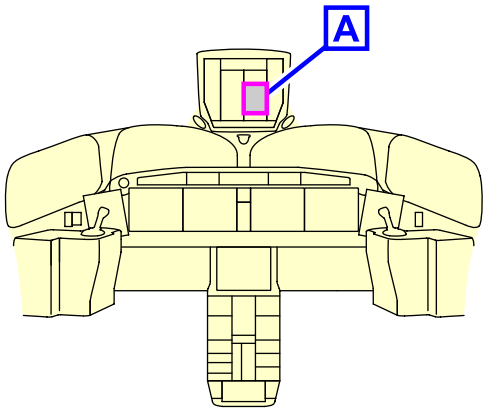

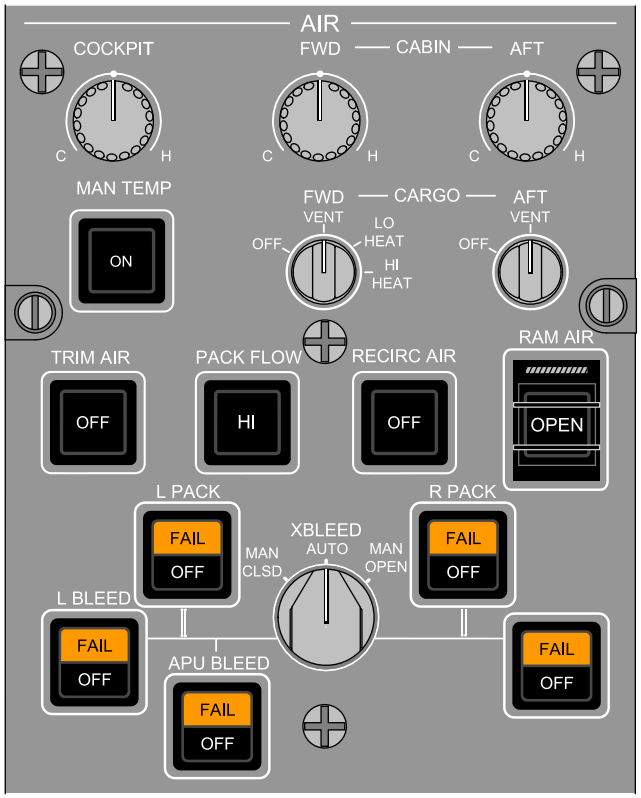

AIR PANEL

A

ICN-BD500-A-J210000-C-3AB48-06682-A-003-01

Figure 3 Aft cargo compartment – clearances - (Sheet 4 of 4)

Aircraft touch and no-touch zones - Technical data

Applicability:
50001-54999, 55001-59999

Table of contents

Page

Aircraft touch and no-touch zones - Technical data 1
References 1
Description 1
1 Information 1
2 Doors ground clearances and distances from the aircraft nose 2
3 Touch and no-touch zones 3

List of tables

Page

1 References 1
2 A220-100 Doors ground clearances and distances from the aircraft nose 2
3 A220-300 Doors ground clearances and distances from the aircraft nose 3

List of figures

Page

1 Door ground clearances and distances from the aircraft nose 4
2 Composite materials 5

References

Table 1 References

Data Module/Technical Publication	Title
None	

Description

1 Information

This data module gives, to the crew, the clear opening, the touch and the no-touch zones, the ground clearances and the distances from the aircraft nose for these aircraft doors:

Forward Passenger Door (FPD) and the Aft Passenger Door (APD).

Forward Service Door (FSD) and the Aft Service Door (ASD).

Forward Cargo Door (FCD) and the Aft Cargo Door (ACD).

For A220-100 refer to Table 2 and to Fig. 1.

For A220-300 refer to Table 3 and to Fig. 1.

2 Doors ground clearances and distances from the aircraft nose

Note

Vertical clearances shown are more than differences in attitude because of the difference of aircraft weight and the center of gravity.

Table 2 A220-100 Doors ground clearances and distances from the aircraft nose

Locator	Description	Minimum
A	From the nose to the end of pilot side window	126.25 in. (3,207 m)
B	From the nose to the forward fuselage frame of the forward passenger door	191 in. (4,851 m)
C	From the nose to the forward fuselage frame of the aft passenger door	1,013 in. 25,730 m
D	From the nose to the forward fuselage frame of the forward cargo compartment door	256 in. (6,502 m)
E	From the nose to the forward fuselage frame of the aft cargo compartment door	832 in. (21,132 m)
F	From the nose to the forward fuselage frame of the aft service door	1,013 in. 25,730 m
G	From the ground to the bottom of the forward passenger door	117 in. (2,971 m)
H	From the ground to the bottom of the aft passenger door	126 in. (3,200 m)
J	From the ground to the bottom of the forward service door	117 in. (2,971 m)
K	From the ground to the bottom of the forward cargo compartment door	66 in. (1,677 m)
L	From the ground to the bottom of the aft cargo compartment door	73 in. (1,854 m)
M	From the ground to the bottom of the aft service door	126 in. (3,200 m)

Table 3 A220-300 Doors ground clearances and distances from the aircraft nose

Locator	Description	Minimum
A	From the nose to the end of pilot side window	126.25 in. (3,207 m)
B	From the nose to the forward fuselage frame of the forward passenger door	191 in. (4,851 m)
C	From the nose to the forward fuselage frame of the aft passenger door	1,160 in. (29,464 m)
D	From the nose to the forward fuselage frame of the forward cargo compartment door	256 in. (6,502 m)
E	From the nose to the forward fuselage frame of the aft cargo compartment door	979 in. (24,866 m)
F	From the nose to the forward fuselage frame of the aft service door	1,160 in. 25,730 m
G	From the ground to the bottom of the forward passenger door	117 in. (2,971 m)
H	From the ground to the bottom of the aft passenger door	126 in. (3,200 m)
J	From the ground to the bottom of the forward service door	117 in. (2,971 m)
K	From the ground to the bottom of the forward cargo compartment door	66 in. (1,677 m)
L	From the ground to the bottom of the aft cargo compartment door	73 in. (1,854 m)
M	From the ground to the bottom of the aft service door	126 in. (3,200 m)

3 Touch and no-touch zones

Composite structures are sensitive to damage caused by the hails, the bird strikes and the ground vehicles. There are small damages on the external aircraft surface which do not show all possible internal surface damages.

Note

The damage on the composite structures are not easily find as the damages on the metal structures. Record all the incident to the aircraft terminal. Refer to Fig. 2 for the location of composite material.

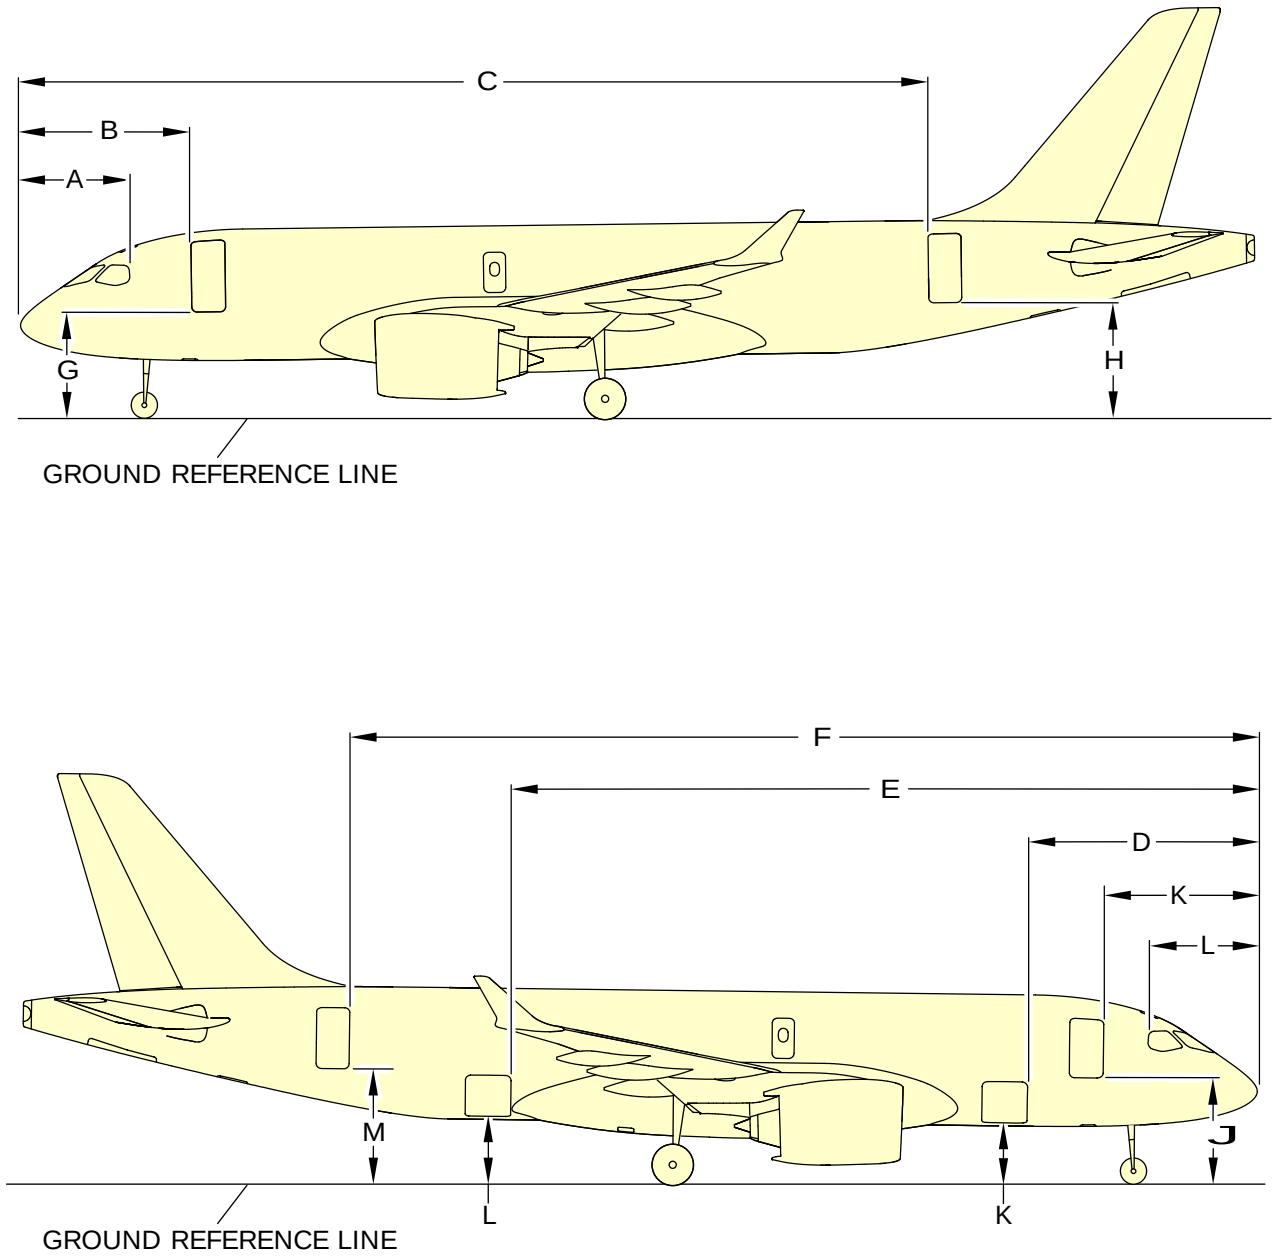

ICN-BD500-A-J153000-A-3AB48-31025-A-001-01

Figure 1 Door ground clearances and distances from the aircraft nose

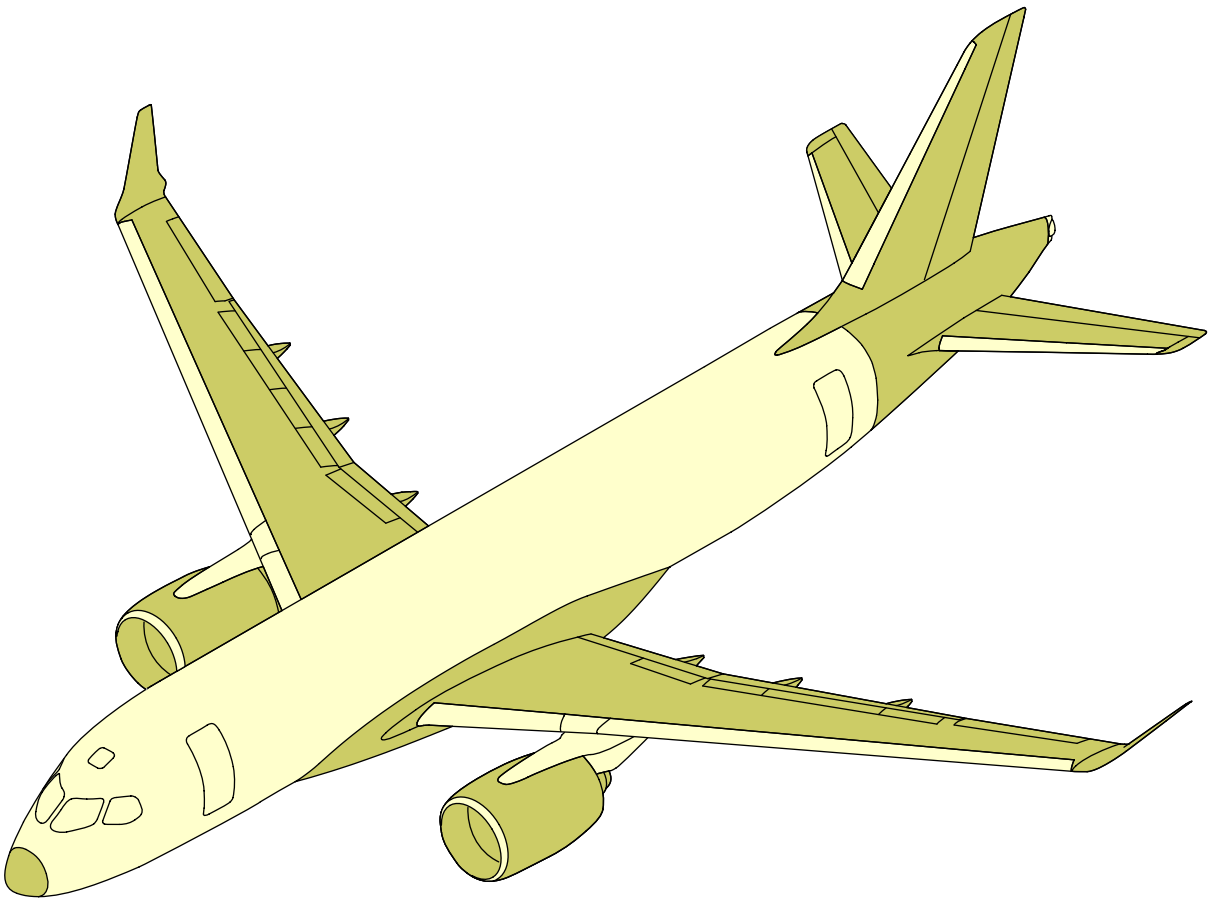

LEGEND

Composite.

ICN-BD500-A-J079500-C-3AB48-24022-A-001-01

Figure 2 Composite materials

Intentionally left blank

Aircraft antennas - Technical data

Applicability:
50001-54999, 55001-59999

Table of contents

Page

Aircraft antennas - Technical data 1
References 1
Description 1
1 General description 1
2 Communication system 1

List of tables

Page

1 References 1

List of figures

Page

1 Aircraft antennas layout 2

References

Table 1 References

Data Module/Technical Publication	Title
BD500-A-J23-00-00-00AAA-040A-A	Communication Systems - Description of how it is made and its function

Description

1 General description

This data module contains general data about the aircraft antennas layout. The antenna installations have been selected to optimize performance and minimize interference between systems.

Refer to Fig. 1 .

2 Communication system

For communication systems description, refer to BD500-A-J23-00-00-00AAA-040A-A.

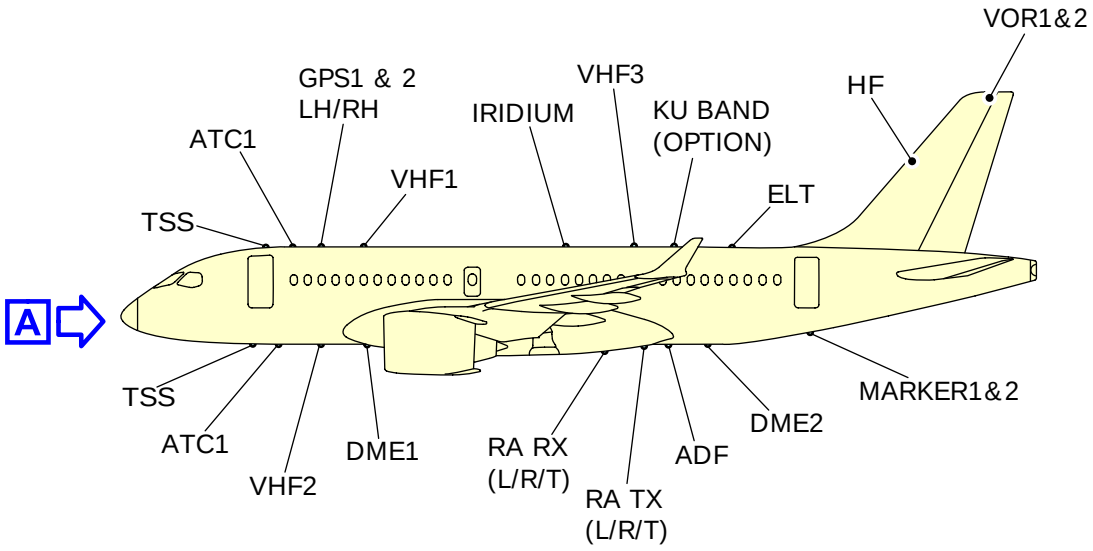

CS100 ANTENNA LAYOUT

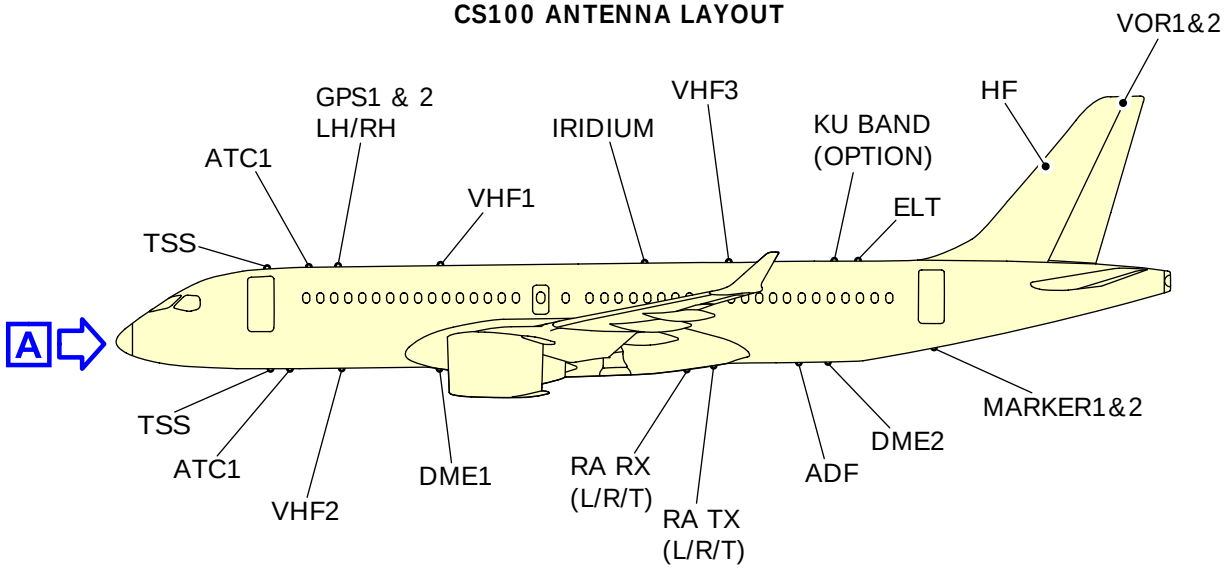

CS300 ANTENNA LAYOUT

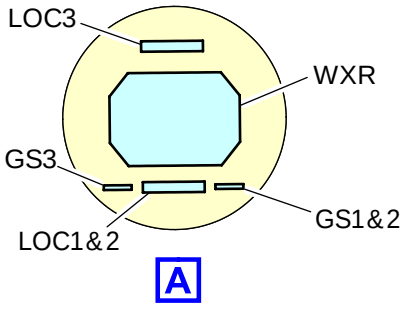

ICN-BD500-A-J230000-A-3AB48-81272-A-001-01

Figure 1 Aircraft antennas layout

A220

Chapter 3: Aircraft performance

Intentionally left blank

Aircraft performance - Technical data

Applicability:
50001-54999

Table of contents

Page

Aircraft performance - Technical data 1
References 1
Description 1
1 Introduction 1
2 Payload/Range 2
3 Takeoff field length requirements 4
4 Landing field length requirements 11
5 Landing reference speed 13

List of tables

Page

1 References 1
2 Standard day temperature chart 2

List of figures

Page

1 Zero Fuel Weight (ZFW) vs Range ISA 3
2 Takeoff field length - ISA - PW1519G 5
3 Takeoff field length ISA +15°C - PW1519G 6
4 Takeoff field length ISA - PW1521G 7
5 Takeoff field length ISA +15°C - PW1521G 8
6 Takeoff field length ISA - PW1524G 9
7 Takeoff field length ISA +15°C - PW1524G 10
8 Landing field length - Dry runway 12
9 Landing reference speed 14

References

Table 1 References

Data Module/Technical Publication	Title
None	

Description

1 Introduction

This data module gives data about:

- Payload/Range
- Takeoff field length requirements
- Landing field length requirements
- Landing reference speed

The table below provides standard day temperature for pressure altitudes.

Table 2 Standard day temperature chart

Altitude		Standard day temperature	
Feet (ft.)	Meters (m)	ºF	ºC
0	0	59	15
2000	610	51.9	11
4000	1220	44.7	7.1
6000	1830	37.6	3.1
8000	2440	30.5	-0.8
10000	3050	23.3	-4.8

2 Payload/Range

This section gives information about the payload/range at ISA conditions.

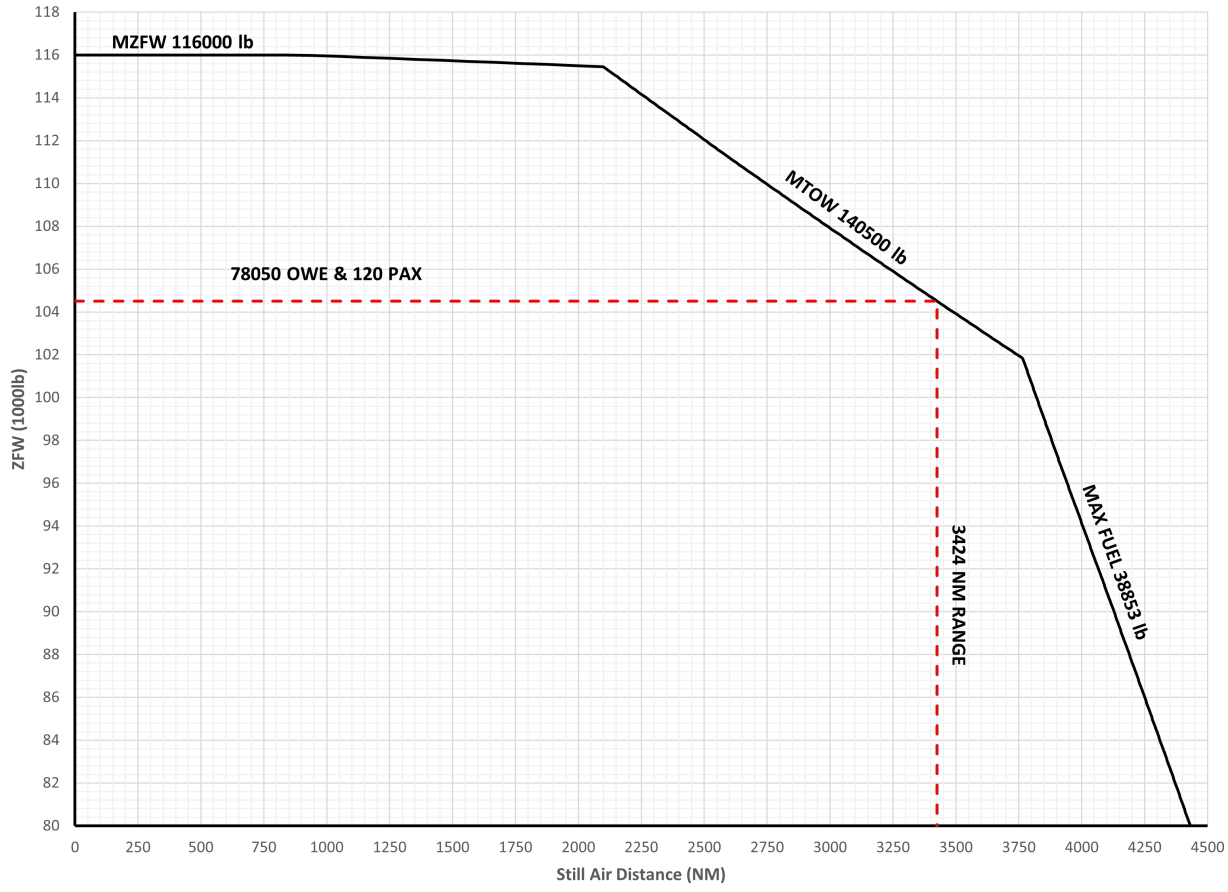

ICN-BD500-A-J000000-A-3AB48-81642-A-001-01

Figure 1 Zero Fuel Weight (ZFW) vs Range ISA

3 Takeoff field length requirements

For more information about aircraft performance, refer to the Aircraft Flight Manual (AFM) BD500–3AB48–22200-00.

For aircraft performance and field length requirements refer to:

- Fig. 2 for the takeoff field length ISA - PW1519G.
- Fig. 3 for the takeoff field length ISA +15°C - PW1519G.
- Fig. 4 for the takeoff field length ISA - PW1521G.
- Fig. 5 for the takeoff field length ISA +15°C - PW1521G.
- Fig. 6 for the takeoff field length ISA - PW1524G.
- Fig. 7 for the takeoff field length ISA +15°C - PW1524G.

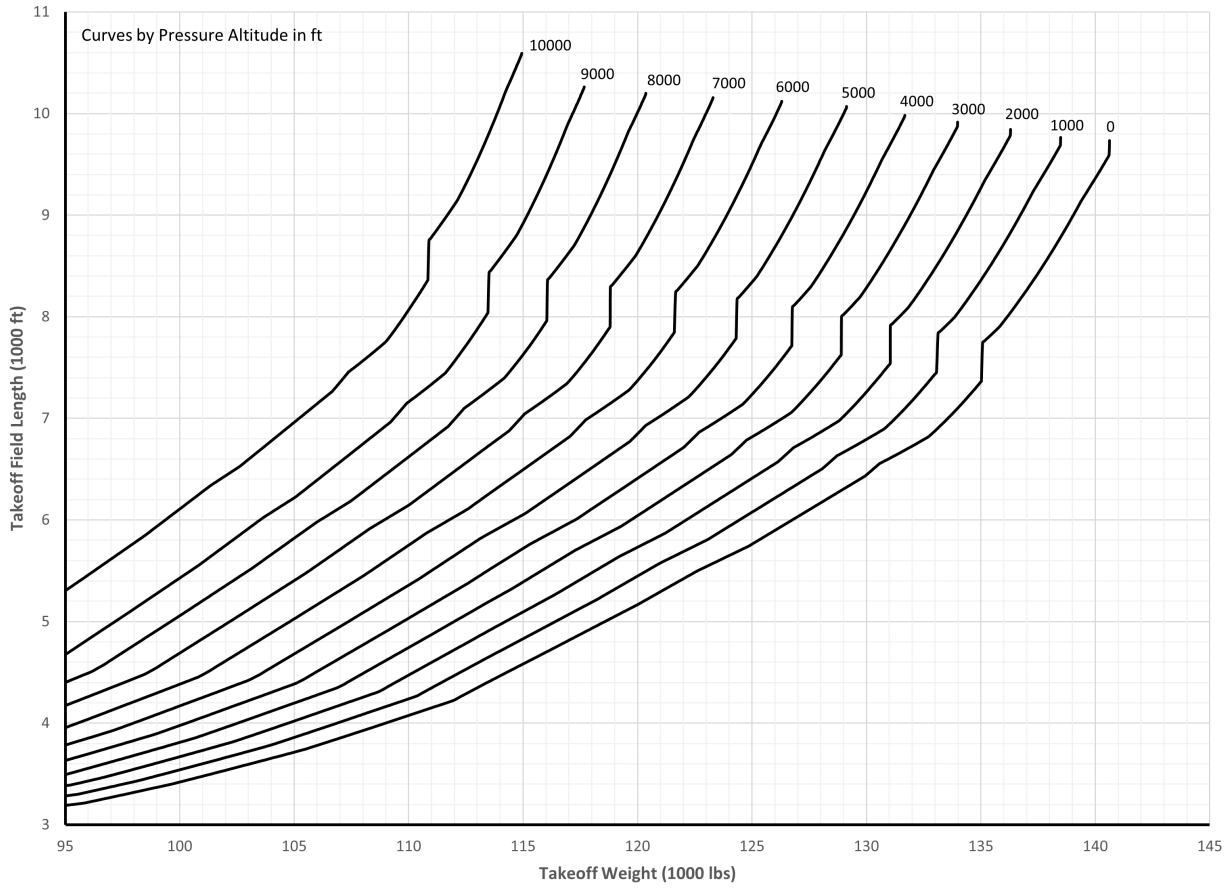

ICN-BD500-A-J000000-A-3AB48-81643-A-001-01

Figure 2 Takeoff field length - ISA - PW1519G

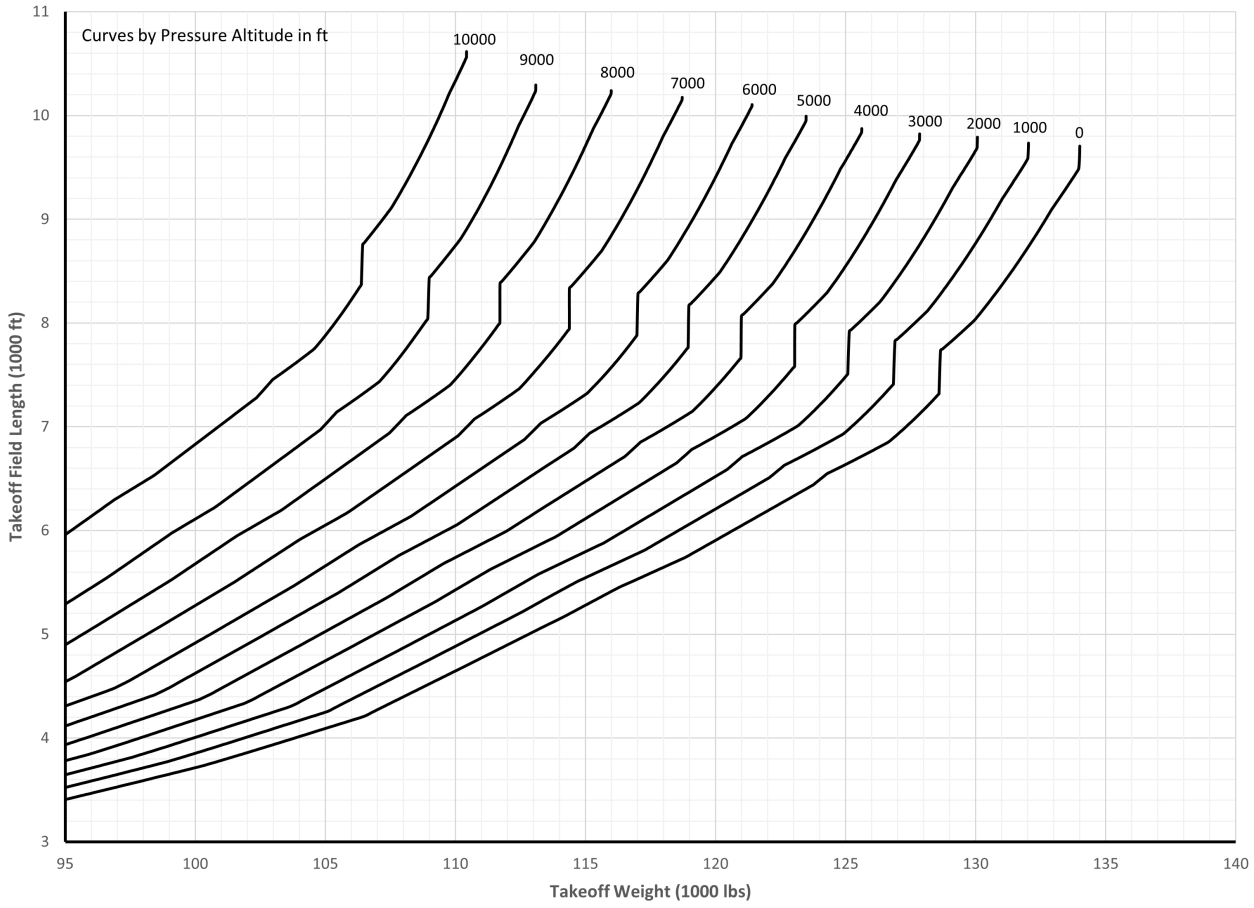

ICN-BD500-A-J000000-A-3AB48-81644-A-001-01

Figure 3 Takeoff field length ISA +15°C - PW1519G

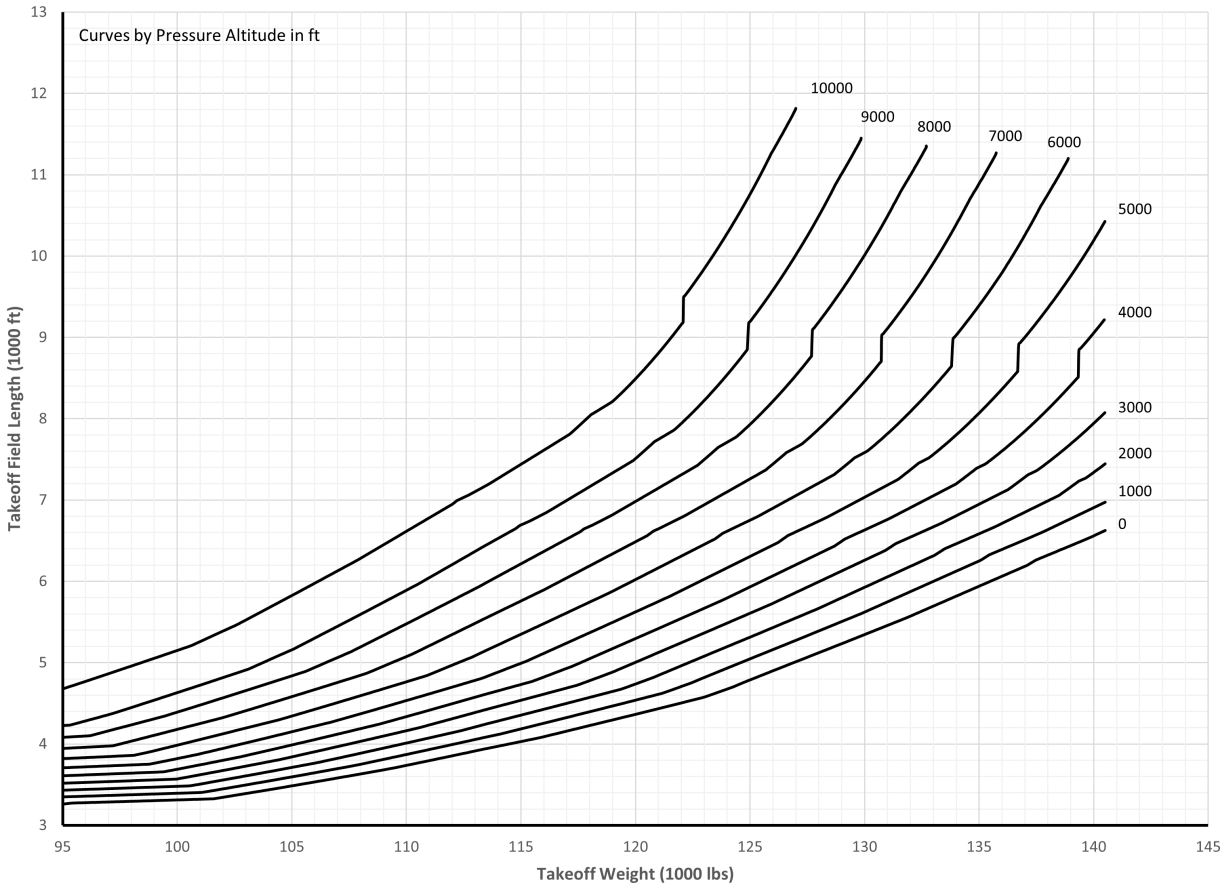

ICN-BD500-A-J000000-A-3AB48-81645-A-001-01

Figure 4 Takeoff field length ISA - PW1521G

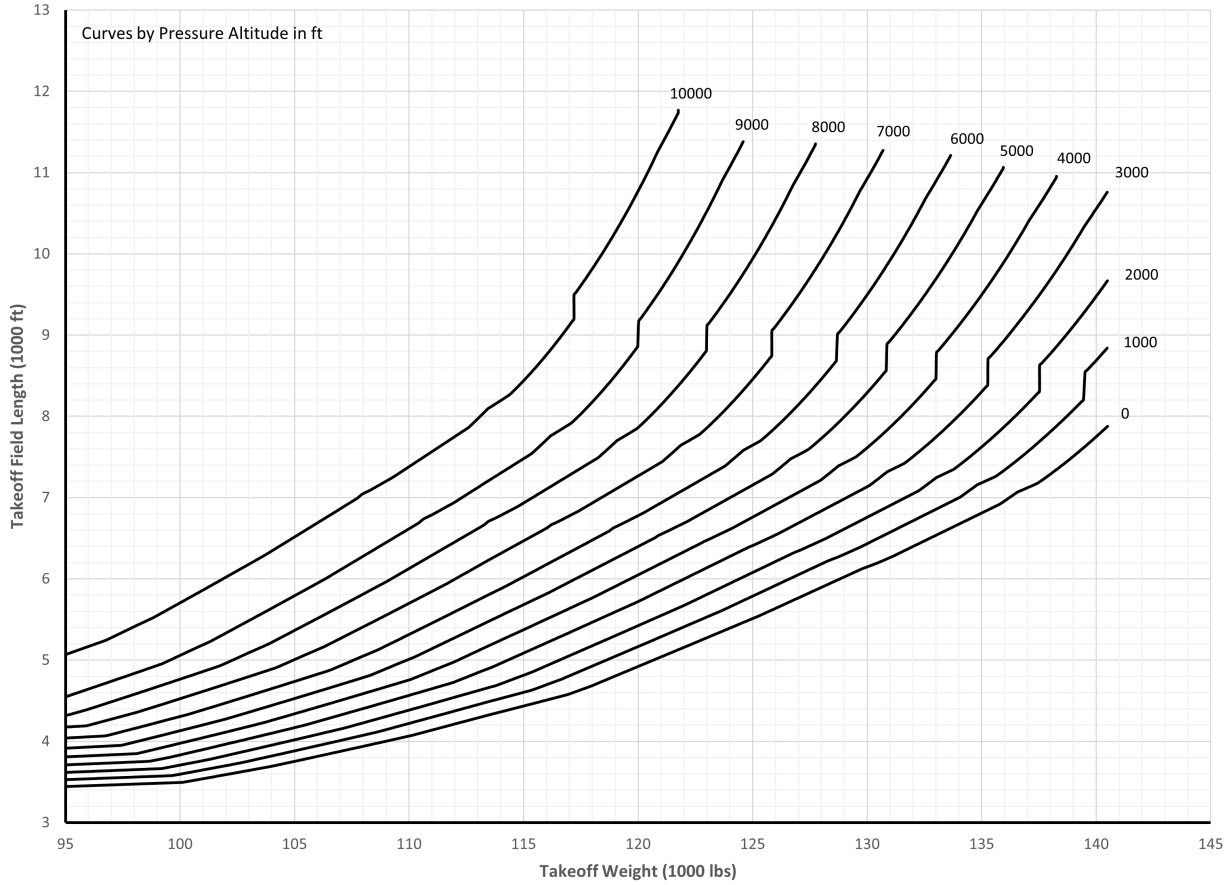

ICN-BD500-A-J000000-A-3AB48-81646-A-001-01

Figure 5 Takeoff field length ISA +15°C - PW1521G

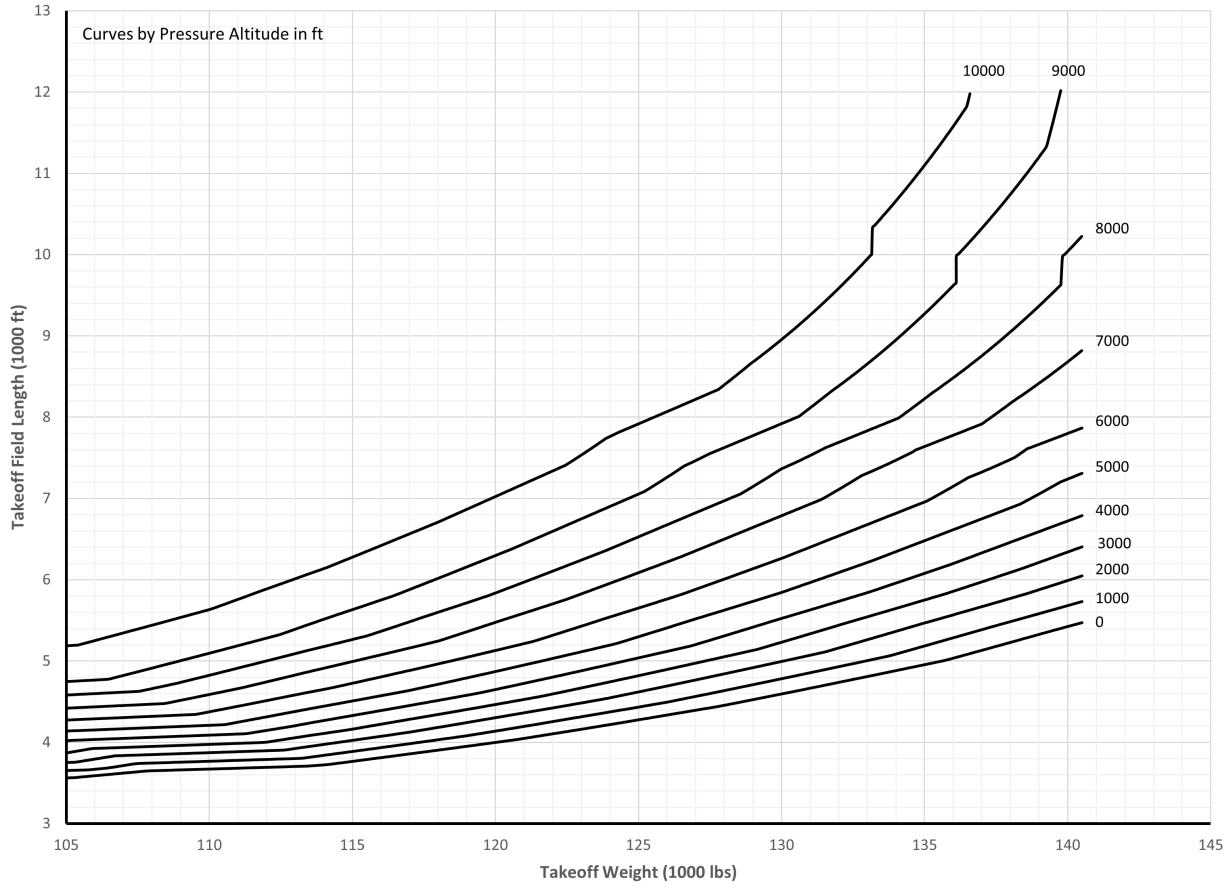

ICN-BD500-A-J000000-A-3AB48-81647-A-001-01

Figure 6 Takeoff field length ISA - PW1524G

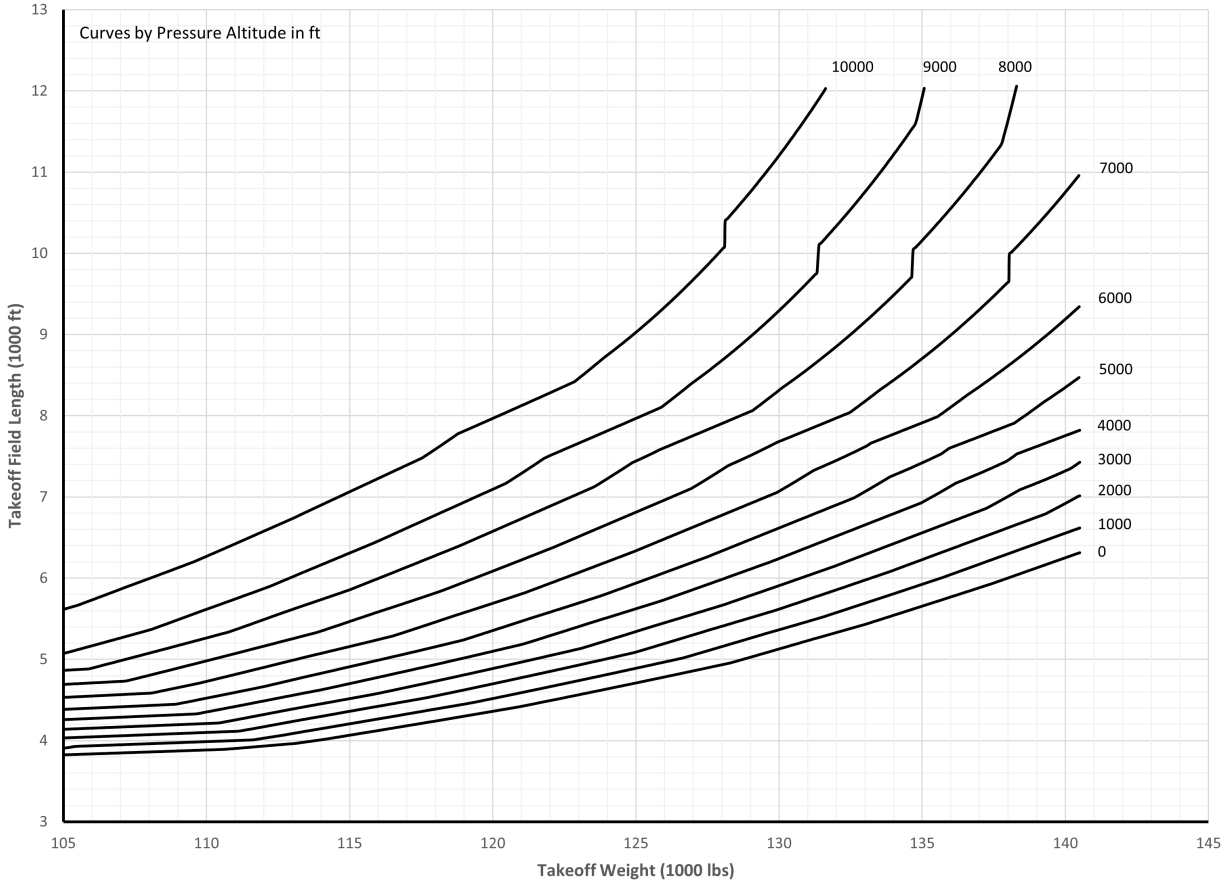

ICN-BD500-A-J000000-A-3AB48-81648-A-001-01

Figure 7 Takeoff field length ISA +15°C - PW1524G

4 Landing field length requirements

For more information about landing field, refer to the AFM BD500-3AB48-22200-00.

For landing field length requirements refer to Fig. 8 .

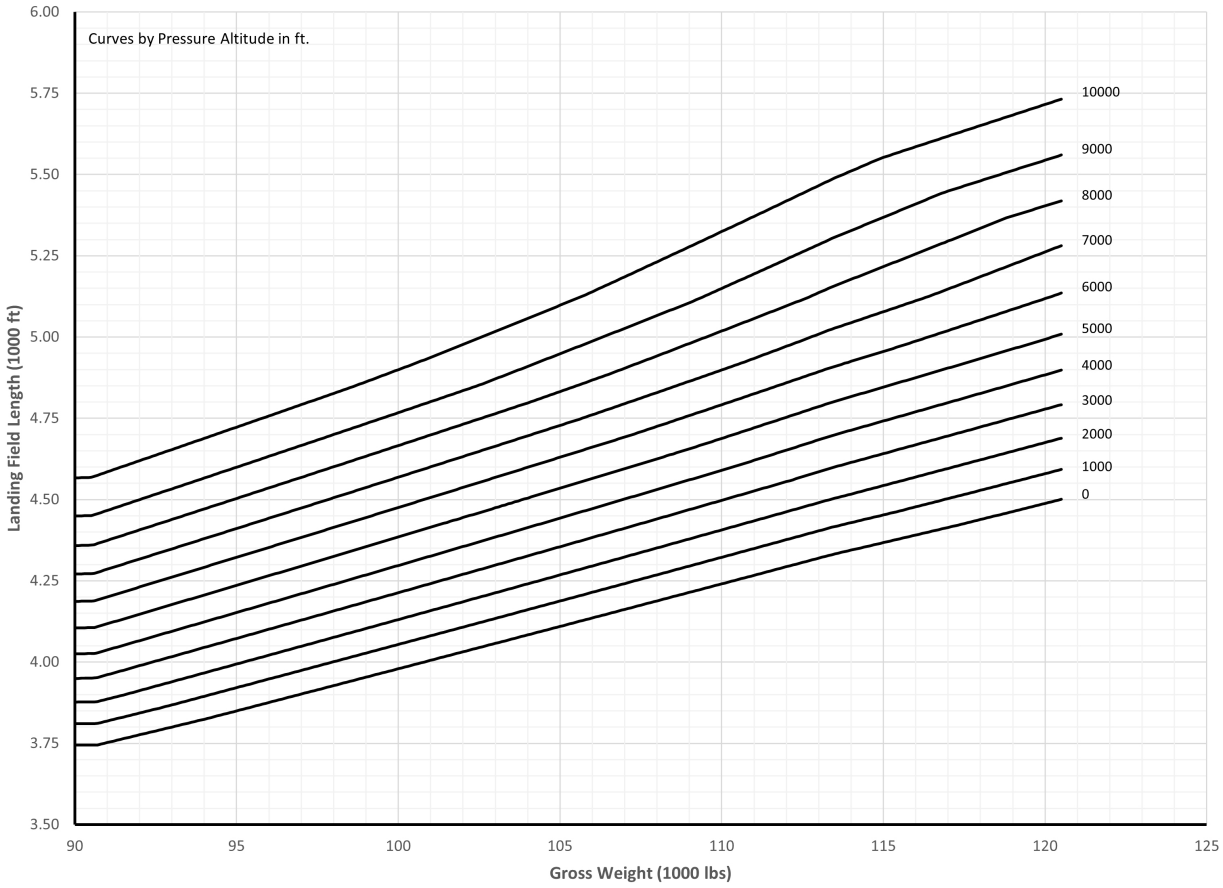

ICN-BD500-A-J000000-A-3AB48-81649-A-001-01

Figure 8 Landing field length - Dry runway

5 Landing reference speed

This section gives information about the landing reference speed.

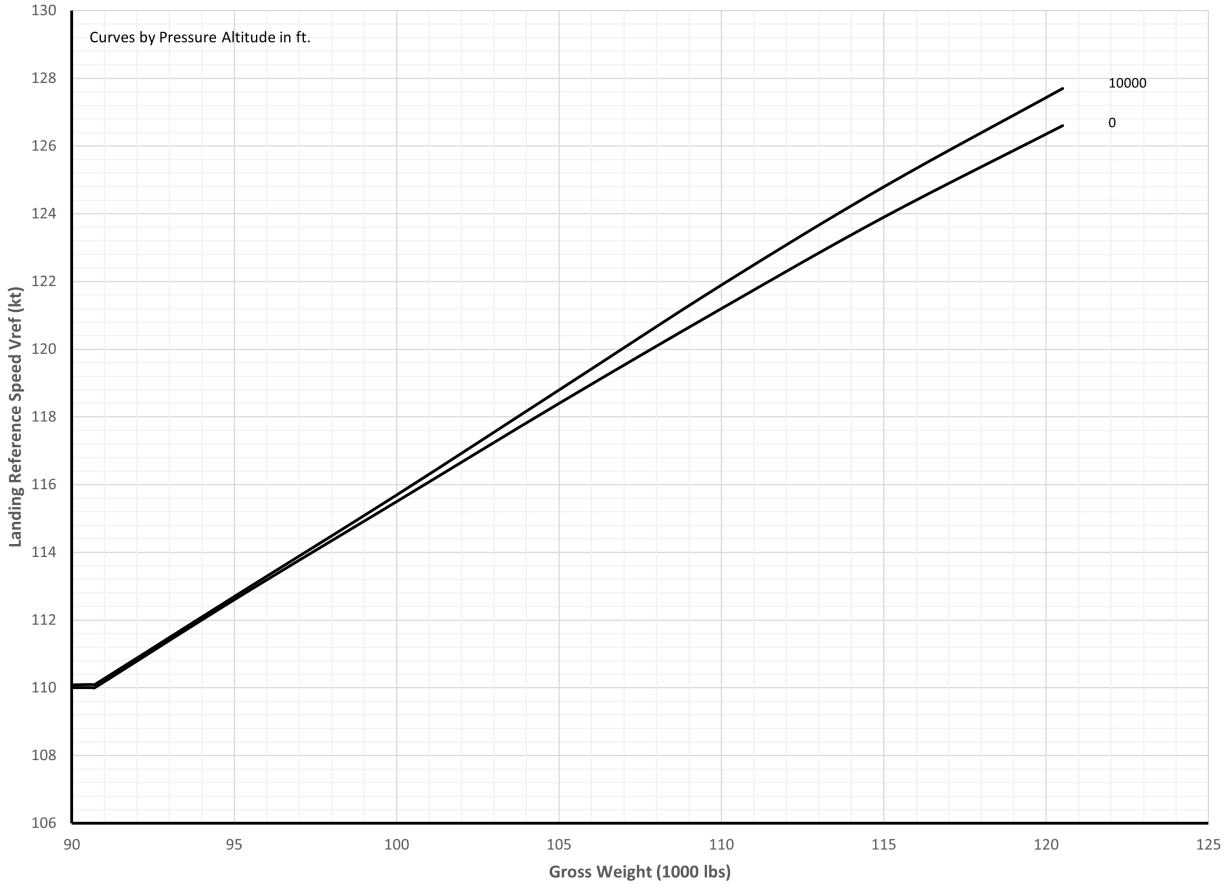

ICN-BD500-A-J000000-A-3AB48-81650-A-001-01

Figure 9 Landing reference speed

A220

Aircraft performance - Technical data

Applicability:
55001-59999

Table of contents

Page

Aircraft performance - Technical data 1
References 1
Description 1
1 Introduction 1
2 Payload/Range 2
3 Takeoff field length requirements 4
4 Landing field length requirements 9
5 Landing reference speed 11

List of tables

Page

1 References 1
2 Standard day temperature chart 2

List of figures

Page

1 Zero Fuel Weight (ZFW) vs Range ISA 3
2 Takeoff field length ISA - PW1521G 5
3 Takeoff field length ISA +15°C - PW1521G 6
4 Takeoff field length ISA - PW1524G 7
5 Takeoff field length ISA +15°C - PW1524G 8
6 Landing field length - Dry runway 10
7 Landing reference speed 12

References

Table 1 References

Data Module/Technical Publication	Title
None	

Description

1 Introduction

This section gives data about:

- Payload/Range
- Takeoff field length requirements
- Landing field length requirements
- Landing reference speed

The table below provides standard day temperature for pressure altitudes.

Table 2 Standard day temperature chart

Altitude		Standard day temperature	
Feet (ft.)	Meters (m)	ºF	ºC
0	0	59	15
2000	610	51.9	11
4000	1220	44.7	7.1
6000	1830	37.6	3.1
8000	2440	30.5	-0.8
10000	3050	23.3	-4.8

2 Payload/Range

This section gives information about the payload/range at ISA conditions.

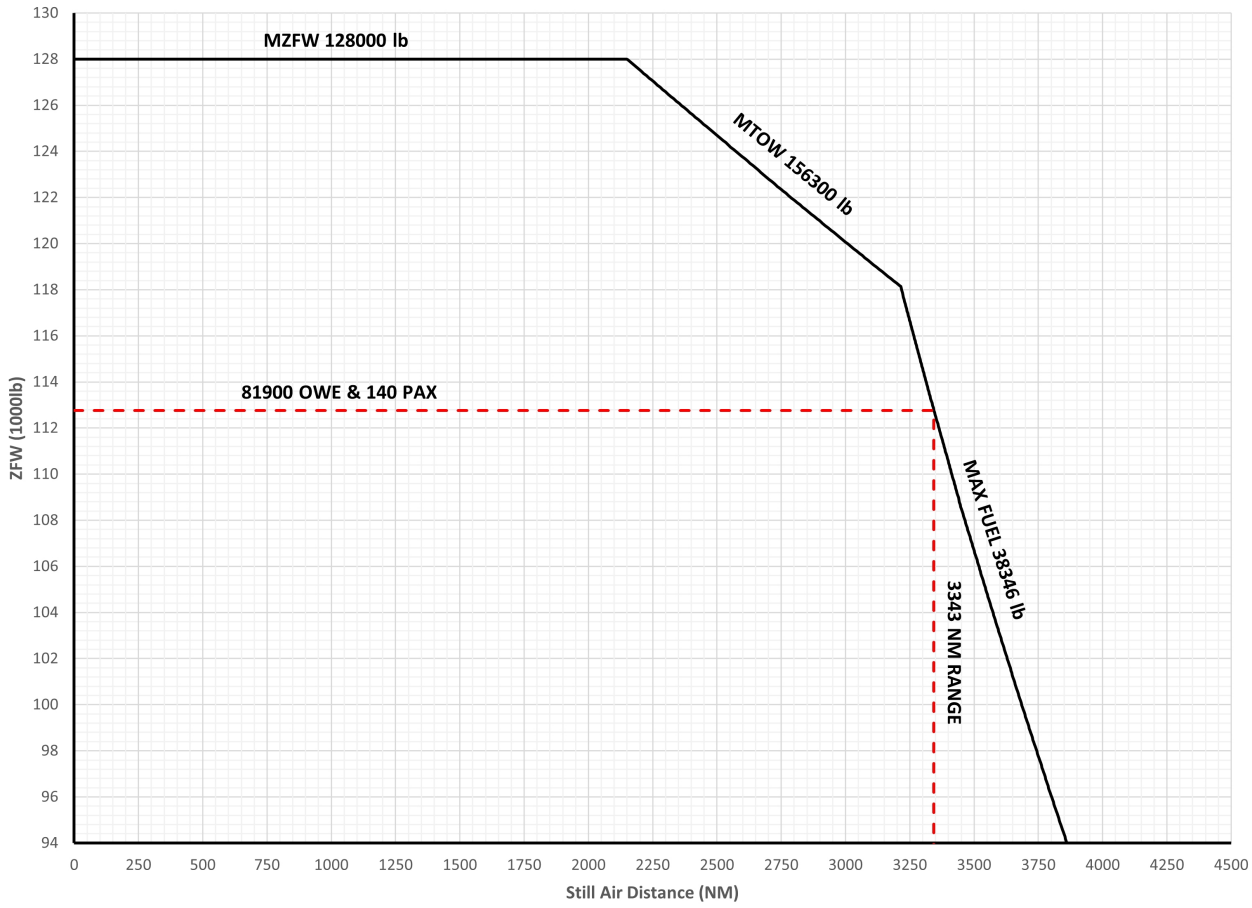

ICN-BD500-A-J000000-A-3AB48-81651-A-001-01

Figure 1 Zero Fuel Weight (ZFW) vs Range ISA

3 Takeoff field length requirements

For more information about aircraft performance, refer to the Aircraft Flight Manual (AFM) BD500–3AB48–32200-00.

For aircraft performance and field length requirements refer to:

- Fig. 2 for the takeoff field length ISA - PW1521G.
- Fig. 3 for the takeoff field length ISA +015°C - PW1521G.
- Fig. 4 for the takeoff field length ISA - PW1524G.
- Fig. 5 for the takeoff field length ISA +015°C - PW1524G.

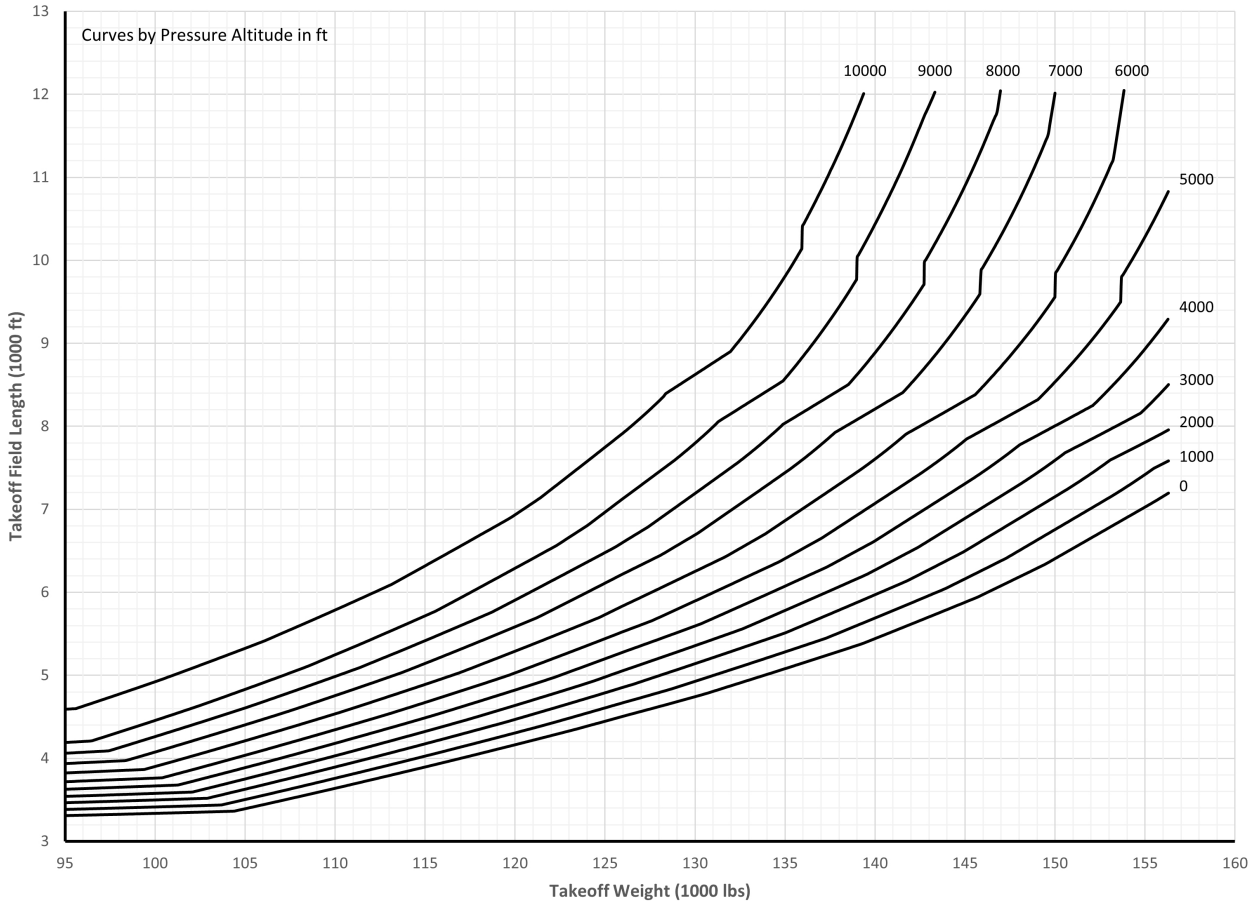

ICN-BD500-A-J000000-A-3AB48-81652-A-001-01

Figure 2 Takeoff field length ISA - PW1521G

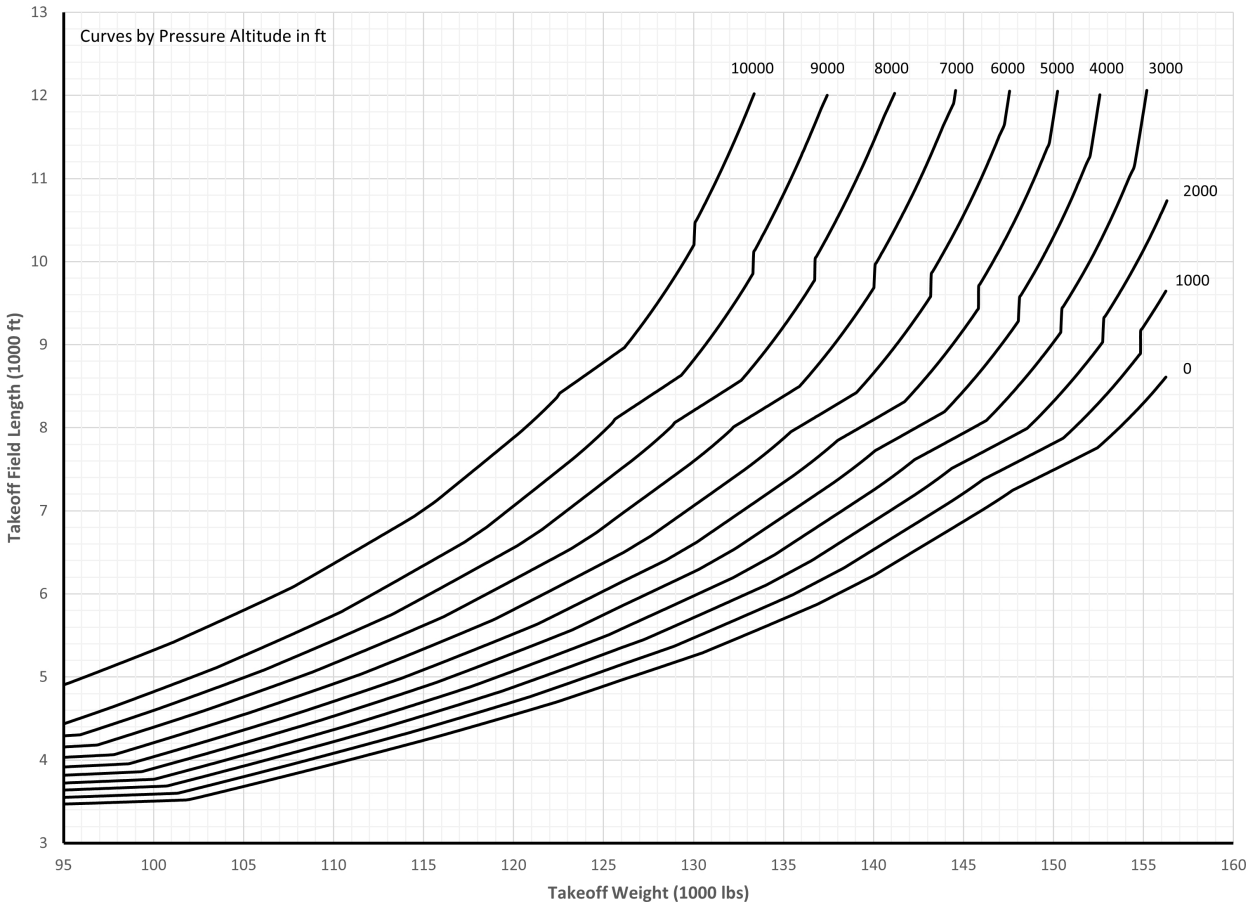

ICN-BD500-A-J000000-A-3AB48-81653-A-001-01

Figure 3 Takeoff field length ISA +15°C - PW1521G

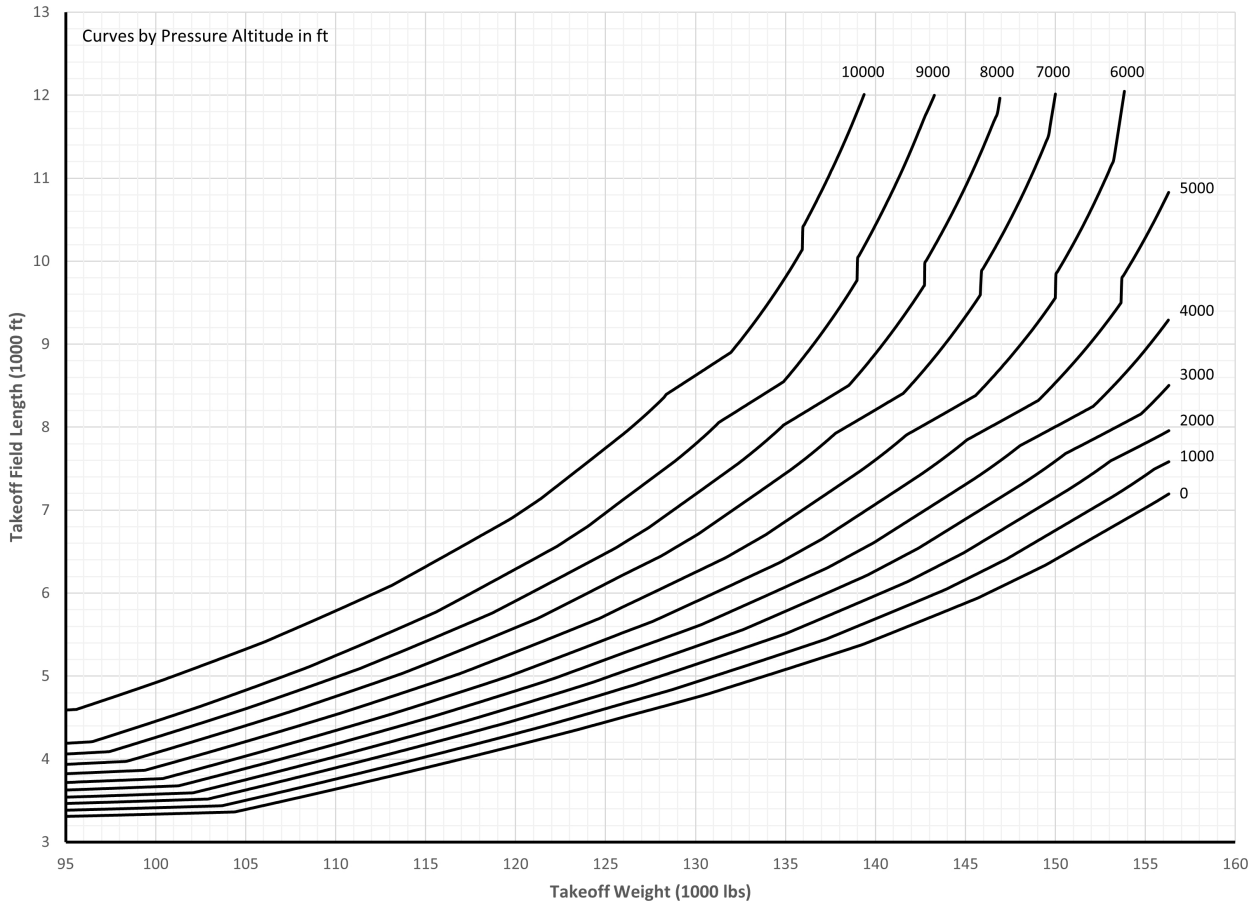

ICN-BD500-A-J000000-A-3AB48-81654-A-001-01

Figure 4 Takeoff field length ISA - PW1524G

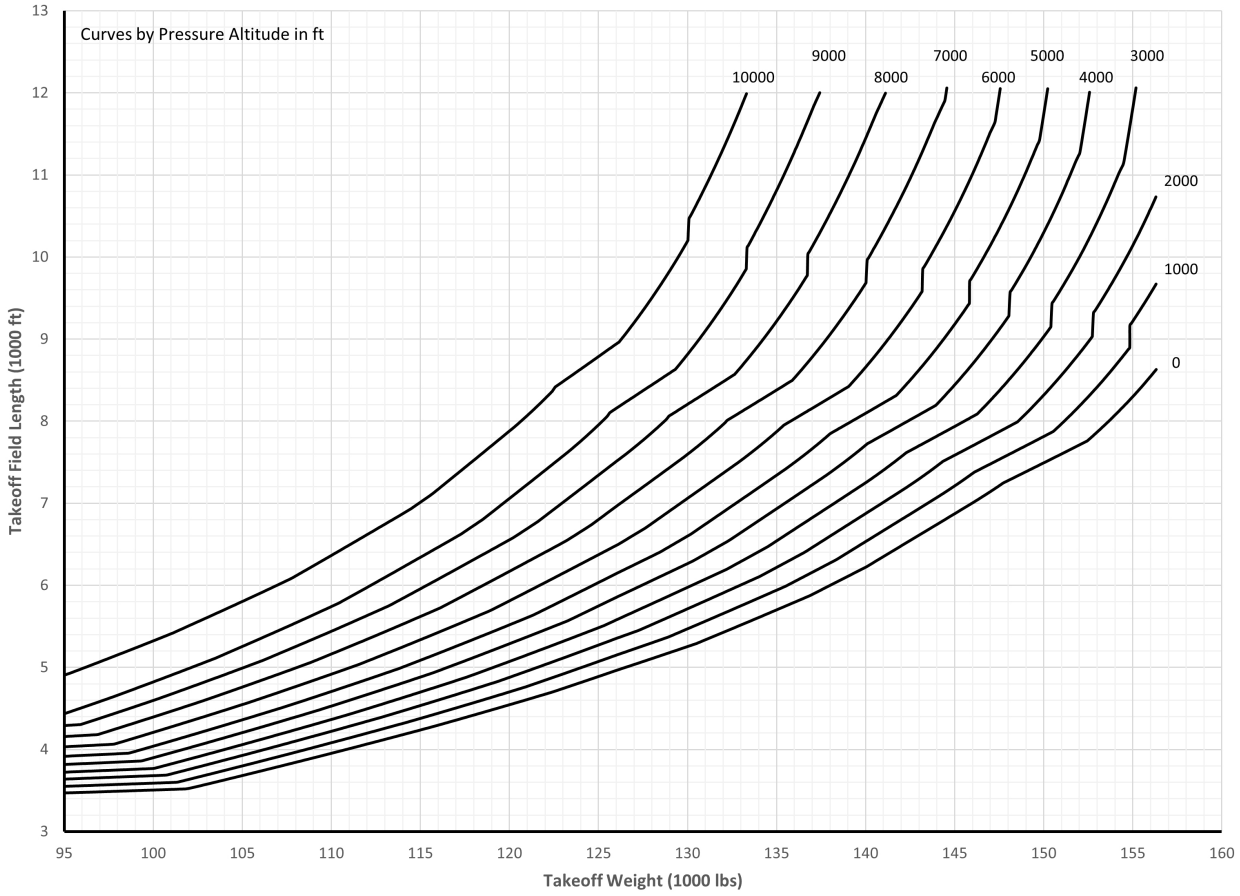

ICN-BD500-A-J000000-A-3AB48-81655-A-001-01

Figure 5 Takeoff field length ISA +15°C - PW1524G

4 Landing field length requirements

For more information about landing field, refer to the AFM BD500-3AB48-32200-00.

For landing field length requirements refer to Fig. 6 .

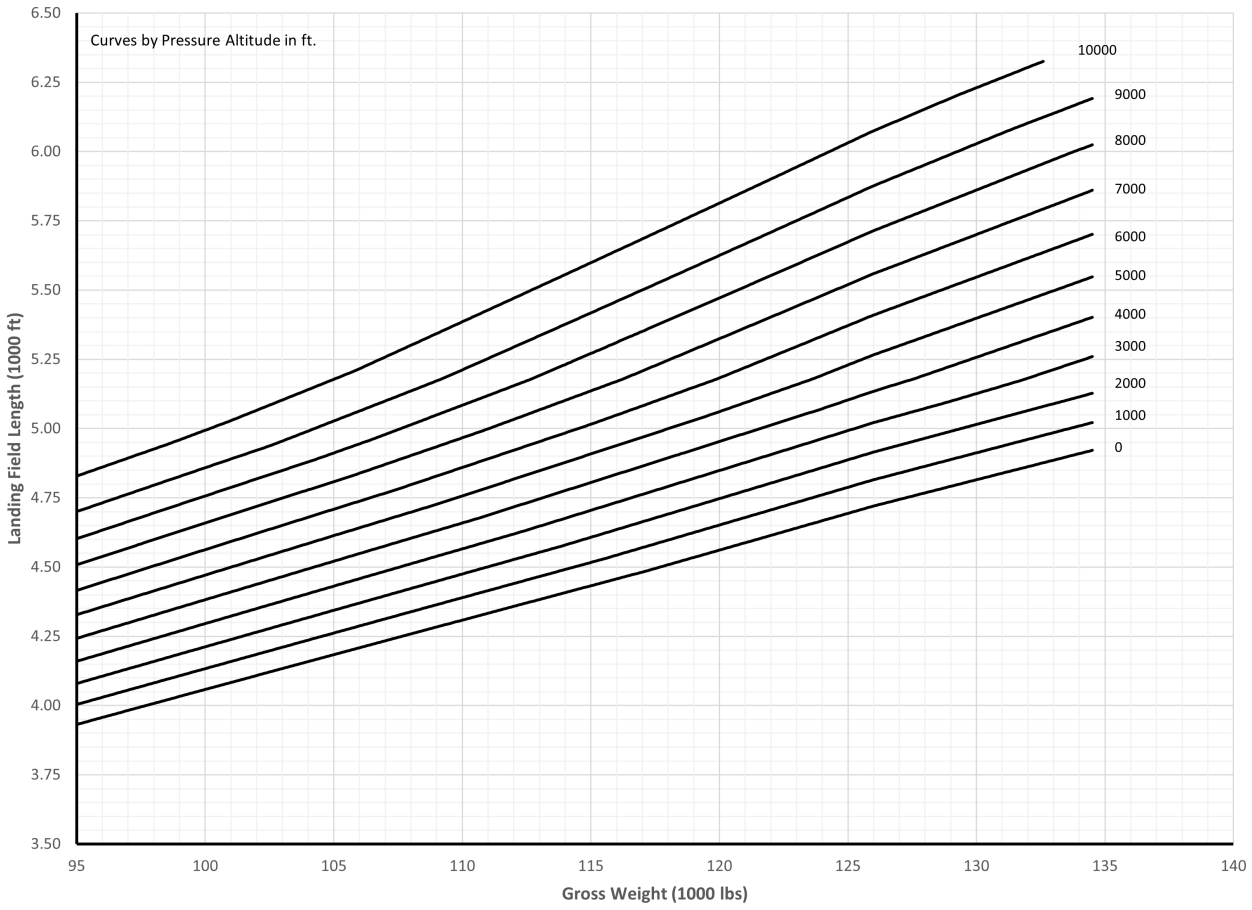

ICN-BD500-A-J000000-A-3AB48-81656-A-001-01

Figure 6 Landing field length - Dry runway

5 Landing reference speed

This section gives information about the landing reference speed.

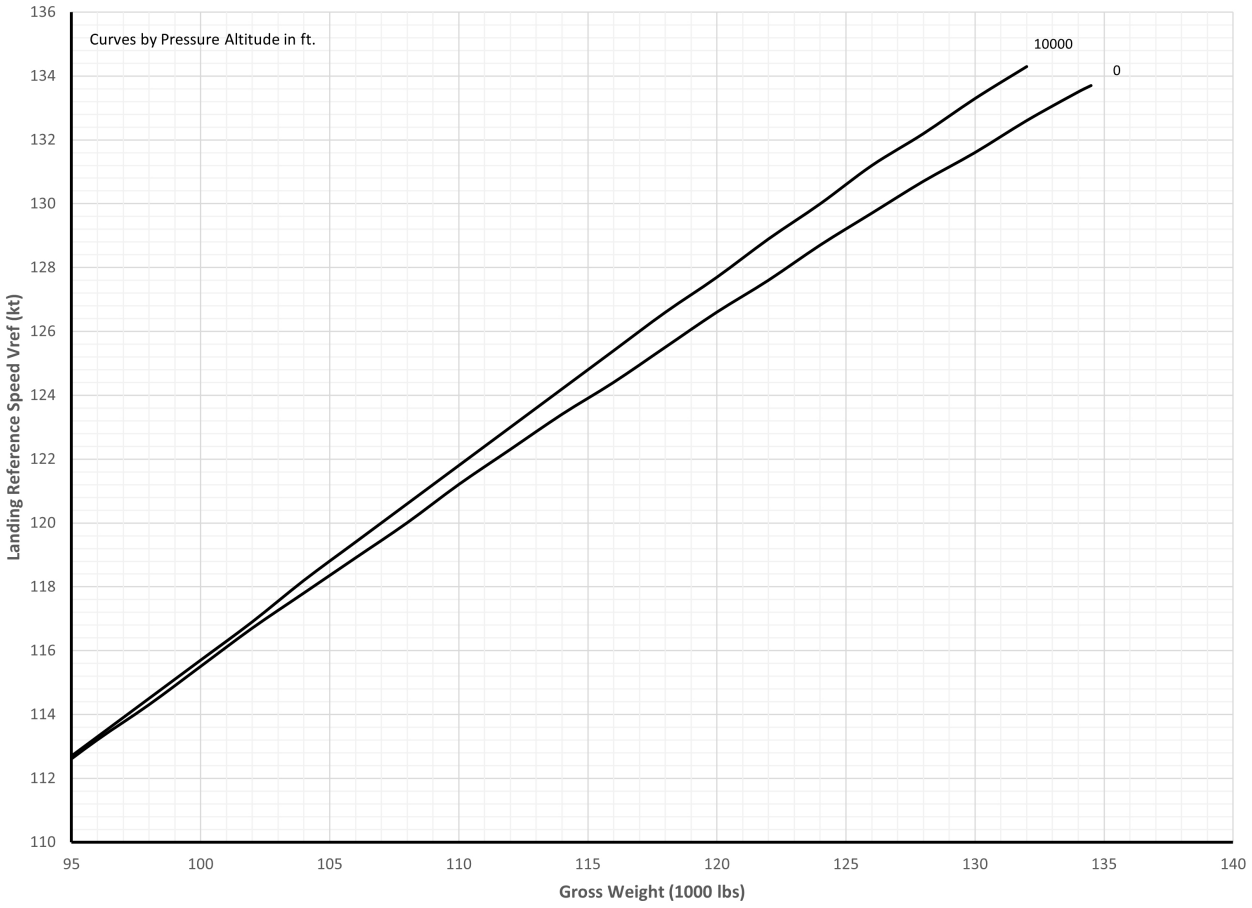

ICN-BD500-A-J000000-A-3AB48-81657-A-001-01

Figure 7 Landing reference speed

A220

Chapter 4: Ground maneuvering

Intentionally left blank

Operating conditions - Technical data

Applicability:
50001-54999

Table of contents

Page

Operating conditions - Technical data 1
References 1
Description 1
1 Introduction 1
2 Engine dangerous areas 2
3 Engine exhaust velocities and temperatures 2
4 Auxiliary Power Unit (APU) 9
5 Engine noise levels 12

List of tables

Page

1 References 1
2 Engine noise levels 12
3 Engine noise levels 13

List of figures

Page

1 Exhaust plume velocity profile / A220-100 Break-away thrust 2970 lbf 3
2 Exhaust plume temperature profile / A220-100 Break-away thrust 2970 lbf 4
3 Exhaust plume velocity profile / Ground idle 5
4 Exhaust plume temperature profile / Ground idle 6
5 Exhaust plume velocity profile / Maximum take-off at sea level static 7
6 Exhaust plume temperature profile / Maximum take-off at sea level static 8
7 APU exhaust plume temperature 10
8 APU danger areas 11

References

Table 1 References

Data Module/Technical Publication	Title
BD500-A-J71-00-00-00AAA-012A-A	Power plant - General warnings and cautions and related safety data (engine safety precautions)

Description

1 Introduction

This data module gives data on the engine noise levels and the intake and exhaust dangerous areas during normal operations. This section is divided into the subsections that follow:

- Engine dangerous areas
- Engine exhaust velocities and temperatures
- Auxiliary Power Unit (APU)

- Engine noise levels

Aircraft operating conditions and noise are important to airport and community planners. While an airport is a major element in a community transportation system and is vital to it's growth, it must be a good neighbor. This can only be accomplished with proper planning. Because aircraft noise extends beyond the boundaries of the airport, it is vital to consider the impact on surroundings communities.

2 Engine dangerous areas

This section contains information about the danger areas of engines during a ground run up. Refer to BD500-A-J71-00-00-00AAA-012A-A for danger areas of engines.

3 Engine exhaust velocities and temperatures

This section shows the estimated engine exhaust plume velocity and temperature profiles during idle, breakaway, and maximum takeoff conditions.

The exhaust plume profiles are provided from the engine nozzle exit plane, assuming sea level, static, ISA condition, without any wind and bleed extraction. They do not take into account an engine-to-engine variation or engine deterioration and do not account for interaction with the fuselage, ground or other engine plume. Refer to Fig. 1 thru Fig. 6.

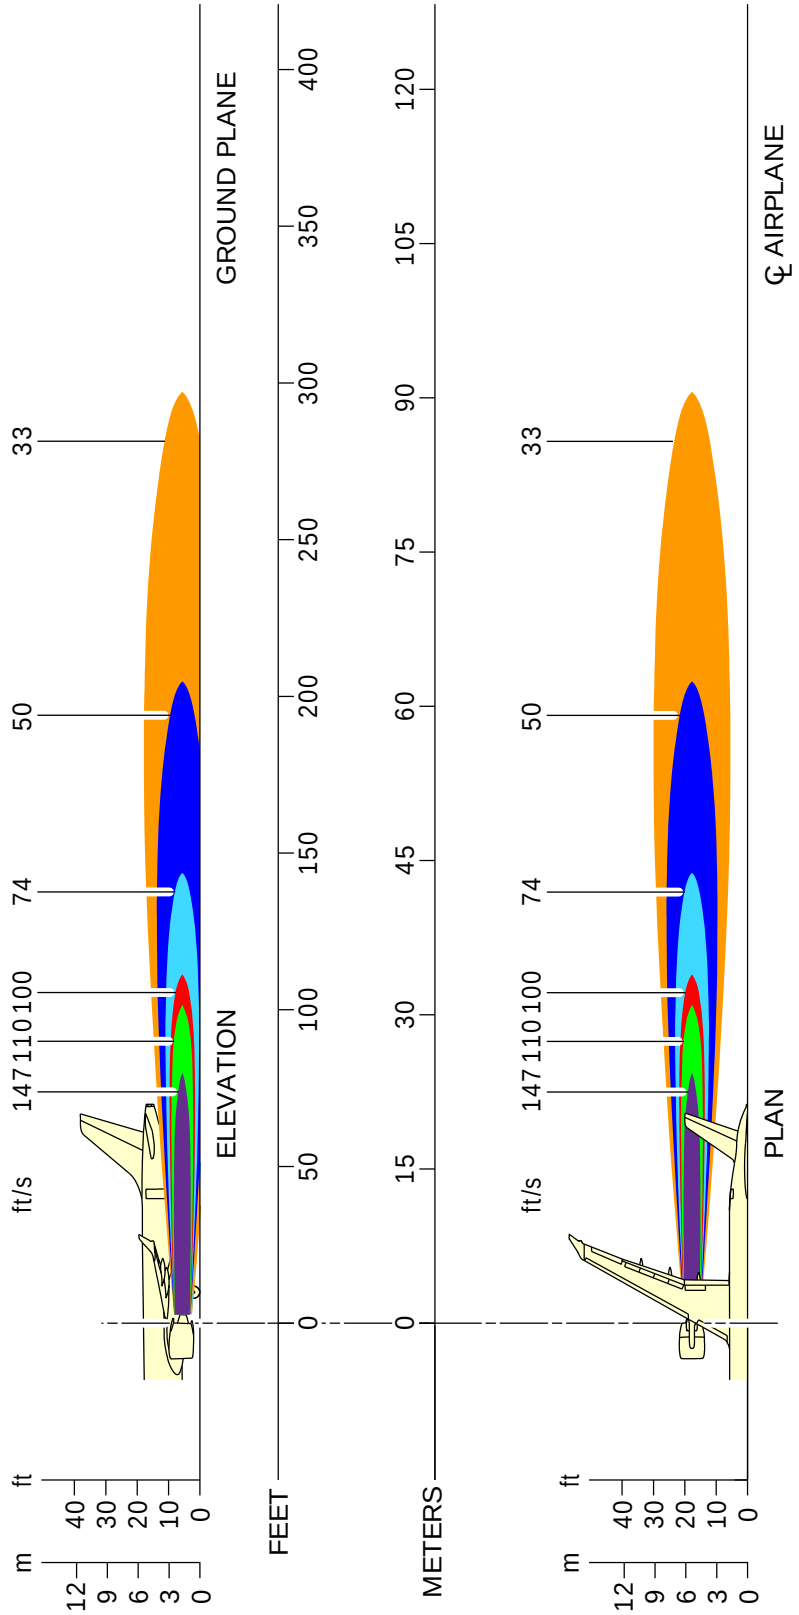

ICN-BD500-A-J000000-A-3AB48-27915-A-001-01

Figure 1 Exhaust plume velocity profile / A220-100 Break-away thrust 2970 lbf

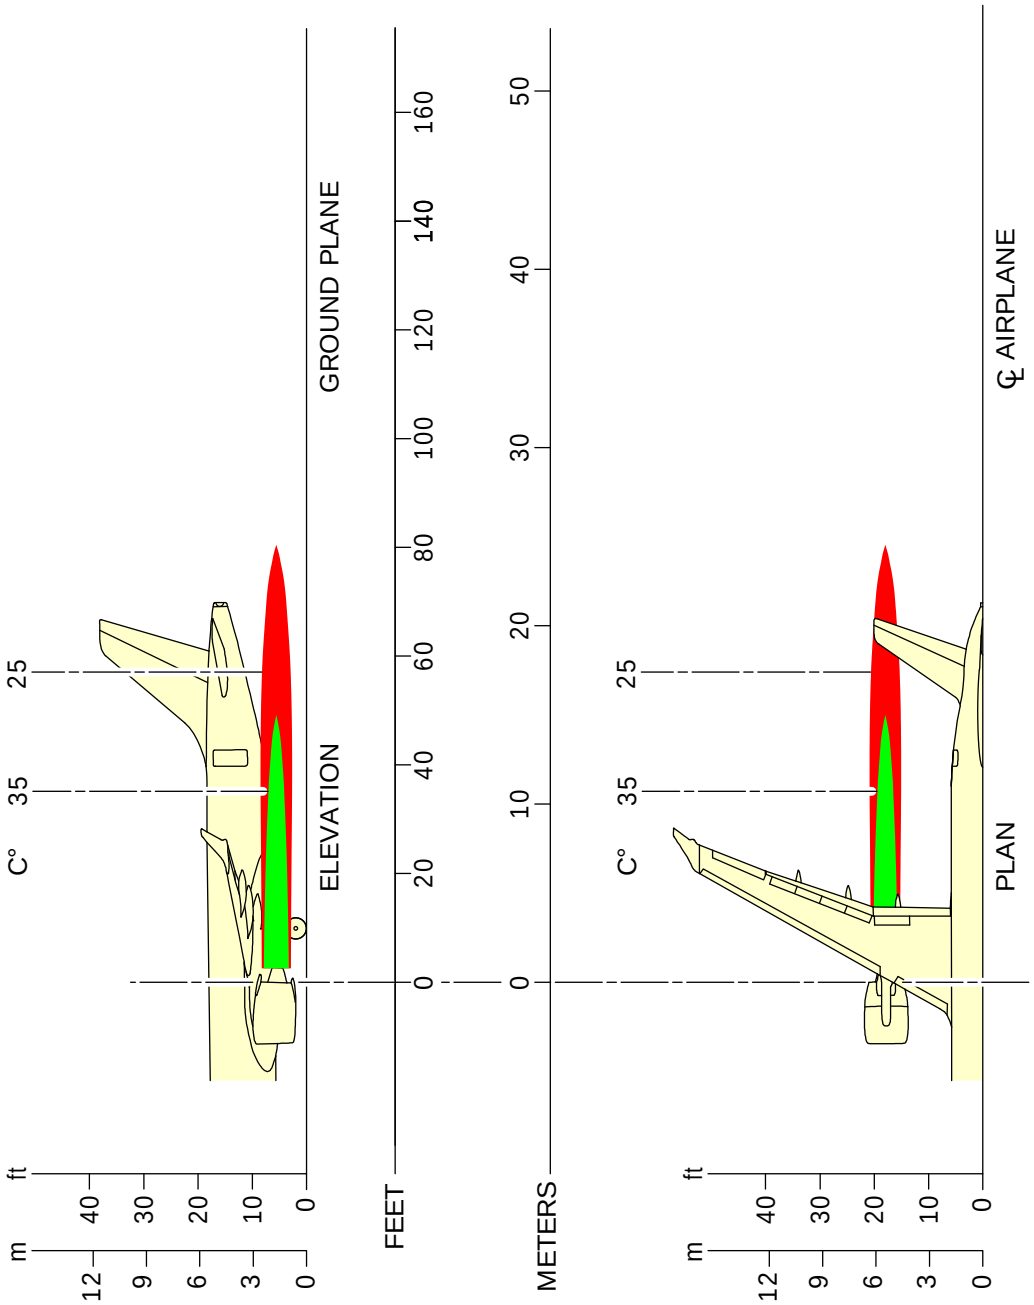

ICN-BD500-A-J000000-A-3AB48-27917-A-001-01

Figure 2 Exhaust plume temperature profile / A220-100 Break-away thrust 2970 lbf

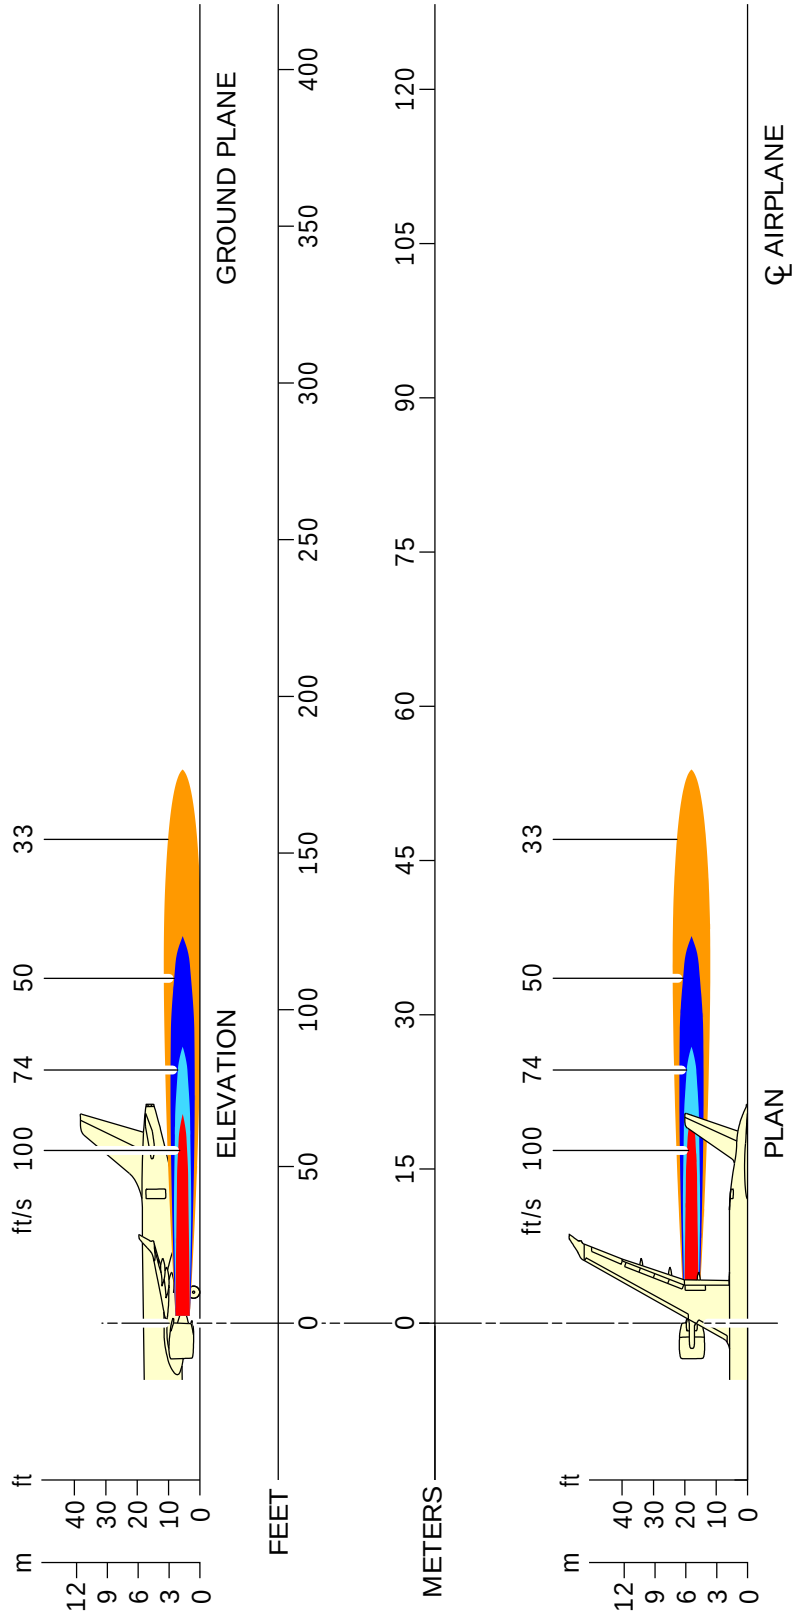

ICN-BD500-A-J000000-A-3AB48-27919-A-001-01

Figure 3 Exhaust plume velocity profile / Ground idle

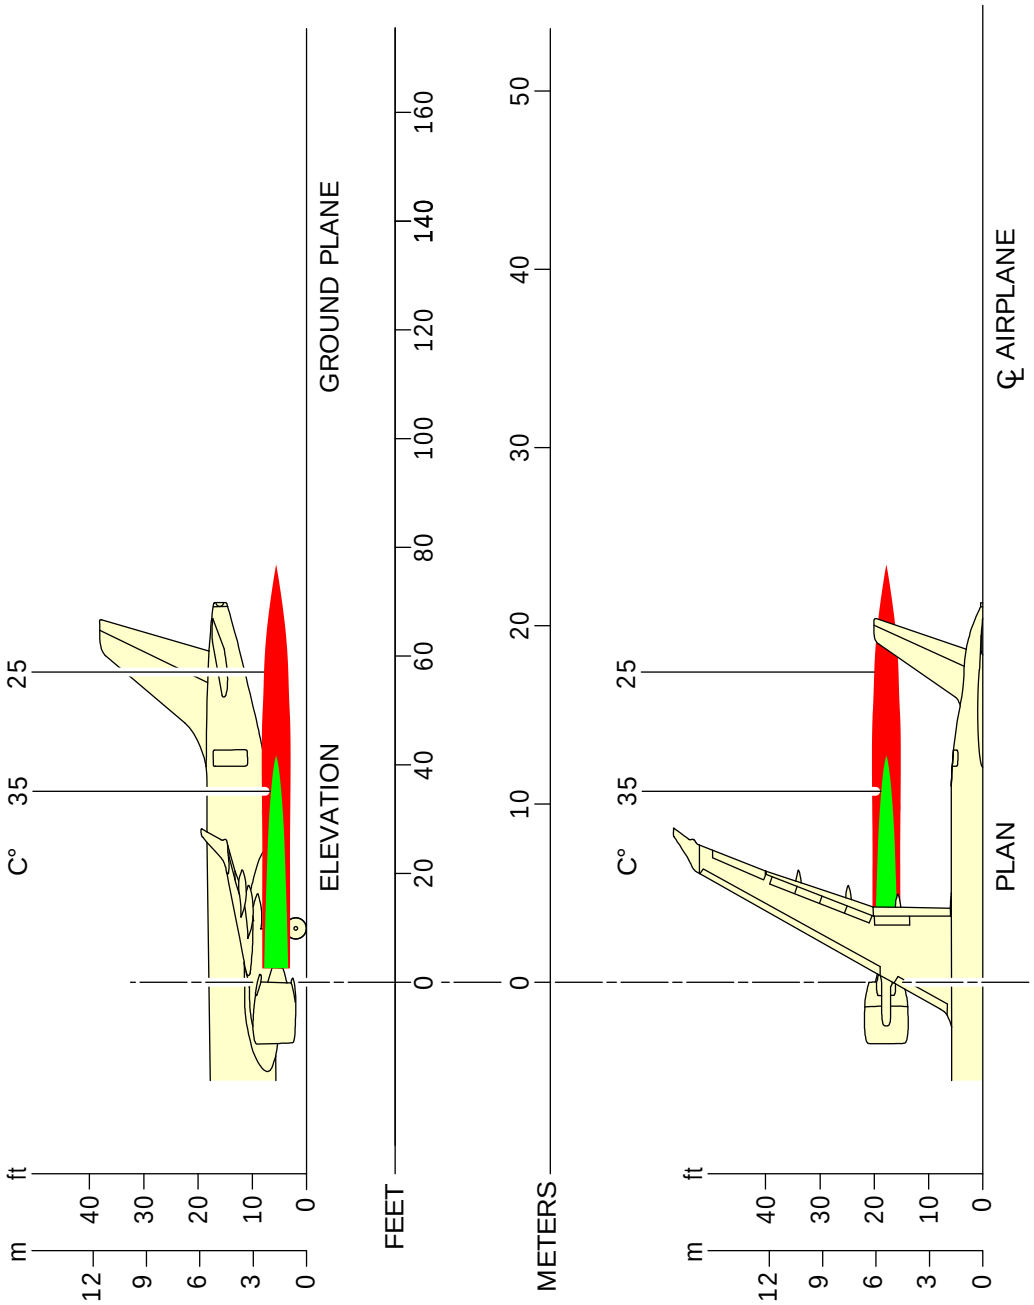

ICN-BD500-A-J000000-A-3AB48-27920-A-001-01

Figure 4 Exhaust plume temperature profile / Ground idle

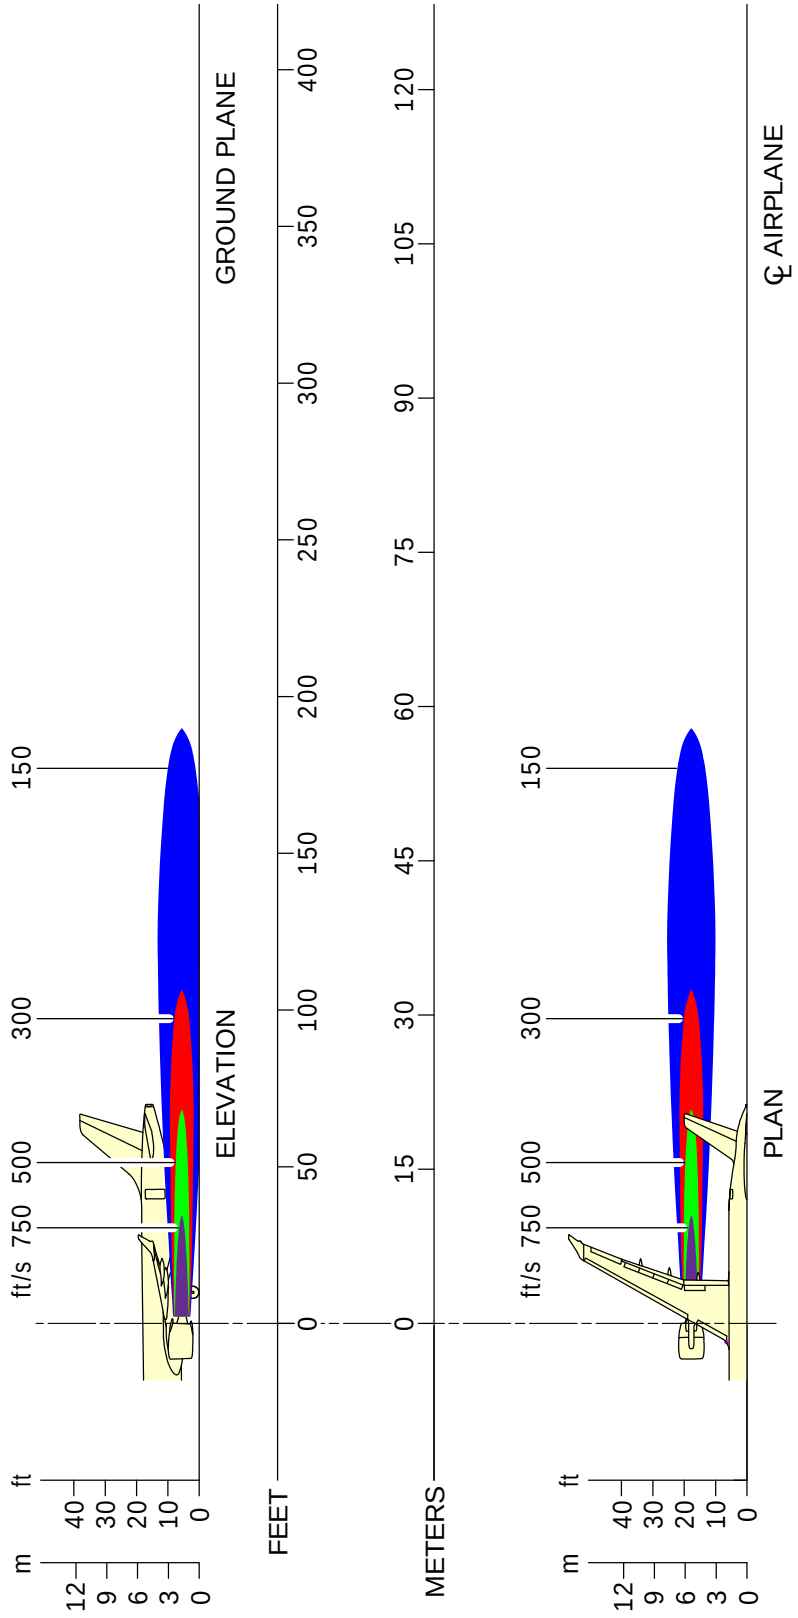

ICN-BD500-A-J000000-A-3AB48-27921-A-001-01

Figure 5 Exhaust plume velocity profile / Maximum take-off at sea level static

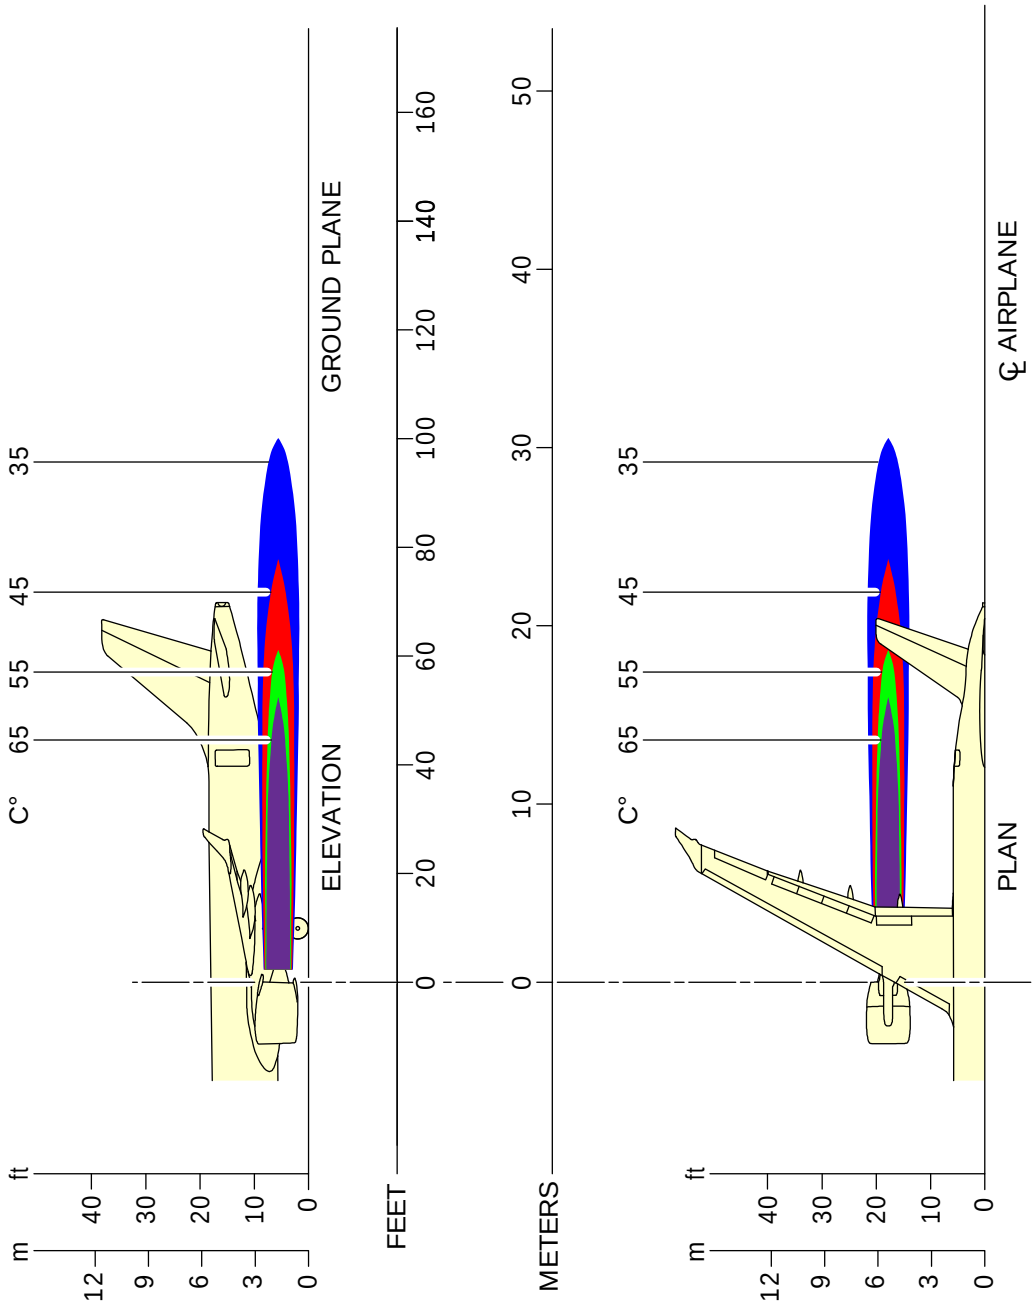

ICN-BD500-A-J000000-A-3AB48-27922-A-001-01

Figure 6 Exhaust plume temperature profile / Maximum take-off at sea level static

4 Auxiliary Power Unit (APU)

This section contains information about the danger areas of the APU when operated on the ground. Refer to Fig. 7 and Fig. 8 for danger areas and the exhaust plume temperature of the APU.

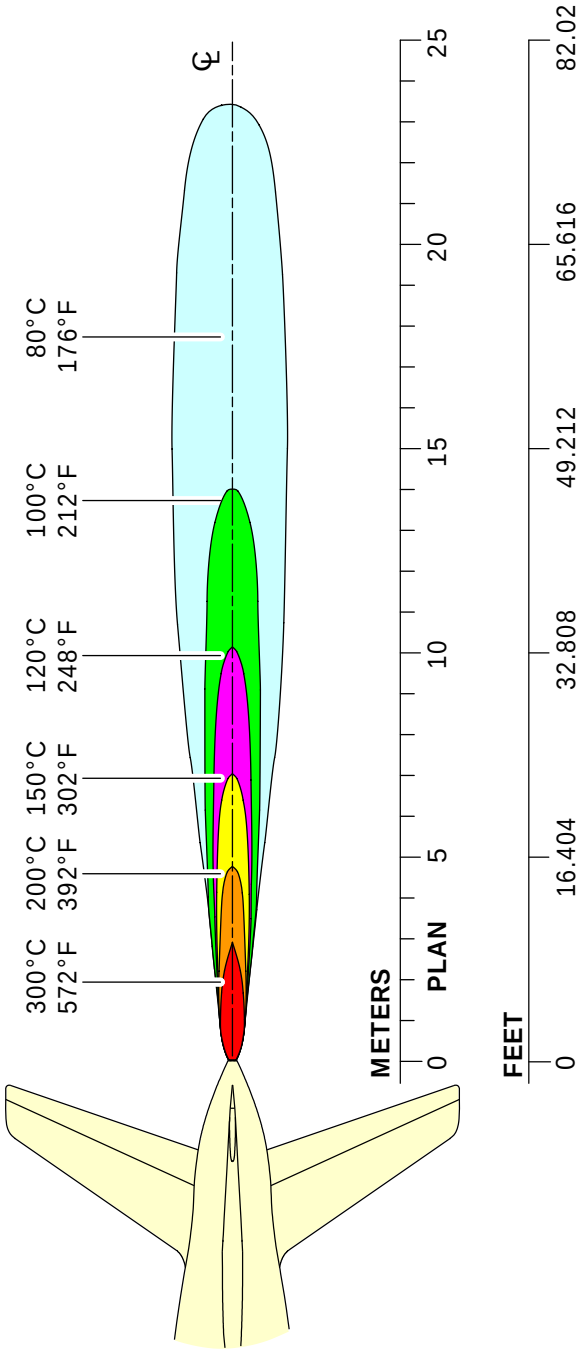

ICN-BD500-A-J000000-A-3AB48-47400-A-001-01

Figure 7 APU exhaust plume temperature

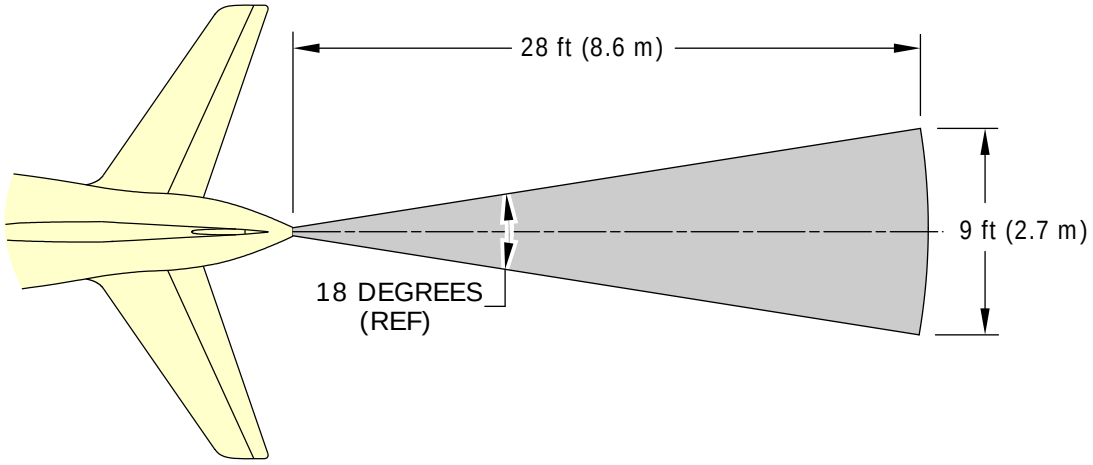

ICN-BD500-A-J000000-A-3AB48-47401-A-001-01

Figure 8 APU danger areas

5 Engine noise levels

The community noise levels must agree with FAR 36 Stage 3, ICAO Annex 16, Chapter 4, Chapter 516.

Refer to Table 2 or Table 3 for the demonstrated Effective Perceived Noise levels (EPNdB), limits, and the relative difference (margin of compliance) for the engines.

Applicability:
50001-50061, 50063-50065, 50068, 50070, 50072-50077, 50079-50084, 50087-54887, 54889-54999

Table 2 Engine noise levels

Engine <option code>	Weights		Measurement Points			Margins (EPNdB)	Margin Requirement (EPNdB)
	MTOW <option code>	MLW <option code>	Description	Noise Limit (EPNdB)	Measured Level (EPNdB)		
PW1524G <72210003>	134,000 lb (60,781 kg) <13000170>	115,500 lb (52,390 kg) <1300270>	Approach	99.9	91.9	8.0	0
			Lateral	96.0	87.9	8.1	0
			Flyover	90.4	79.0	11.4	0
			Sum of smallest two individual margins:			16.1	2
			Sum of all individual margins:			27.5	10

Applicability:
50062, 50066-50067, 50069, 50071, 50078, 50085-50086, 54888

Table 3 Engine noise levels

Engine <option code>	Weights		Measure-ment Points			Margins (EPNdB)	Margin Require-ment (EPNdB)
	MTOW <option code>	MLW <option code>	Description	Noise Limit (EPNdB)	Measured Level (EPNdB)		
PW1524G <72210003>	138,000 lb (62,595 kg) <13000040>	112,500 lb (51,029 kg) <13000230>	Approach	99.9	91.9	8.0	0
			Lateral	96.0	87.9	8.1	0
			Flyover	90.4	79.0	11.4	0
			Sum of smallest two individual margins:			16.1	2
			Sum of all individual margins:			27.5	10

Intentionally left blank

A220

Operating conditions - Technical data

Applicability:
55001-59999

Table of contents

Page

Operating conditions - Technical data 1
References 1
Description 1
1 Introduction 1
2 Engine dangerous areas 2
3 Engine exhaust velocities and temperatures 2
4 Auxiliary Power Unit (APU) 9
5 Engine noise levels 12

List of tables

Page

1 References 1
2 Engine noise levels 12

List of figures

Page

1 Exhaust plume velocity profile / A220-300 Break-away thrust 3300 lbf 3
2 Exhaust plume temperature profile / A220-300 Break-away thrust 3300 lbf 4
3 Exhaust plume velocity profile / Ground idle 5
4 Exhaust plume temperature profile / Ground idle 6
5 Exhaust plume velocity profile / Maximum take-off at sea level static 7
6 Exhaust plume temperature profile / Maximum take-off at sea level static 8
7 APU exhaust plume temperature 10
8 APU danger areas 11

References

Table 1 References

Data Module/Technical Publication	Title
BD500-A-J71-00-00-00AAA-012A-A	Power plant - General warnings and cautions and related safety data

Description

1 Introduction

This data module gives data on the engine noise levels and the intake and exhaust dangerous areas during normal operations. This section is divided into the subsections that follow:

- Engine dangerous areas
- Engine exhaust velocities and temperatures
- Auxiliary Power Unit (APU)

- Engine noise levels

Aircraft operating conditions and noise are important to airport and community planners. While an airport is a major element in a community transportation system and is vital to it's growth, it must be a good neighbor. This can only be accomplished with proper planning. Because aircraft noise extends beyond the boundaries of the airport, it is vital to consider the impact on surroundings communities.

2 Engine dangerous areas

This section contains information about the danger areas of engines during a ground run up. Refer to BD500-A-J71-00-00-00AAA-012A-A for danger areas of engines.

3 Engine exhaust velocities and temperatures

This section shows the estimated engine exhaust plume velocity and temperature profiles during idle, breakaway, and maximum takeoff conditions.

The exhaust plume profiles are provided from the engine nozzle exit plane, assuming sea level, static, ISA condition, without any wind and bleed extraction. They do not take into account an engine-to-engine variation or engine deterioration and do not account for interaction with the fuselage, ground or other engine plume. Refer to Fig. 1 thru Fig. 6.

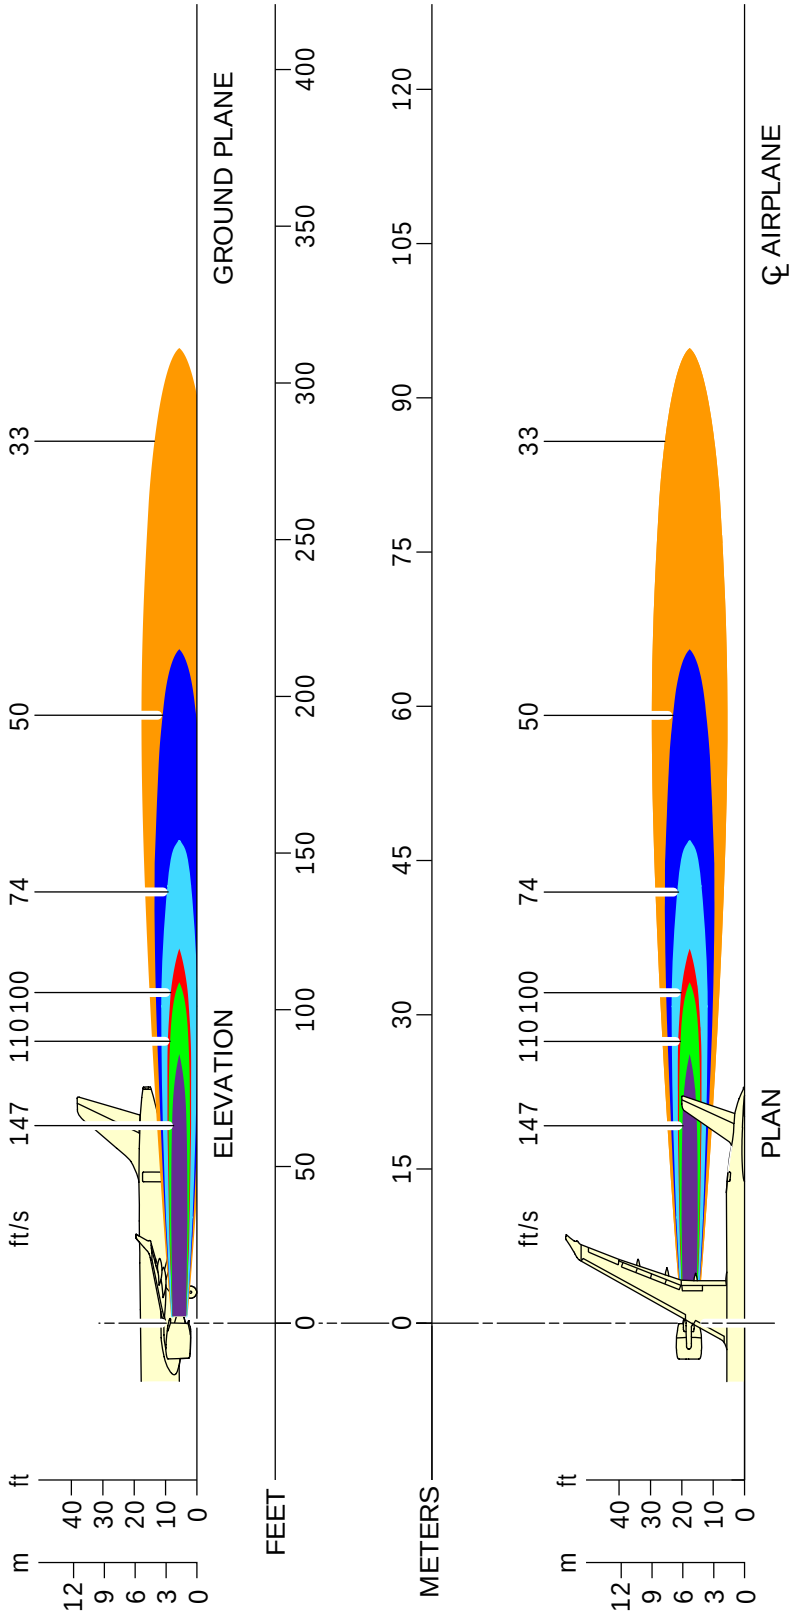

ICN-BD500-A-J000000-A-3AB48-27916-A-001-01

Figure 1 Exhaust plume velocity profile / A220-300 Break-away thrust 3300 lbf

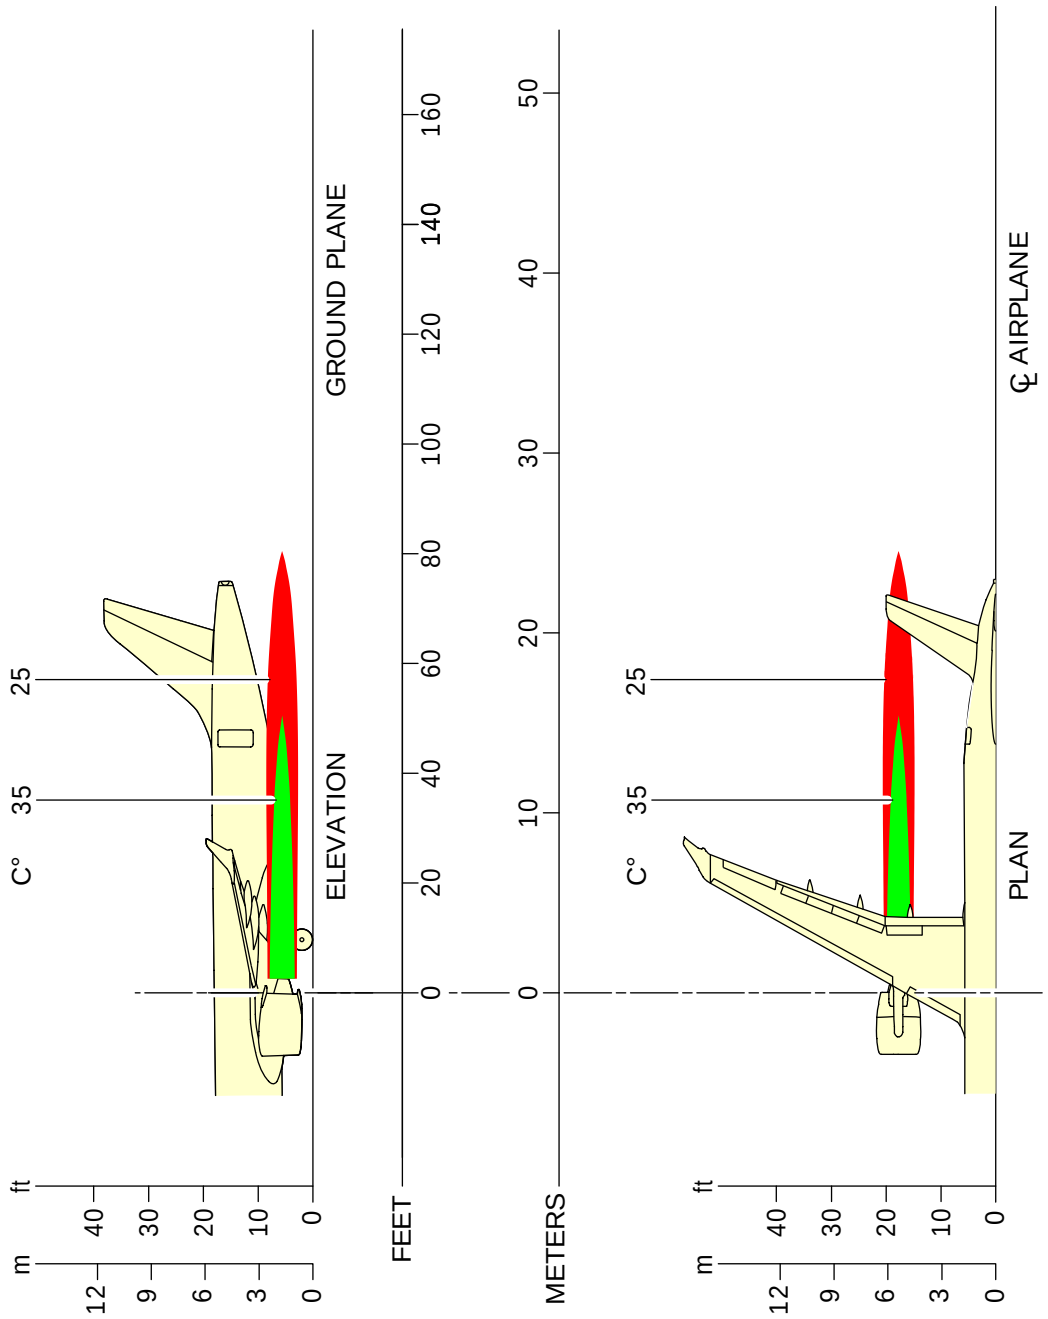

ICN-BD500-A-J000000-A-3AB48-27918-A-001-01

Figure 2 Exhaust plume temperature profile / A220-300 Break-away thrust 3300 lbf

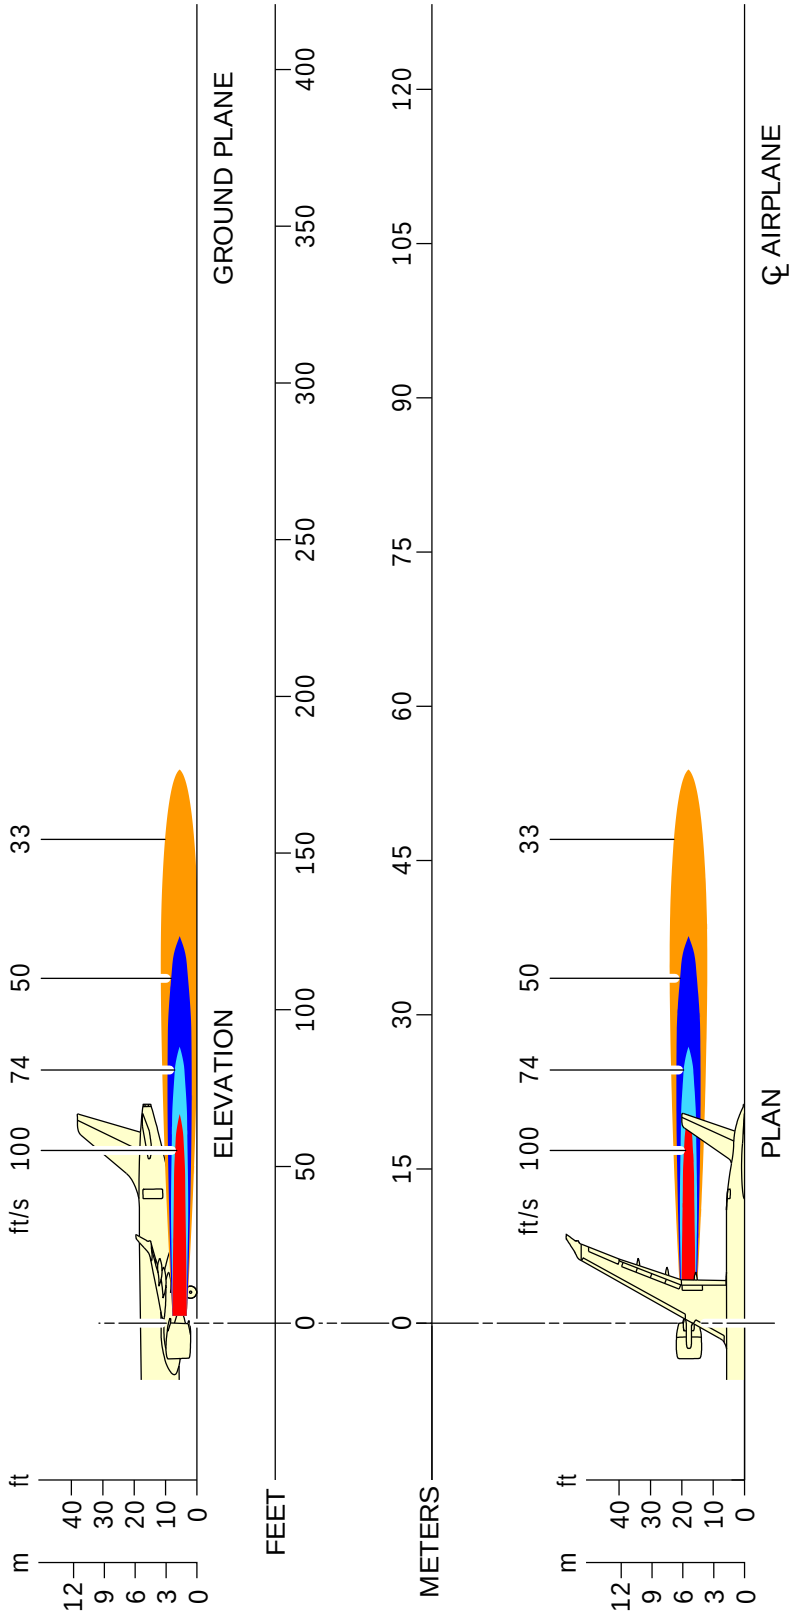

ICN-BD500-A-J000000-A-3AB48-27919-A-001-01

Figure 3 Exhaust plume velocity profile / Ground idle

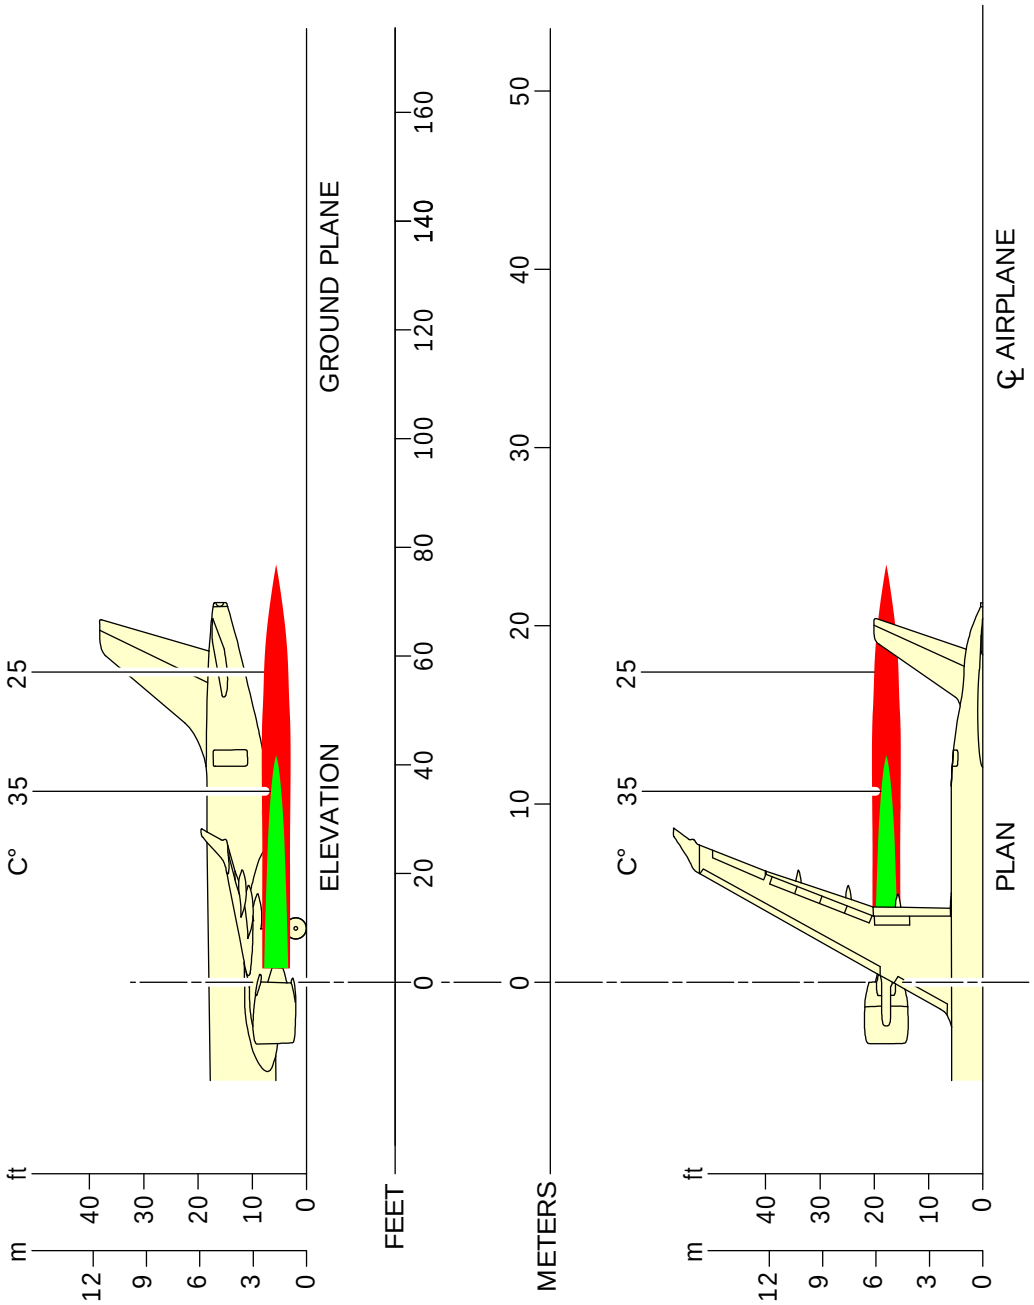

ICN-BD500-A-J000000-A-3AB48-27920-A-001-01

Figure 4 Exhaust plume temperature profile / Ground idle

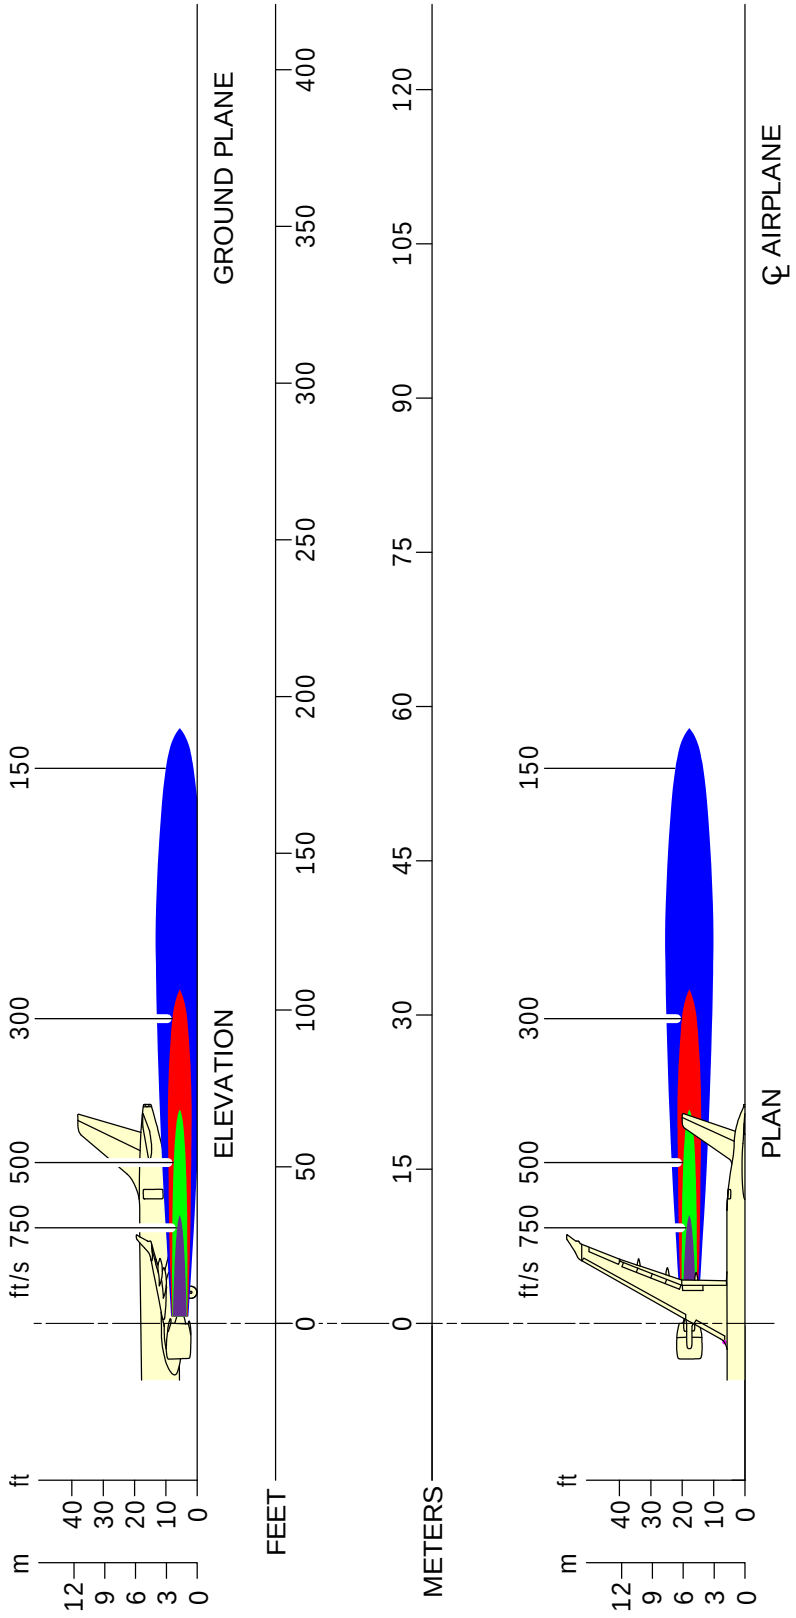

ICN-BD500-A-J000000-A-3AB48-27921-A-001-01

Figure 5 Exhaust plume velocity profile / Maximum take-off at sea level static

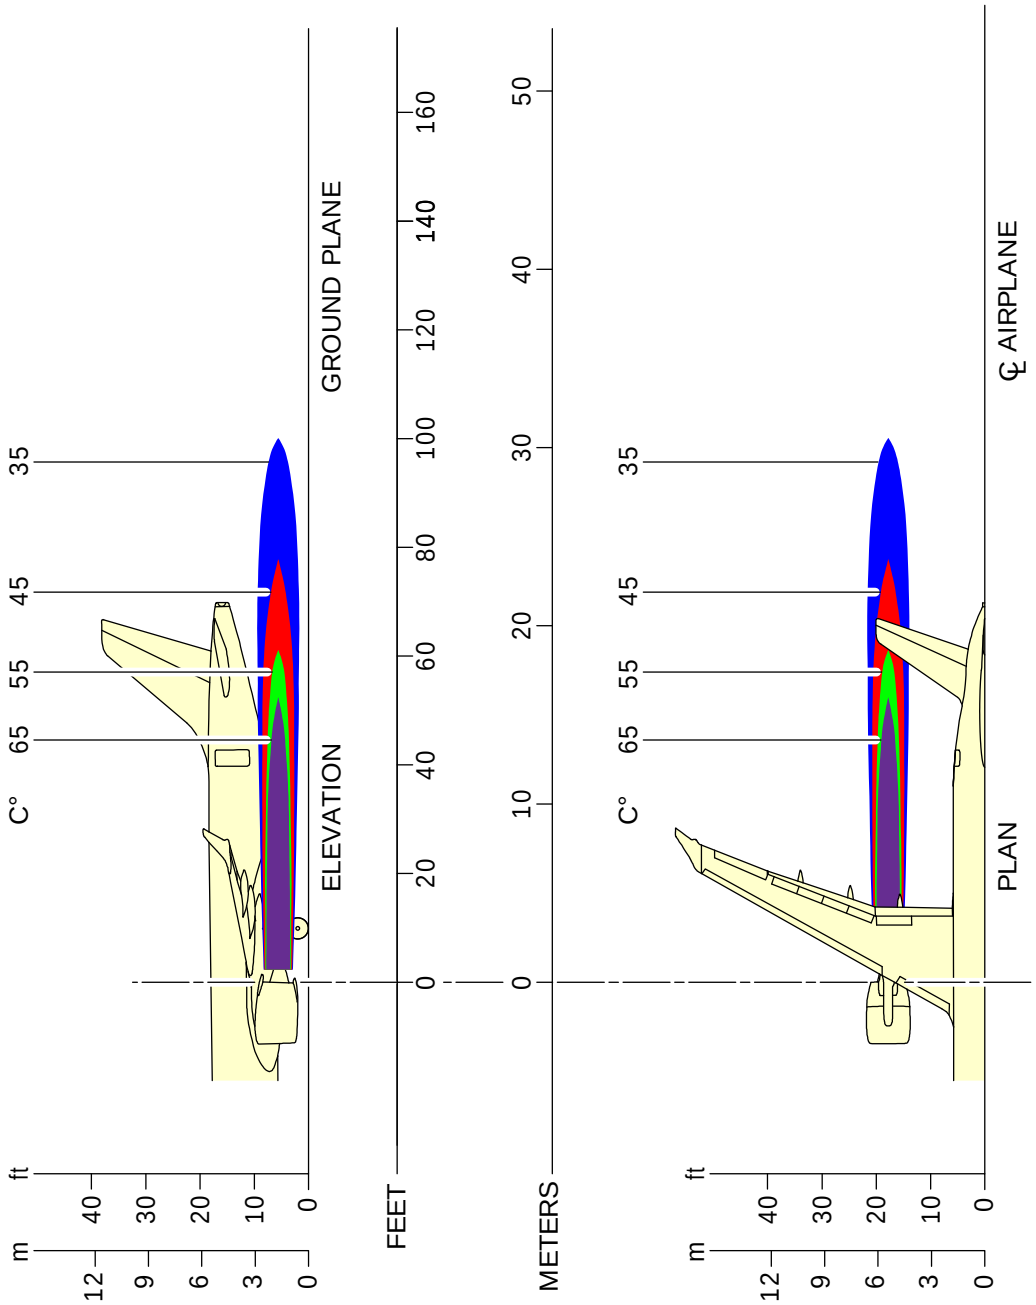

ICN-BD500-A-J000000-A-3AB48-27922-A-001-01

Figure 6 Exhaust plume temperature profile / Maximum take-off at sea level static

4 Auxiliary Power Unit (APU)

This section contains information about the danger areas of the APU when operated on the ground. Refer to Fig. 7 and Fig. 8 for danger areas and the exhaust plume temperature of the APU.

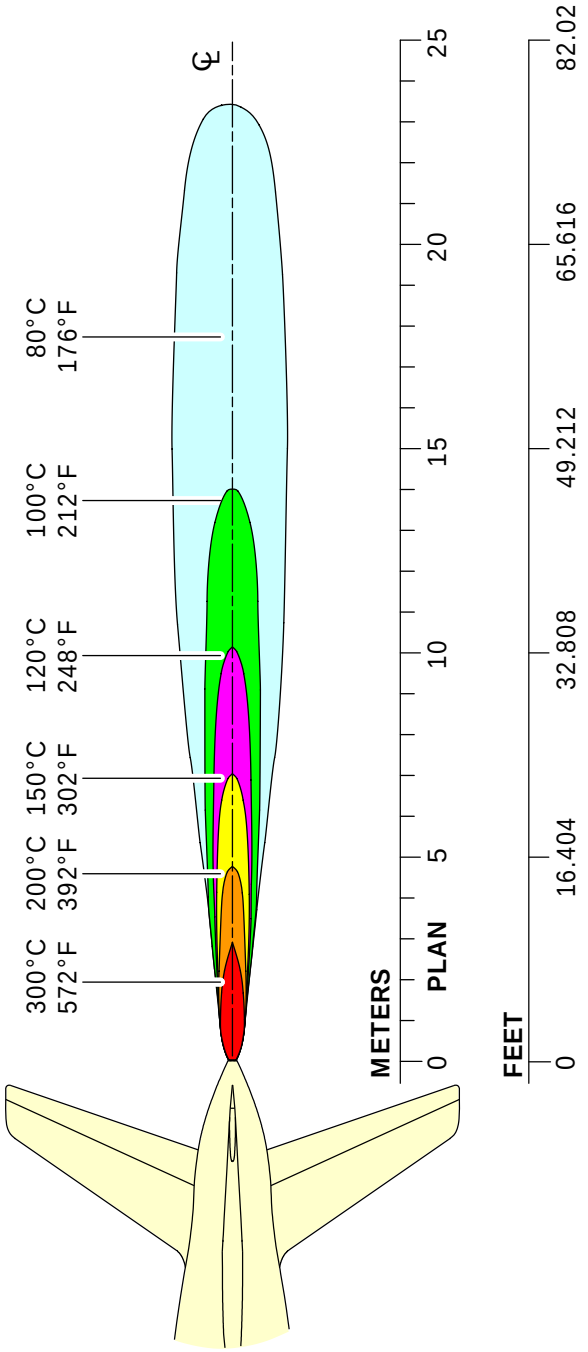

ICN-BD500-A-J000000-A-3AB48-47400-A-001-01

Figure 7 APU exhaust plume temperature

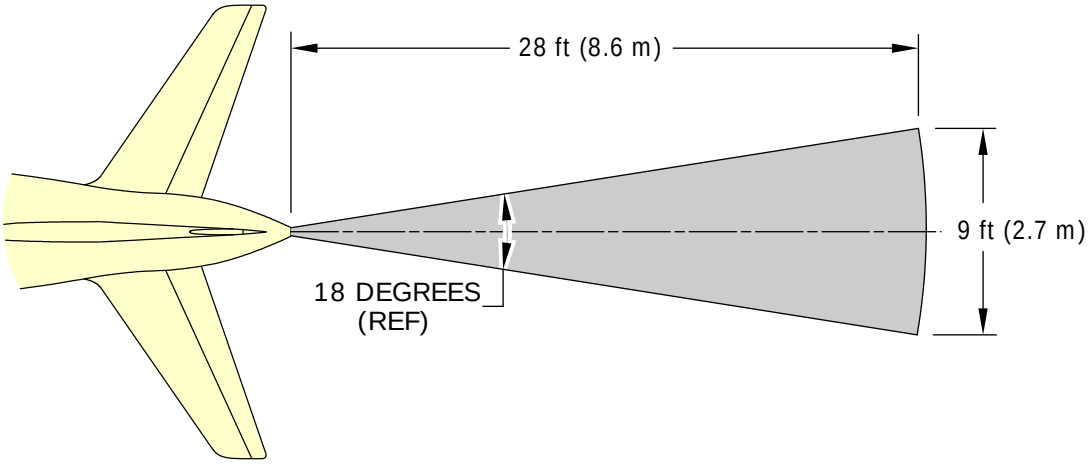

ICN-BD500-A-J000000-A-3AB48-47401-A-001-01

Figure 8 APU danger areas

5 Engine noise levels

The community noise levels must agree with FAR 36 Stage 3, ICAO Annex 16, Chapter 4, Chapter 516.

Refer to Table 2 for the demonstrated Effective Perceived Noise levels (EPNdB), limits, and the relative difference (margin of compliance) for the engines.

Table 2 Engine noise levels

Engine <option code>	Weights		Measure-ment Points			Margins (EPNdB)	Margin Require-ment (EPNdB)
	MTOW <option code>	MLW <option code>	Description	Noise Limit (EPNdB)	Measured Level (EPNdB)		
PW1524G <72210003>	149,000 lb (67,585 kg) <13000170>	129,500 lb (58,740 kg) <1300270>	Approach	99.9	91.9	8.0	0
			Lateral	96.0	87.9	8.1	0
			Flyover	90.4	79.0	11.4	0
			Sum of smallest two individual margins:			16.1	2
			Sum of all individual margins:			27.5	10

A220

Ground maneuvering - Technical data

Applicability:
50001-54999

Table of contents

Page

Ground maneuvering - Technical data 1
References 1
Description 2
1 Turning radii 2
1.1 Introduction 2
1.2 Landing gear turning radii, including minimum turning radii 2

List of tables

Page

1 References 1
2 A220-100 turning radii for various nose wheel angles 3

List of figures

Page

1 Turn radii 5
2 Visibility from cockpit in static position 7
3 Clear areas of vision 9
4 A220 Clear areas of vision 10
5 More than 90° turn - Runway to taxiway - Cockpit over centerline method 12
6 More than 90° turn - Runway to taxiway - Oversteering method 14
7 90° turn - Runway to taxiway - Cockpit over centerline method 16
8 90° turn - Runway to taxiway - Oversteering method 18
9 More than 90° turn - Taxiway to taxiway - Cockpit over centerline method 20
10 More than 90° turn - Taxiway to taxiway - Oversteering method 22
11 90° turn - Taxiway to taxiway - Cockpit over centerline method 24
12 90° turn - Taxiway to taxiway - Oversteering method 26
13 Runway holding bay (Apron) 28
14 Techniques when using a Hammerhead Turnaround 30
15 Techniques when using a Hammerhead Turnaround 31
16 180 Degree (Pivot) Turns in Less than 147.6 feet / 45 m 33

References

Table 1 References

Data Module/Technical Publication	Title
None	

Description

1 Turning radii

1.1 Introduction

This data module contains data about the aircraft turning capability and maneuvering characteristics on the ground. The data is based on aircraft performance in good conditions of operation. Thus, the values must be considered theoretical and used only as an aid. Refer to Table 2 for the values to use with Fig. 1 for the turn radii with 3 degree slip angle.

1.2 Landing gear turning radii, including minimum turning radii

Table 2 A220-100 turning radii for various nose wheel angles

Turning angle (in degrees) with 3 degree tire slip	Turning center to aircraft center line (D)	Nose tip (R1)	Nose gear outside face (R2)	Main gear outside face (R3)	Wing tip (R4)	Empennage tip (R5)	Minimum theoretical pavement width for 180 degrees turn (Tw= R2+R3)
17	1686.8 in. (42844.72 mm)	1807.5 in. (45910.50 mm)	1776.3 in. (45118.02 mm)	1845.6 in. (46878.24 mm)	2385.4 in. (60589.16 mm)	2046.7 in. (51986.18 mm)	3621.9 in. (91996.26 mm)
27	1012.1 in. (25707.34 mm)	1202.7 in. (30548.58 mm)	1148.4 in. (29169.36 mm)	1171 in. (29743.40 mm)	1715 in. (43561 mm)	1430.1 in. (36324.54 mm)	2319.4 in (58912.76 mm)
37	684.4 in. (17383.76 mm)	943.6 in (23967.44 mm)	869.3 in. (22080.22 mm)	843.2 in. (21417.28 mm)	1390.8 in. (35326.32 mm)	1154.2 in. (29316.68 mm)	1712.6 in. (43500.04 mm)
47	480.9 in. (12214.86 mm)	808.3 in (20530.82 mm)	717.6 in. (18227.04 mm)	639.8 in. (16250.92 mm)	1190.6 in. (30241.24 mm)	998.9 in. (25372.06 mm)	1357.3 in. (34475.42 mm)
57	334.9 in. (8506.46 mm)	730.9 in. (18564.86 mm)	627.9 in. (15948.66 mm)	493.2 in. (12527.28 mm)	1047.6 in. (26609.04 mm)	899.3 in. (22842.22 mm)	1121.1 in. (28475.94 mm)
67	218.9 in. (5560.06 mm)	685.5 in. (17411.70 mm)	572.7 in. (14546.58 mm)	377.8 in. (9596.12 mm)	934.7 in. (23741.38 mm)	830.1 in. (21084.54 mm)	950.4 in. (24140.16 mm)
77	119.1 in. (3025.14 mm)	660.4 in. (16774.16 mm)	541.7 in. (13759.18 mm)	277.9 in. (7058.66 mm)	838.2 in. (21290.28 mm)	779.4 in. (19796.76 mm)	819.6 in. (20817.84 mm)

Intentionally left blank

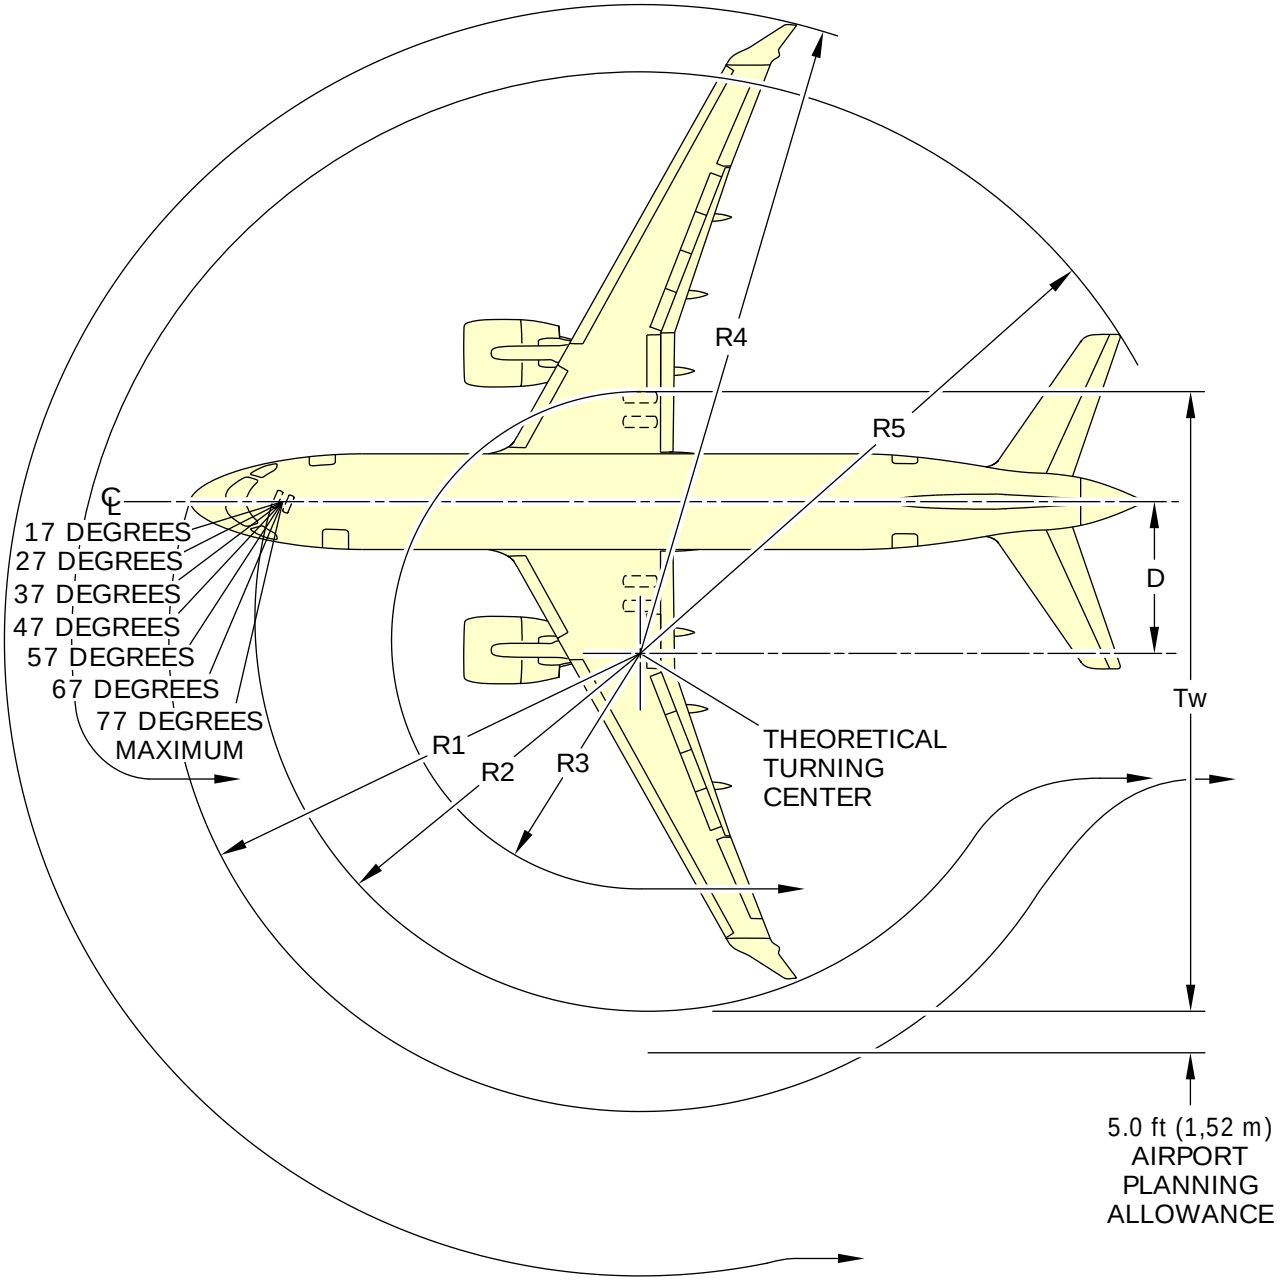

ICN-BD500-A-J092001-A-3AB48-00068-A-001-01

Figure 1 Turn radii

2 Visibility from cockpit in static position

This section contains data about the visibility from cockpit in static position.

To see the diagram, refer to Fig. 2.

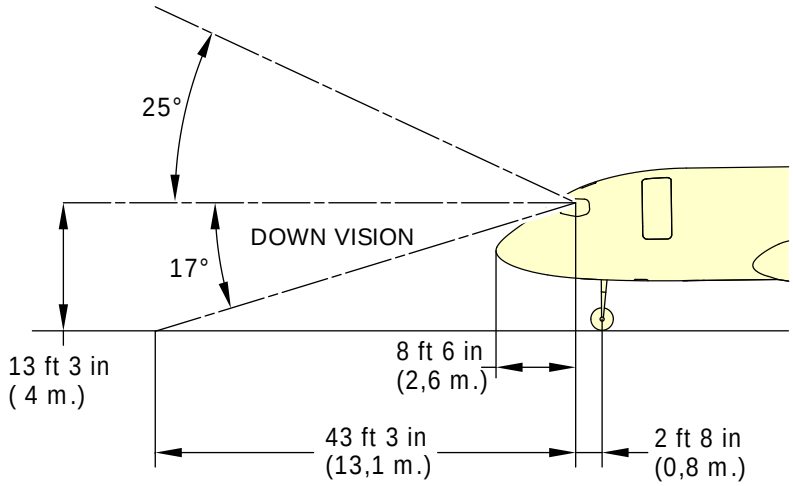

VISUAL ANGLES IN VERTICAL PLANE THROUGH PILOT'S EYE POSITION

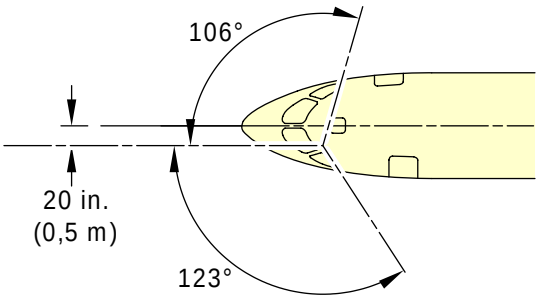

VISUAL ANGLES IN HORIZONTAL PLANE THROUGH PILOT'S EYE POSITION

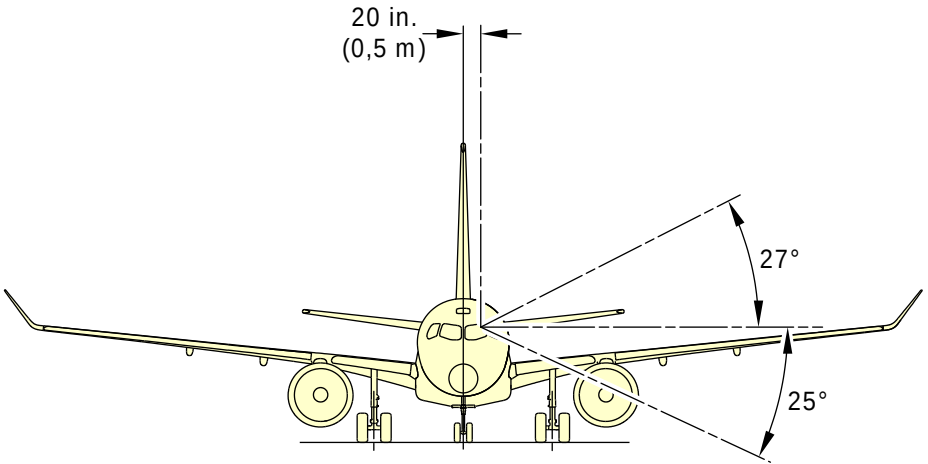

VISUAL ANGLE IN A PLANE PERPEDNDICULAR TO LONGITUDINAL AXIS THROUGH PILOT'S EYE POSITION

NOTES

1. Not to be used for landing approach visibility.
2. Not scale.

ICN-BD500-A-J000000-A-3AB48-22579-A-001-01

Figure 2 Visibility from cockpit in static position

2.1 Clear areas of vision

To see the diagram, refer to Fig. 3 and Fig. 4.

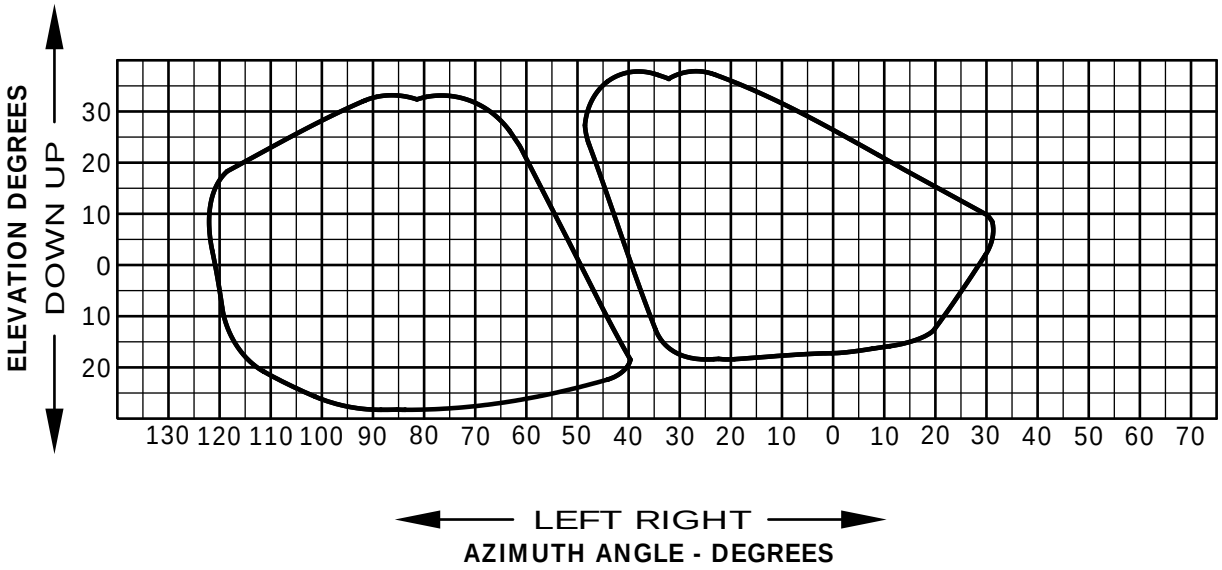

ICN-BD500-A-J092001-A-3AB48-00119-A-001-01

Figure 3 Clear areas of vision

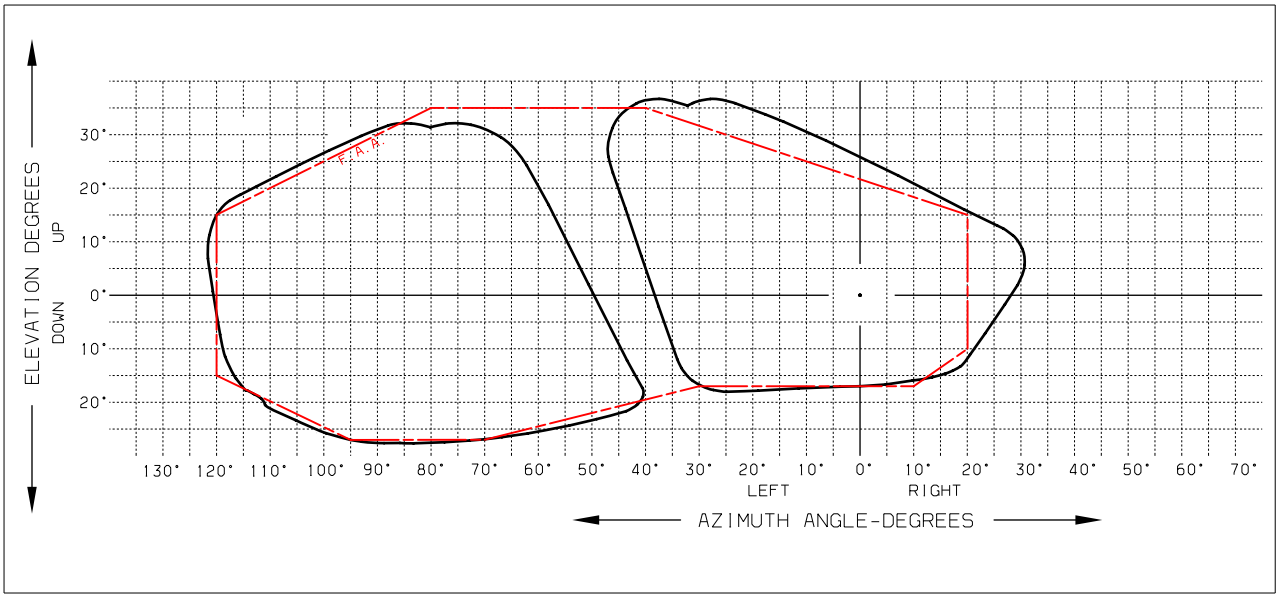

ICN-BD500-A-J000000-A-3AB48-45615-A-001-01

Figure 4 A220 Clear areas of vision

3 Runways and taxiways turn paths

This section contains data about the runways and taxiways turn paths.

3.1 More than 90° turn - Runway to taxiway - Cockpit over centerline method

To see the diagram, refer to Fig. 5.

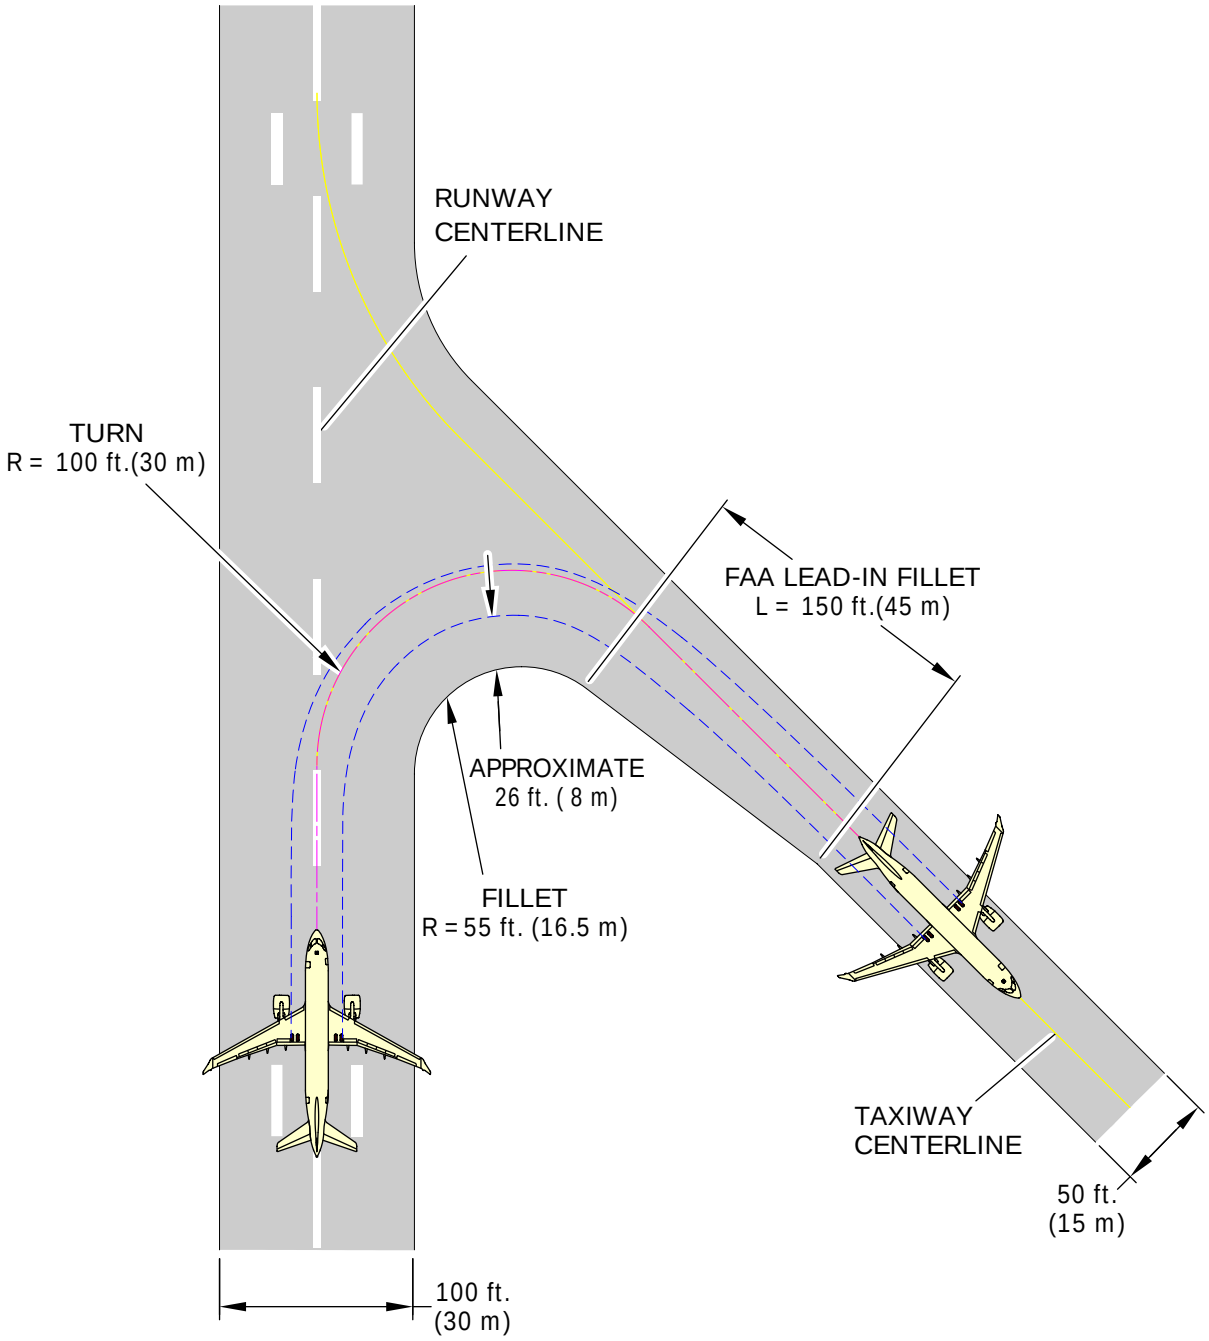

LEGEND

Nose gear.
Main gear.

NOTE

Coordinate with airline operator for the specific planned operating procedure.

ICN-BD500-A-J000000-A-3AB48-22068-A-001-01

Figure 5 More than 90° turn - Runway to taxiway - Cockpit over centerline method

3.2 More than 90° turn - Runway to taxiway - Oversteering method

To see the diagram, refer to Fig. 6.

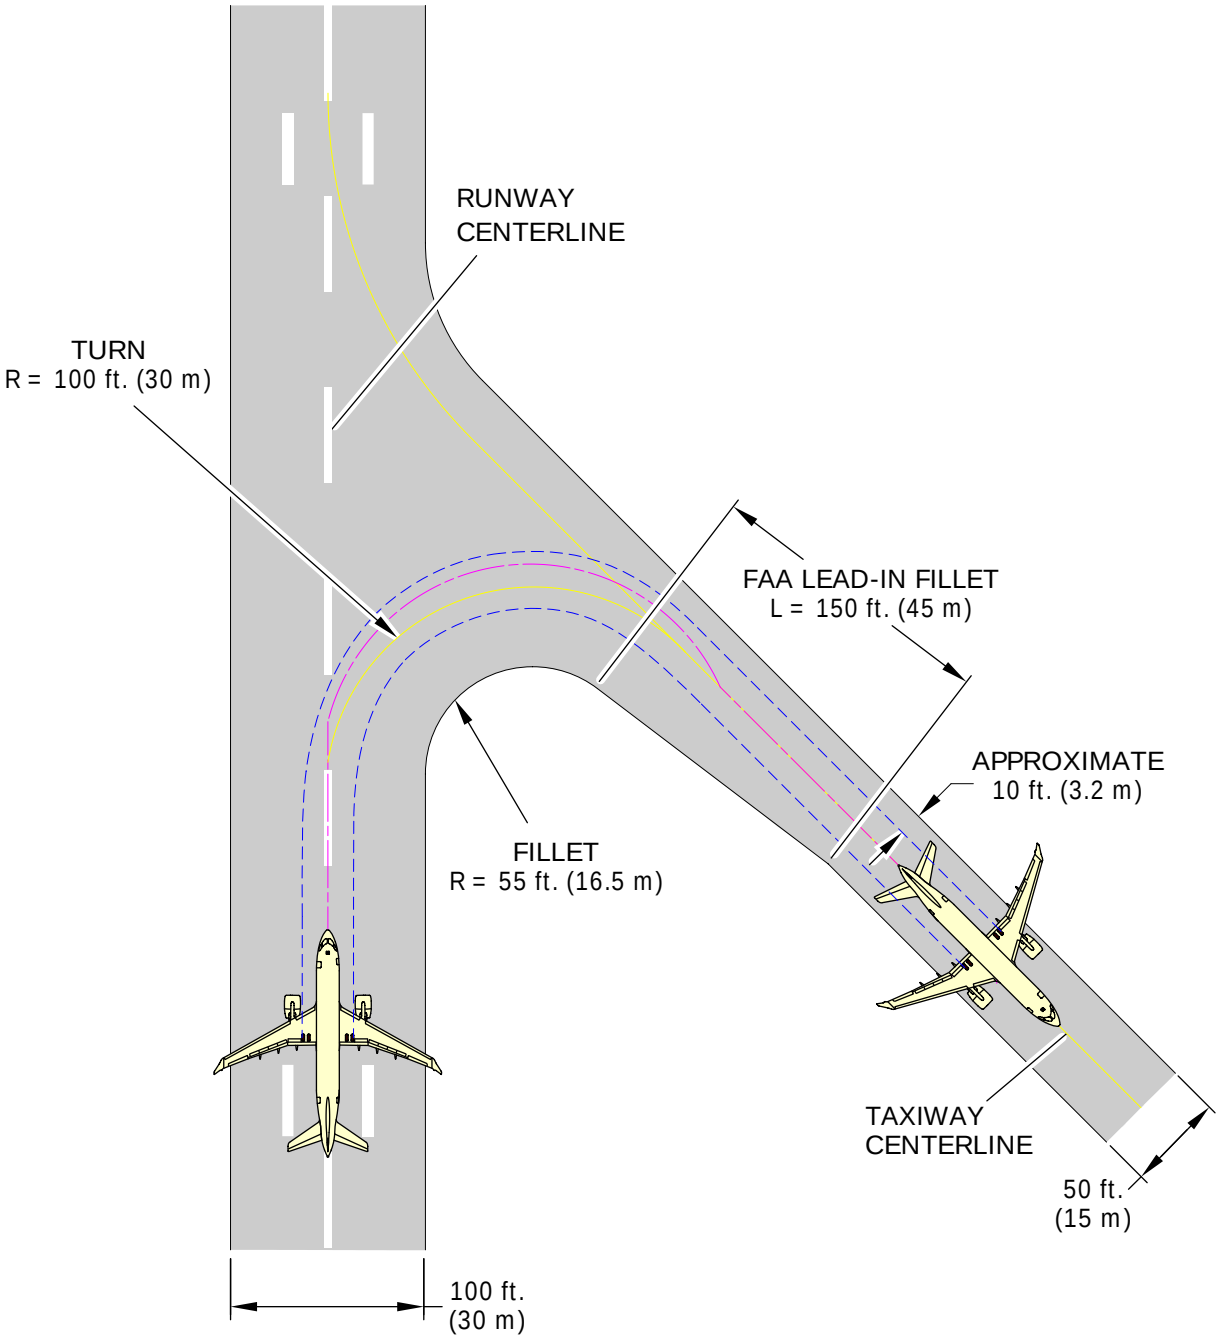

LEGEND

Nose gear.
Main gear.

NOTE

Coordinate with airline operator for the specific planned operating procedure.

ICN-BD500-A-J000000-A-3AB48-22553-A-001-01

Figure 6 More than 90° turn - Runway to taxiway - Oversteering method

3.3 90° turn - Runway to taxiway - Cockpit over centerline method

To see the diagram, refer to Fig. 7.

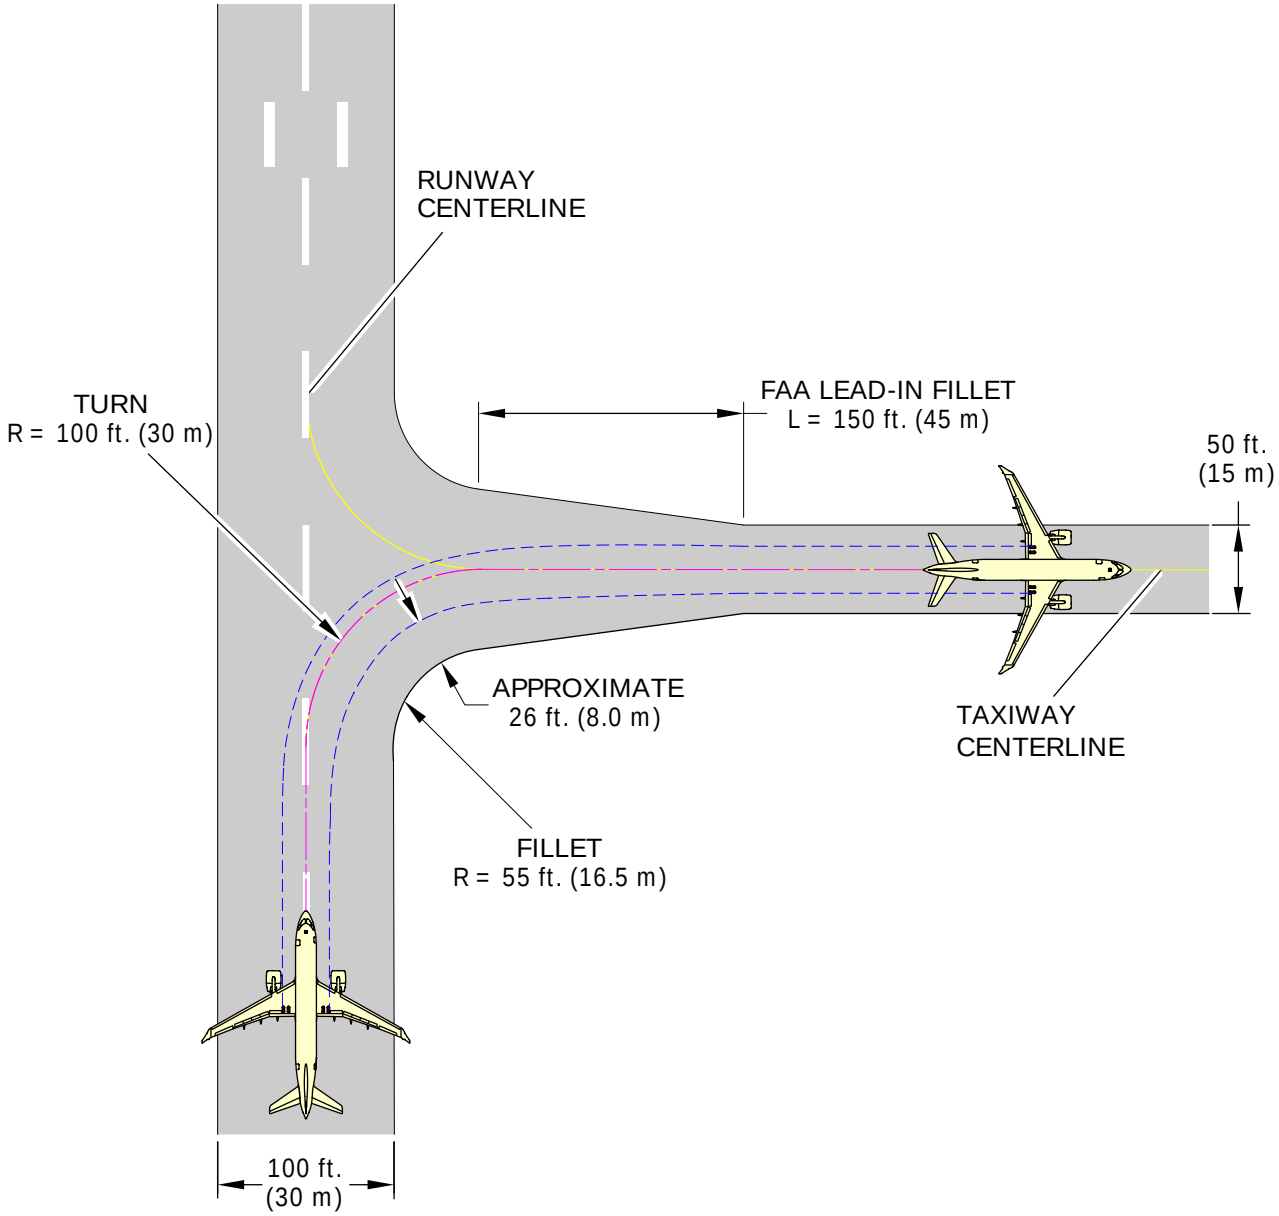

LEGEND

Nose gear.
Main gear.

NOTE

Coordinate with airline operator for the specific planned operating procedure.

ICN-BD500-A-J000000-A-3AB48-22065-A-001-01

Figure 7 90° turn - Runway to taxiway - Cockpit over centerline method

3.4 90° turn - Runway to taxiway - Oversteering method

To see the diagram, refer to Fig. 8.

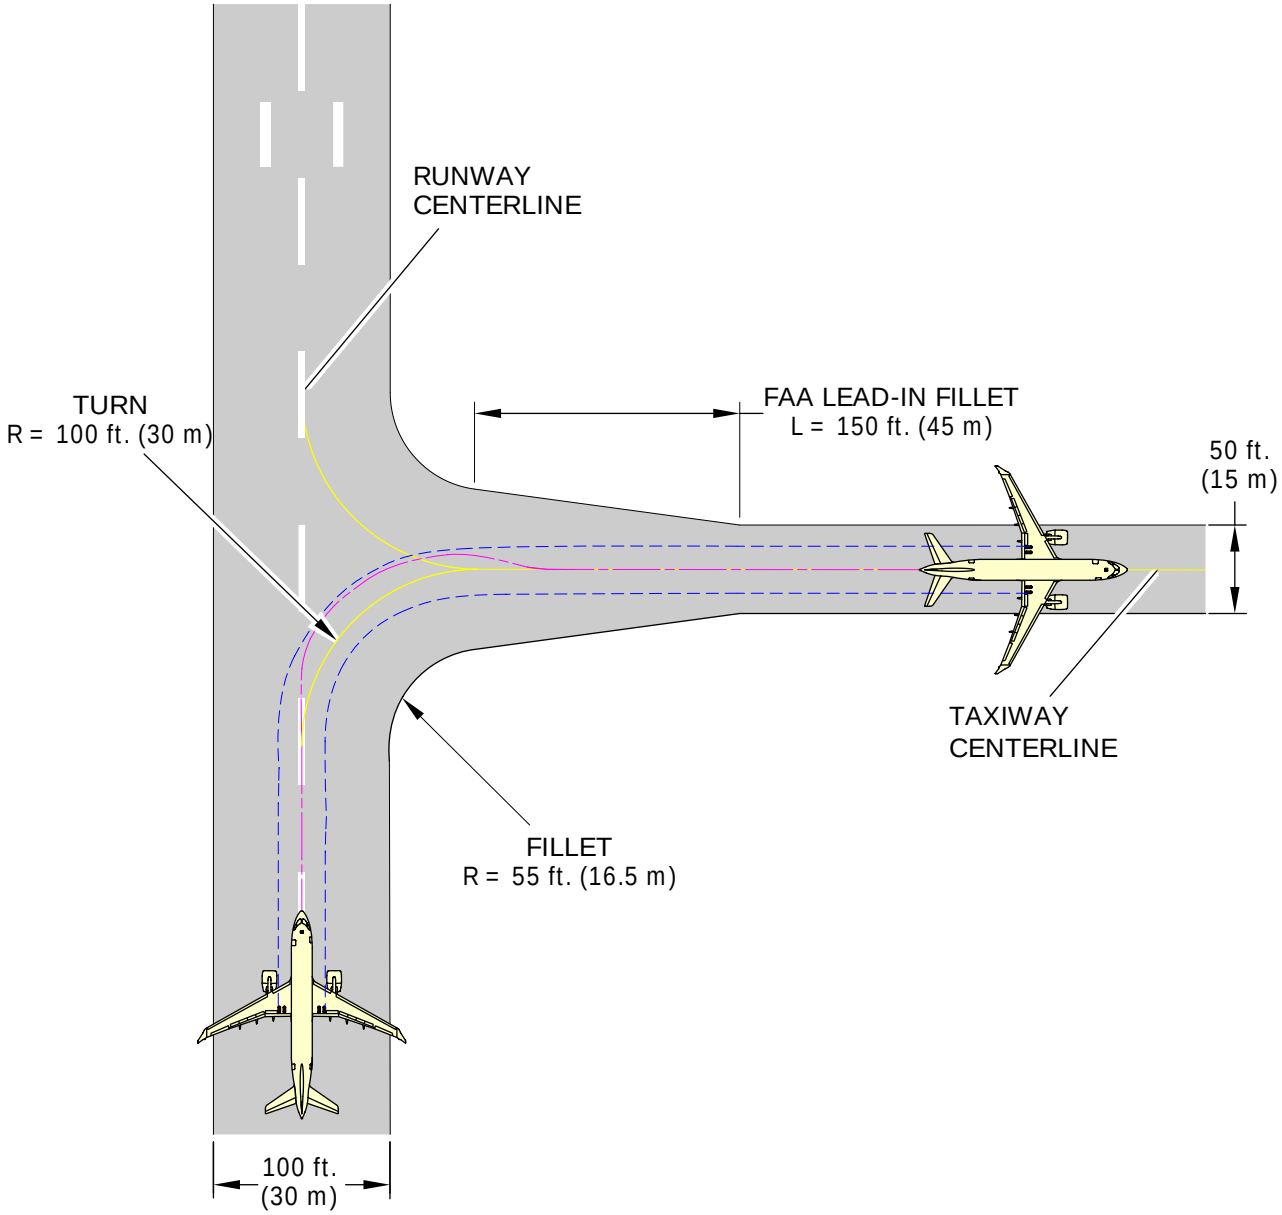

LEGEND

Nose gear.
Main gear.

NOTE

Coordinate with airline operator for the specific planned operating procedure.

ICN-BD500-A-J000000-A-3AB48-22555-A-001-01

Figure 8 90° turn - Runway to taxiway - Oversteering method

3.5 More than 90° turn - Taxiway to taxiway - Cockpit over centerline method

To see the diagram, refer to Fig. 9.

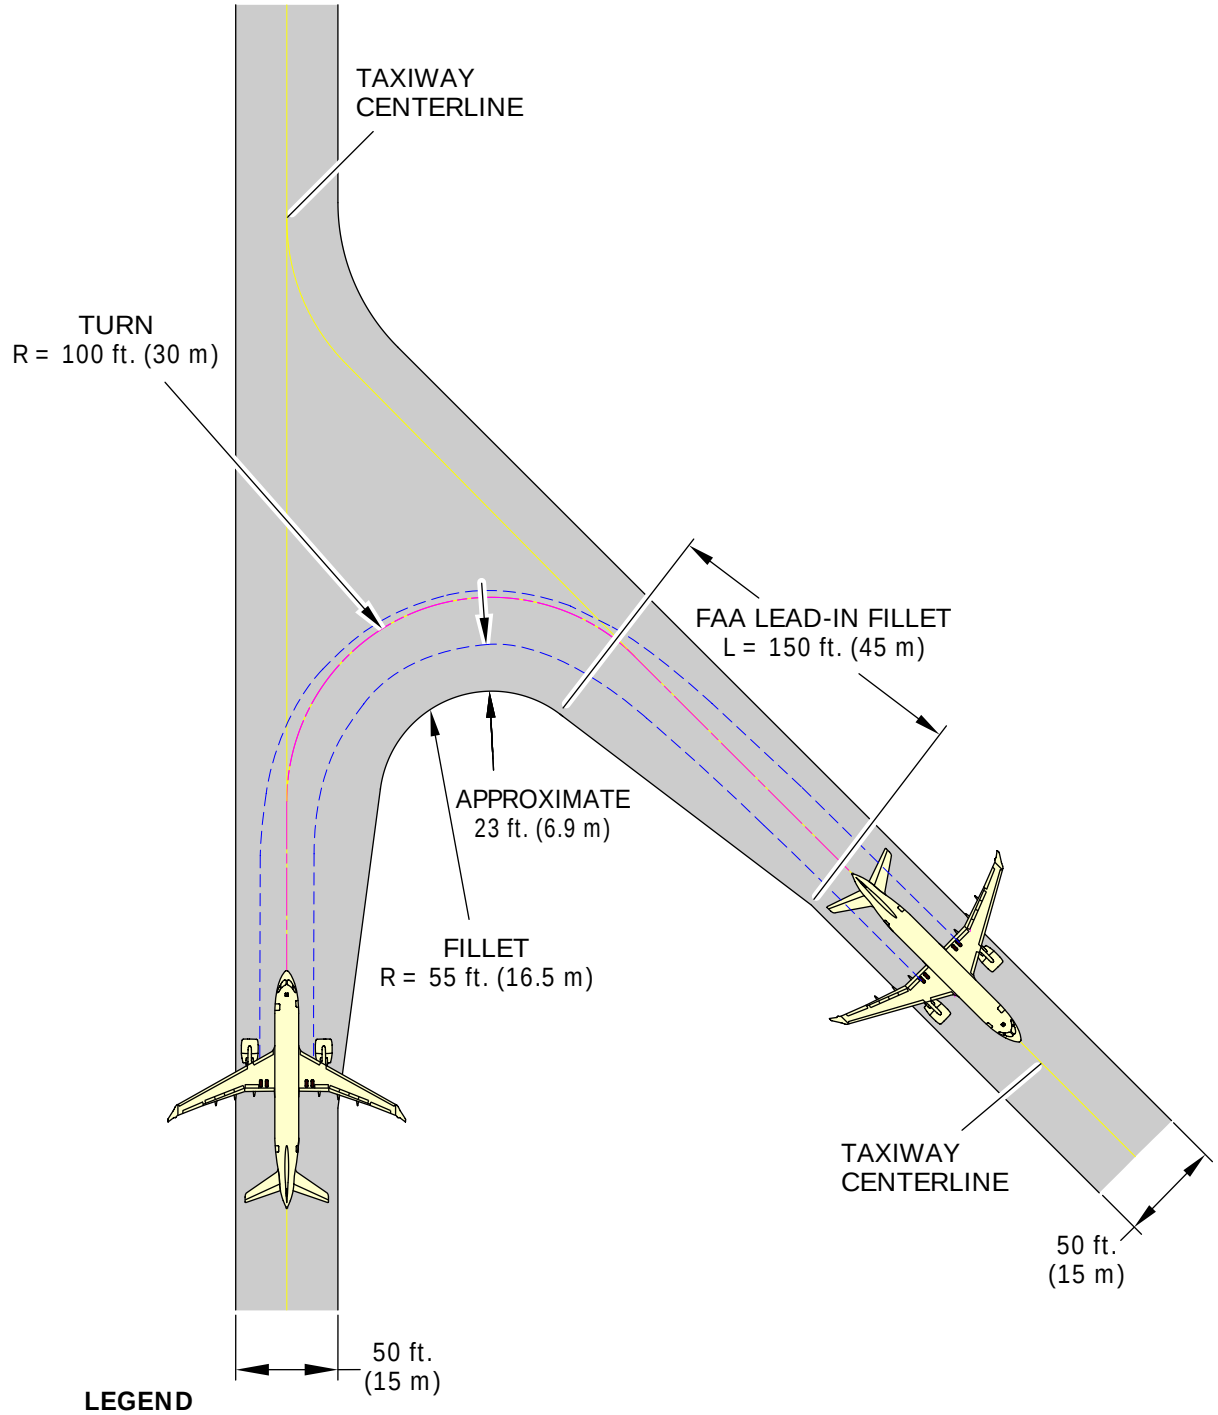

LEGEND

Nose gear.
Main gear.

NOTE

Coordinate with airline operator for the specific planned operating procedure.

ICN-BD500-A-J000000-A-3AB48-22069-A-001-01

Figure 9 More than 90° turn - Taxiway to taxiway - Cockpit over centerline method

3.6 More than 90° turn - Taxiway to taxiway - Oversteering method

To see the diagram, refer to Fig. 10.

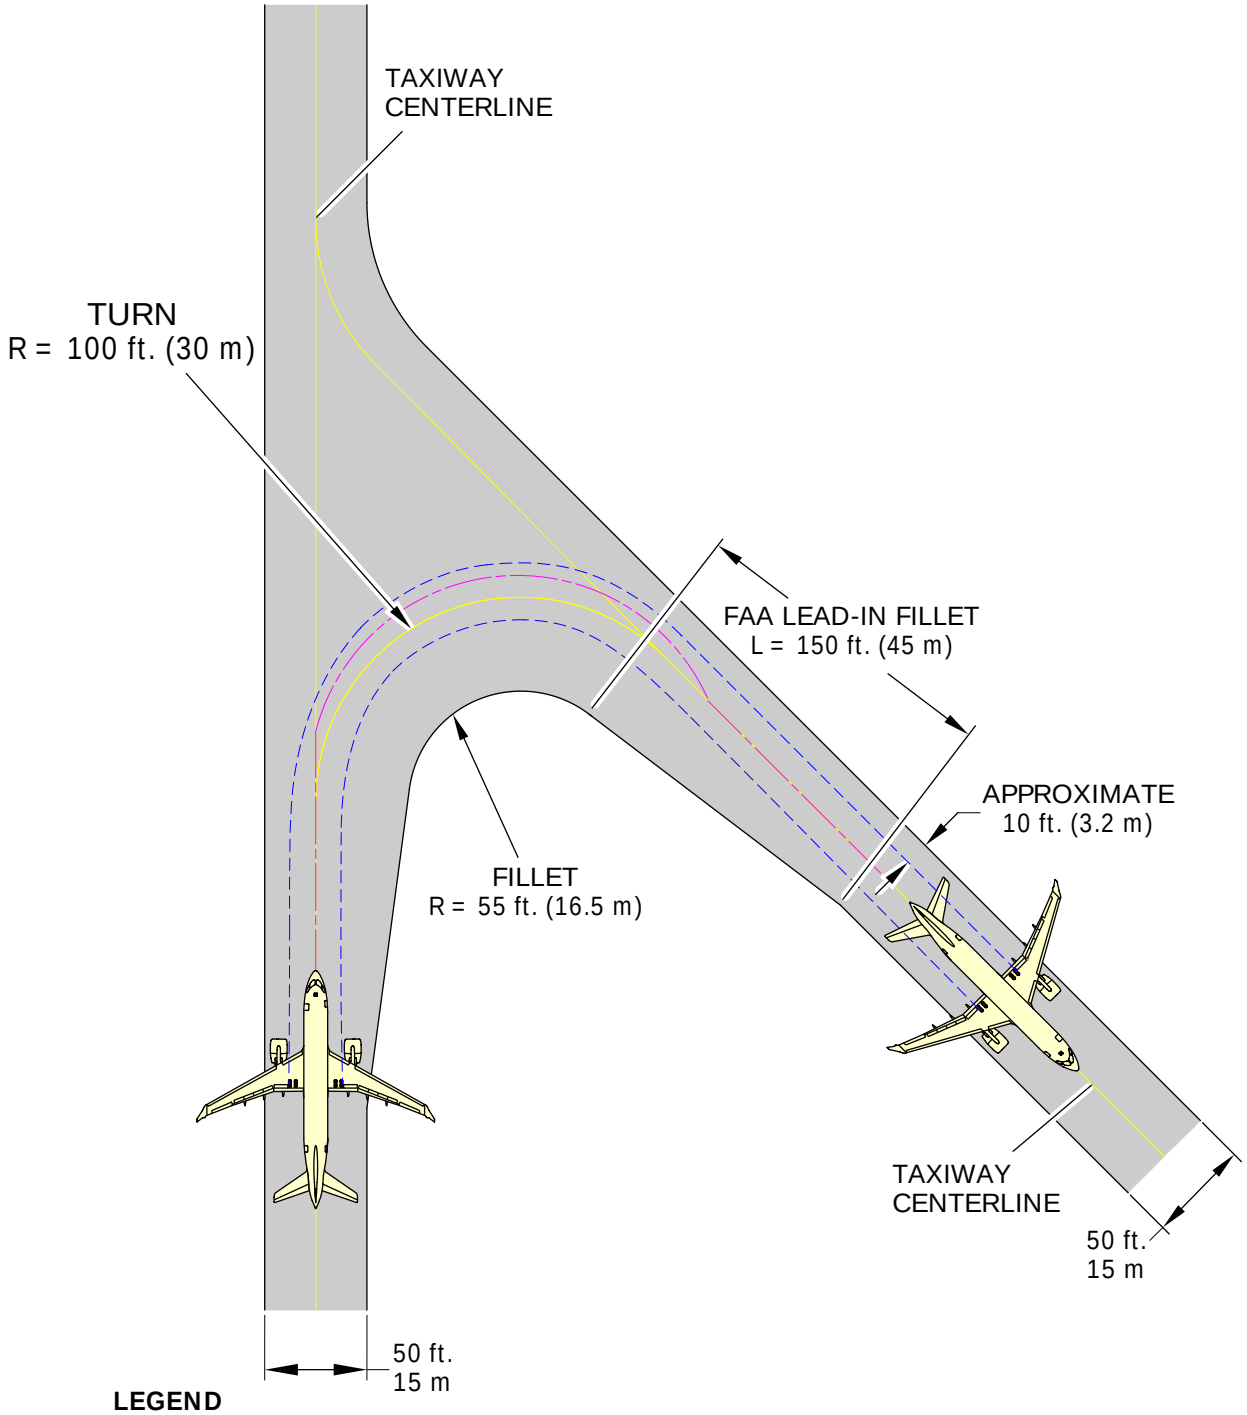

LEGEND

Nose gear.
Main gear.

NOTE

Coordinate with airline operator for the specific planned operating procedure.

ICN-BD500-A-J000000-A-3AB48-22552-A-001-01

Figure 10 More than 90° turn - Taxiway to taxiway - Oversteering method

3.7 90° turn - Taxiway to taxiway - Cockpit over centerline method

To see the diagram, refer to Fig. 11.

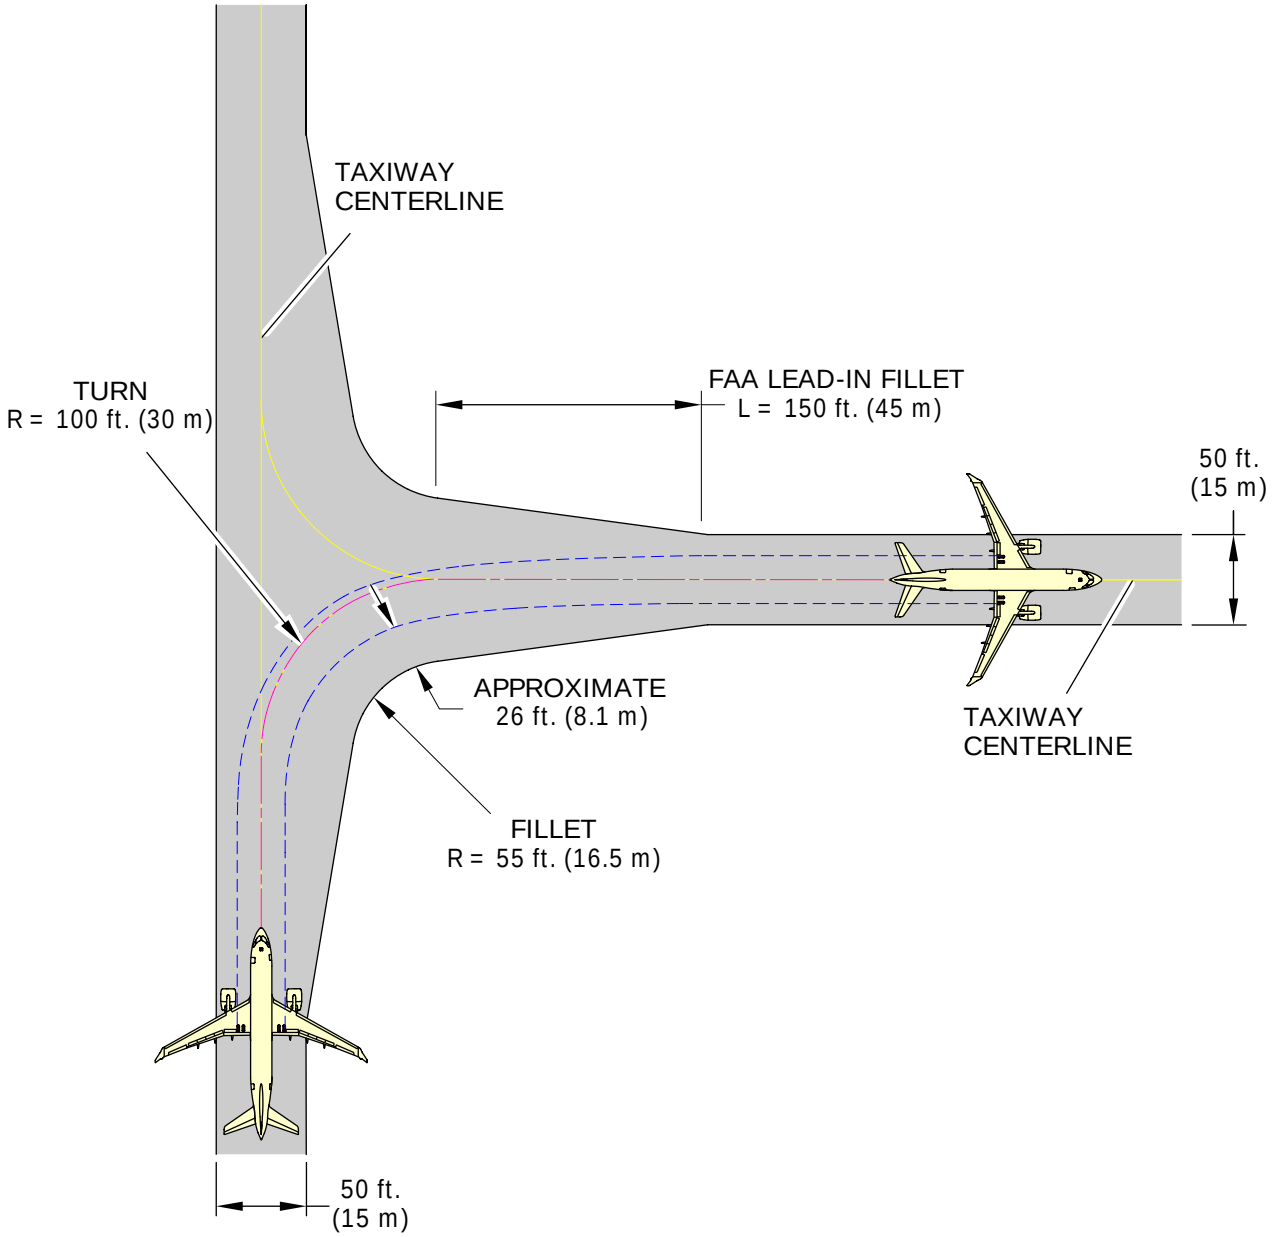

LEGEND

Nose gear.
Main gear.

NOTE

Coordinate with airline operator for the specific planned operating procedure.

ICN-BD500-A-J000000-A-3AB48-22066-A-001-01

Figure 11 90° turn - Taxiway to taxiway - Cockpit over centerline method

3.8 90° turn - Taxiway to taxiway - Oversteering method

To see the diagram, refer to Fig. 12

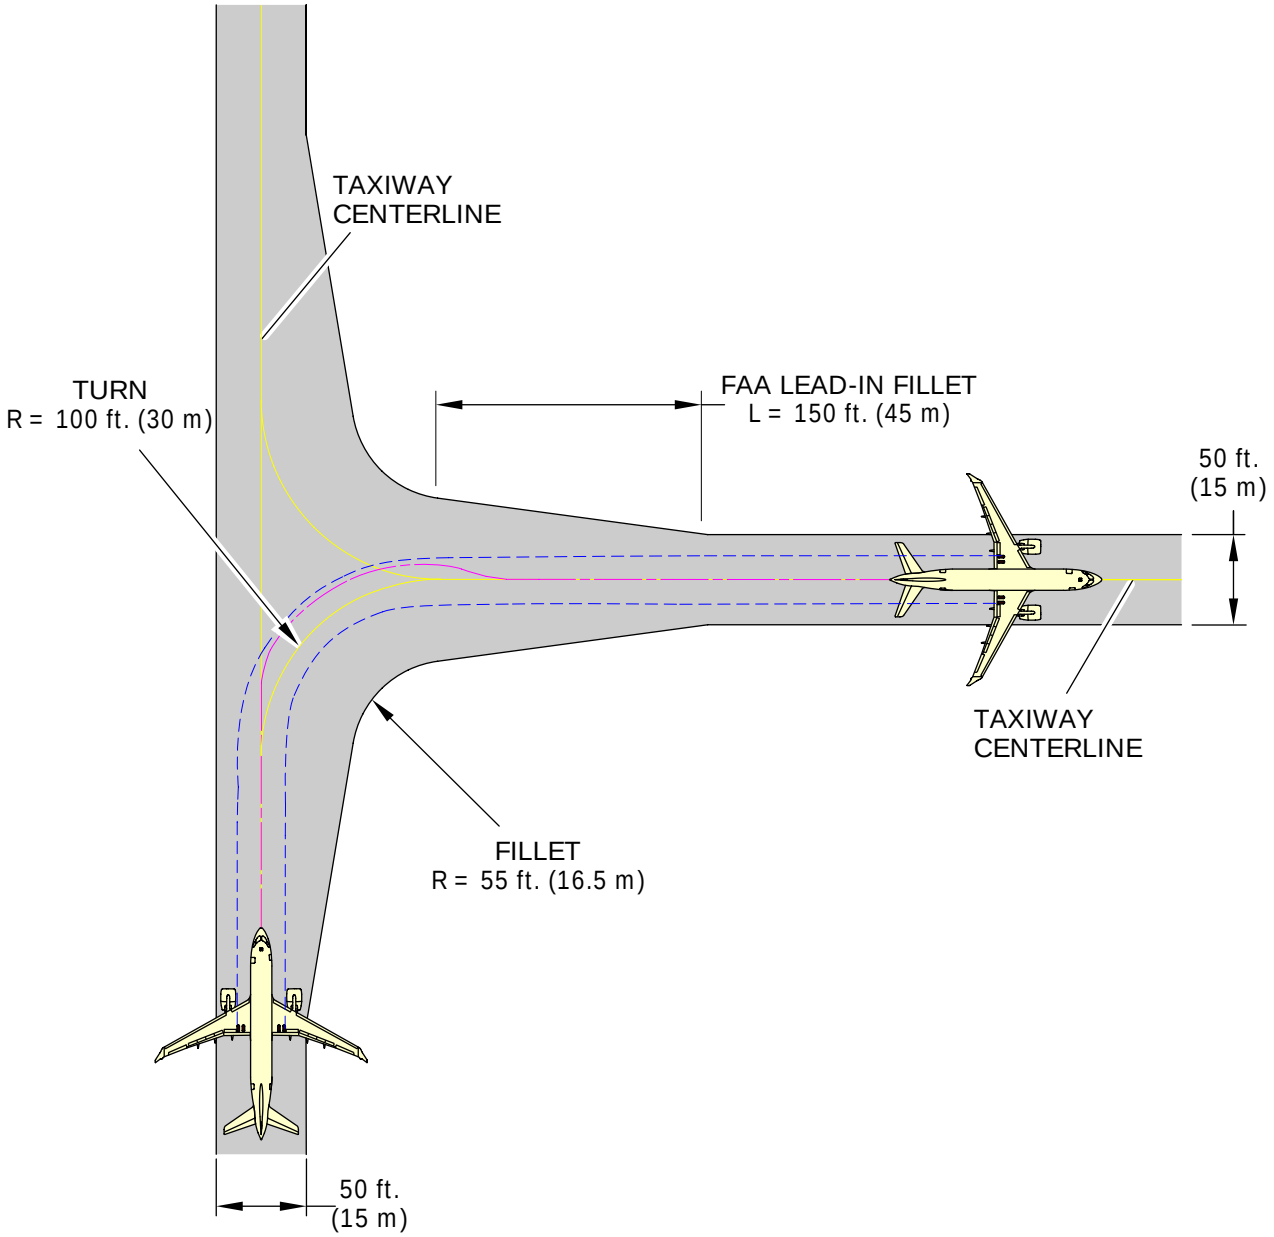

LEGEND

Nose gear.
Main gear.

NOTE

Coordinate with airline operator for the specific planned operating procedure.

ICN-BD500-A-J000000-A-3AB48-22554-A-001-01

Figure 12 90° turn - Taxiway to taxiway - Oversteering method

3.9 Runway holding bay (Apron)

To see the diagram, refer to Fig. 13.

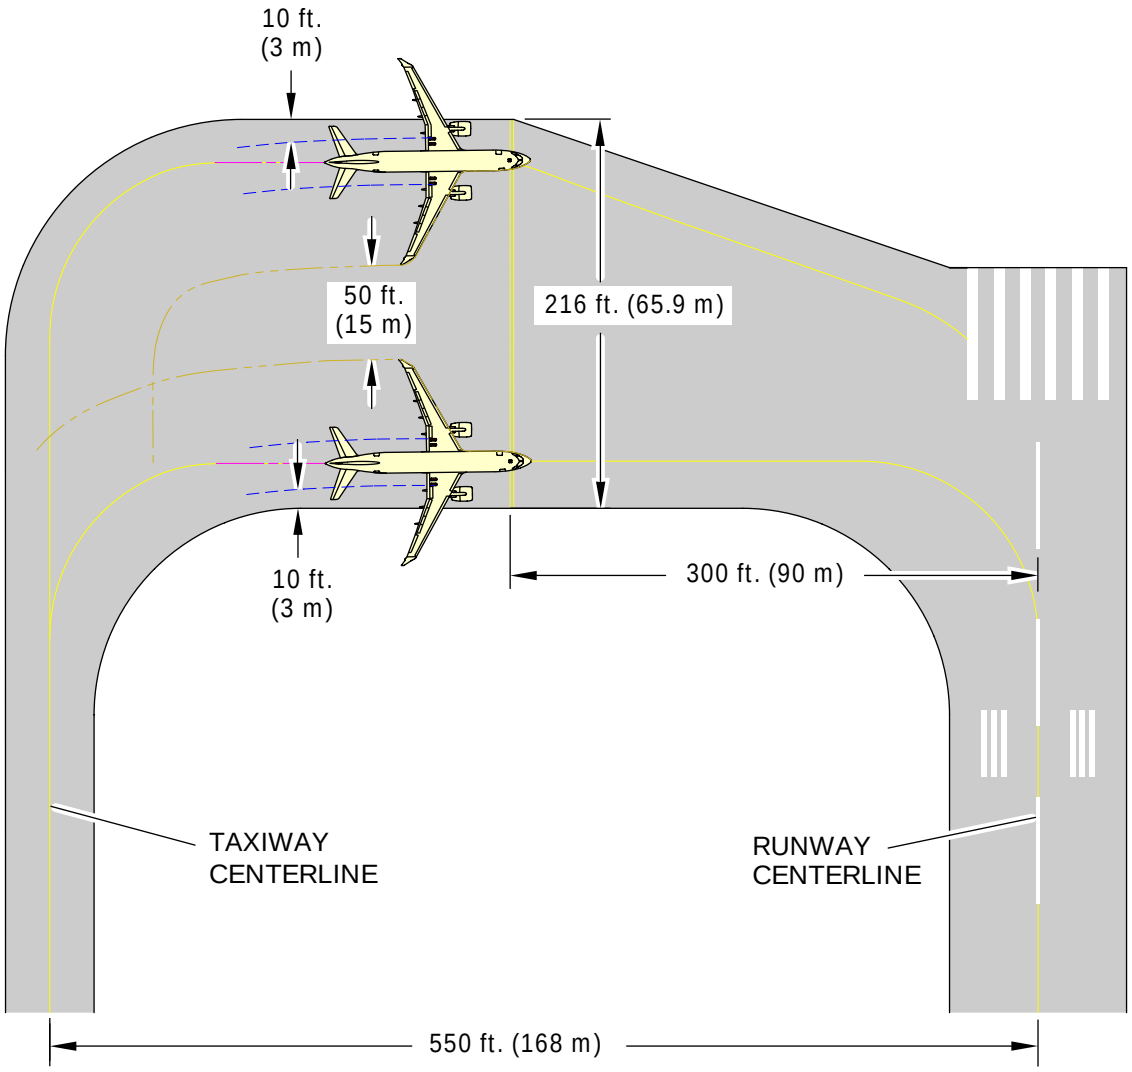

LEGEND

Nose gear.
Main gear.

NOTE

Coordinate with airline operator for the specific planned operating procedure.

ICN-BD500-A-J000000-A-3AB48-22067-A-001-01

Figure 13 Runway holding bay (Apron)

3.10 Hammerhead Turnaround

To see the diagrams, refer to Fig. 14 and Fig. 15.

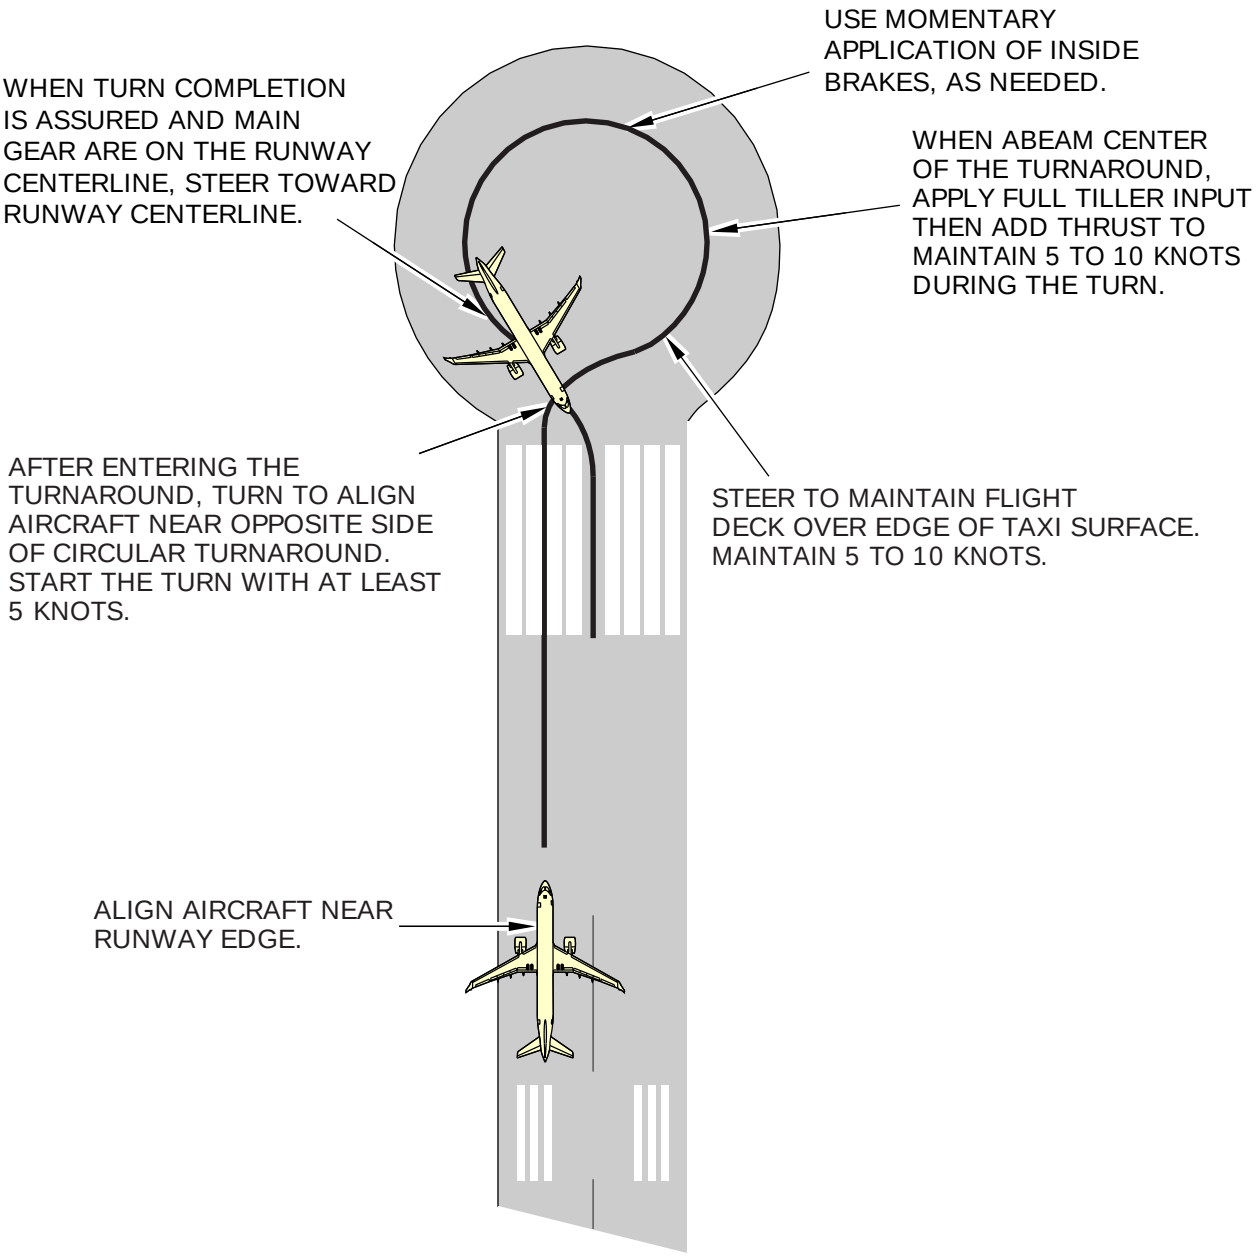

NOTE

Follow turnaround steering guidance cues if available.

ICN-BD500-A-J000000-A-3AB48-45728-A-001-01

Figure 14 Techniques when using a Hammerhead Turnaround

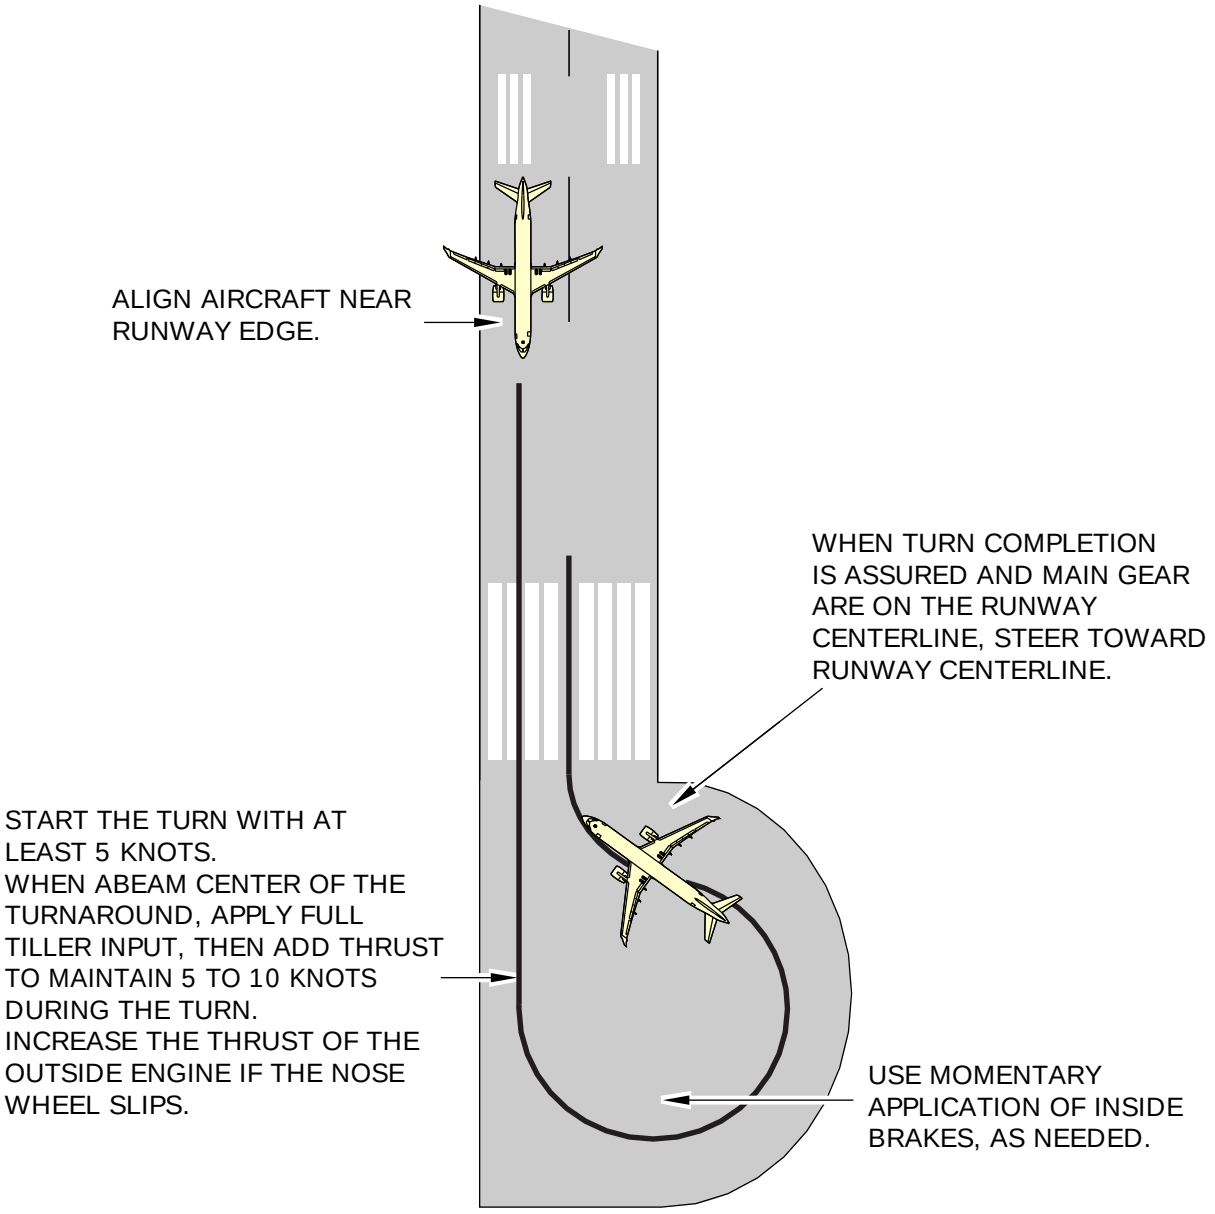

NOTE

Follow turnaround steering guidance cues if available.

ICN-BD500-A-J000000-A-3AB48-45729-A-001-01

Figure 15 Techniques when using a Hammerhead Turnaround

3.11 180 Degree (Pivot) Turns in Less than 147.6 feet (45 m)

To see the diagram, refer to Fig. 16.

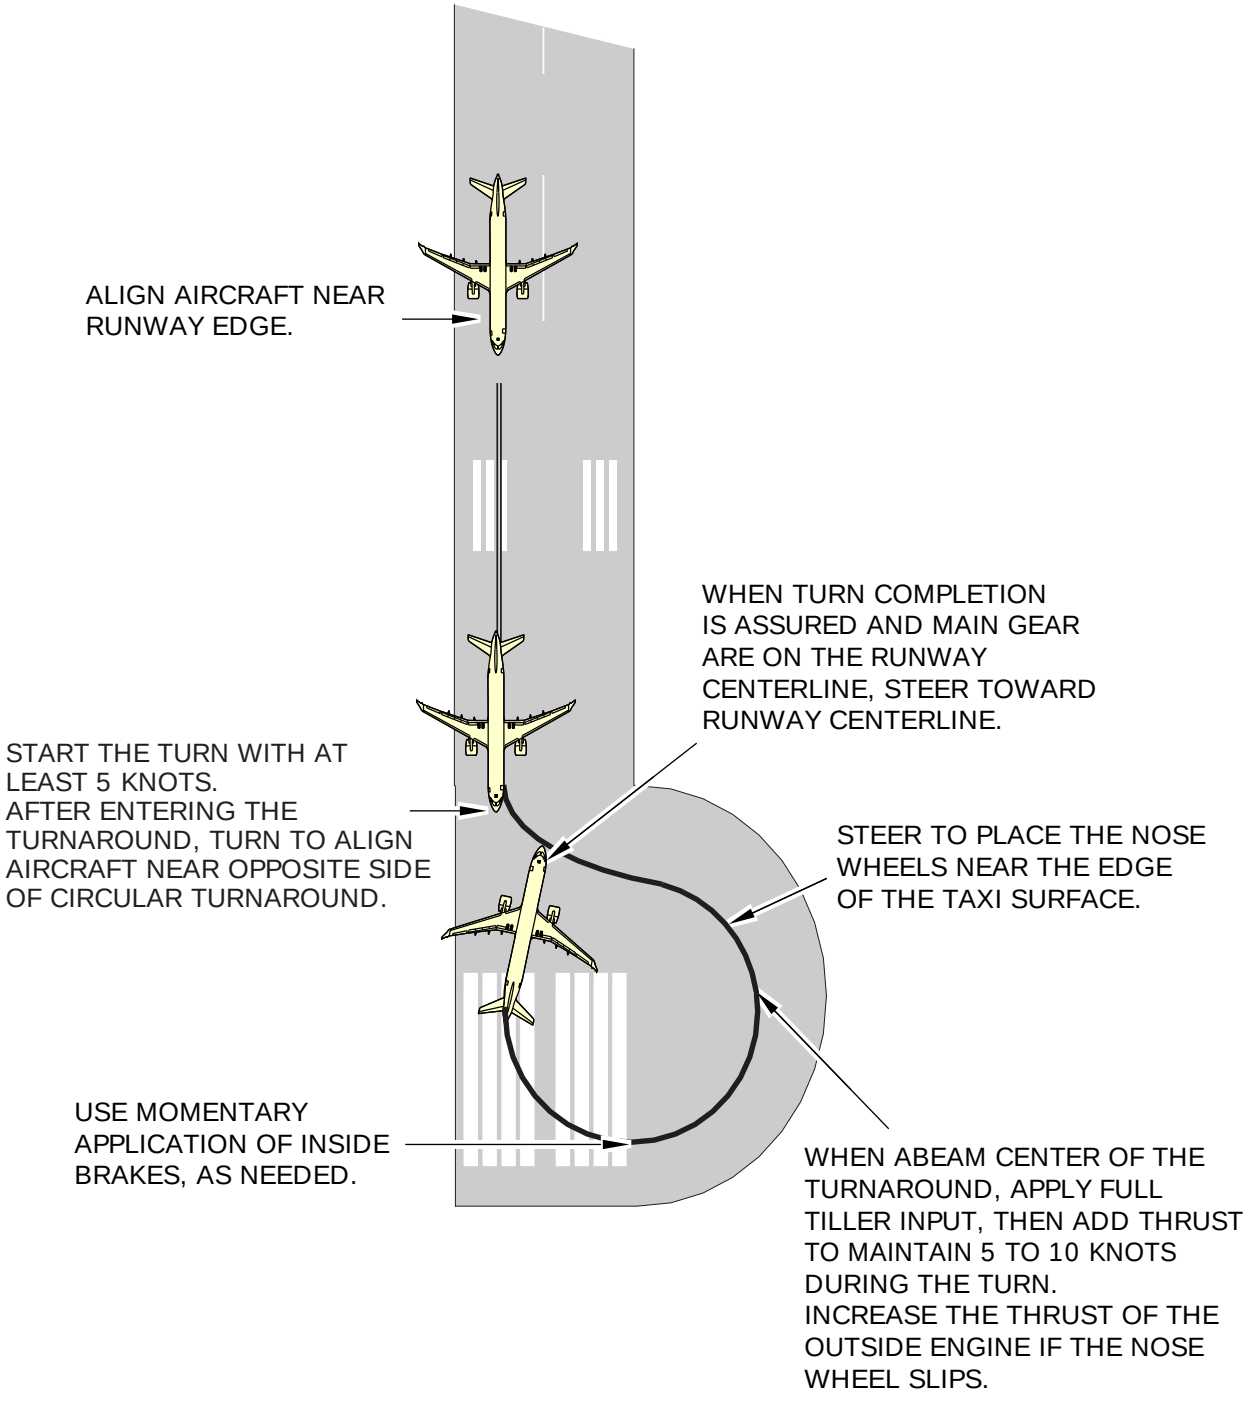

NOTE

Follow turnaround steering guidance cues if available.

ICN-BD500-A-J000000-A-3AB48-45730-A-001-01

Figure 16 180 Degree (Pivot) Turns in Less than 147.6 feet / 45 m

Intentionally left blank

A220

Ground maneuvering - Technical data

Applicability:
55001-59999

Table of contents

Page

Ground maneuvering - Technical data 1
References 1
Description 2
1 Turning radii 2
1.1 Introduction 2
1.2 Landing gear turning radii, including minimum turning radii 2

List of tables

Page

1 References 1
2 A220-300 turning radii for various nose wheel angles 3

List of figures

Page

1 Turn radii 5
2 Visibility from cockpit in static position 7
3 Clear areas of vision 9
4 A220 Clear areas of vision 10
5 More than 90° turn - Runway to taxiway - Cockpit over centerline method 12
6 More than 90° turn - Runway to taxiway - Oversteering method 14
7 90° turn - Runway to taxiway - Cockpit over centerline method 16
8 90° turn - Runway to taxiway - Oversteering method 18
9 More than 90° turn - Taxiway to taxiway - Cockpit over centerline method 20
10 More than 90° turn - Taxiway to taxiway - Oversteering method 22
11 90° turn - Taxiway to taxiway - Cockpit over centerline method 24
12 90° turn - Taxiway to taxiway - Oversteering method 26
13 Runway holding bay (Apron) 28
14 Techniques when using a Hammerhead Turnaround 30
15 Techniques when using a Hammerhead Turnaround 31
16 180 Degree (Pivot) Turns in Less than 147.6 feet / 45 m 33

References

Table 1 References

Data Module/Technical Publication	Title
None	

Description

1 Turning radii

1.1 Introduction

This data module contains data about the aircraft turning capability and maneuvering characteristics on the ground. The data is based on aircraft performance in good conditions of operation. Thus, the values must be considered theoretical and used only as an aid. Refer to Table 2 for the values to use with Fig. 1 for the turn radii with 3 degree slip angle.

1.2 Landing gear turning radii, including minimum turning radii

Table 2 A220-300 turning radii for various nose wheel angles

Turning angle (in degrees) with 3 degree tire slip	Turning center to aircraft center line (D)	Nose tip (R1)	Nose gear outside face (R2)	Main gear outside face (R3)	Wing tip (R4)	Empennage tip (R5)	Minimum theoretical pavement width for 180 degrees turn (Tw= R2+R3)
17	1961.5 in. (49822.10 mm)	2094.2 in. (53192.68 mm	2063.6 in. (52415.44 mm	2120.4 in. (53858.16 mm)	2659 in. (67538.60 mm)	2307.1 in. (58600.34 mm	4148 in. (105359.20 mm)
27	1177 in. (29895.80 mm)	1386.9 in. (35227.26 mm	1333.4 in. (33868.36 mm)	1335.8 in. (33929.32 mm)	1878.6 in. (47716.44 mm)	1576.4 in. (40040.56 mm	2669.2 in (67797.68 mm)
37	795.8 in. (20213.32 mm)	1082.4 in. (27492.96 mm	1008.9 in. (25626.06 mm)	954.7 in. (24249.38 mm)	1500.9 in. (38122.86 mm)	1245.2 in. (31628.08 mm	1963.6 in. (49875.44 mm)
47	559.2 in. (14203.68 mm)	922.5 in. (23431.5 mm)	832.4 in. (21142.96 mm)	718.1 in. (18239.74 mm)	1267.5 in. (32194.50 mm)	1056.8 in. (26842.72 mm	1550.5 in. (39382.70 mm)
57	389.4 in. (9890.76 mm)	830.6 in. (21097.24 mm	727.5 in. (18478.50 mm)	548.3 in. (13926.82 mm)	1100.9 in. (27962.86 mm)	935.1 in. (23751.54 mm	1275.8 in. (32405.32 mm)
67	254.6 in. (6466.84 mm)	776.5 in. (19723.10 mm)	663.9 in. (16863.06 mm)	413.4 in. (10500.36 mm)	969.4 in. (24622.76 mm)	850.3 in. (21597.60 mm)	1077.4 in. (27365.96 mm)
77	138.5 in. (3517.90 mm)	746.6 in. (18963.64 mm	627.9 in. (15948.66 mm	297.3 in. (7551.42 mm)	856.9 in. (21765.26 mm)	788.5 in. (20027.90 mm)	925.4 in. (23505.16 mm)

Intentionally left blank

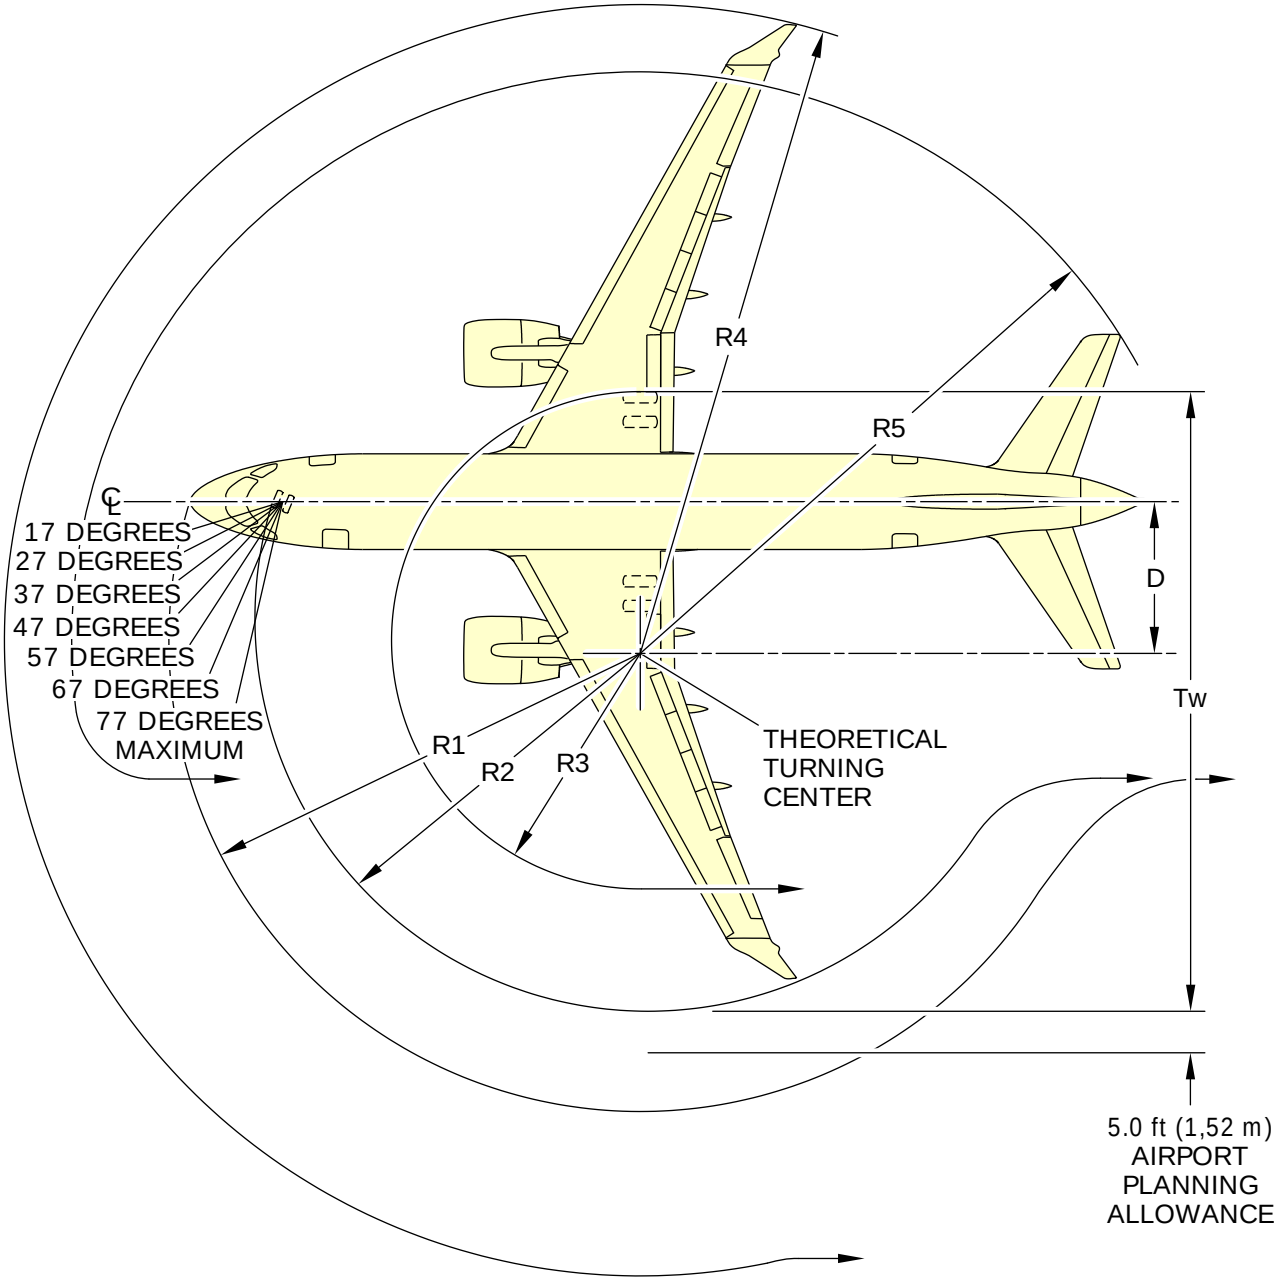

ICN-BD500-A-J092001-A-3AB48-00068-A-001-01

Figure 1 Turn radii

2 Visibility from cockpit in static position

This section contains data about the visibility from cockpit in static position for.

To see the diagram, refer to Fig. 3.

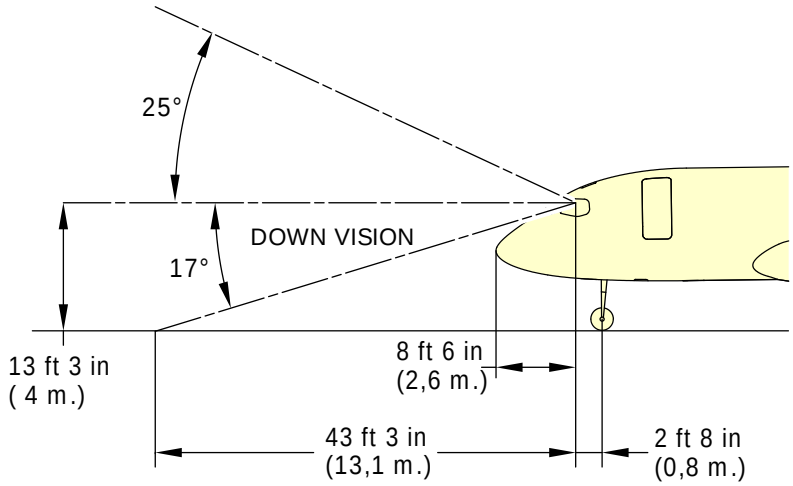

VISUAL ANGLES IN VERTICAL PLANE THROUGH PILOT'S EYE POSITION

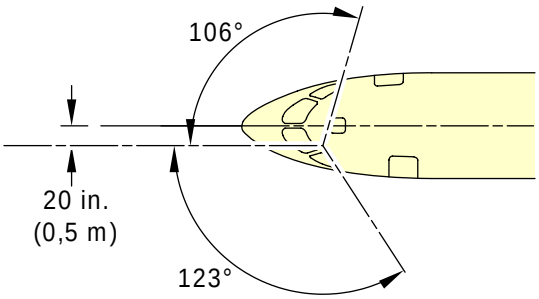

VISUAL ANGLES IN HORIZONTAL PLANE THROUGH PILOT'S EYE POSITION

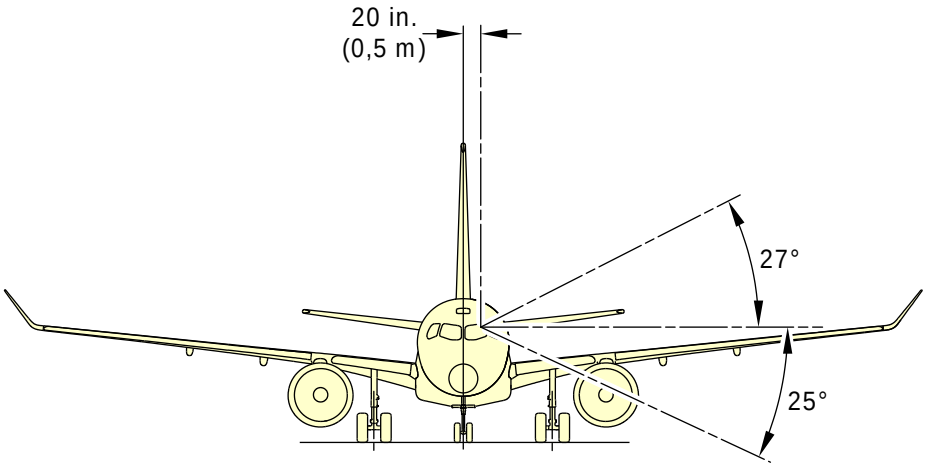

VISUAL ANGLE IN A PLANE PERPEDNDICULAR TO LONGITUDINAL AXIS THROUGH PILOT'S EYE POSITION

NOTES

1. Not to be used for landing approach visibility.
2. Not scale.

ICN-BD500-A-J000000-A-3AB48-22579-A-001-01

Figure 2 Visibility from cockpit in static position

2.1 Clear areas of vision

To see the diagram, refer to Fig. 2 and Fig. 4.

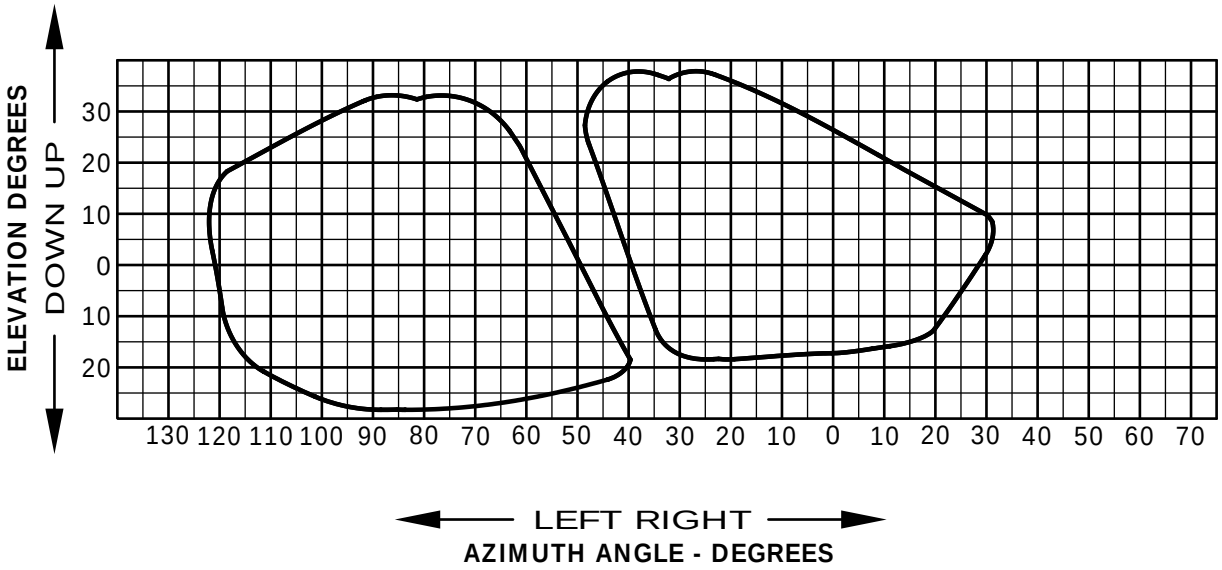

ICN-BD500-A-J092001-A-3AB48-00119-A-001-01

Figure 3 Clear areas of vision

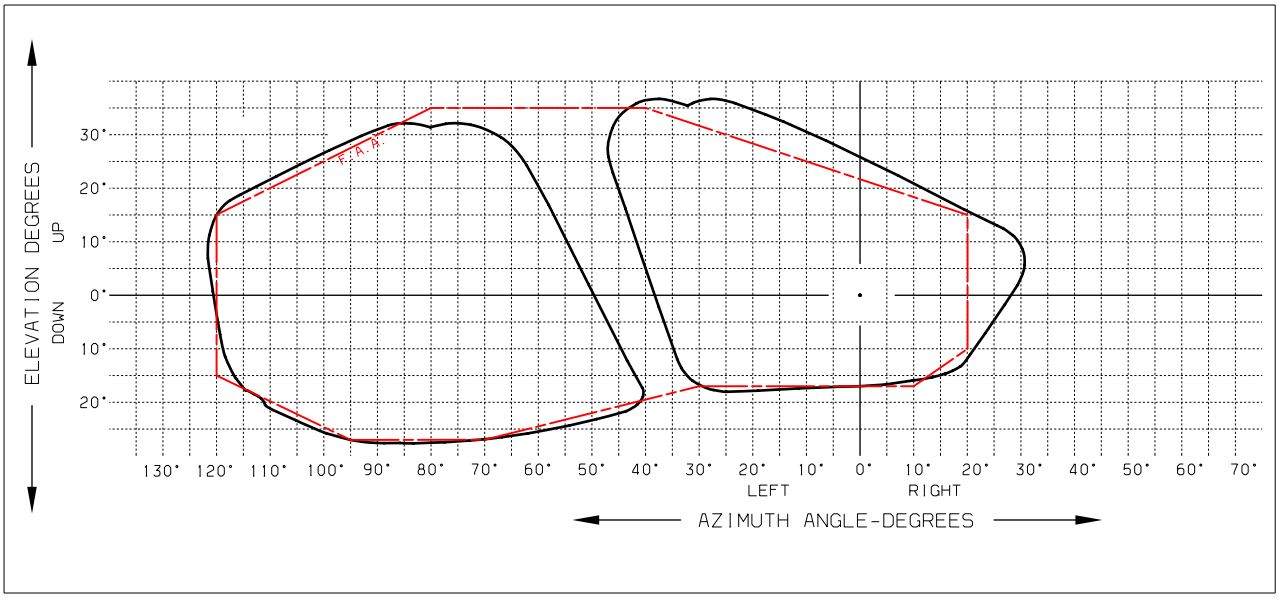

CSERIES CLEAR AREAS OF VISION

(SCALE 1:10)

FAA RECOMMENDED VISION AREA

CSERIES

ICN-BD500-A-J000000-A-3AB48-45615-A-001-01

Figure 4 A220 Clear areas of vision

3 Runways and taxiways turn paths

This section contains data about the runways and taxiways turn paths.

3.1 More than 90° turn - Runway to taxiway - Cockpit over centerline method

To see the diagram, refer to Fig. 5.

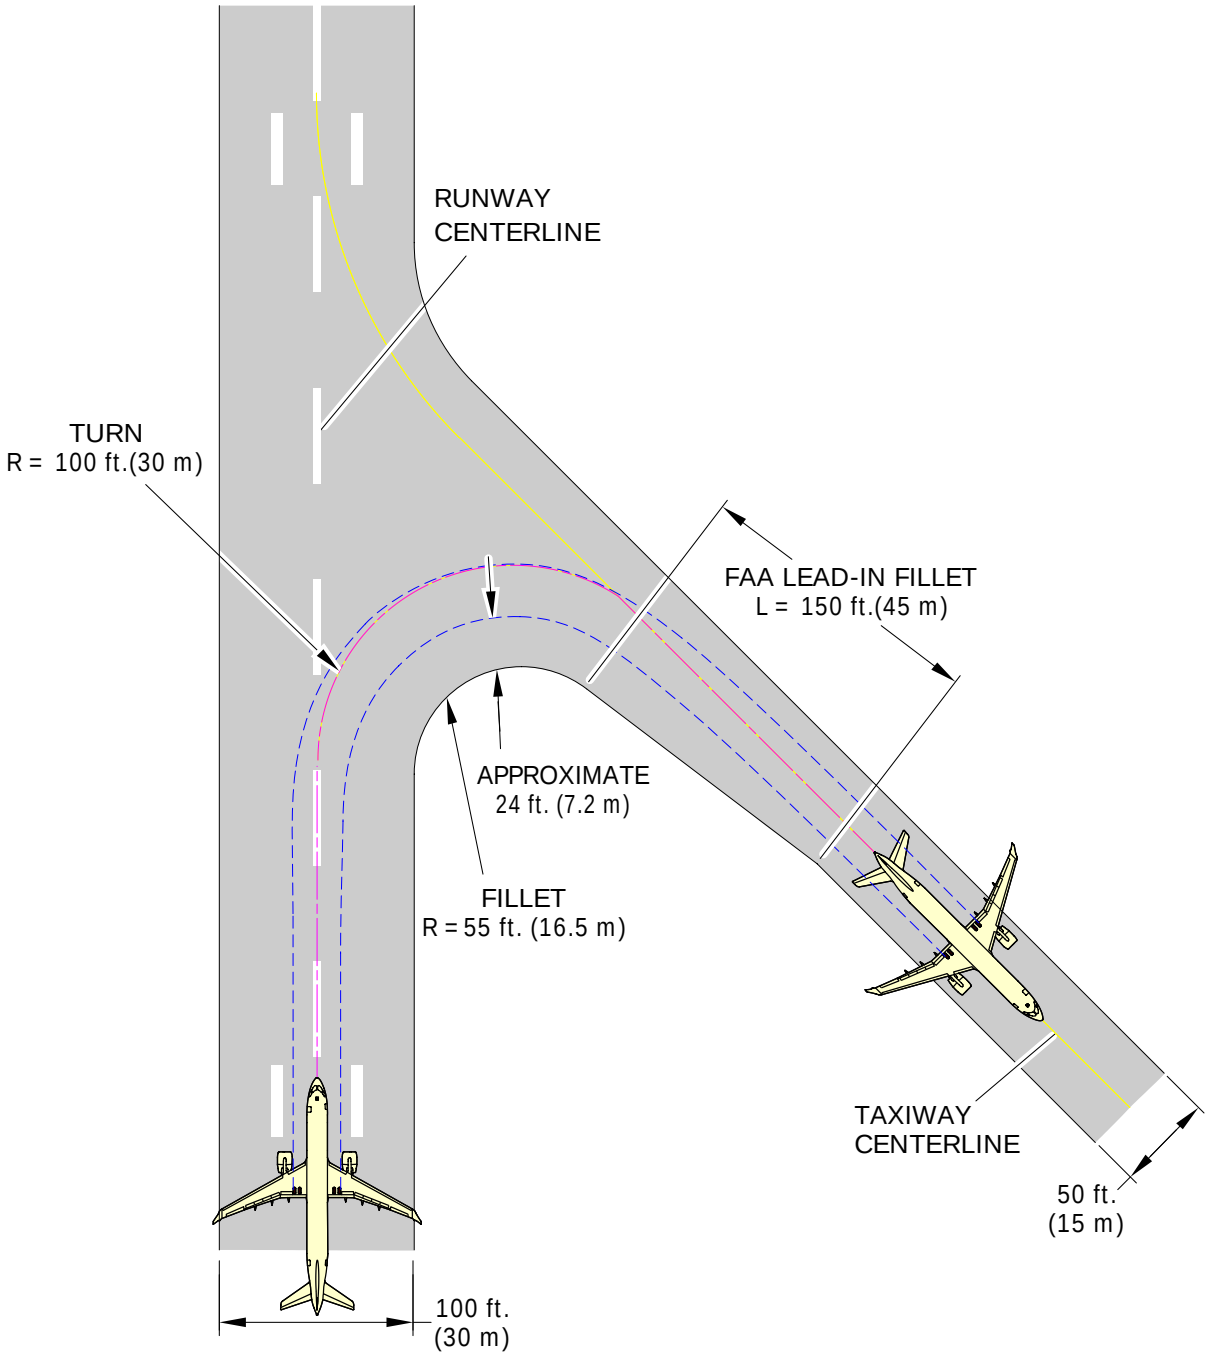

LEGEND

Nose gear.
Main gear.

NOTE

Coordinate with airline operator for the specific planned operating procedure.

ICN-BD500-A-J000000-A-3AB48-25563-A-001-01

Figure 5 More than 90° turn - Runway to taxiway - Cockpit over centerline method

3.2 More than 90° turn - Runway to taxiway - Oversteering method

To see the diagram, refer to Fig. 6.

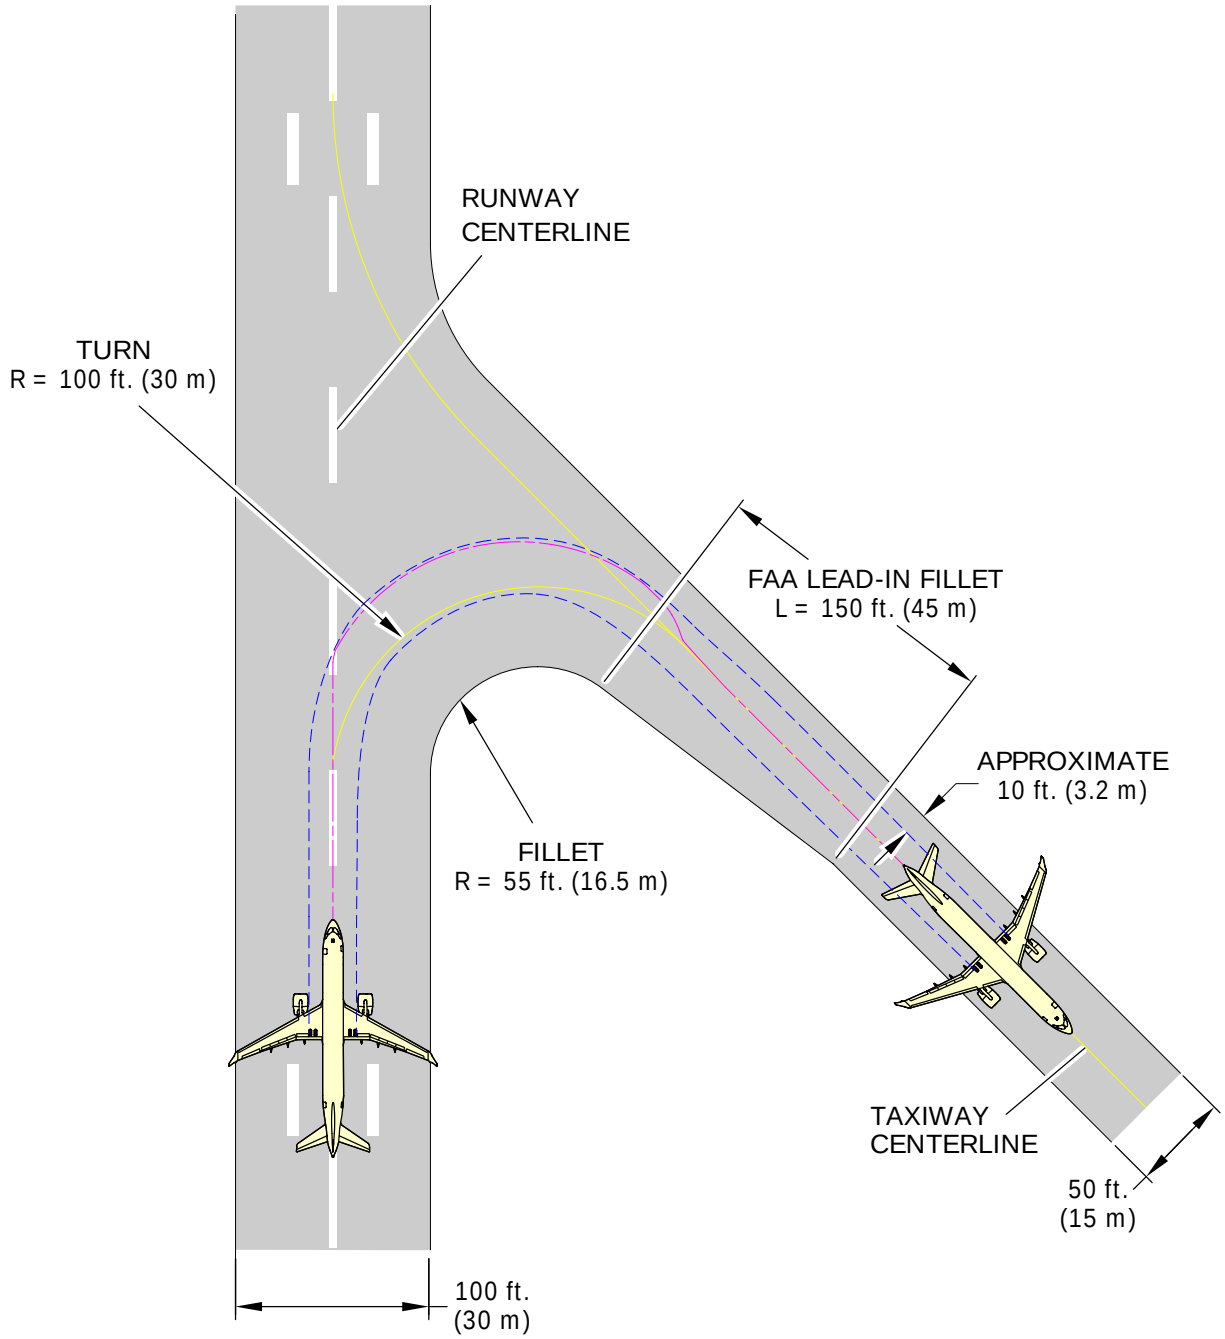

LEGEND

Nose gear.
Main gear.

NOTE

Coordinate with airline operator for the specific planned operating procedure.

ICN-BD500-A-J000000-A-3AB48-25564-A-001-01

Figure 6 More than 90° turn - Runway to taxiway - Oversteering method

3.3 90° turn - Runway to taxiway - Cockpit over centerline method

To see diagram, refer to Fig. 7.

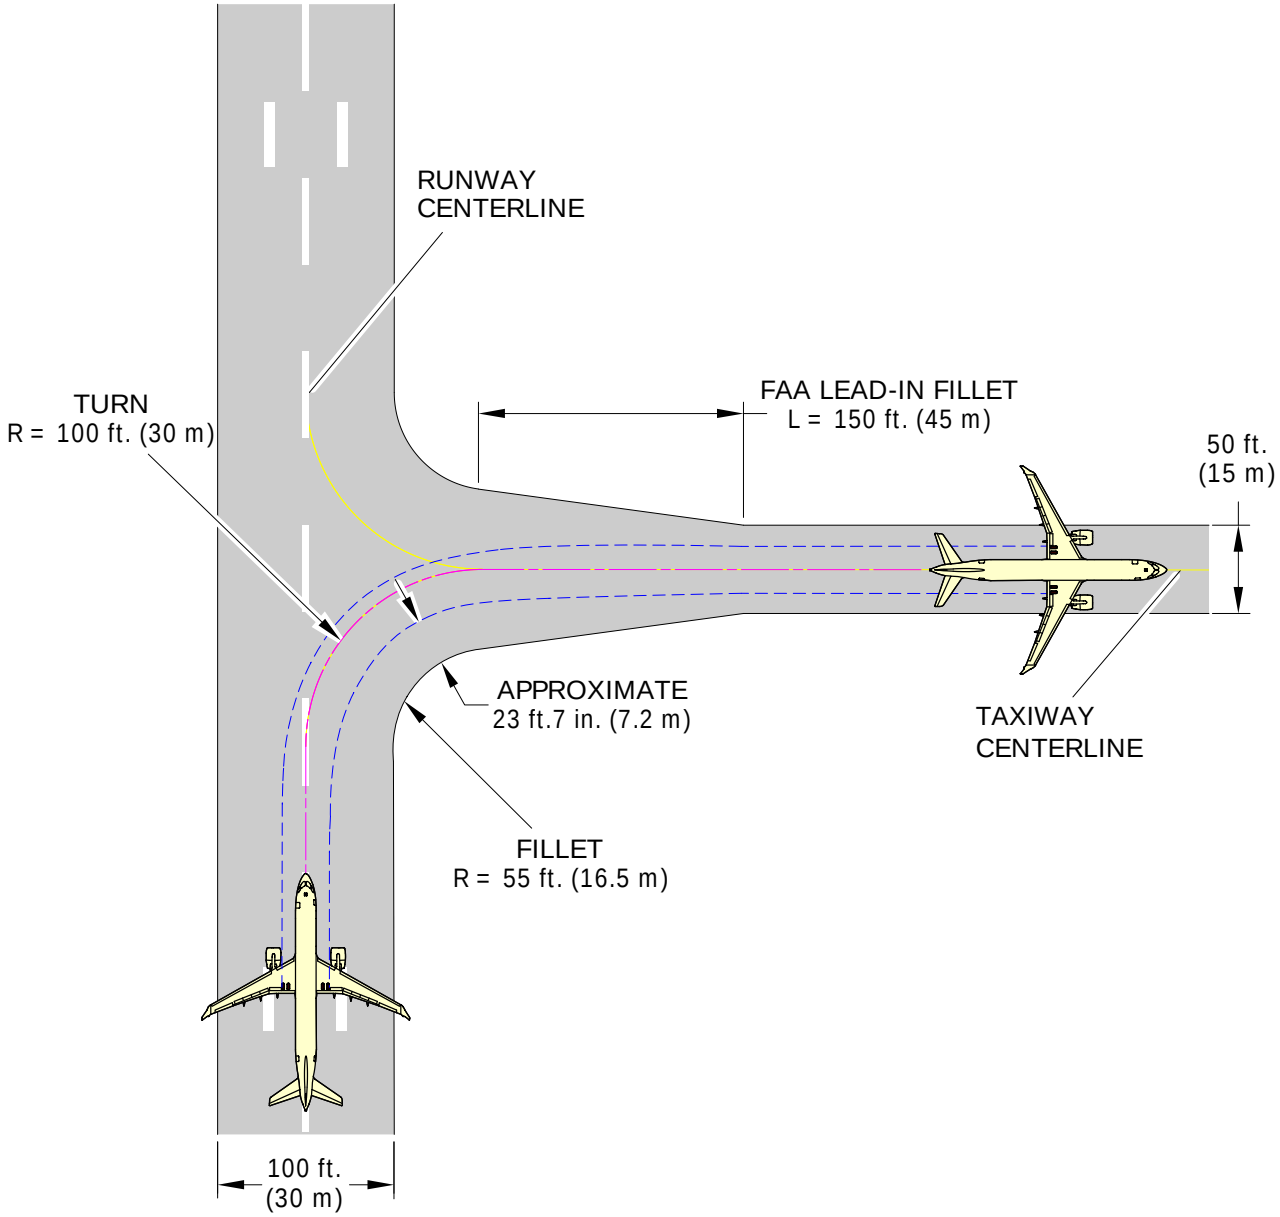

LEGEND

Nose gear.
Main gear.

NOTE

Coordinate with airline operator for the specific planned operating procedure.

ICN-BD500-A-J000000-A-3AB48-25565-A-001-01

Figure 7 90° turn - Runway to taxiway - Cockpit over centerline method

3.4 90° turn - Runway to taxiway - Oversteering method

To see the diagram, refer to Fig. 8.

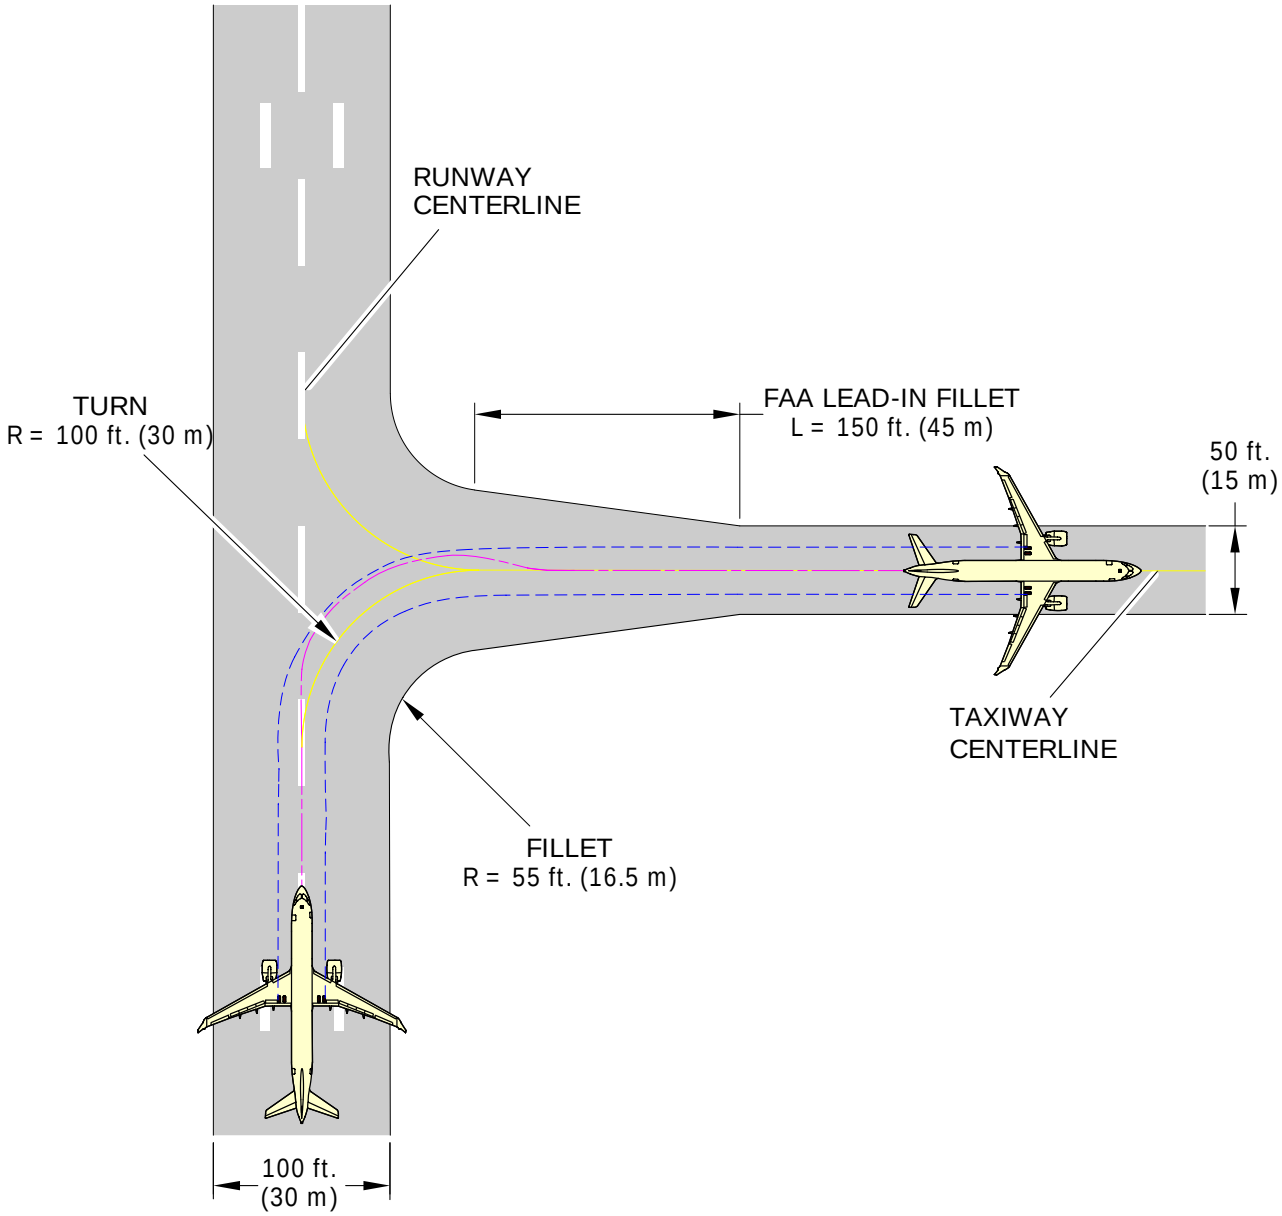

LEGEND

Nose gear.
Main gear.

NOTE

Coordinate with airline operator for the specific planned operating procedure.

ICN-BD500-A-J000000-A-3AB48-25566-A-001-01

Figure 8 90° turn - Runway to taxiway - Oversteering method

3.5 More than 90° turn - Taxiway to taxiway - Cockpit over centerline method

To see the diagram, refer to Fig. 9.

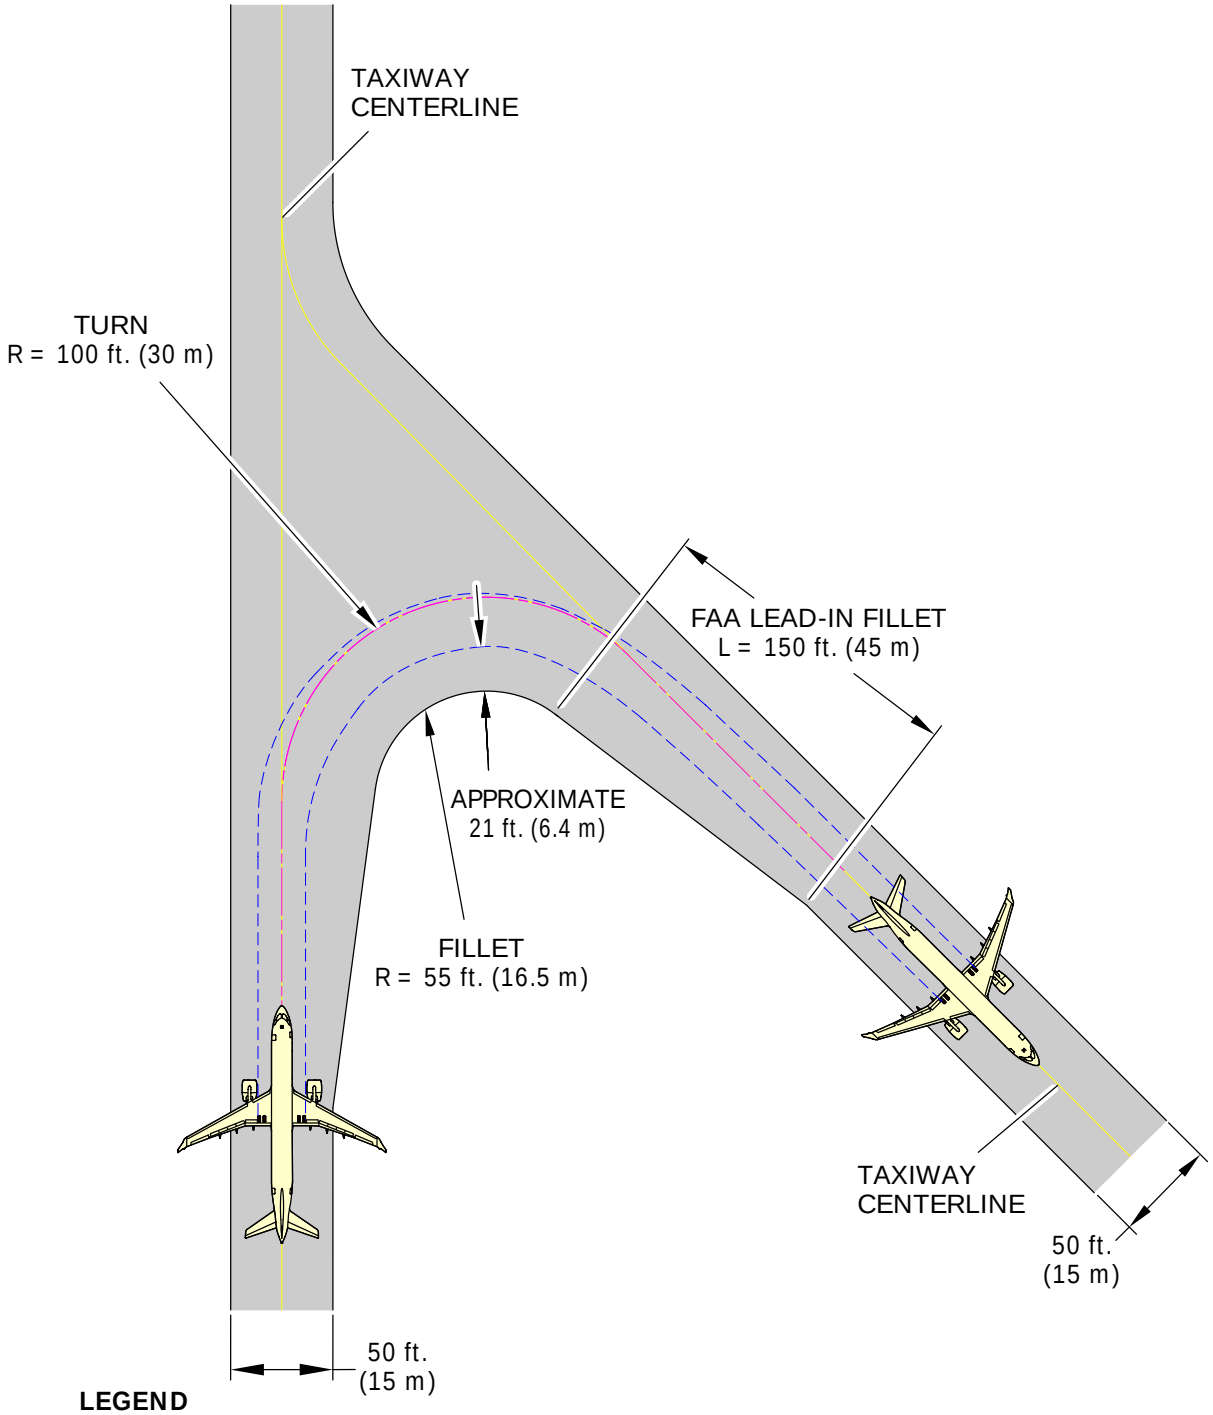

LEGEND

Nose gear.
Main gear.

NOTE

Coordinate with airline operator for the specific planned operating procedure.

ICN-BD500-A-J000000-A-3AB48-25567-A-001-01

Figure 9 More than 90° turn - Taxiway to taxiway - Cockpit over centerline method

3.6 More than 90° turn - Taxiway to taxiway - Oversteering method

To see the diagram, refer to Fig. 10.

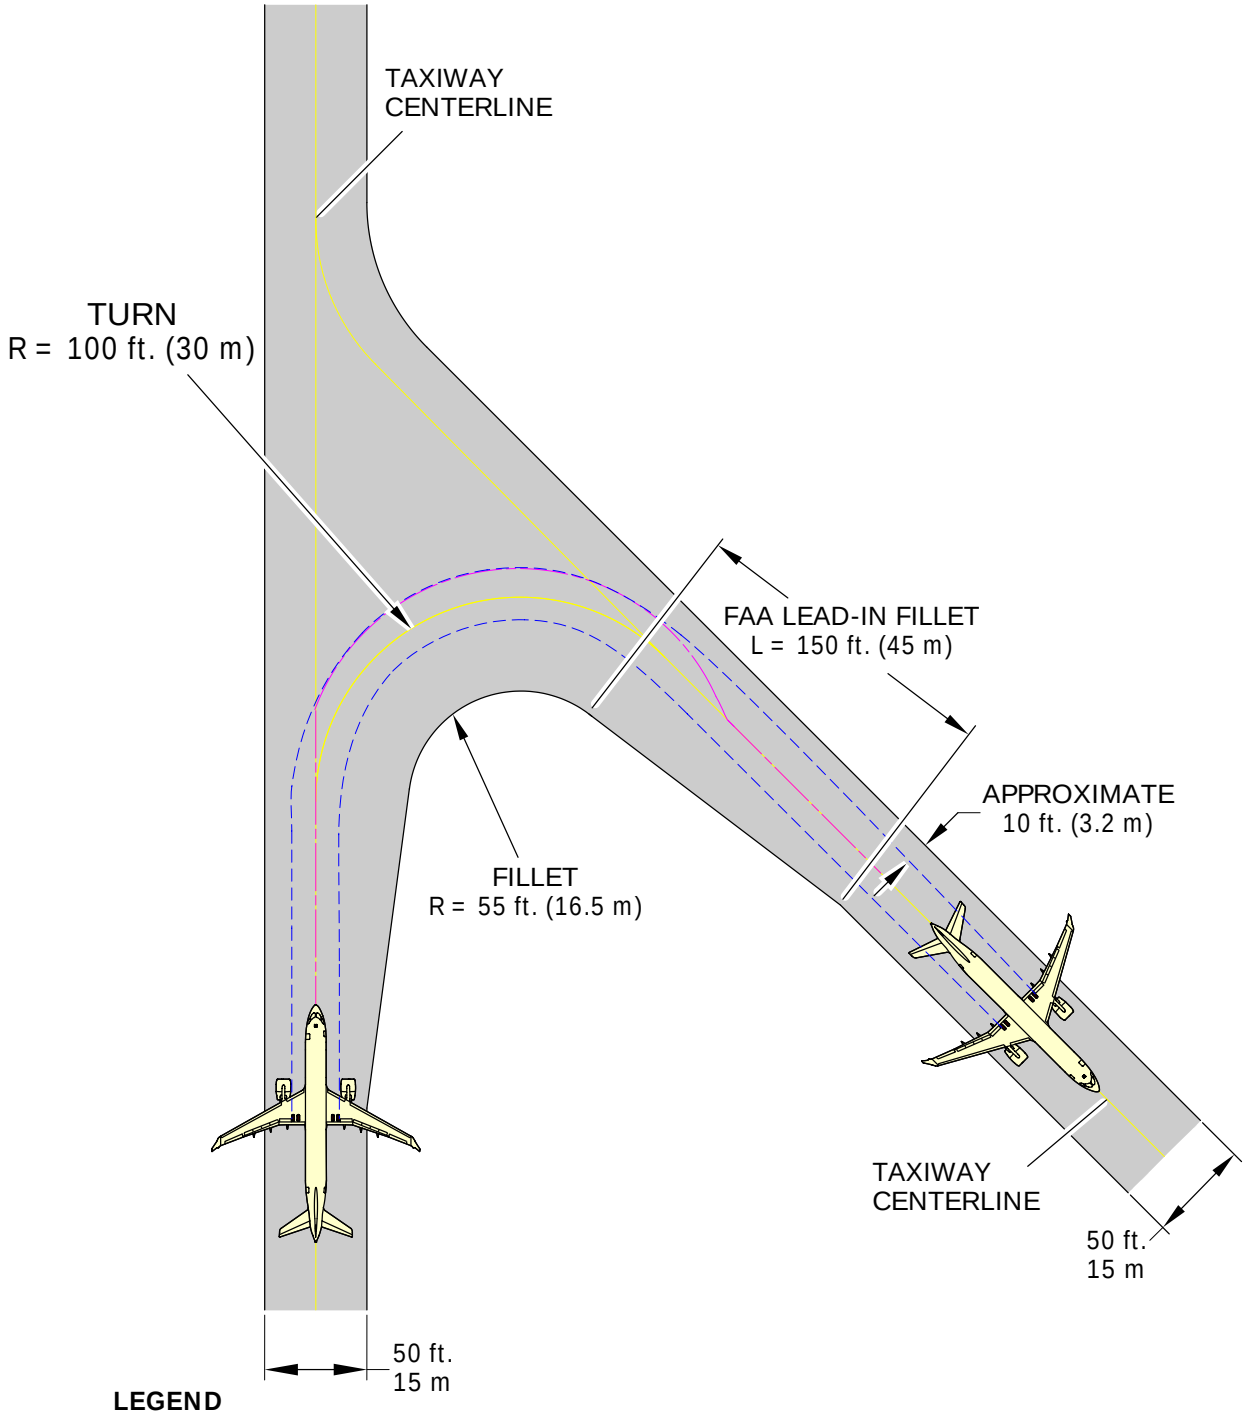

LEGEND

Nose gear.
Main gear.

NOTE

Coordinate with airline operator for the specific planned operating procedure.

ICN-BD500-A-J000000-A-3AB48-25568-A-001-01

Figure 10 More than 90° turn - Taxiway to taxiway - Oversteering method

3.7 90° turn - Taxiway to taxiway - Cockpit over centerline method

To see the diagram, refer to Fig. 11.

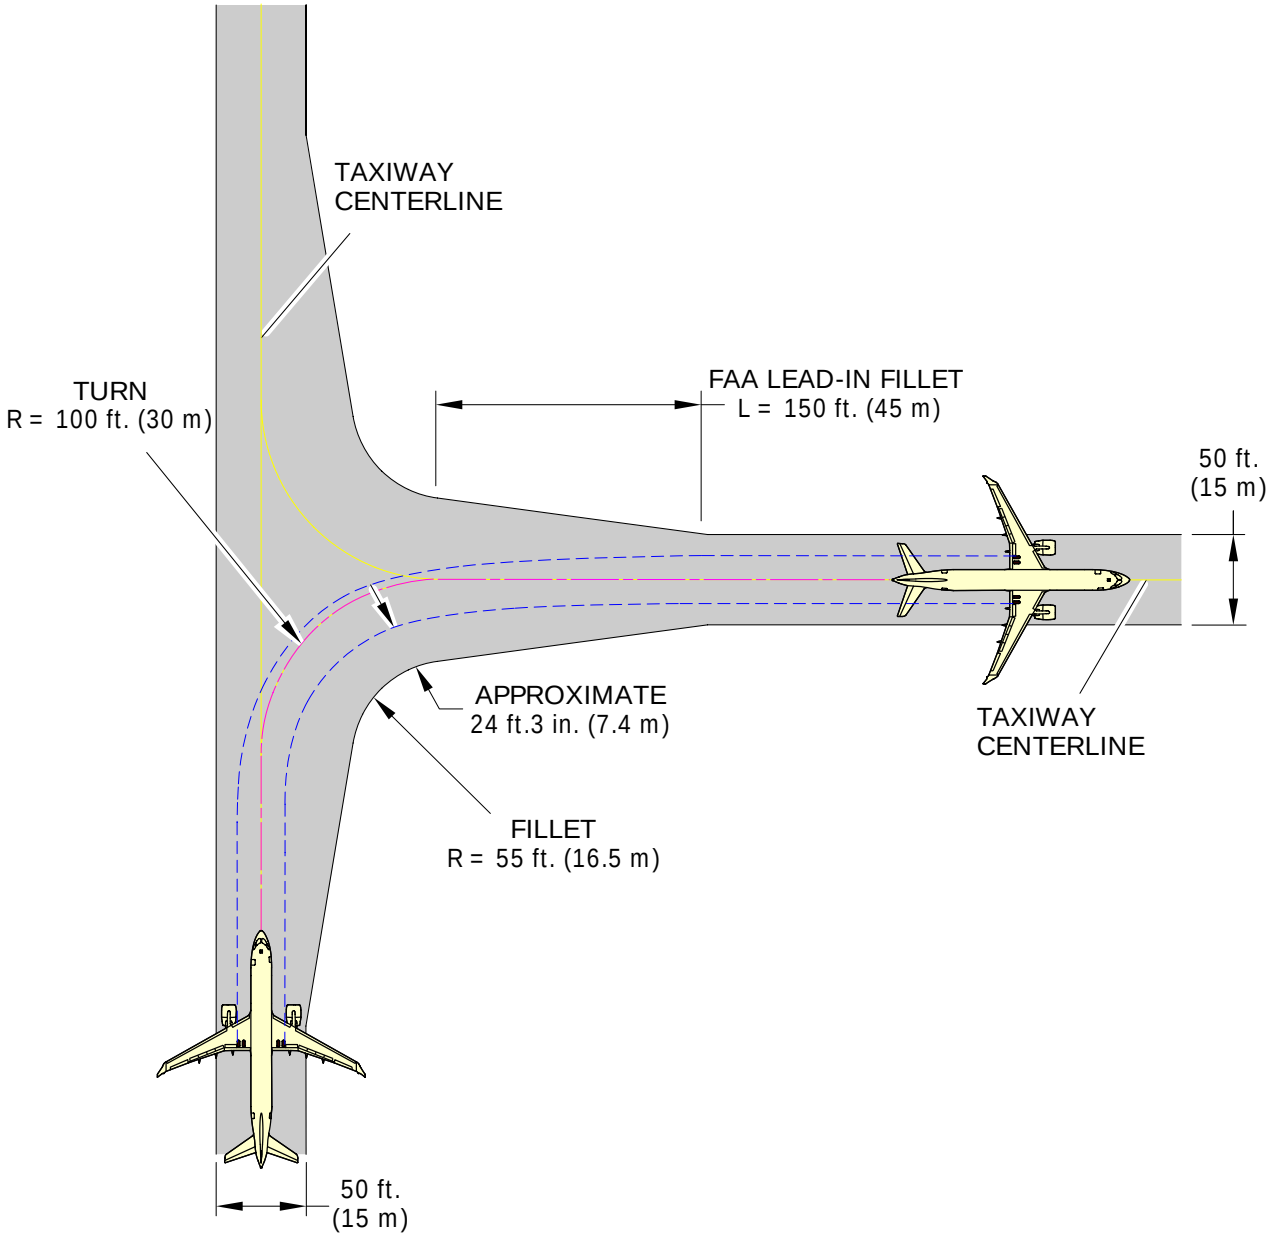

LEGEND

Nose gear.
Main gear.

NOTE

Coordinate with airline operator for the specific planned operating procedure.

ICN-BD500-A-J000000-A-3AB48-25569-A-001-01

Figure 11 90° turn - Taxiway to taxiway - Cockpit over centerline method

3.8 90° turn - Taxiway to taxiway - Oversteering method

To see the diagram, refer to Fig. 12.

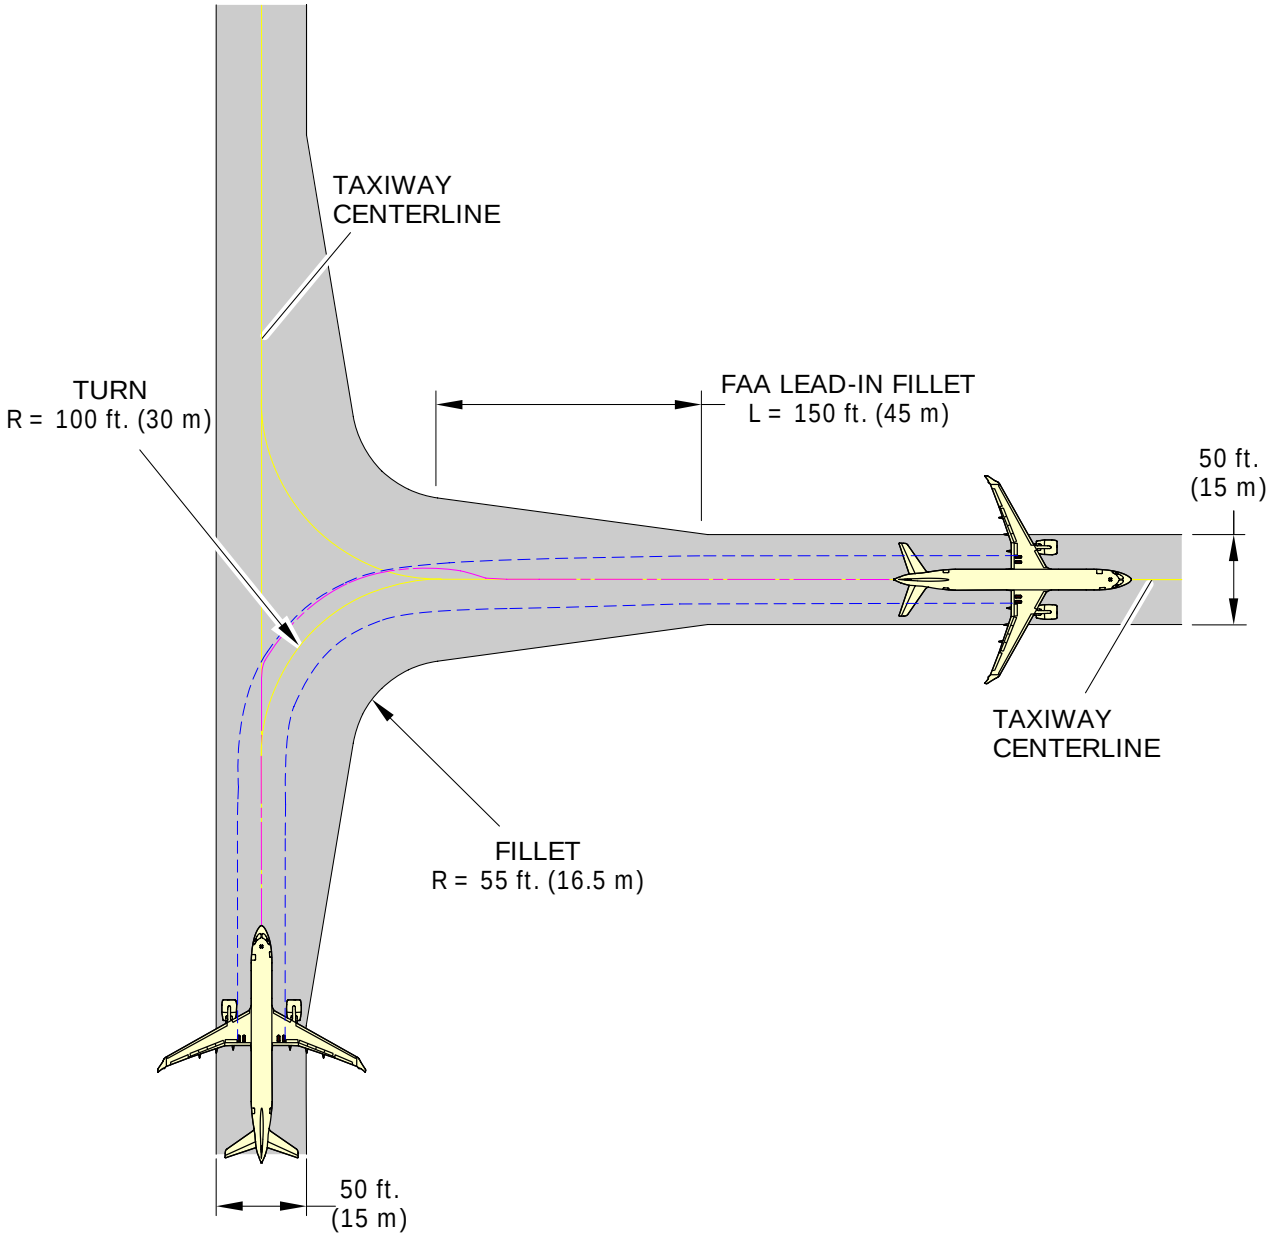

LEGEND

Nose gear.
Main gear.

NOTE

Coordinate with airline operator for the specific planned operating procedure.

ICN-BD500-A-J000000-A-3AB48-25570-A-001-01

Figure 12 90° turn - Taxiway to taxiway - Oversteering method

3.9 Runway holding bay (Apron)

To see the diagram, refer to Fig. 13

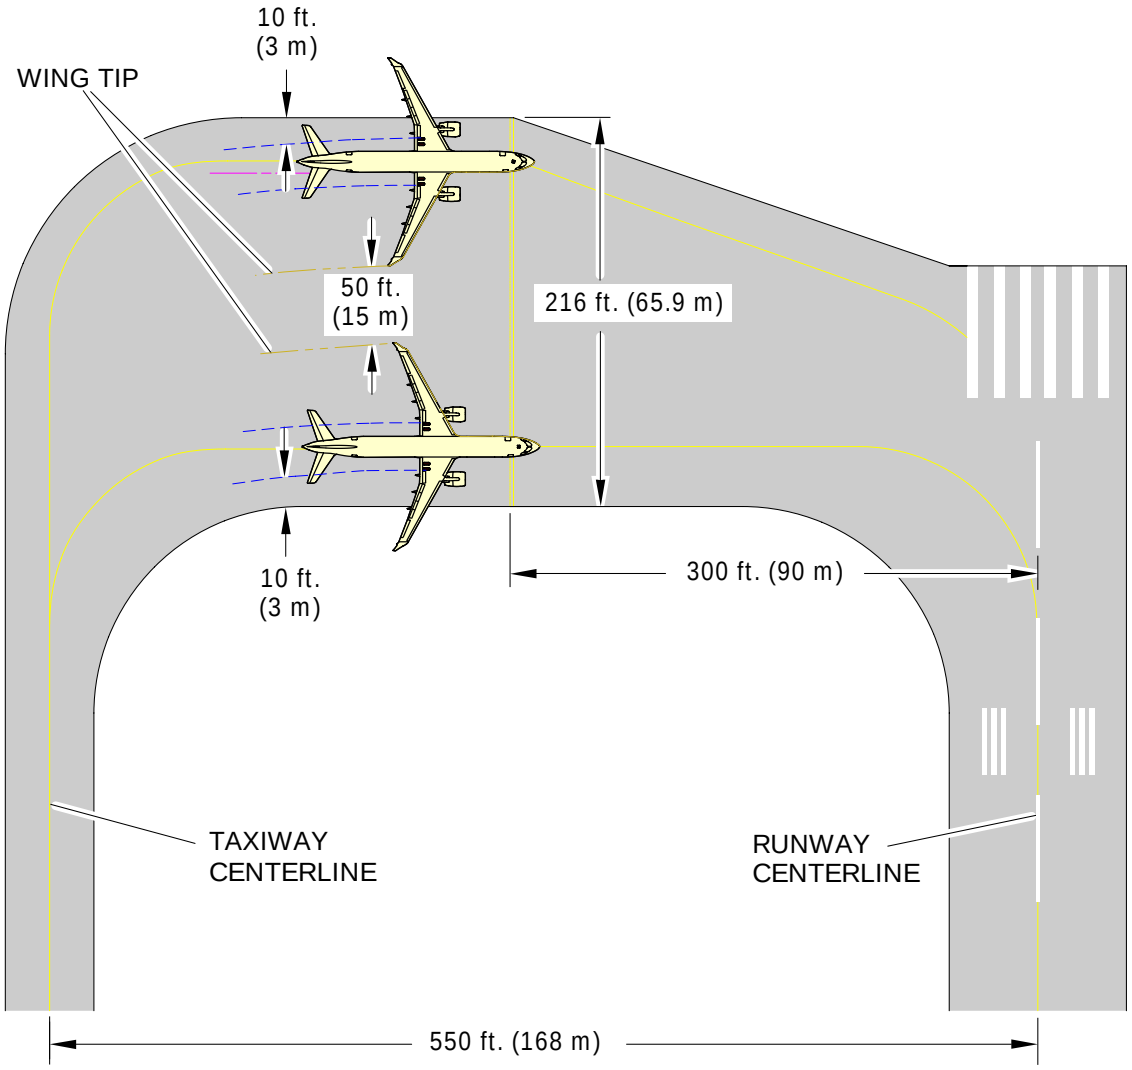

LEGEND

Nose gear.
Main gear.

NOTE

Coordinate with airline operator for the specific planned operating procedure.

ICN-BD500-A-J000000-A-3AB48-25571-A-001-01

Figure 13 Runway holding bay (Apron)

3.10 Hammerhead Turnaround

To see the diagrams, refer to Fig. 14 and Fig. 15.

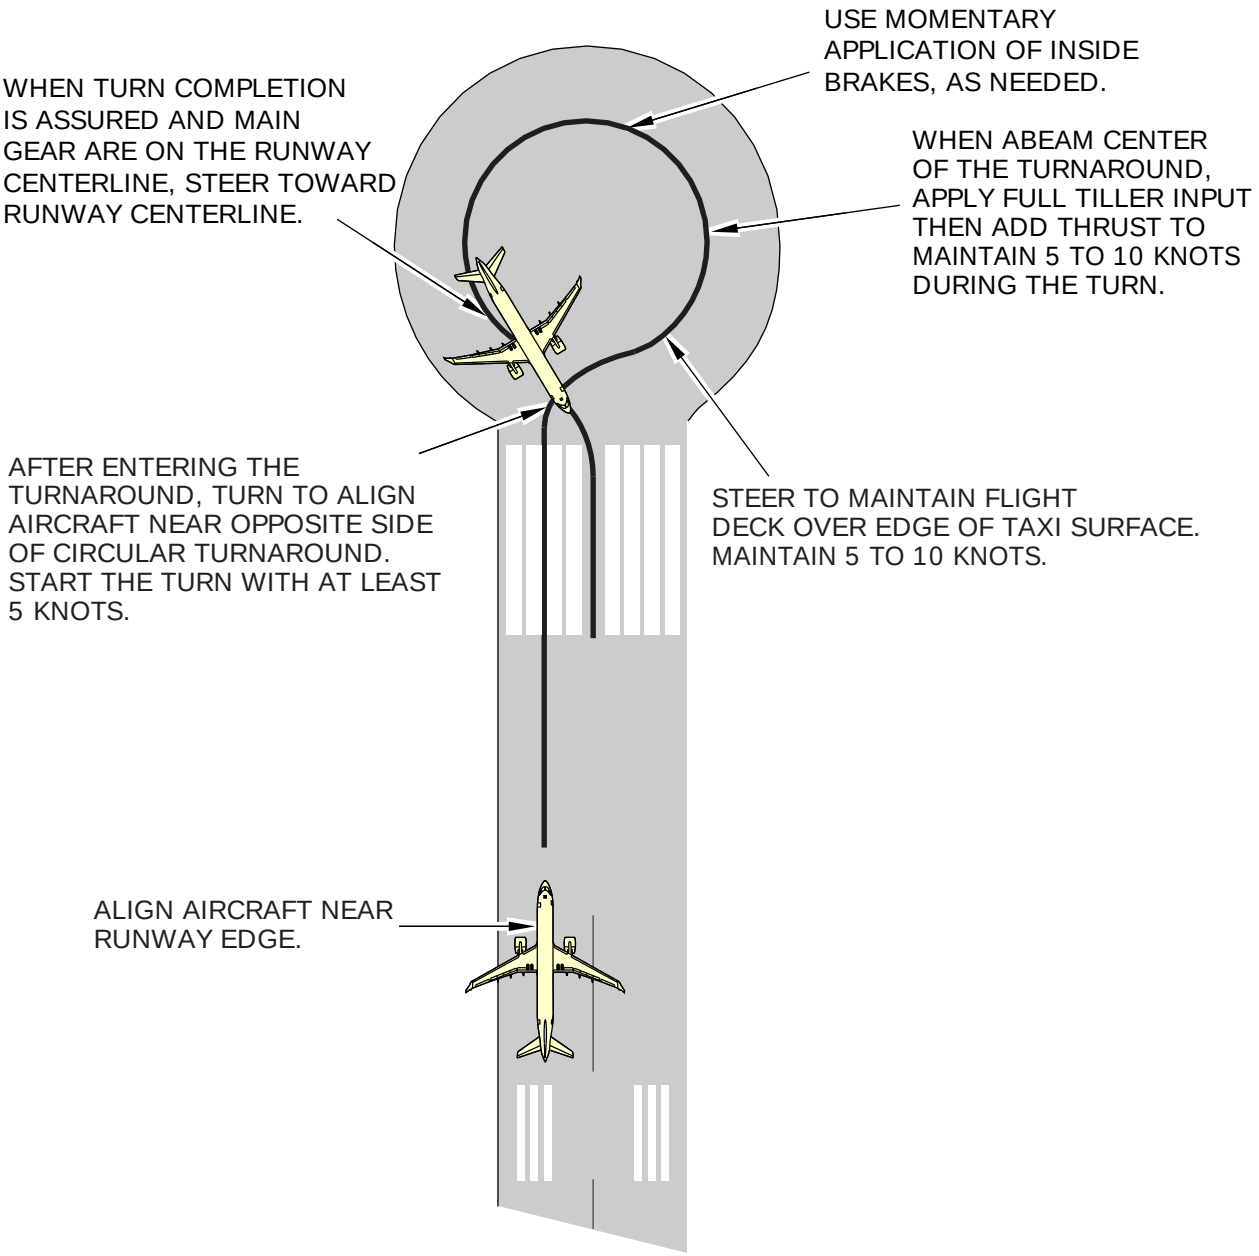

NOTE

Follow turnaround steering guidance cues if available.

ICN-BD500-A-J000000-A-3AB48-45728-A-001-01

Figure 14 Techniques when using a Hammerhead Turnaround

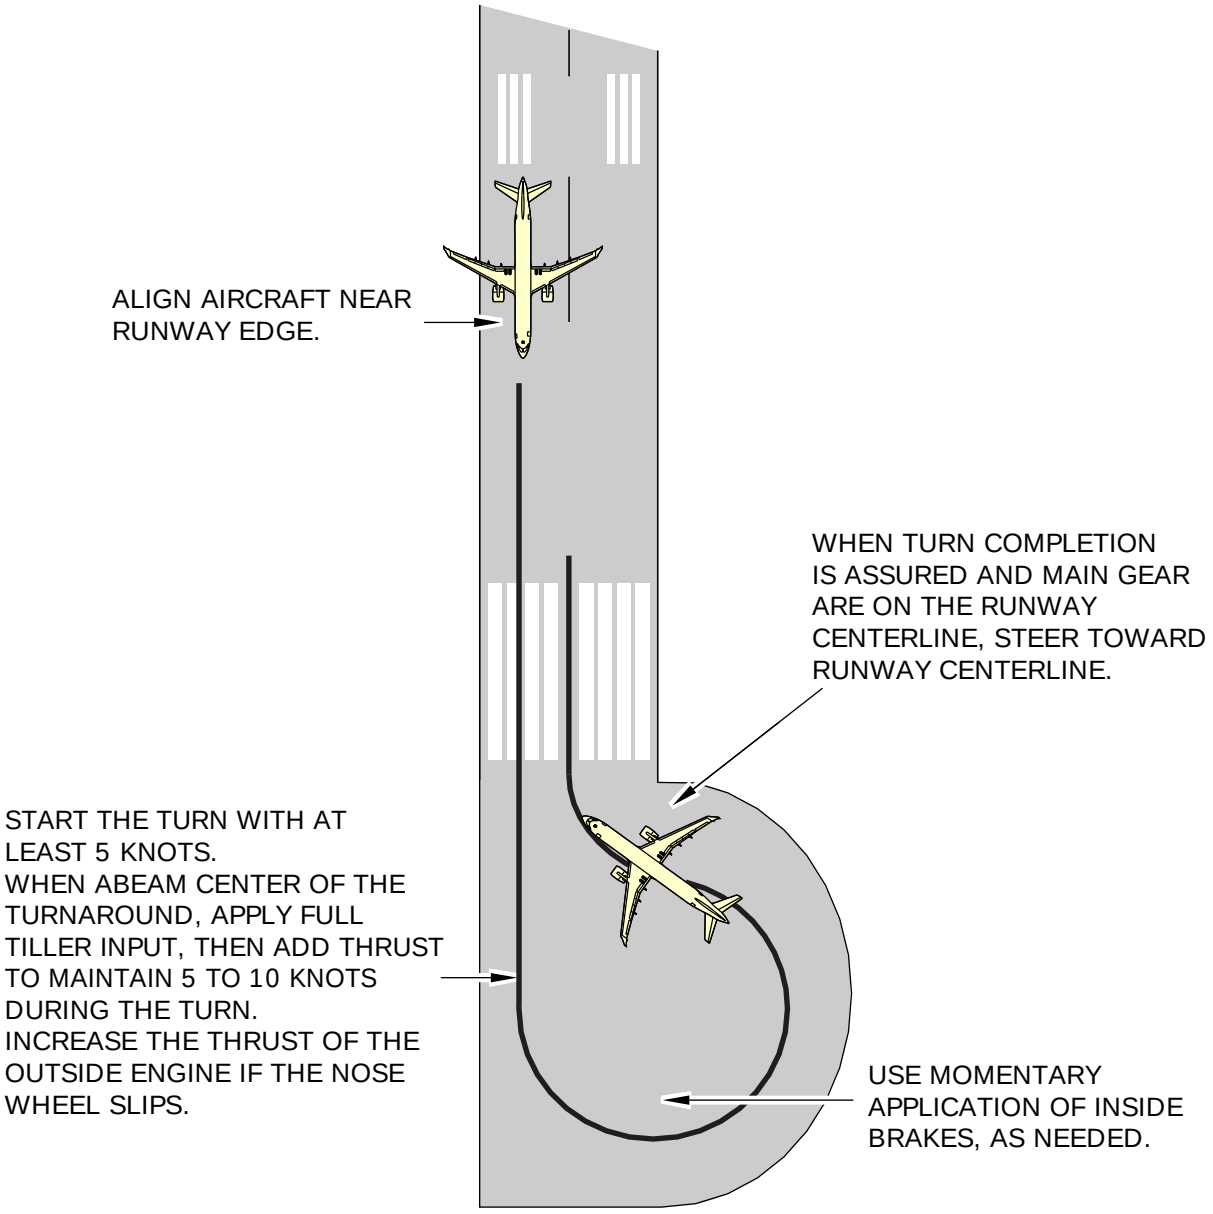

NOTE

Follow turnaround steering guidance cues if available.

ICN-BD500-A-J000000-A-3AB48-45729-A-001-01

Figure 15 Techniques when using a Hammerhead Turnaround

3.11 180 Degree (Pivot) Turns in Less than 147.6 feet (45 m)

To see the diagram, refer to Fig. 16.

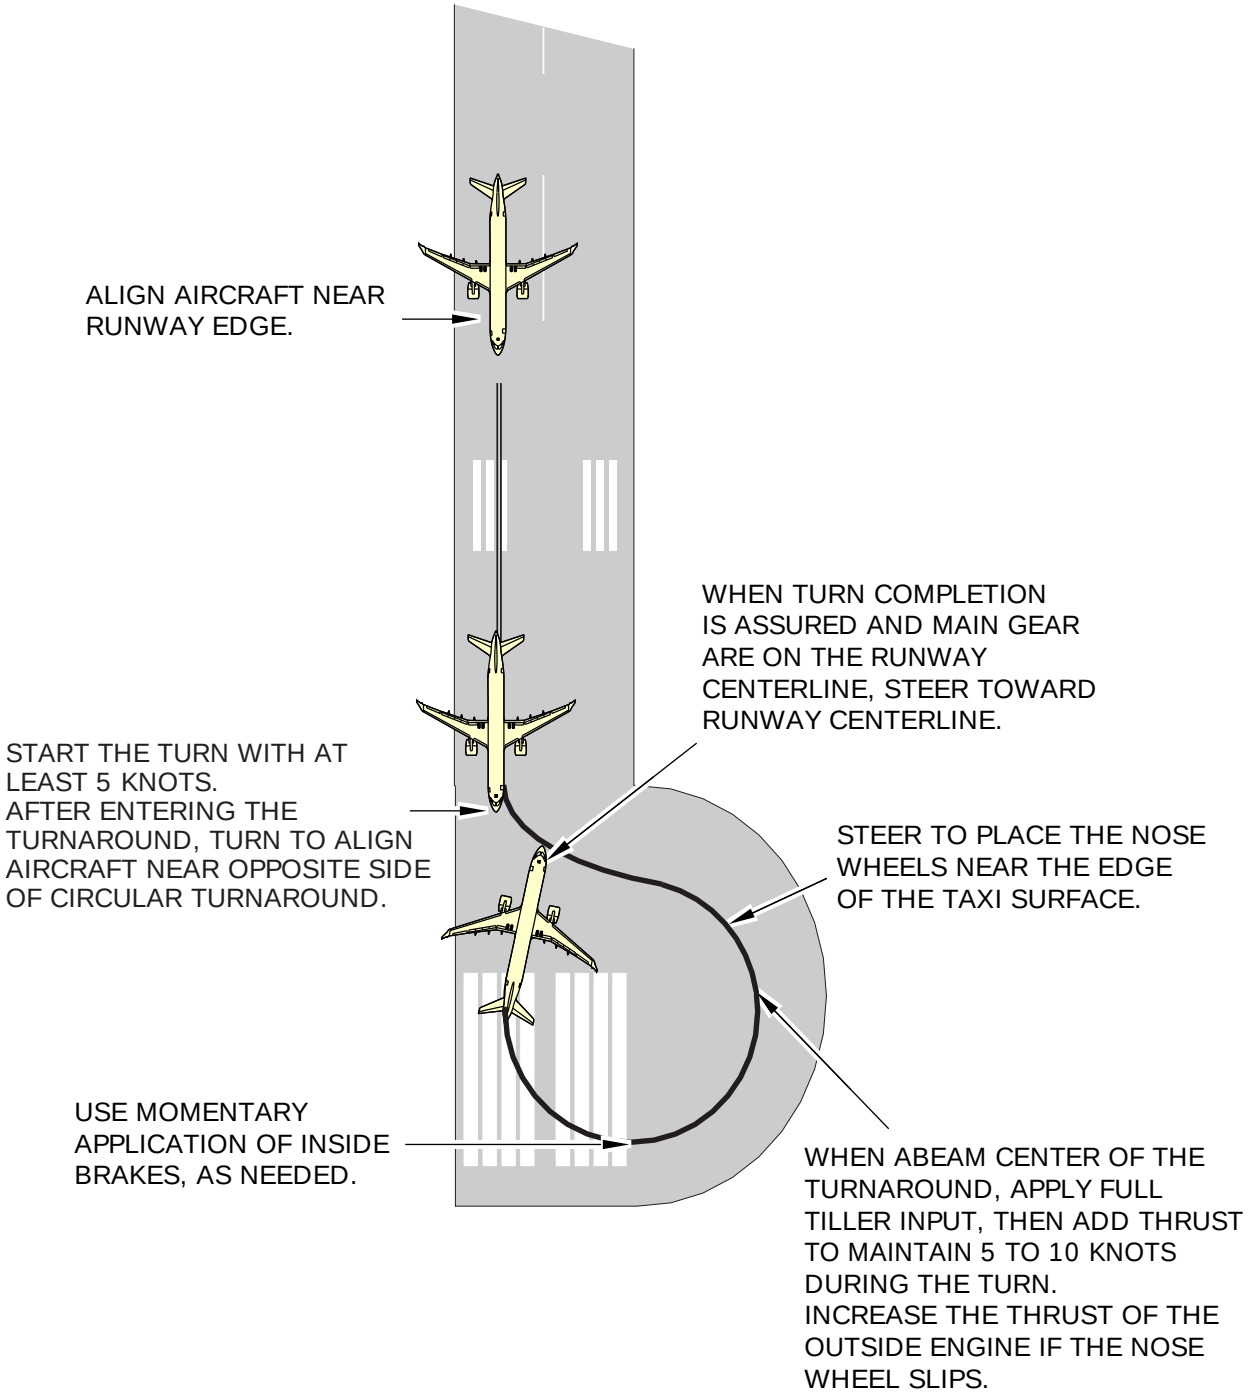

NOTE

Follow turnaround steering guidance cues if available.

ICN-BD500-A-J000000-A-3AB48-45730-A-001-01

Figure 16 180 Degree (Pivot) Turns in Less than 147.6 feet / 45 m

Intentionally left blank

Ground maneuvering, turning radii - Technical data

Applicability:
50001-54999, 55001-59999

Table of contents

Page

Ground maneuvering, turning radii - Technical data 1
References 1
Description 1
1 Introduction 1
2 Landing gear turning radii, including minimum turning radii 2

List of tables

Page

1 References 1
2 Turning radii for various nose wheel angles 2
3 Turning radii for various nose wheel angles 2

List of figures

Page

1 Ground maneuvering, turning radii - Technical data 4

References

Table 1 References

Data Module/Technical Publication	Title
None	

Description

1 Introduction

This data module contains data about the aircraft turning capability and maneuvering characteristics on the ground. The data is based on aircraft performance in good conditions of operation. Thus, the values must be considered theoretical and used only as an aid. Refer to Table 2 and Table 3 for the values to use with Fig. 1 for the turn radii with 3 degree slip angle.

2 Landing gear turning radii, including minimum turning radii

Applicability:
50001-54999

Table 2 Turning radii for various nose wheel angles

Turning angle (in degrees) with 3 degree tire slip	Turning center to aircraft center line (D)	Nose tip (R1)	Nose gear outside face (R2)	Main gear outside face (R3)	Wing tip (R4)	Empennage tip (R5)	Minimum theoretical pavement width for 180 degrees turn (Tw= R2+ R3)
17	1686.8 in. (4284.47 cm)	1807.5 in. (4591.05 cm)	1776.3 in. (4511.80 cm)	1845.6 in. (4687.82 cm)	2385.4 in. (6058.91 cm)	2046.7 in. (5198.61 cm)	3621.9 in. (9199.62 cm)
27	1012.1 in. (2570.73 cm)	1202.7 in. (3054.85 cm)	1148.4 in. (2916.93 cm)	1171.0 in. (2974.34 cm)	1715.0 in. (4356.1 cm)	1430.1 in. (3632.45 cm)	2319.4 in. (5891.27 cm)
37	684.4 in. (1738.37 cm)	943.6 in. (2396.74 cm)	869.3 in. (2208.02 cm)	843.2 in. (2141.72 cm)	1390.8 in. (3532.63 cm)	1154.2 in. (2931.66 cm)	1712.6 in. (4350.00 cm)
47	480.9 in. (1221.48 cm)	808.3 in. (2053.08 cm)	717.6 in. (1822.70 cm)	639.8 in. (1625.09 cm)	1190.6 in. (3024.12 cm)	998.9 in. (2537.20 cm)	1357.3 in. (3447.54 cm)
57	334.9 in. (850.64 cm)	730.9 in. (1856.48 cm)	627.9 in. (1594.86 cm)	493.2 in. (1252.72 cm)	1047.6 in. (2660.90 cm)	899.3 in. (2284.22 cm)	1121.1 in. (2847.59 cm)
67	218.9 in. (556.00 cm)	685.5 in. (1741.17 cm)	572.7 in. (1454.65 cm)	377.8 in. (959.61 cm)	934.7 in. (2374.13 cm)	830.1 in. (2108.45 cm)	950.4 in. (2414.01 cm)
77	119.1 in. (302.51 cm)	660.04 in. (1667.41 cm)	541.7 in. (1375.91 cm)	277.9 in. (705.86 cm)	838.2 in. (2129.02 cm)	779.4 in. (1979.67 cm)	819.6 in. (2081.78 cm)

Applicability:
55001-59999

Table 3 Turning radii for various nose wheel angles

Turning angle (in degrees) with 3 degree tire slip	Turning center to aircraft center line (D)	Nose tip (R1)	Nose gear outside face (R2)	Main gear outside face (R3)	Wing tip (R4)	Empennage tip (R5)	Minimum theoretical pavement width for 180 degrees turn (Tw= R2+ R3)
17	1961.5 in.	2094.2 in.	2063.6 in.	2120.4 in.	2659.0 in.	2307.1 in.	4148.0 in.

Turning angle (in degrees) with 3 degree tire slip	Turning center to aircraft center line (D)	Nose tip (R1)	Nose gear outside face (R2)	Main gear outside face (R3)	Wing tip (R4)	Empennage tip (R5)	Minimum theoretical pavement width for 180 degrees turn (Tw= R2+ R3)
	(4982.21 cm)	(5319.26 cm)	(5241.54 cm)	(5385.81 cm)	(6753.86 cm)	(5860.03 cm)	(10535.92 cm)
27	1177.0 in. (2989.58 cm)	1386.9 in. (3522.72 cm)	1333.4 in. (3386.83 cm)	1335.8 in. (3392.93 cm)	1878.6 in. (4771.64 cm)	1576.4 in. (4004.05 cm)	2669.2 in. (6779.76 cm)
37	795.8 in. (2021.33 cm)	1082.4 in. (2749.29 cm)	1008.9 in. (2562.60 cm)	954.7 in. (2424.93 cm)	1500.9 in. (3812.28 cm)	1245.2 in. (3162.80 cm)	1963.6 in. (4987.54 cm)
47	559.2 in. (1420.36 cm)	922.5 in. (2343.15 cm)	832.4 in. (2114.29 cm)	718.1 in. (1823.97 cm)	1267.5 in. (3219.45 cm)	1056.8 in. (2684.27 cm)	1550.5 in. (3938.27 cm)
57	389.4 in. (989.07 cm)	830.6 in. (2109.72 cm)	727.5 in. (1847.85 cm)	548.3 in. (1392.68 cm)	1100.9 in. (2796.28 cm)	935.1 in. (2375.15 cm)	1275.8 in. (3240.53 cm)
67	254.6 in. (646.68 cm)	776.5 in. (1971.04 cm)	663.9 in. (1686.30 cm)	413.4 in. (1050.03 cm)	969.4 in. (2462.27 cm)	850.3 in. (2159.76 cm)	1077.4 in. (2736.59 cm)
77	138.5 in. (351.79 cm)	746.6 in. (1896.36 cm)	627.9 in. (1594.86 cm)	297.3 in. (755.14 cm)	856.9 in. (2176.52 cm)	788.5 in. (2002.79 cm)	925.2 in. (2350.00 cm)

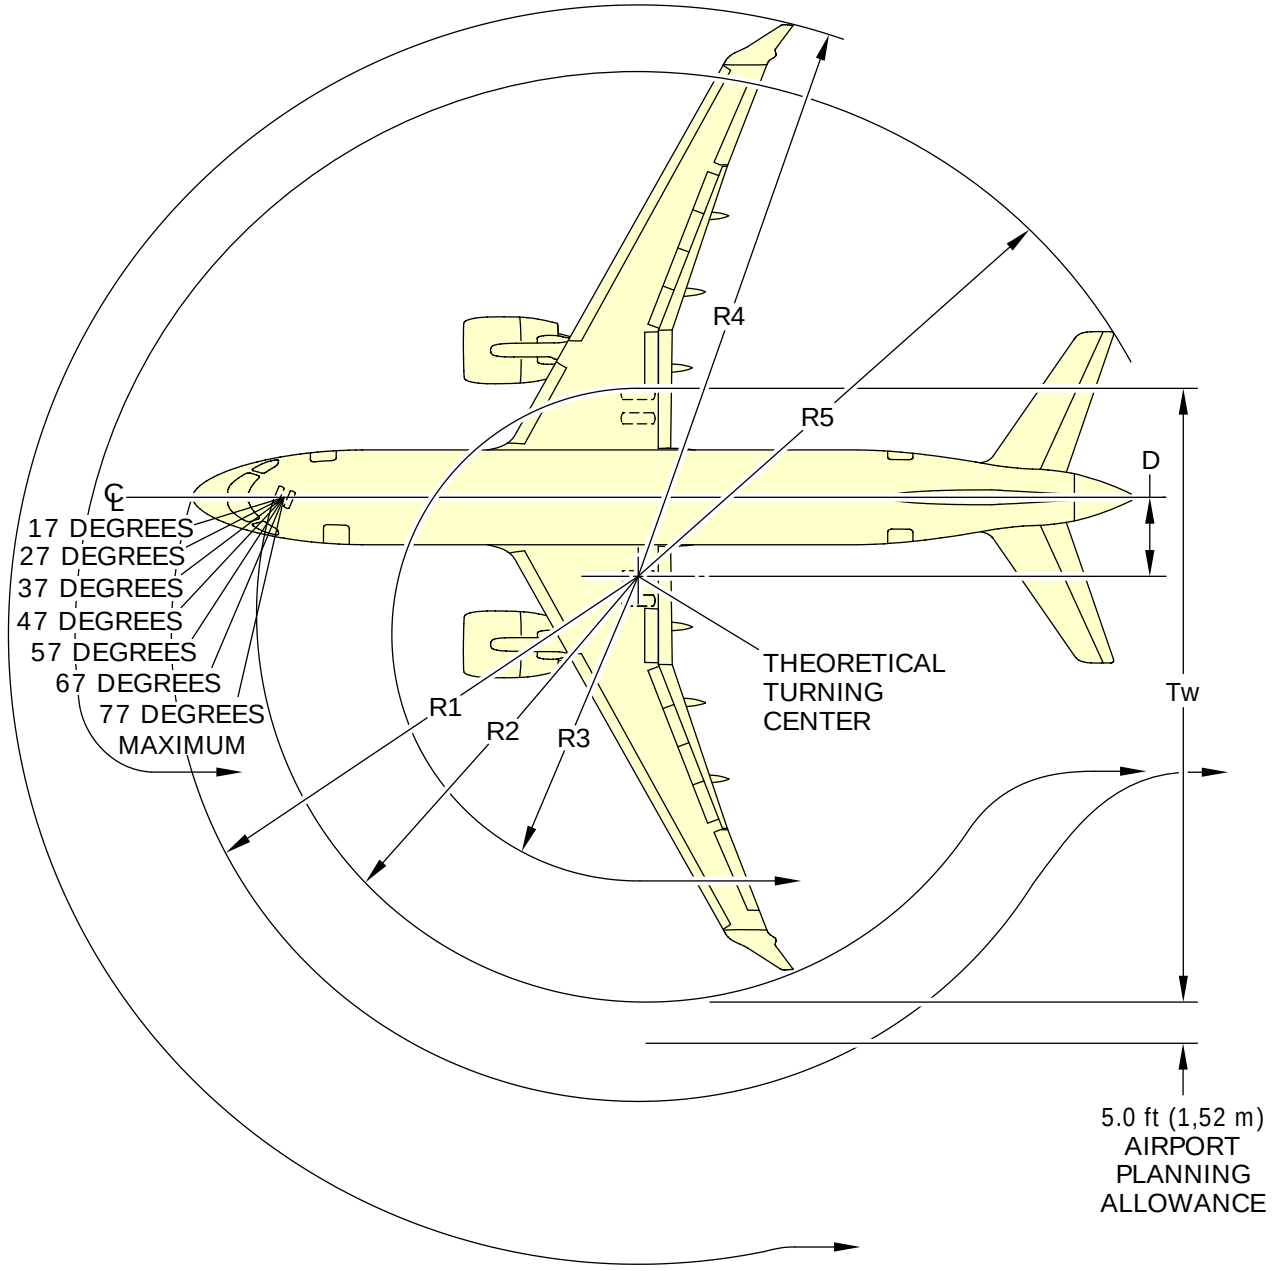

ICN-BD500-A-J092001-C-3AB48-45815-A-001-01

Figure 1 Ground maneuvering, turning radii - Technical data

A220

Ground maneuvering, visibility from flight compartment - Technical data

Applicability:
50001-54999, 55001-59999

Table of contents

Page

Ground maneuvering, visibility from flight compartment - Technical data 1
References 1
Description 1
1 Introduction 1
2 Clear areas of vision 1
3 Visibility from cockpit in static position 1

List of tables

Page

1 References 1

List of figures

Page

1 Clear areas of vision 2
2 Visibility from cockpit in static position 3

References

Table 1 References

Data Module/Technical Publication	Title
None	

Description

1 Introduction

This data module contains data about the visibility from the flight compartment.

2 Clear areas of vision

To see the diagram, refer to Fig. 1

3 Visibility from cockpit in static position

This section contains data about the visibility from cockpit in static position. Refer toFig. 2

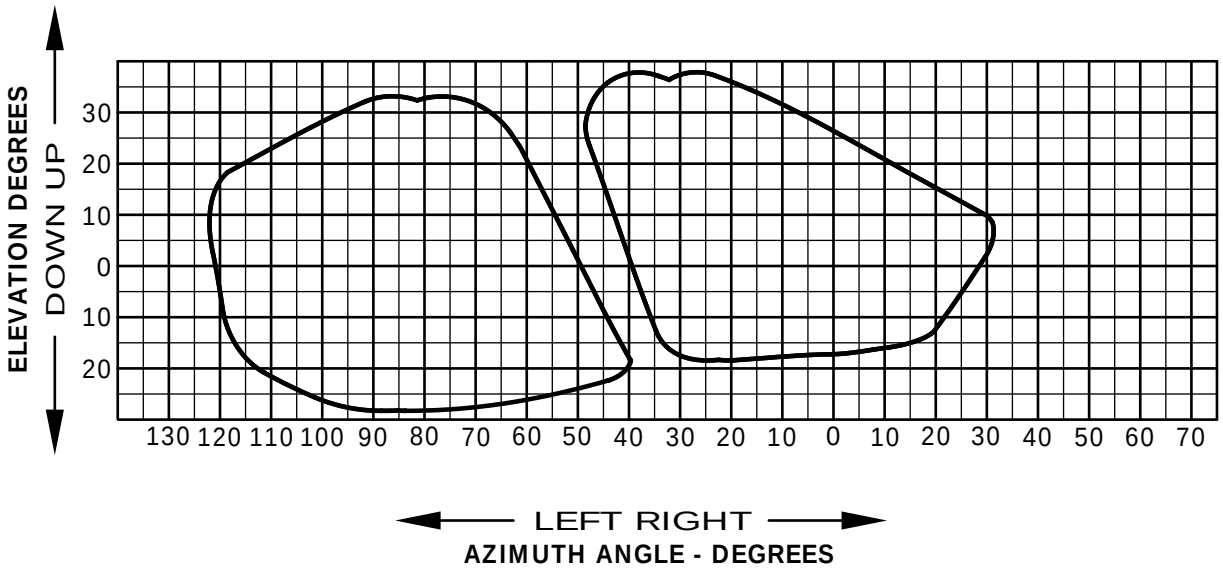

ICN-BD500-A-J092001-A-3AB48-00119-A-001-01

Figure 1 Clear areas of vision

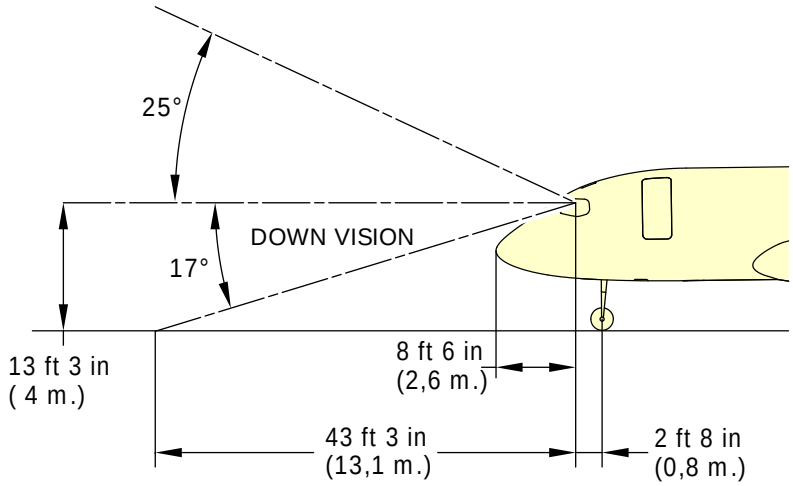

VISUAL ANGLES IN VERTICAL PLANE THROUGH PILOT'S EYE POSITION

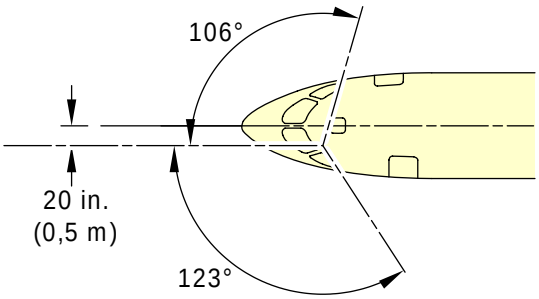

VISUAL ANGLES IN HORIZONTAL PLANE THROUGH PILOT'S EYE POSITION

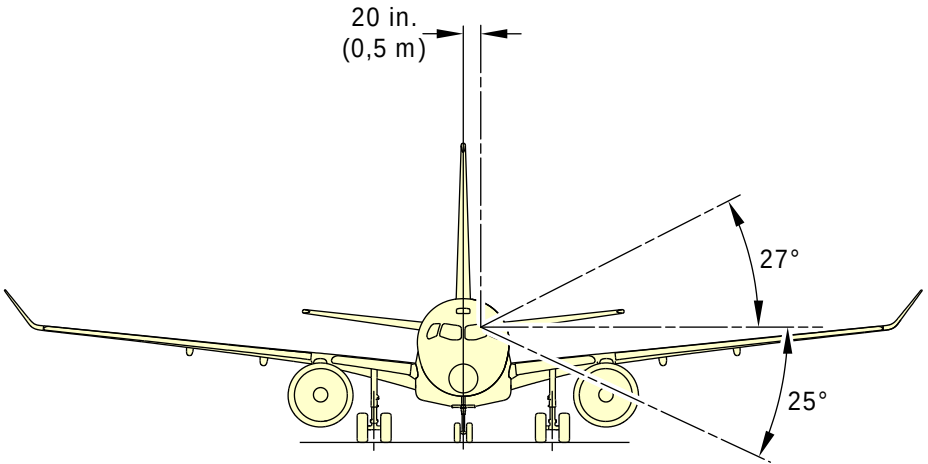

VISUAL ANGLE IN A PLANE PERPEDNDICULAR TO LONGITUDINAL AXIS THROUGH PILOT'S EYE POSITION

NOTES

1. Not to be used for landing approach visibility.
2. Not scale.

ICN-BD500-A-J000000-A-3AB48-22579-A-001-01

Figure 2 Visibility from cockpit in static position

Intentionally left blank

Wheel chocks - Handling procedure

Applicability:
50001-54999, 55001-59999

Table of contents

Page

Wheel chocks - Handling procedure 1
References 1
Common information 1
Preliminary requirements 1
Procedure 3
Requirements after job completion 6

List of tables

Page

1 References 1
2 Required conditions 2
3 Support equipment 2
4 Consumables, materials, and expendables 2
5 Spares 2
6 Required conditions 6

List of figures

Page

1 Wheel chocks on aircraft – Location 5

References

Table 1 References

Data Module/Technical Publication	Title
BD500-A-J12-30-32-02AAA-913A-A	Apply park brake - General maintenance procedure
BD500-A-J10-20-00-02AAA-030A-A	Parking and mooring gust limits - Technical data

Common information

This data module gives general information about the placement of the wheel chocks (59603, Pt. No. 99-9028-6000) for different aircraft conditions.

Note

The operator can use these guidelines and his experience and knowledge of the local regulations to make decision.

Preliminary requirements

Production maintenance data

Zones	711	Nose landing gear
	731	Main landing gear, left side

741	Main landing gear, right side

Required conditions

Table 2 Required conditions

Action/Condition	Data Module/Technical publication
Make sure that the aircraft is safe for maintenance.	
Make sure that the parking brake is on.	BD500-A-J12-30-32-02AAA-913A-A
Make sure that the beacon lights are off.	
Make sure that all the engines are stopped.	

Support equipment

Table 3 Support equipment

Name	Identification/Reference	Quantity	Remark
Wheel chocks	99-9028-6000	AR	Or equivalent

Consumables, materials, and expendables

Table 4 Consumables, materials, and expendables

Name	Identification/Reference	Quantity	Remark
None			

Spares

Table 5 Spares

Name	Identification/Reference	Quantity	Remark
None			

Safety conditions

WARNING

Obey these safety precautions during movement of the aircraft (Towing, Push-back, Taxiing). Make sure that:

- **The path of the aircraft is clear of persons, equipment and other obstacles.**
- **No persons go near the tow tractor, tow bar, landing gears, engine nacelles or below the aircraft fuselage.**
- **Only qualified persons are in the tractor and no persons sit or stand on the tow bar.**
- **No persons go near the aircraft before it is fully stopped.**

There is a risk of injury or death if you do not obey these instructions.

Procedure

1 Put the wheel chocks (59603, Pt. No. 99-9028-6000) as follows:

Refer to Fig. 1 .

1.1 If the aircraft is in flight-ready condition and the wind speed is below 25 Knots, do as follows:

1.1.1 Put the wheel chocks (59603, Pt. No. 99-9028-6000) in front of and rear of the inboard tires of the right and left Main Landing Gear (MLG).

1.1.2 Make sure that the wheel chocks do not touch the tires (59603, Pt. No. 99-9028-6000) .

Note

Weight changes can have an effect on the wheelbase, which can cause the tires to catch the chocks.

If you put wheel chock(s) at the Nose Landing Gear (NLG) because of the local regulations, make sure that they do not touch the tires.

1.1.3 If the aircraft is parked on a slope, do as follows:

1.1.3.1 Additionally, put the wheel chocks (59603, Pt. No. 99-9028-6000) on the down-slope side of the inboard tires of each of the MLG .

1.1.4 Make sure that the down-slope chocks touch the tires and the up-slope chocks do not touch the tires.

Note

On slippery surfaces, use more wheel chocks

On slippery surfaces, apply the parking brake.

1.2 If the aircraft is in flight-ready condition and the wind speed is 25 Knots or above, or the aircraft is parked, or the aircraft is in storage condition, do as follows:

When high winds are expected for the time that the aircraft is parked on an open area, do as follows:

1.2.1 Check parking/mooring wind and gust limits. Refer to BD500-A-J10-20-00-02AAA-030A-A.

1.2.2 Put the wheel chocks (59603, Pt. No. 99-9028-6000) in the front and rear side of the NLG and the MLG tires.

1.2.3 Make sure that the wheel chocks do not touch the tires (59603, Pt. No. 99-9028-6000) .

Note

Weight changes can have an effect on the wheelbase, which can cause the tires to catch the chocks.

1.2.4 If the aircraft is parked on a slope, put the wheel chocks (59603, Pt. No. 99-9028-6000) against the down-slope tires.

Note

On slippery surfaces or strong wind conditions, apply the parking brake. Refer to BD500-A-J12-30-32-02AAA-913A-A.

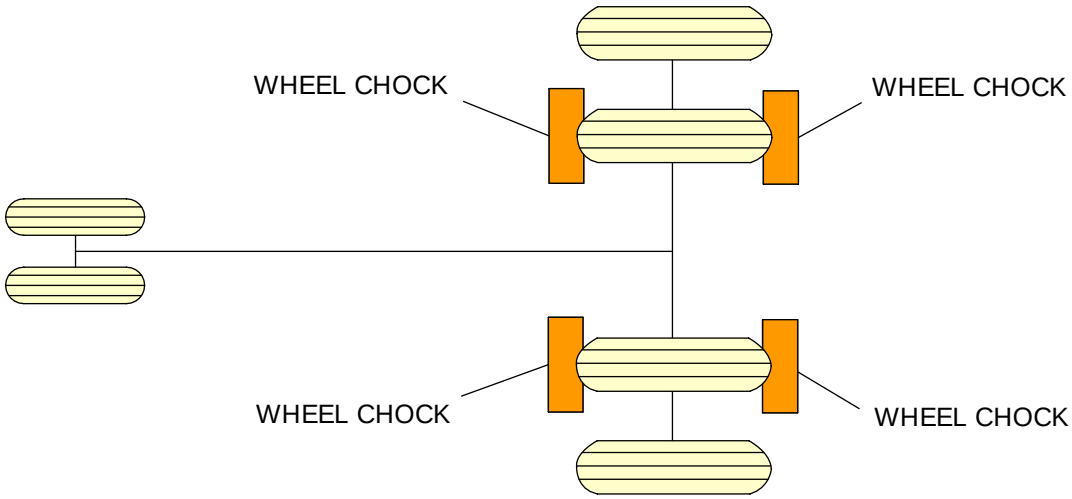

AIRCRAFT IN FLIGHT READY CONDITION, WIND SPEED LESS THAN 25 KNOTS

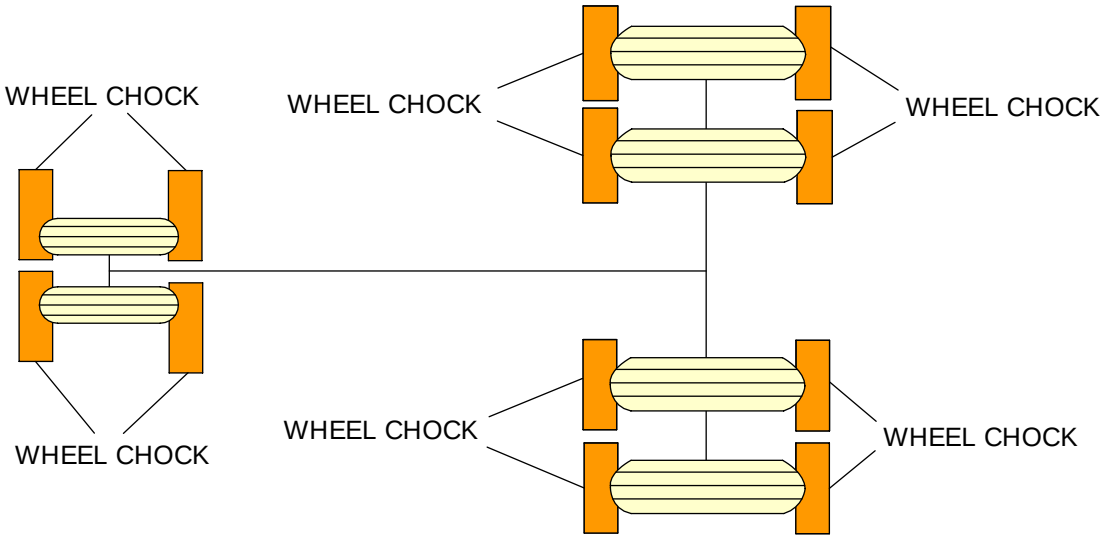

AIRCRAFT IN FLIGHT READY CONDITION, WIND SPEED MORE THAN 25 KNOTS OR AIRCRAFT IN PARKED OR IN THE STORAGE CONDITION

ICN-BD500-A-J101601-C-3AB48-92845-A-002-01

Figure 1 Wheel chocks on aircraft – Location

Requirements after job completion

Required conditions

Table 6 Required conditions

Action/Condition	Data Module/Technical publication
None	

A220

Chapter 5: Terminal servicing

Intentionally left blank

A220

Terminal servicing - Technical data

Applicability:
50001-54999

Table of contents

Page

Terminal servicing - Technical data 1
References 2
Description 2
1 Introduction 2
1.1 Aircraft servicing arrangement 2
1.2 Terminal operations 5
1.3 Ground servicing connections 7
1.4 Ground electrical power requirements 33
1.5 Engine starting pneumatic power requirements 34
1.6 Ground pneumatic power requirements 35
1.6.1 Heating 35
1.6.2 Cooling 37
1.7 Preconditioned airflow requirements 39
1.8 Ground towing requirements 39
1.9 Aircraft 39
1.10 Towbar design guidelines 40

List of tables

Page

1 References 2
2 Hydraulic system 9
3 Hydraulic system - Accumulator charging 11
4 Waste system 13
5 Potable water system 15
6 Pneumatic system 17
7 Electrical System 20
8 Oxygen system 22
9 Grounding points 24
10 Fuel system Refuel/Defuel adapter 26
11 Fuel system control panel 28
12 Oil system 31
13 External AC power requirements 33
14 External power quality limitations 33
15 Overcurrent protection ampere versus time delay 34
16 Overvoltage protection versus time delay 34
17 Ground pneumatic power requirements – Engine starting 35
18 Ground air supply requirements for heating (Pull up) 35
19 Ground air supply requirements for heating at a steady state 37
20 Ground air supply requirements for cooling (Pull down) 37
21 Ground air supply requirements for cooling at a steady state 39
22 Preconditioned airflow requirements 39

List of figures

Page

1 Aircraft servicing arrangement 3
2 Turnaround time analysis 6
3 Ground servicing connections 8
4 Ground servicing system 10

5 Accumulator charging valves..... 12
6 Waste system access panel..... 14
7 Potable water system service panel..... 16
8 Low pressure ground system..... 18
9 High pressure ground system..... 19
10 Electrical service panel..... 21
11 Crew oxygen system..... 23
12 Landing gears grounding points..... 25
13 Refuel adapter and grounding point..... 27
14 Refuel/Defuel system..... 29
15 Oil storage system..... 32
16 Ground pneumatic requirements - Heating..... 36
17 Ground pneumatic requirements - Cooling..... 38
18 Ground towing requirements (imperial unit)..... 41
19 Ground towing requirements (metric unit)..... 42

References

Table 1 References

Data Module/Technical Publication	Title
None	

Description

1 Introduction

This data module contains data related to the preparation of an aircraft for flight from a terminal. This data is provided to show the general types of tasks involved in terminal operations. Each airline has different operating conditions and practices, which can result in changes in the operating procedures and time intervals to do the tasks specified. Because of this, requirements for ground operations should be approved with the specified airline(s) before ramp planning is started. This section presents the following topics:

- Aircraft servicing arrangement
- Terminal operations
- Ground servicing connections
- Ground electrical power requirements
- Ground pneumatic power requirements – Engine starting
- Preconditioned airflow requirements – Air conditioning
- Ground towing requirements.

Note

All applicable procedures and limitations are provided in the Aircraft Maintenance Publication (AMP) BD500-3AB48-10200-00.

1.1 Aircraft servicing arrangement

Refer to Fig. 1 for the aircraft servicing arrangement.

(Sheet) Applicability:
50001-50065, 50067-50085, 50087-54987

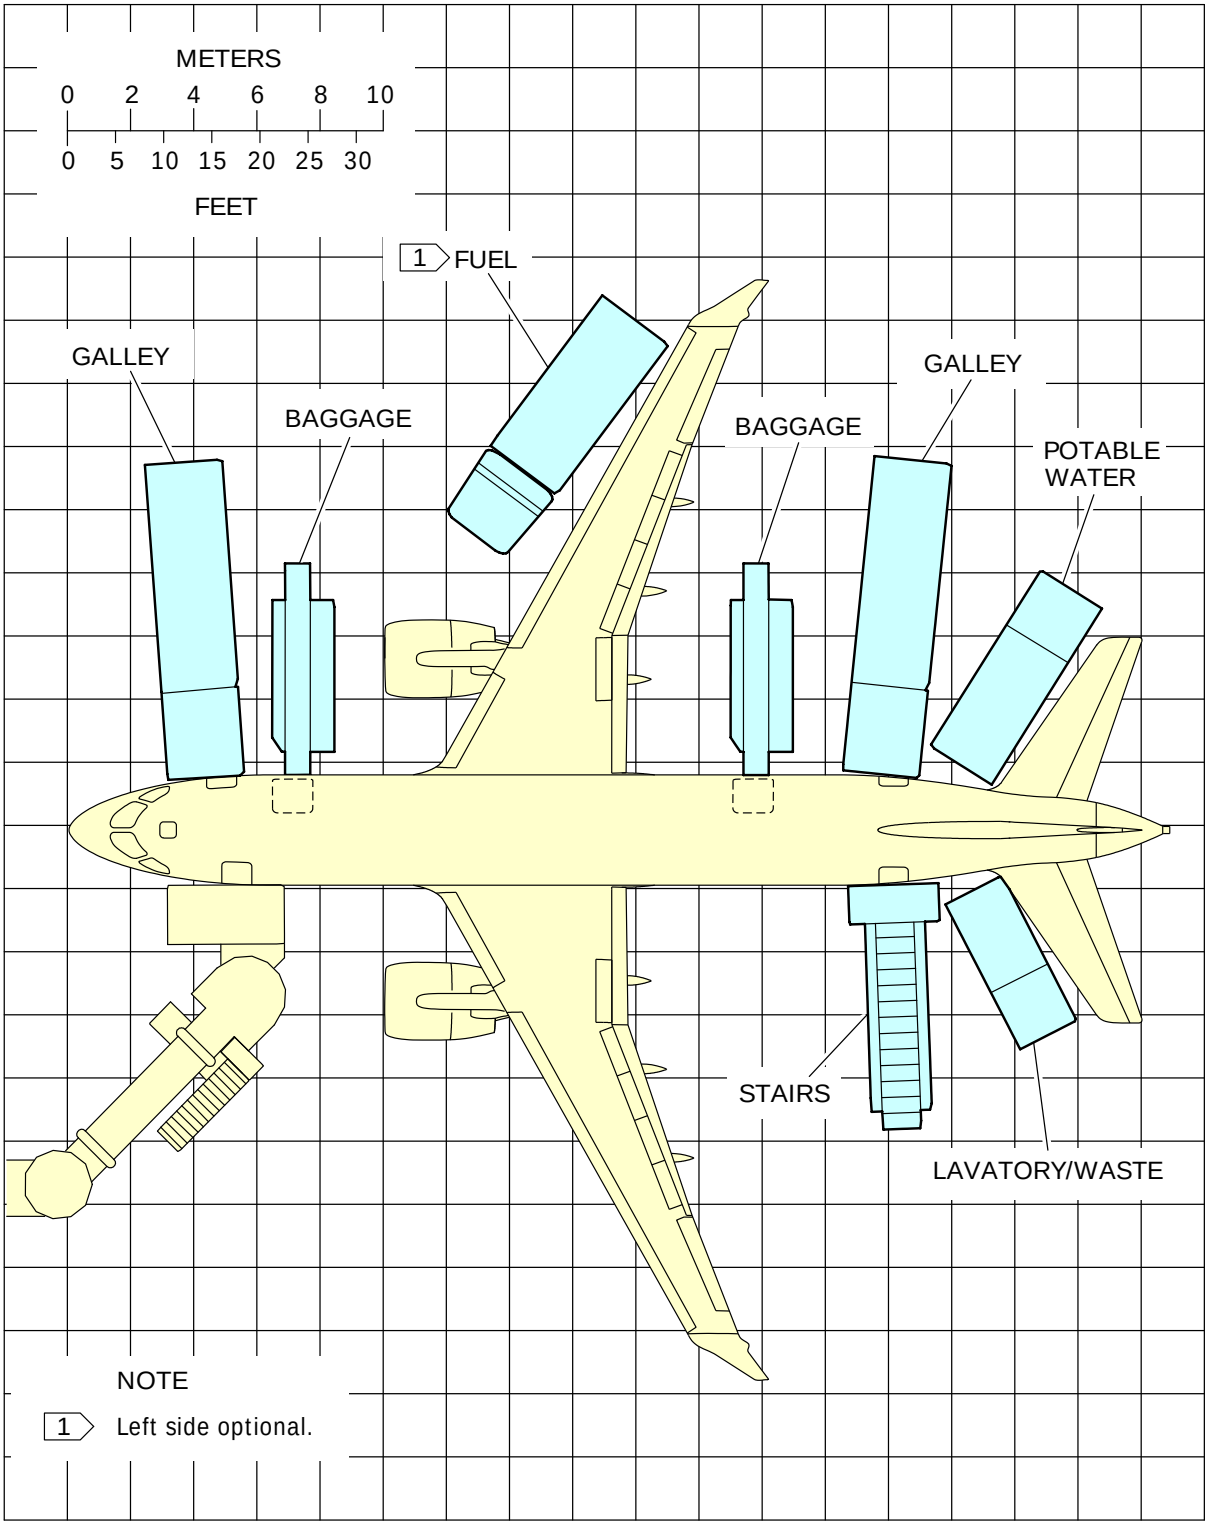

ICN-BD500-A-J000000-A-3AB48-21739-A-001-01

Figure 1 Aircraft servicing arrangement - (Sheet 1 of 2)

(Sheet) Applicability:
50066, 50086

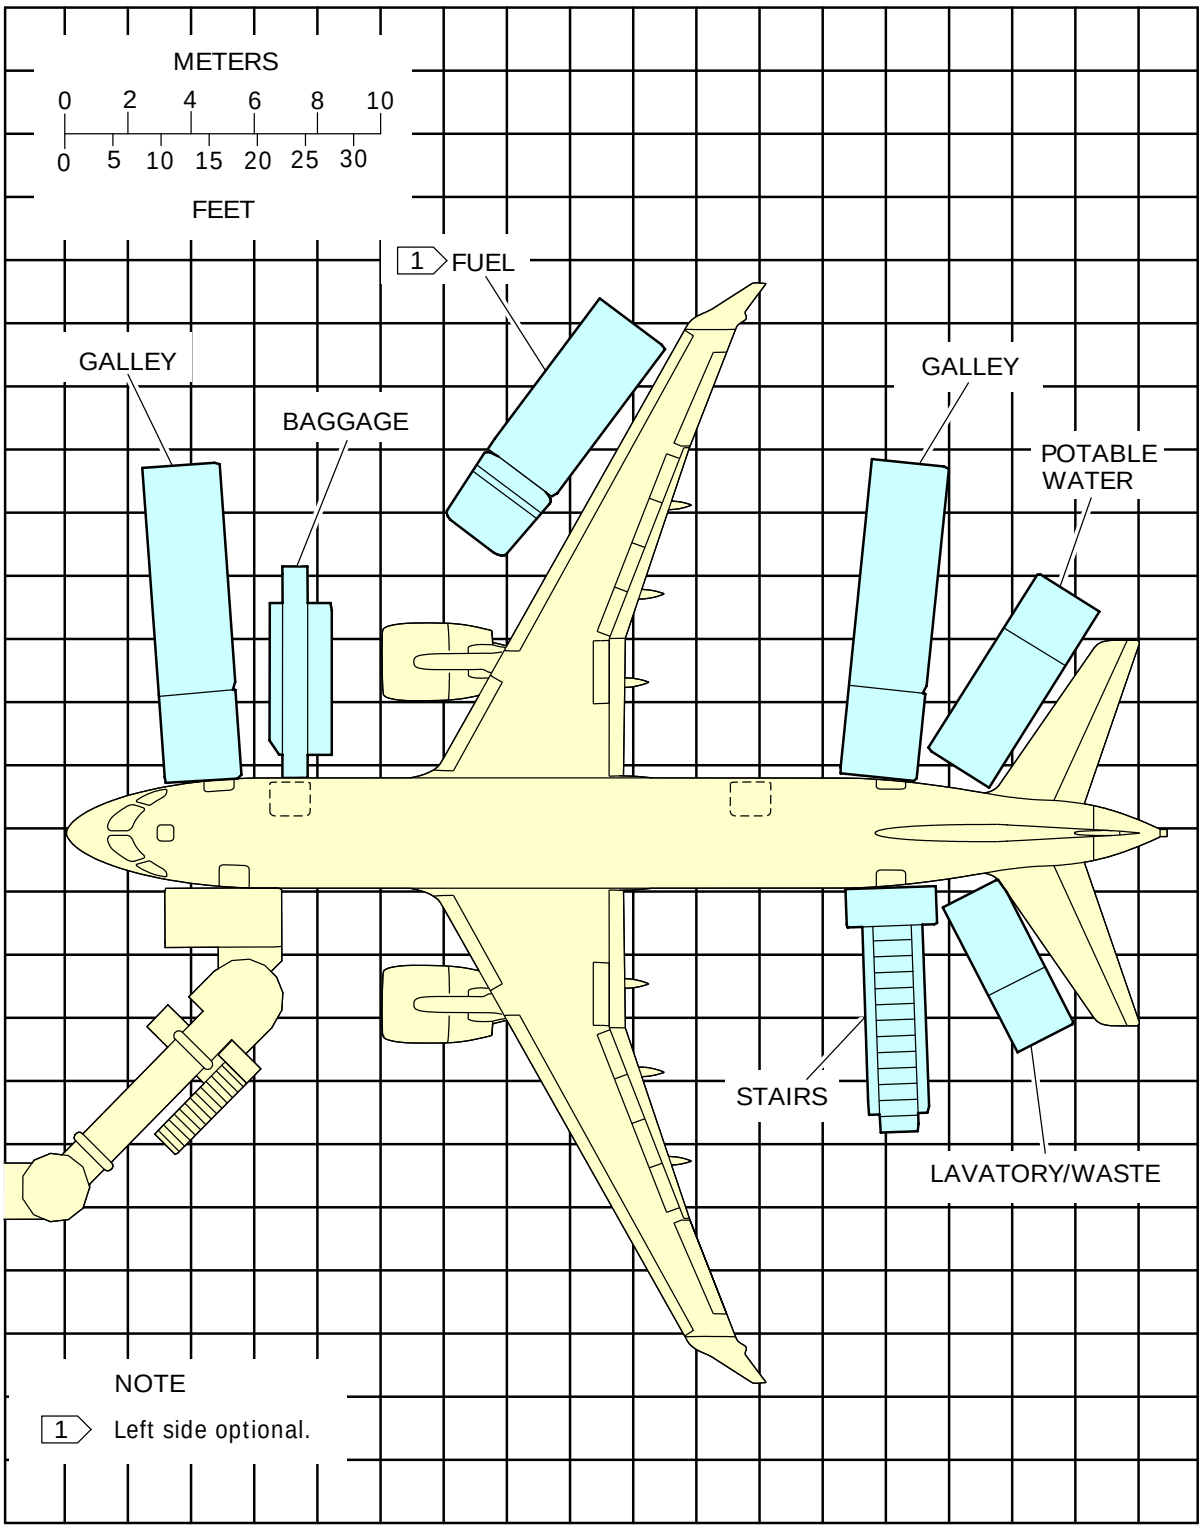

ICN-BD500-A-J000000-C-3AB48-79173-A-001-01

Figure 1 Aircraft servicing arrangement - (Sheet 2 of 2)

1.2 Terminal operations

Refer to Fig. 2 for the turnaround station operations.

The turnaround time analysis is based on the following parameters:

- 100% Pax/baggage exchange
- 94 passengers (85% load factor) / 1 class / 1 door
- 2 Galley service trucks
- Water/Waste servicing is sequential
- Cabin servicing during available time
- Passenger deplane rate is 18 per minute per door
- Passenger boarding rate is 12 per minute per door
- 2 bulk-loading belt-loaders
- 45 bags forward, 67 bags aft (1.2 x 4 ft^3 (1.2 X 0.11 m^3) per passenger)
- Bag loading/unloading rates are 10 and 15 bags per minute
- Fuel loaded via one refuel/defuel adapter
- Refuel adapter rate at 50 psi (344.74 kPa) is as follows:

  1 When refueling tree (3) tanks simultaneously (the center tank and two wing tanks), the refuel rate is 260 gpm (984 L/min).

  2 When refueling two (2) wing tanks, the refuel rate is 140 gpm (530 L/min).

  3 When refueling the center tank only, the refuel rate is 140 gpm (530 L/min).

- Mission range is 1200 NM (2222.4 km)
- Refueling performed while deplaning/boarding.

Note

All equipment is assumed to function properly and weather condition to be normal. This data is provided to illustrate the general scope and type of operations involved in a terminal gate environment. Varying operating practices and circumstances may result in different task sequences and durations.

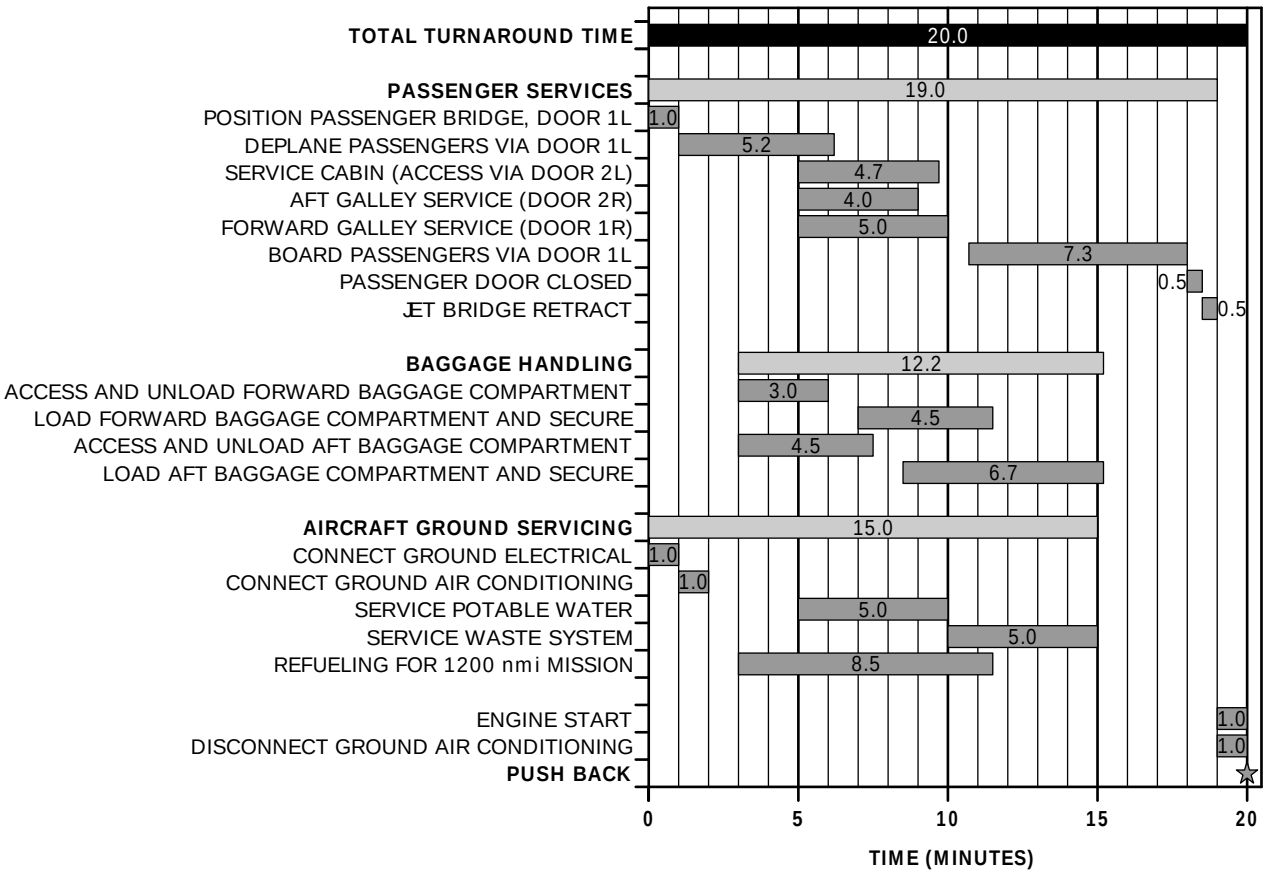

ICN-BD500-A-J000005-A-3AB48-00066-A-001-01

Figure 2 Turnaround time analysis

1.3 Ground servicing connections

Refer to Fig. 3 for the ground servicing connection points. For servicing procedures, refer to the AMP.

All servicing points are designed and positioned to consider accessibility and compatibility with industry standard vehicles and other Ground Support Equipment (GSE). All applicable procedures and limitations are provided in the AMP.

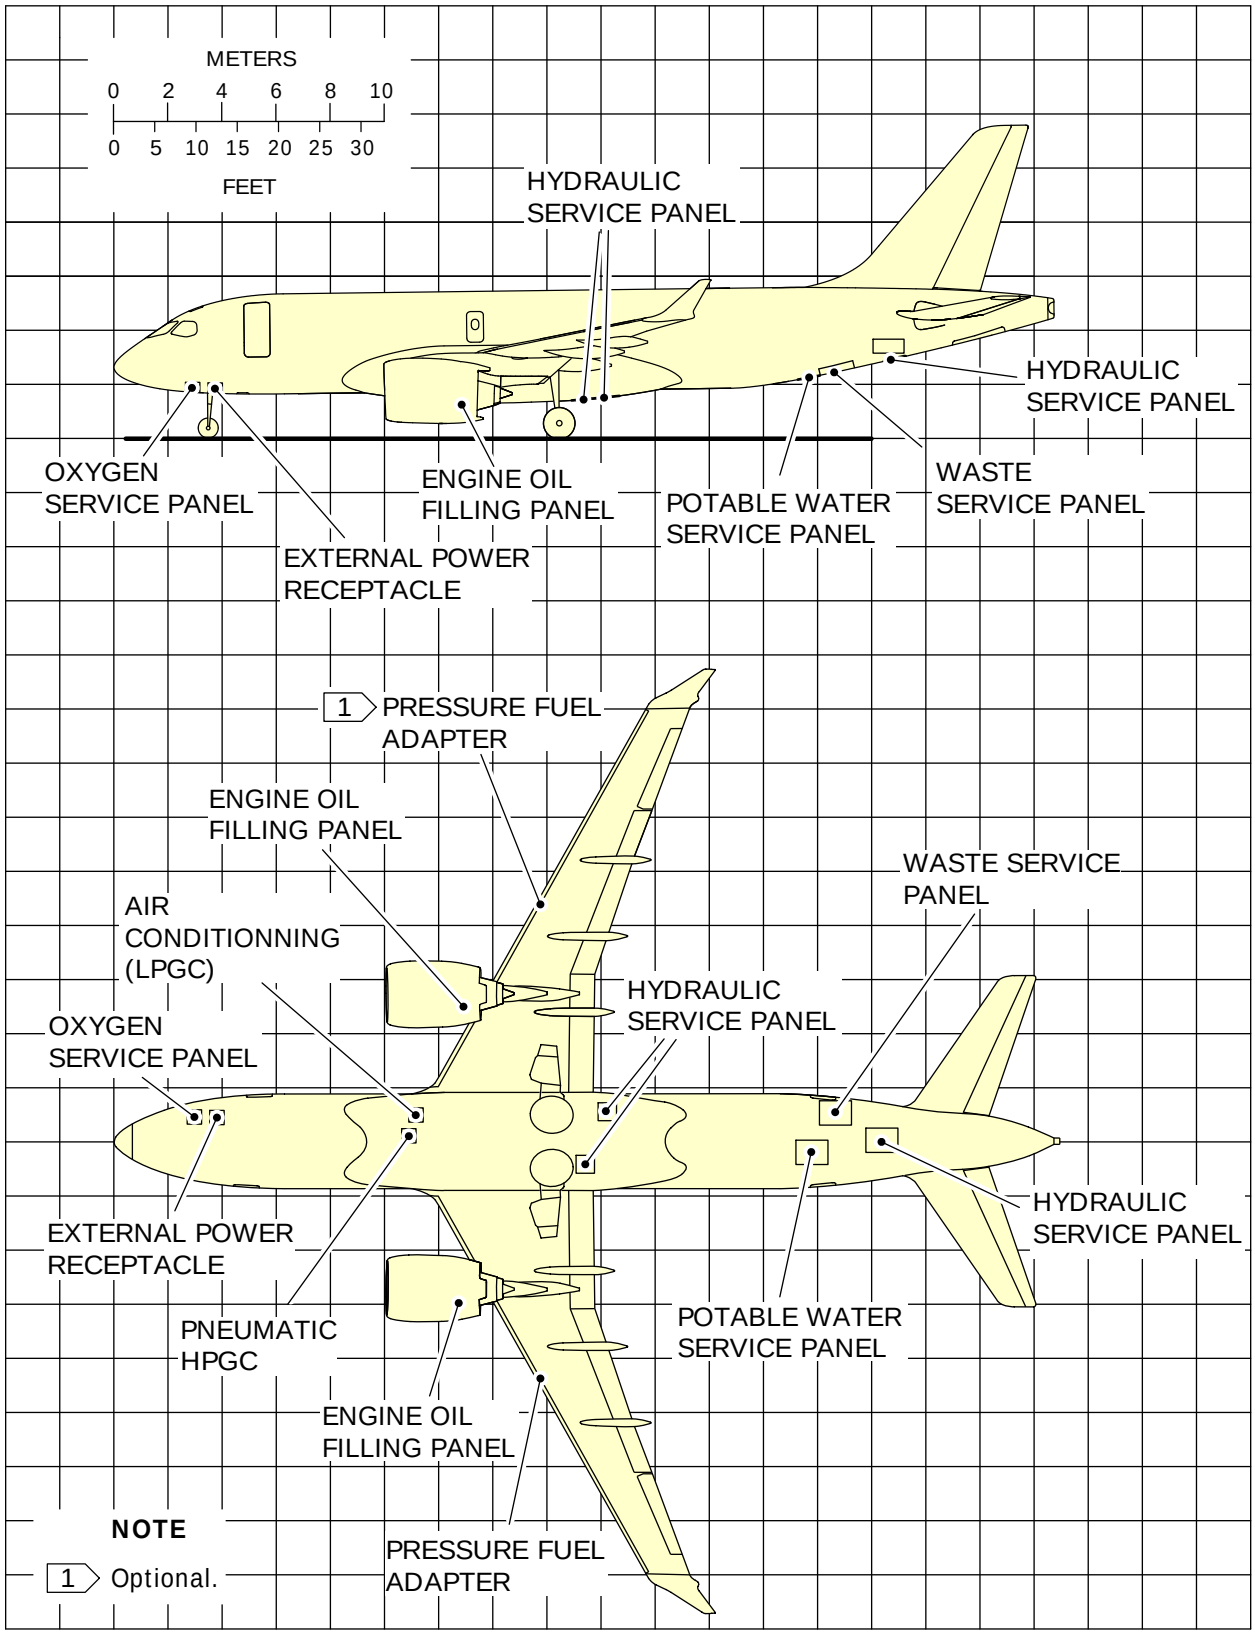

ICN-BD500-A-J000000-A-3AB48-21914-A-001-01

Figure 3 Ground servicing connections

Table 2 Hydraulic system

Access	Aft of nose ft (m)	Position from aircraft Centerline		Mean height from ground ft (m)
		RH side ft (m)	LH side ft (m)	
System # 1 Access door 195CB	60.96 (18.58)	-	3.93 (8.20)	5.82 (1.77)
System # 2 Access door 195AB	58.543 (17.84)	2.795 (0.85)	-	5.57 (1.70)
System # 3 Aft equipment bay door	95.12 (28.99)	On centerline of the aircraft		8.77 (2.67)

Note

All distances are approximate.

All height from ground distances are approximate and will vary with aircraft configuration and loading conditions.

Technical specifications

- Nominal pressure: 3000 psi (206.84 bar)
- Fitting connectors
  - Fitting dimension: Draining: 4 in. (10.16 cm)
  - Fitting dimension: Rinsing: 1 in. (2.54 cm)

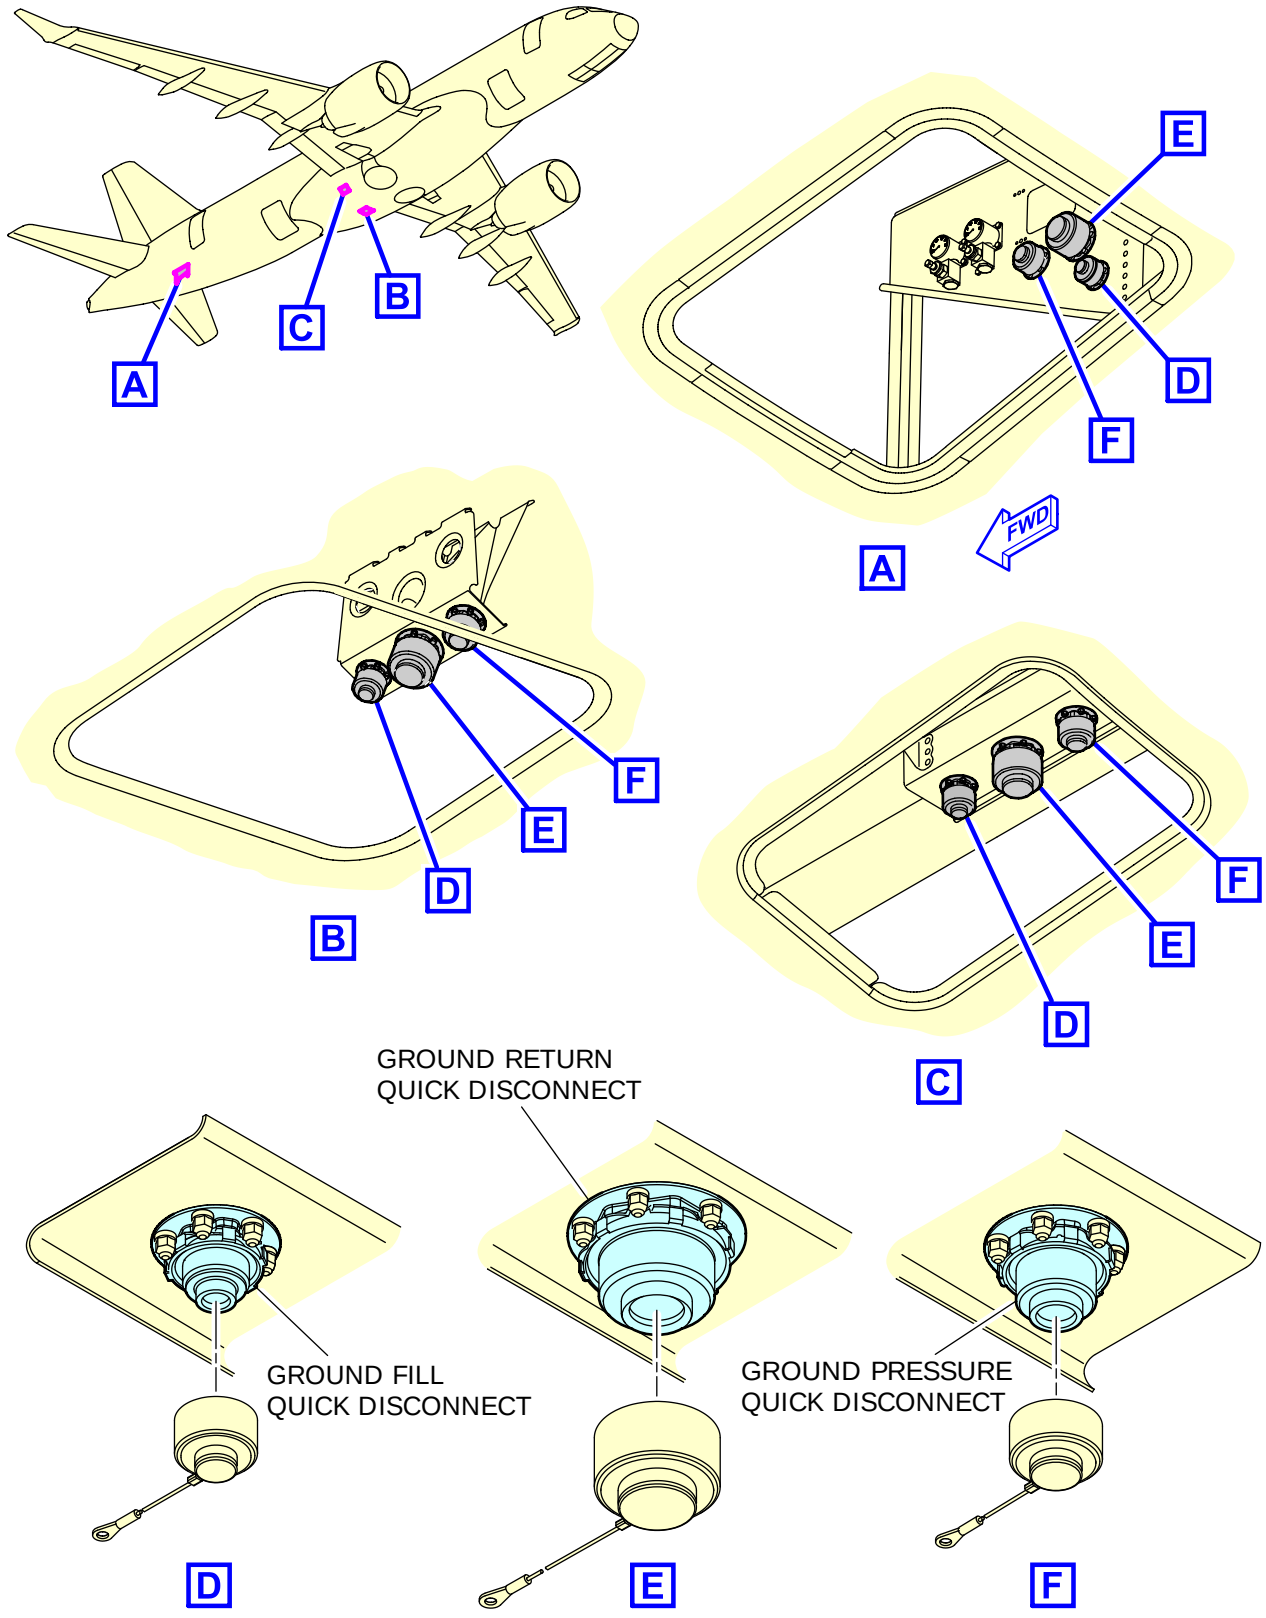

ICN-BD500-A-J000000-A-3AB48-23353-A-001-01

Figure 4 Ground servicing system

Table 3 Hydraulic system - Accumulator charging

Access	Aft of nose ft (m)	Position from aircraft Centerline		Mean height from ground ft (m)
		RH side ft (m)	LH side ft (m)	
Aft equipment bay door	95.12 (28.99)	On centerline of the aircraft		8.77 (2.67)

Note

All distances are approximate.

All height from ground distances are approximate and will vary with aircraft configuration and loading conditions.

Technical specifications

- Operating pressure: 3000 psig (206.84 bar)
- Accumulator pressure gauge range: 0 to 5000 psig (344.74 bar)
- Gauge accuracy: ±75 psig (5.17 bar)

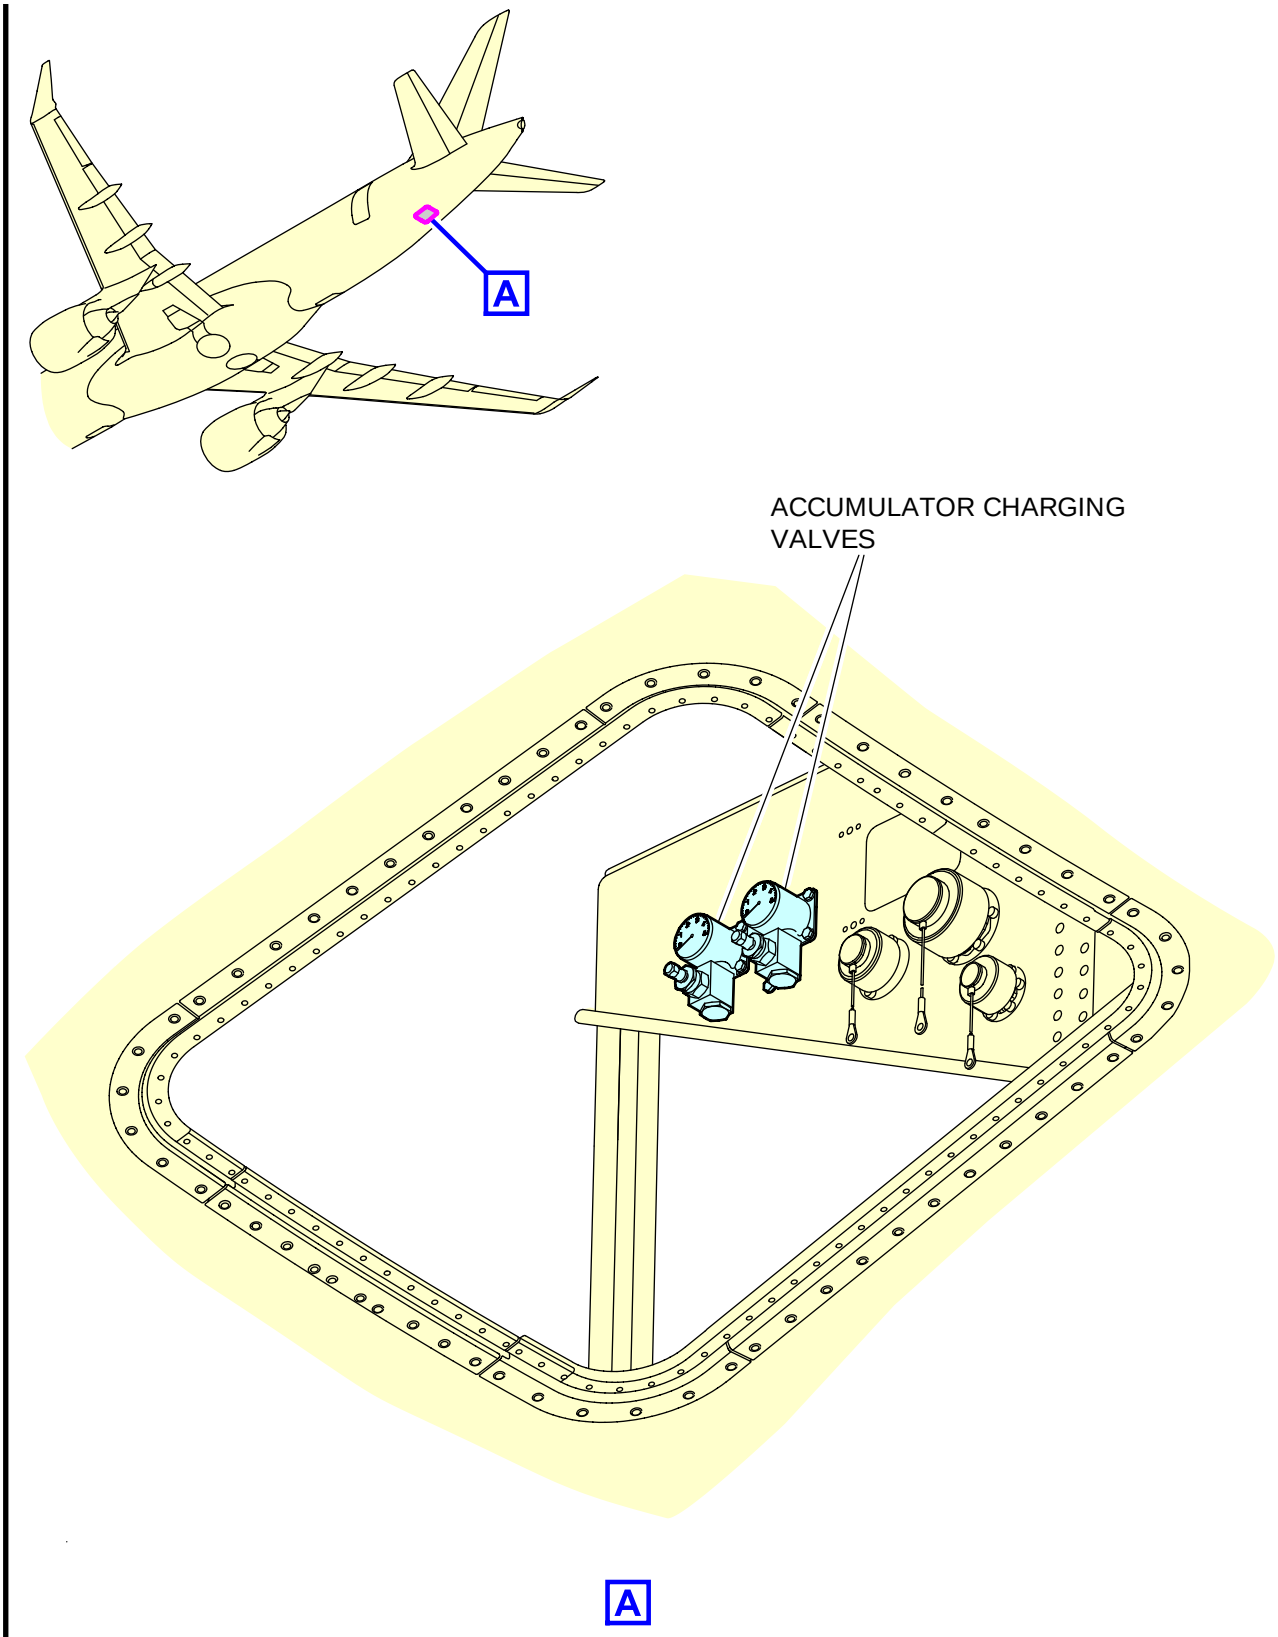

ICN-BD500-A-J000000-A-3AB48-22071-A-001-01

Figure 5 Accumulator charging valves

Table 4 Waste system

Access	Aft of nose ft (m)	Position from aircraft Centerline		Mean height from ground ft (m)
		RH side ft (m)	LH side ft (m)	
Access door 146BR	86.80 (26.46)	-	1.21 (0.37)	7.14 (2.18)

Note

All distances are approximate.

All height from ground distances are approximate and will vary with aircraft configuration and loading conditions.

Technical specifications

- Usable volume: 38 U.S. gal (143.85 L)
- Fitting connectors
  - Fitting dimension: Draining: 4 in. (10.16 cm)
  - Fitting dimension: Rinsing: 1 in. (2.54 cm)

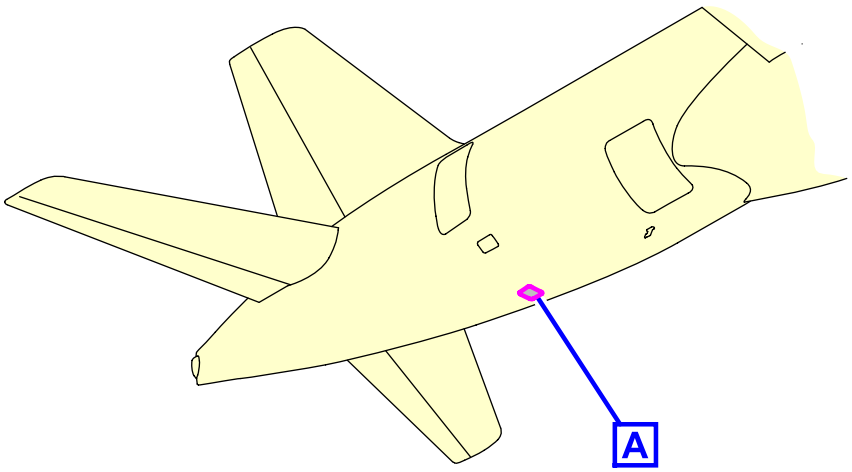

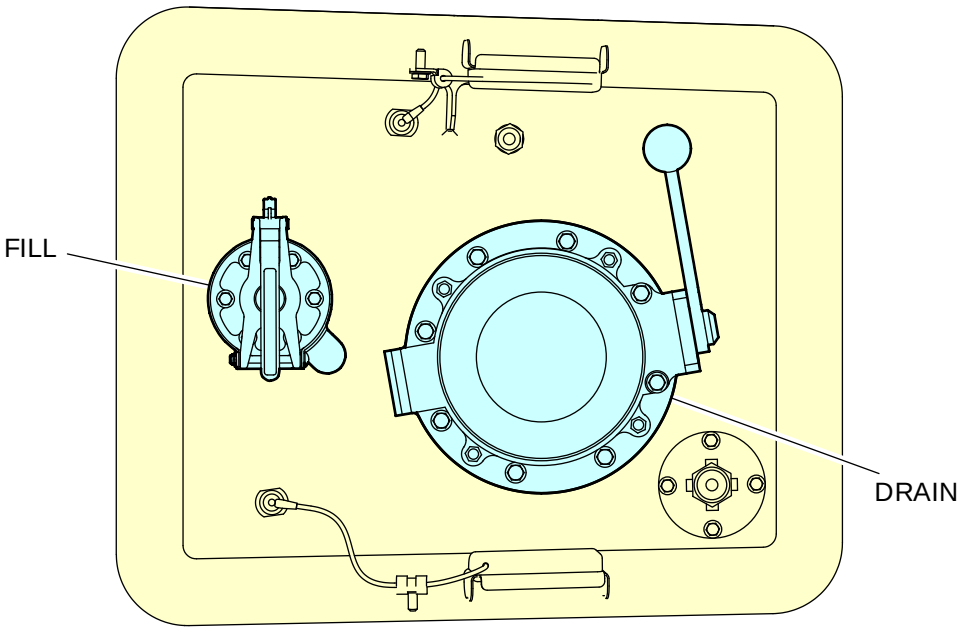

WASTE ACCESS PANEL

A

ICN-BD500-A-J000000-A-3AB48-22008-A-001-01

Figure 6 Waste system access panel

Table 5 Potable water system

Access	Aft of nose ft (m)	Position from aircraft Centerline		Mean height from ground ft (m)
		RH side ft (m)	LH side ft (m)	
Access door 146CR	84.75 (25.83)	3.661 (1.11)	-	7.75 (2.36)

Note

All distances are approximate.

All height from ground distances are approximate and will vary with aircraft configuration and loading conditions.

Technical specifications

- Usable volume: 42 U.S. gal (158.99 L)
- Fitting dimension: Filling/Draining: 3/4 in. (1.905 cm)

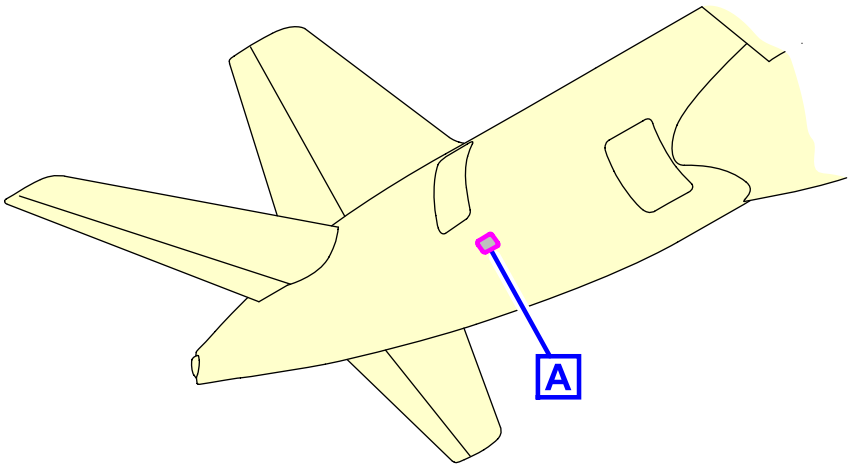

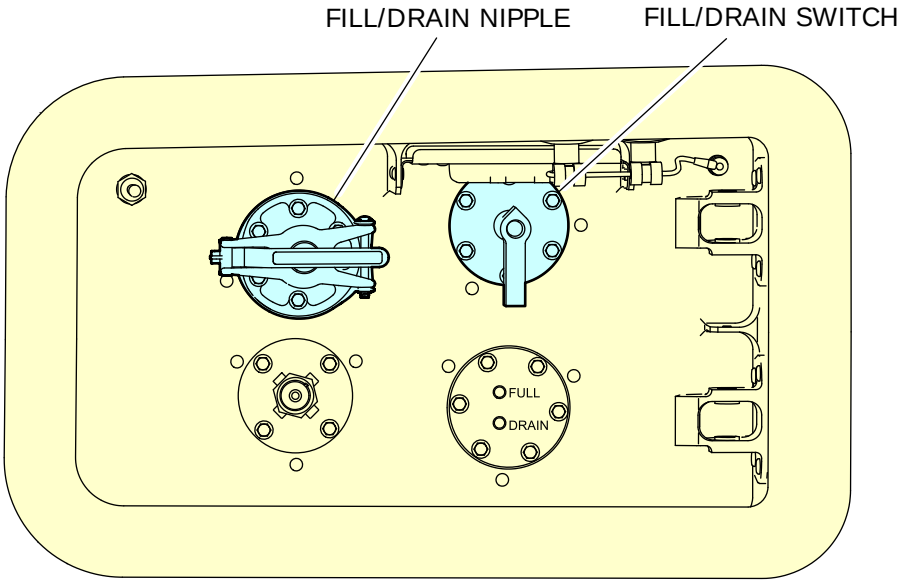

POTABLE WATER SERVICE PANEL

A

ICN-BD500-A-J000000-A-3AB48-22007-A-001-01

Figure 7 Potable water system service panel

Table 6 Pneumatic system

Access	Aft of nose ft (m)	Position from aircraft Centerline		Mean height from ground ft (m)
		RH side ft (m)	LH side ft (m)	
Low Pressure Ground Connection (LPGC) Access door 191BB	37.76 (11.51)	-	4.33 (1.32)	5.30 (1.61)
High Pressure Ground Connection (HPGC) Access door 191AB	37.38 (11.39)	-	1.30 (0.40)	4.62 (1.41)

Note

All distances are approximate.

All height from ground distances are approximate and will vary with aircraft configuration and loading conditions.

Technical specifications

- **LPGC Spec**
  - Discharge pressure range: 0.7 to 1.0 psig maximum (0.05 to 0.07 bar maximum)
  - Temp range: 41 to 122 °F maximum (5 to 50 °C maximum)
  - Max airflow: 125 lb/min
  - Fitting dimension: 8 in. (20.32 cm)
  - LP Ground Cart Standard pneumatic connection per ISO 1034 or MS 33562
- **HPGC Spec**
  - Bleed pressure range: 30 to 45 psig maximum (2.07 to 3.10 bar maximum)
  - Bleed temperature range: 338 to 450 °F (170 to 232 °C)
  - Airflow range: 100 to 140 lb/min
  - Fitting dimension: 3 in. (7.62 cm)
  - HP Ground Cart Standard pneumatic connection per ISO 2026 or MS 33740

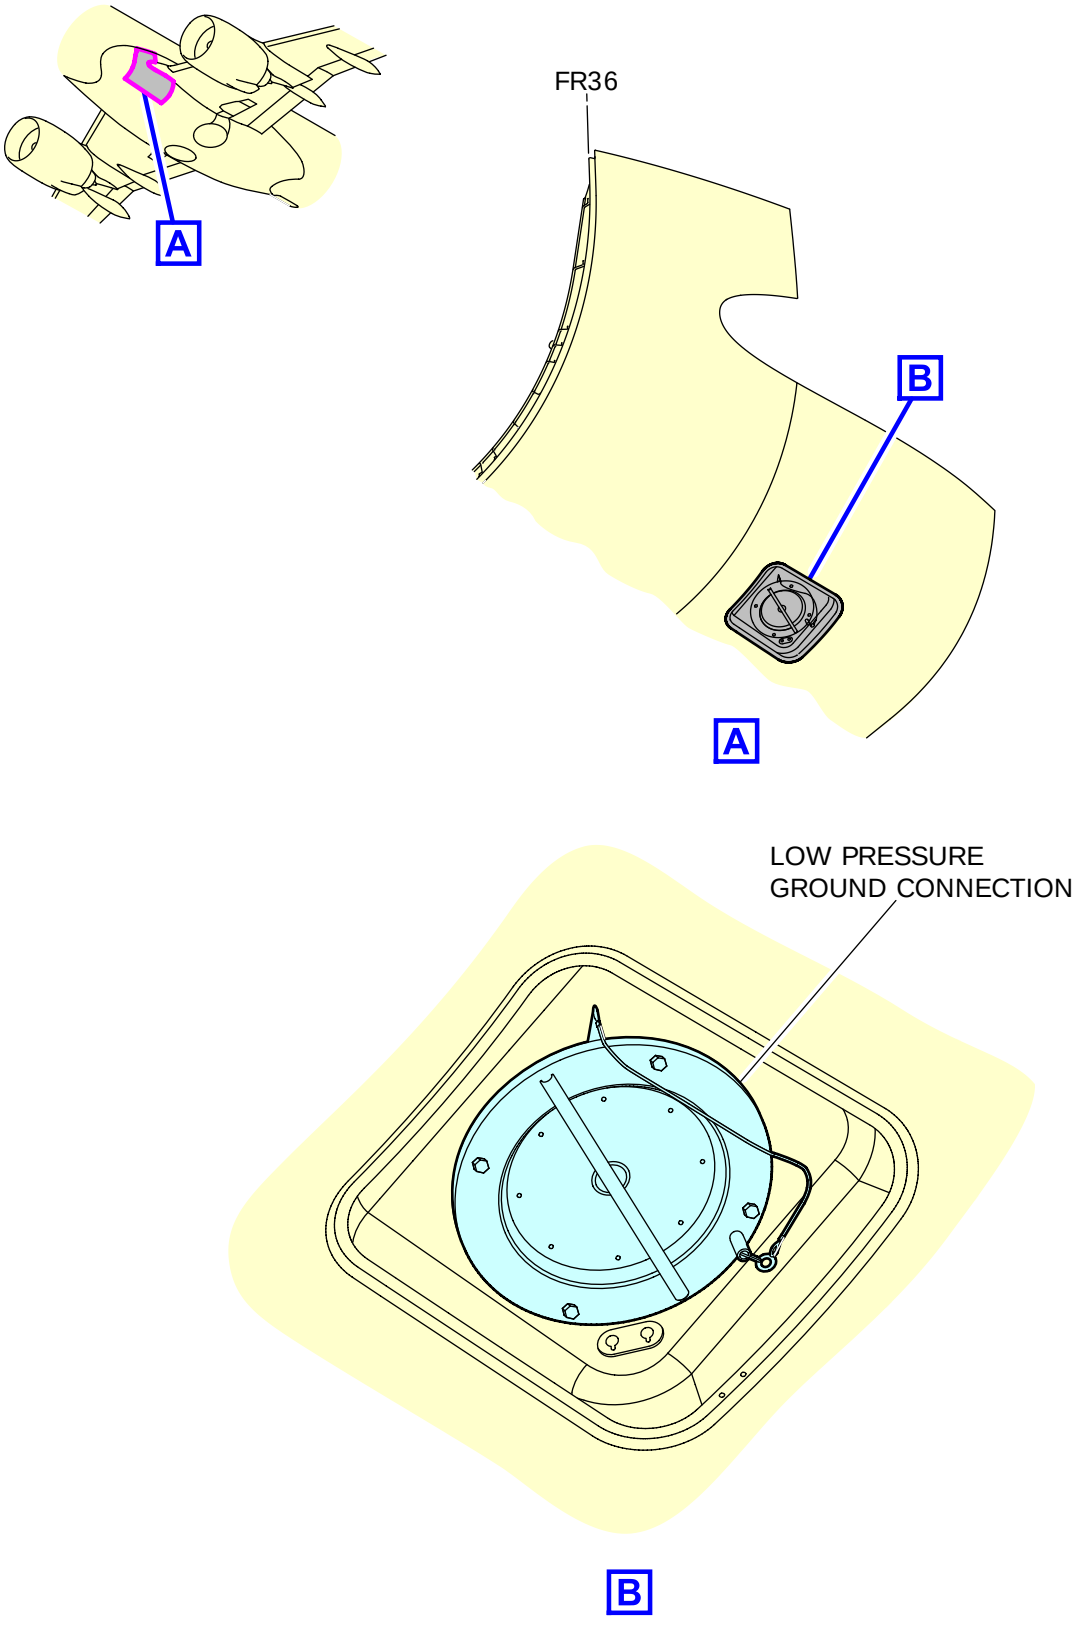

ICN-BD500-A-J212100-C-3AB48-19016-A-002-01

Figure 8 Low pressure ground system

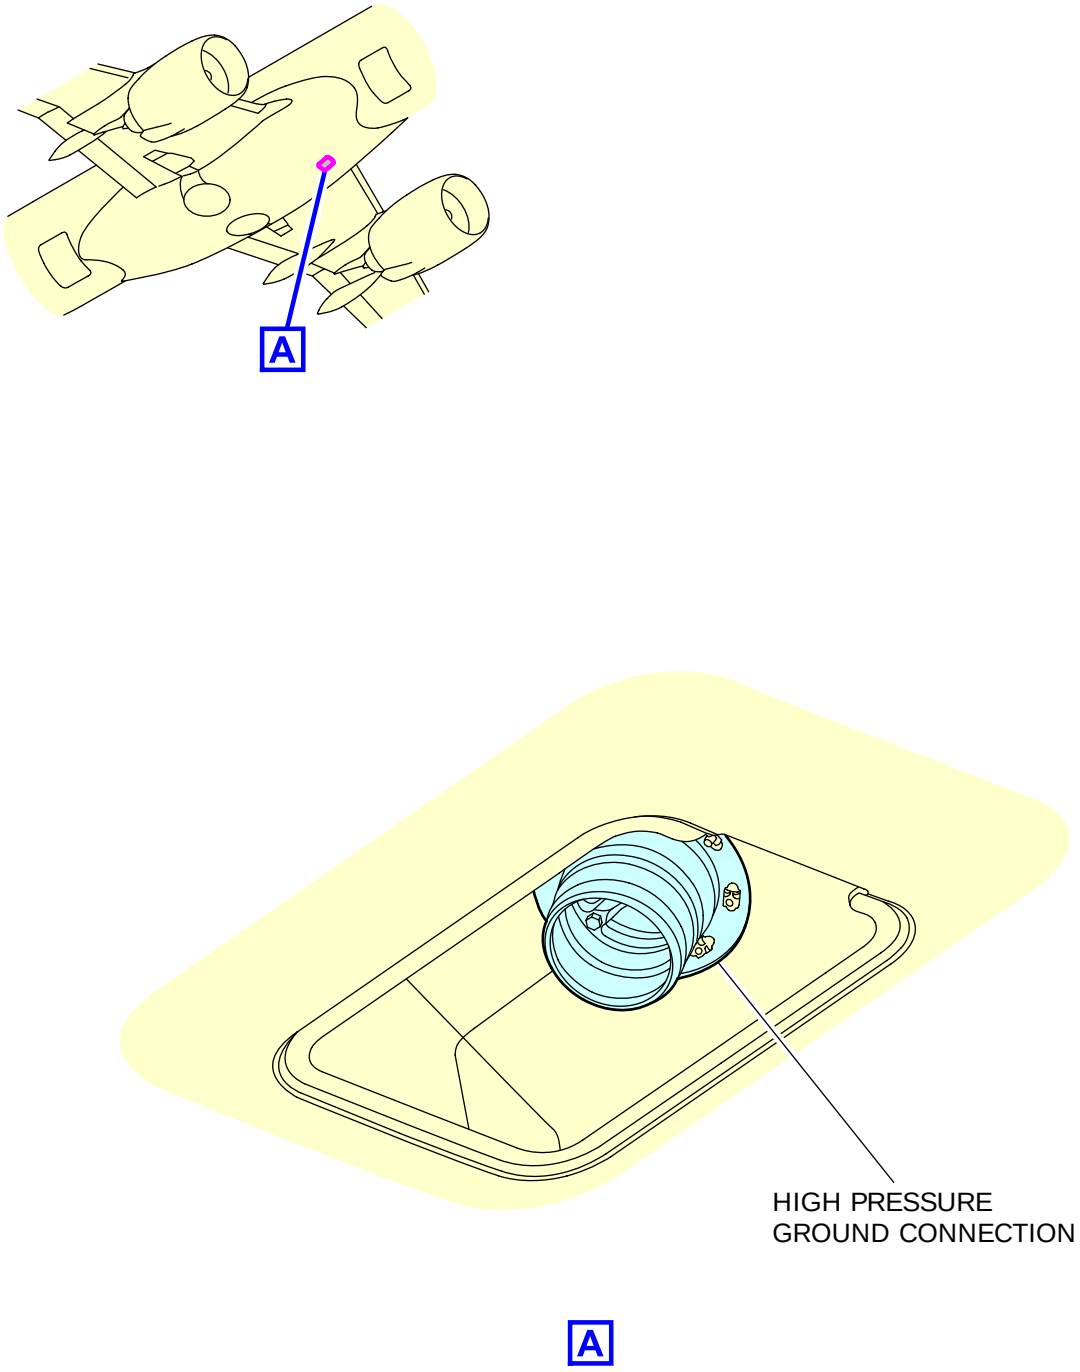

ICN-BD500-A-J361500-C-3AB48-15114-A-001-01

Figure 9 High pressure ground system

Table 7 Electrical System

Access	Aft of nose ft (m)	Position from aircraft Centerline		Mean height from ground ft (m)
		RH side ft (m)	LH side ft (m)	
Access door 115DL	11.71 (3.57)	-	2.68 (0.82)	6.37 (1.94)

Note

All distances are approximate.

All height from ground distances are approximate and will vary with aircraft configuration and loading conditions.

Technical specifications

- Power supply: 115 V Alternating Current (AC) External Power Receptacle

Note

For more specification about the electrical system, refer to Para. 1.4.

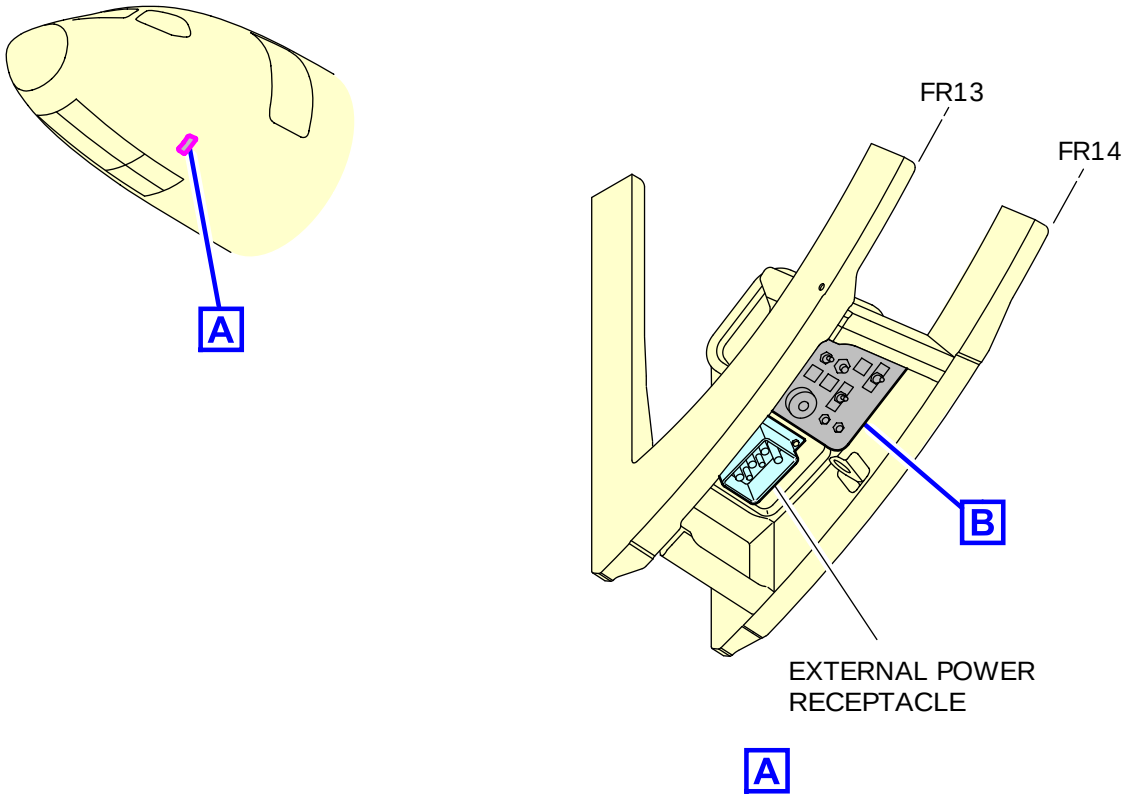

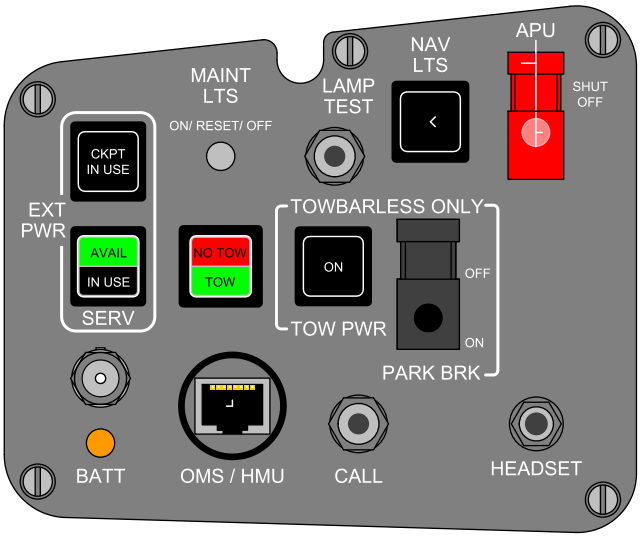

ELECTRICAL/TOWING SERVICE PANEL

B

ICN-BD500-A-J000000-A-3AB48-22070-A-001-01

Figure 10 Electrical service panel

Table 8 Oxygen system

Access	Aft of nose ft (m)	Position from aircraft Centerline		Mean height from ground ft (m)
		RH side ft (m)	LH side ft (m)	
Access door 115CL	10.20 (3.11)	-	2.60 (0.79)	6.44 (1.96)

Note

All distances are approximate.

All height from ground distances are approximate and will vary with aircraft configuration and loading conditions.

Technical specifications

- Nominal working pressure: 1850 psig (128 bar)
- Capacity: 77 ft³ (2180 L)

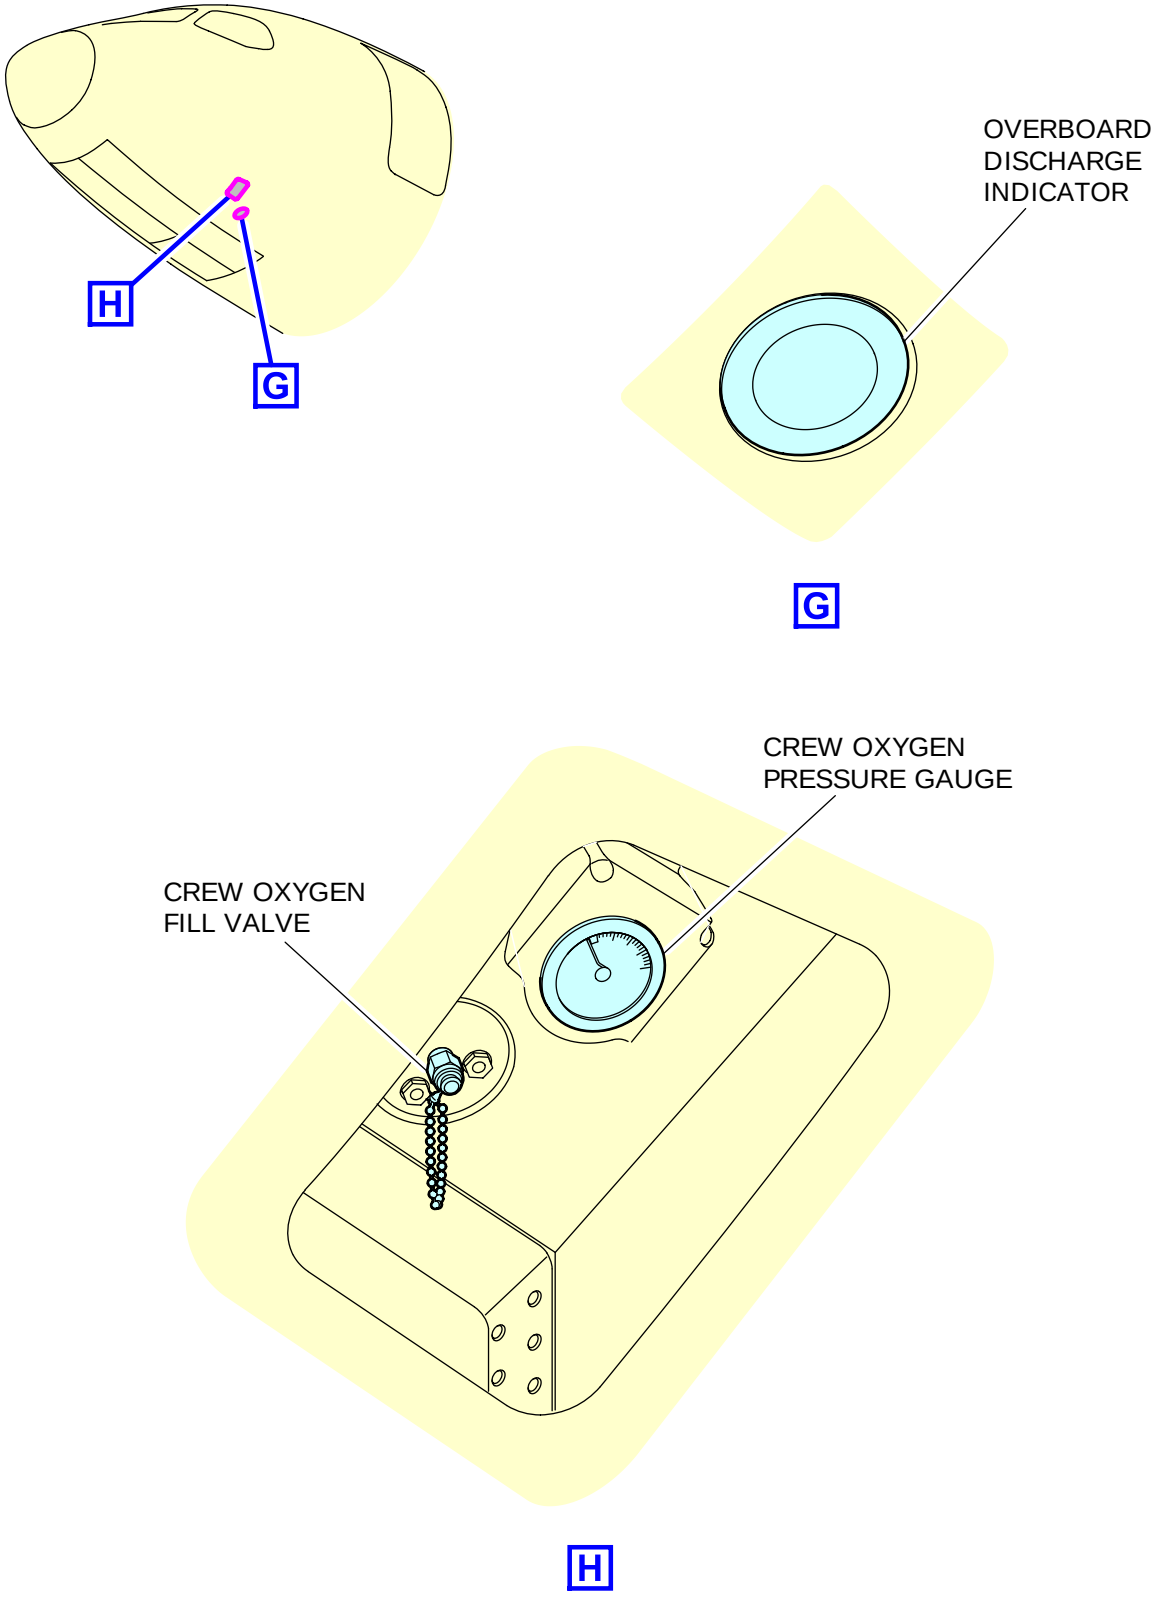

ICN-BD500-A-J351100-C-3AB48-20623-A-002-01

Figure 11 Crew oxygen system

Table 9 Grounding points

Access	Aft of nose ft (m)	Position from aircraft Centerline RH side ft (m)	Mean height from ground ft (m)	LH side ft (m)
Nose Landing Gear (NLG) leg	11.73 (3.58)	On aircraft centerline	5.00 (1.51)	
Left Main Landing Gear (MLG) leg	53.23 (16.23)	-	10.75 (3.27)	2.85 (0.87)
Right MLG leg	53.23 (16.23)	10.75 (3.27)	-	2.85 (0.87)
Right MLG leg	53.23 (16.23)	10.75 (3.27)	-	2.85 (0.87)
LH Refuel/Defuel Access door 621FB (Optional)	51.32 (15.64)	-	27.31 (8.32)	10.93 (3.33)
RH Refuel/Defuel Access door 521FB Fig. 13	51.32 (15.64)	27.31 (8.32)	-	10.93 (3.33)

Note

All distances are approximate.

All height from ground distances are approximate and will vary with aircraft configuration and loading conditions.

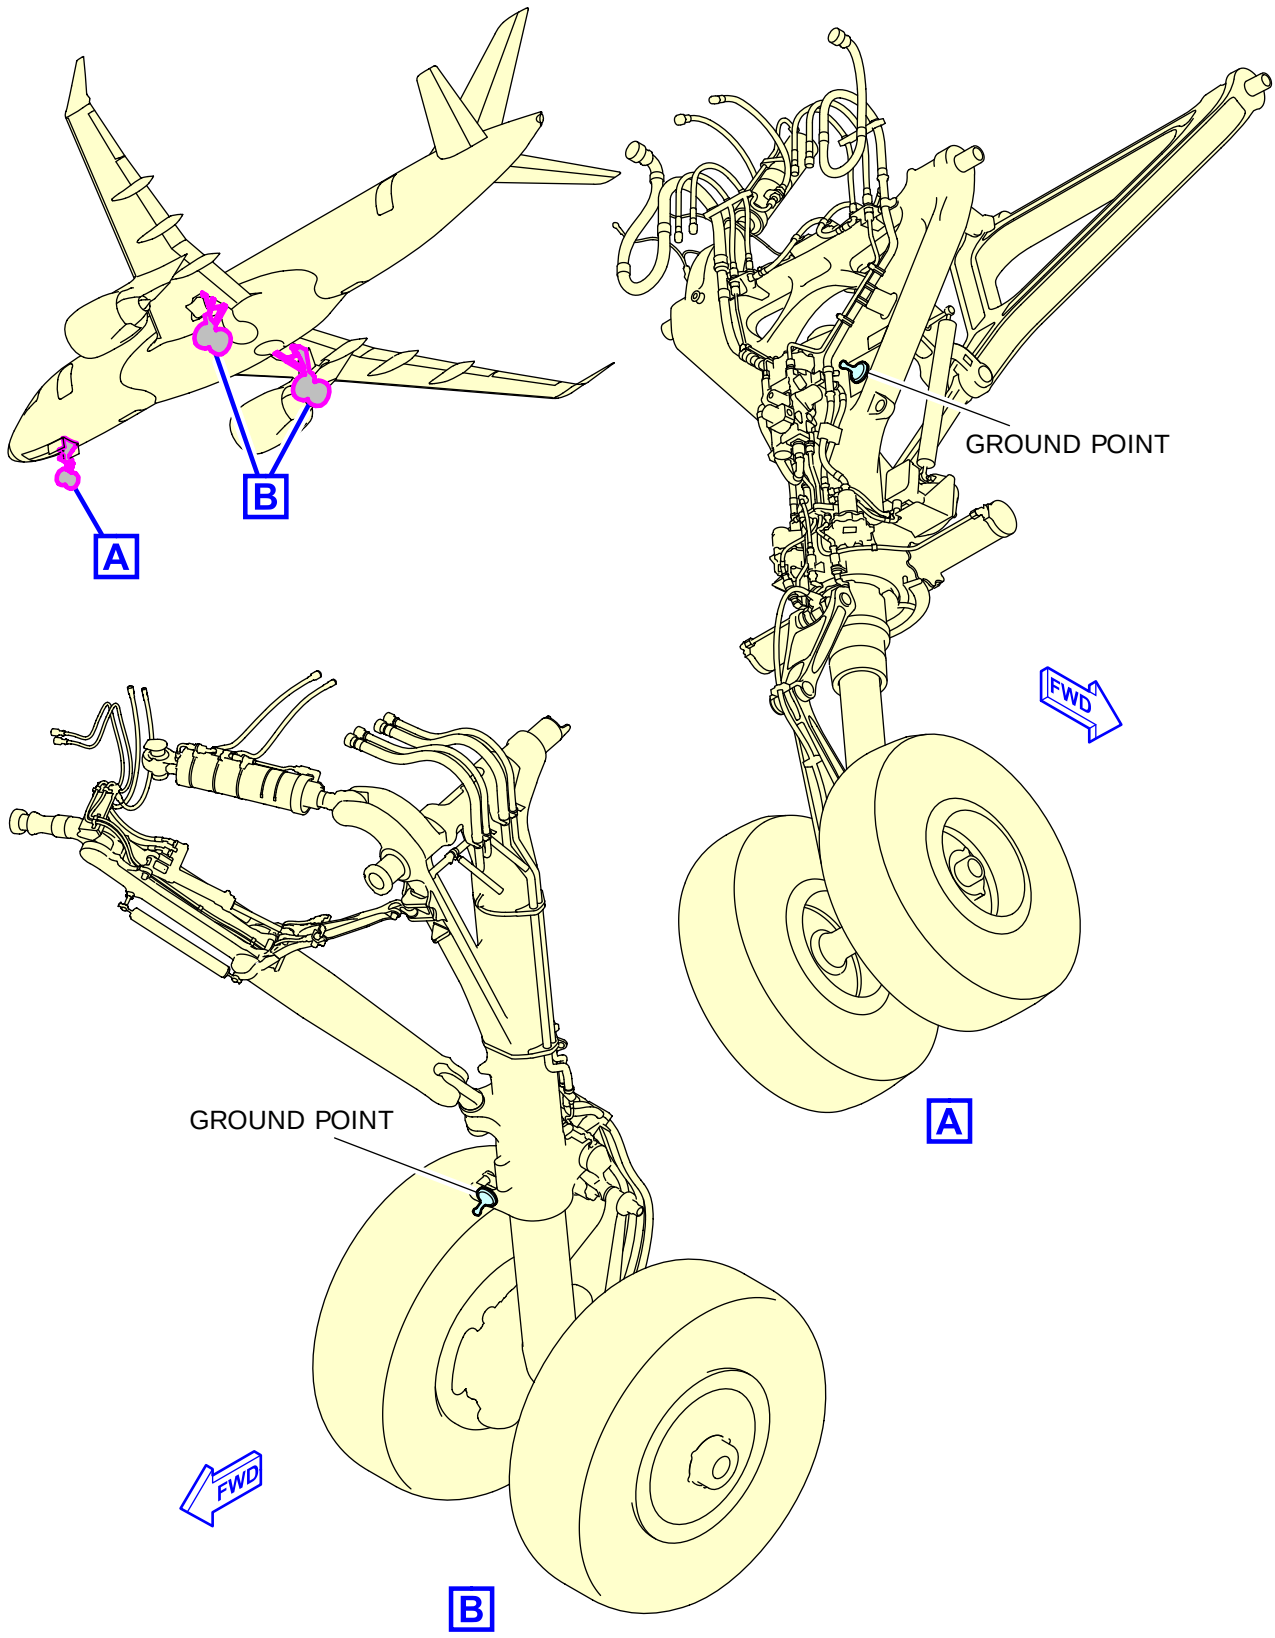

ICN-BD500-A-J000000-A-3AB48-22049-A-002-01

Figure 12 Landing gears grounding points

Table 10 Fuel system Refuel/Defuel adapter

Access	Aft of nose ft (m)	Position from aircraft Centerline		Mean height from ground ft (m)
		RH side ft (m)	LH side ft (m)	
LH Refuel/Defuel Access door 621FB (Optional)	51.32 (15.64)	-	27.31 (8.32)	10.93 (3.33)
RH Refuel/Defuel Access door 521FB	51.32 (15.64)	27.31 (8.32)	-	10.93 (3.33)

Note

All distances are approximate.

All height from ground distances are approximate and will vary with aircraft configuration and loading conditions.

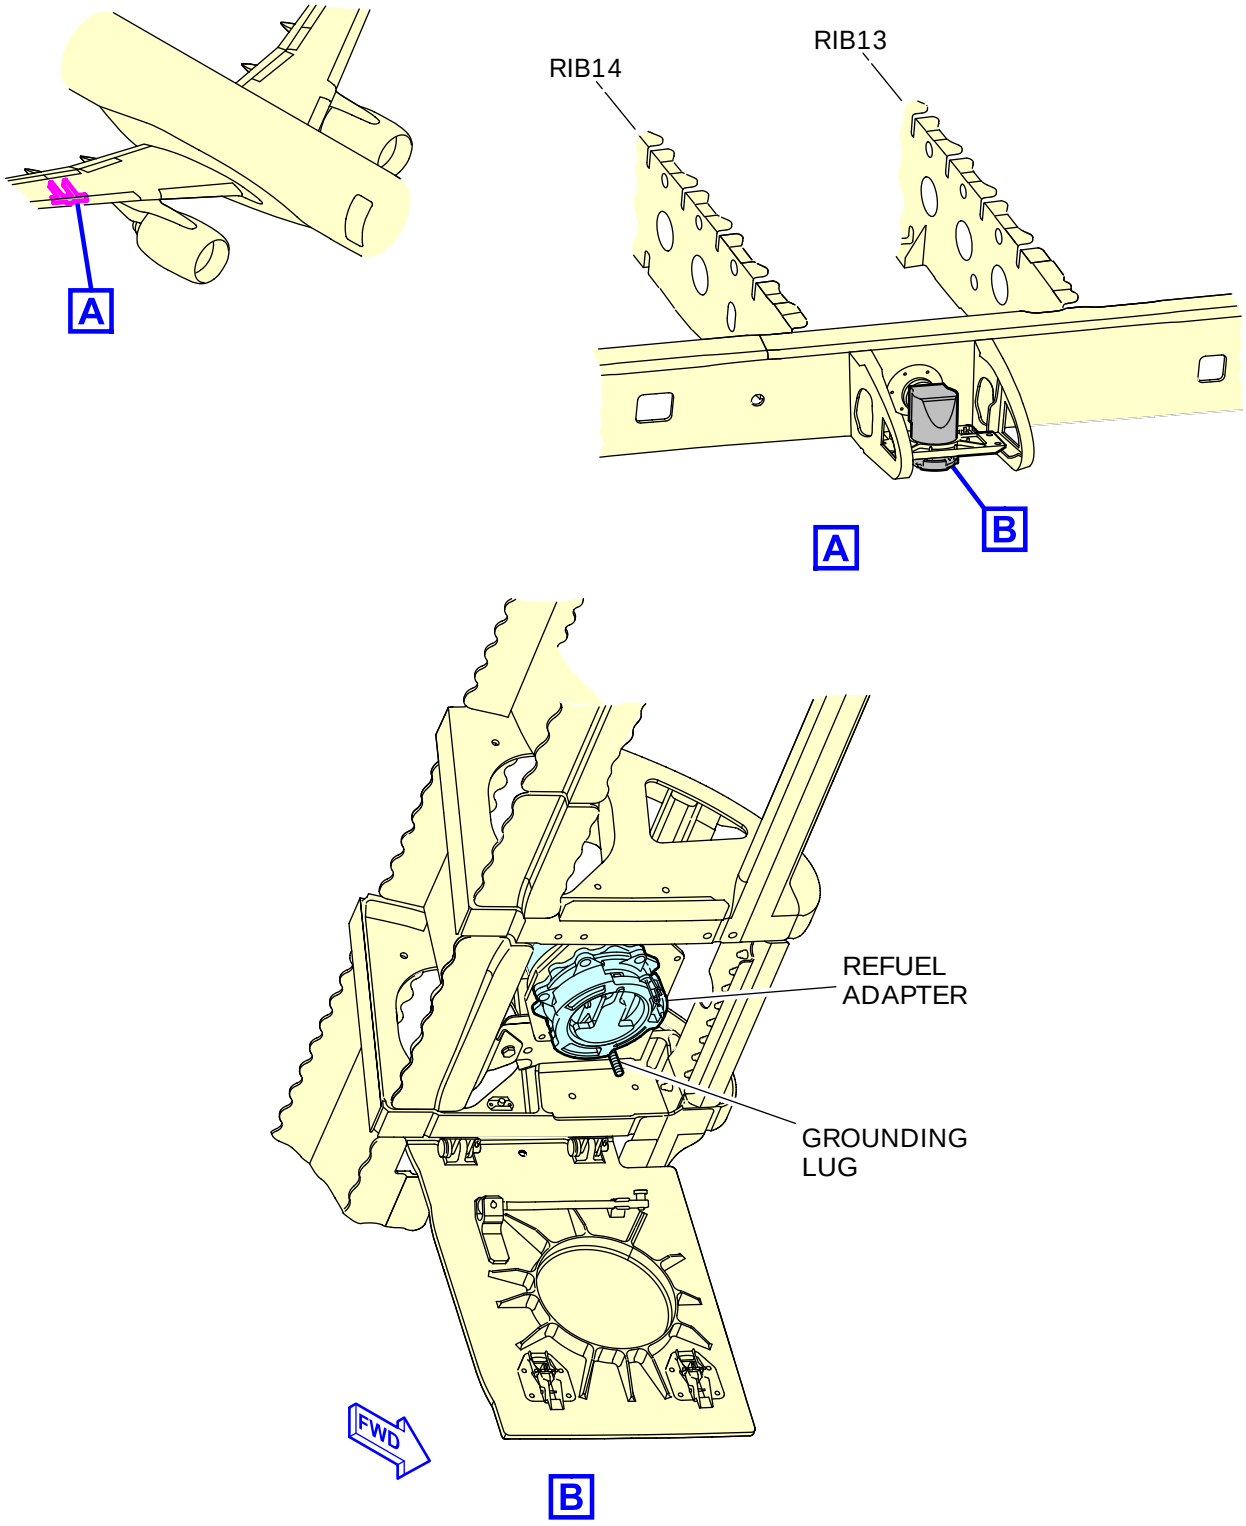

NOTES

1. Refuel adapter is optional on the left side.

ICN-BD500-A-J000000-A-3AB48-22099-A-002-01

Figure 13 Refuel adapter and grounding point

Table 11 Fuel system control panel

Access	Aft of nose ft (m)	Position from aircraft Centerline		Mean height from ground ft (m)
		RH side ft (m)	LH side ft (m)	
Access door 192AB	35.76 (10.9)	4.98 (1.52)	-	6.12 (1.86)

Note

All distances are approximate.

All height from ground distances are approximate and will vary with aircraft configuration and loading conditions.

(Sheet) Applicability:
50001-50065, 50067-50085, 50087-54987

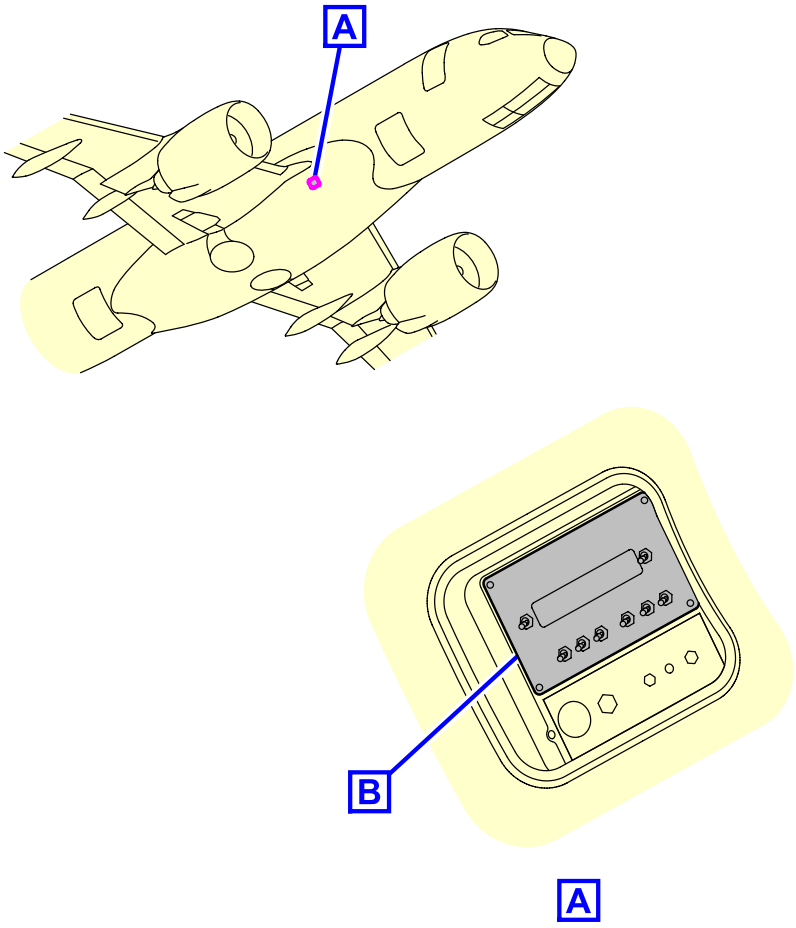

REFUEL/DEFUEL CONTROL PANEL

ICN-BD500-A-J282300-C-3AB48-12260-A-001-01

Figure 14 Refuel/Defuel system - (Sheet 1 of 2)

(Sheet) Applicability:
50066, 50086

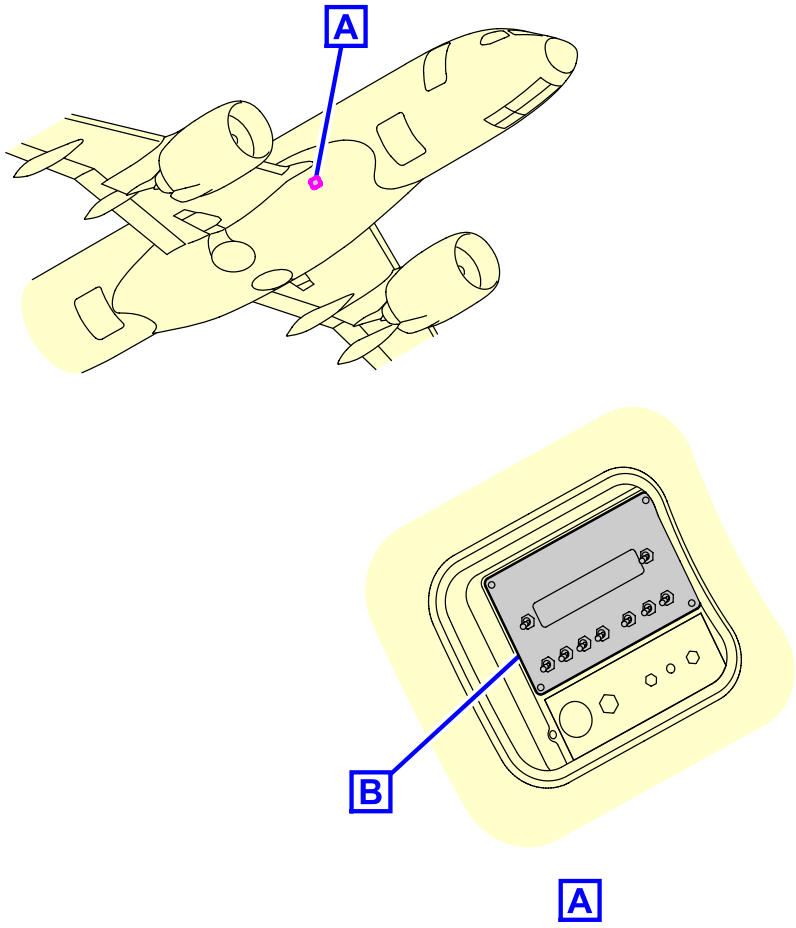

REFUEL/DEFUEL CONTROL PANEL

B

ICN-BD500-A-J000000-C-3AB48-79174-A-001-01

Figure 14 Refuel/Defuel system - (Sheet 2 of 2)

Table 12 Oil system

Access	Aft of nose ft (m)	Position from aircraft Centerline		Mean height from ground ft (m)
		RH side ft (m)	LH side ft (m)	
Engine Oil Filling Cap Access door (LH) 475CR (RH) 485CR	35.76 (10.9)	19.60 (5.97)	16.16 (4.93)	5.50 (1.68)

Note

All distances are approximate.

All height from ground distances are approximate and will vary with aircraft configuration and loading conditions.

Technical specifications

- Oil tank capacity: 6.8 U.S. gal (25.7 L)

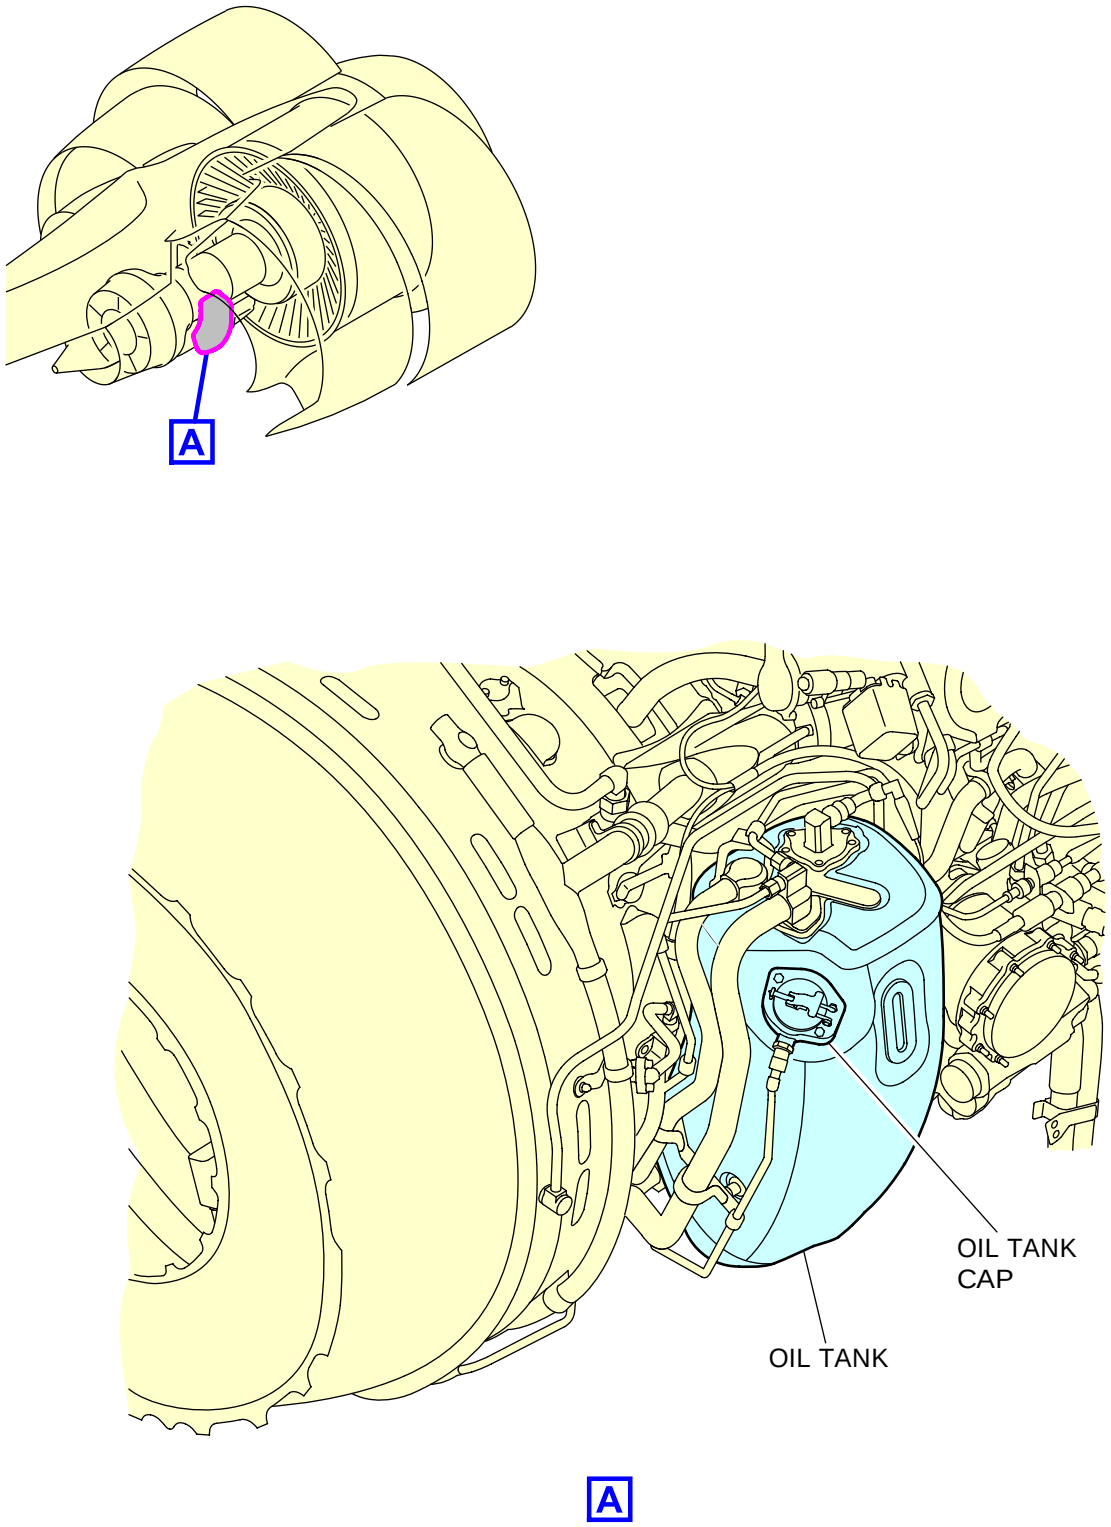

ICN-BD500-A-J791100-C-3AB48-09787-A-001-01

Figure 15 Oil storage system

1.4 Ground electrical power requirements

The external power system is used to connect AC electrical power from a ground cart. There are no provisions to connect DC power from an external ground cart. External AC can be used to power the complete AC distribution system or only those buses that provide power to the passenger compartment.

Note

It is recommended to use ground cart standard 75 KVA and higher. Using ground cart 60 KVA standard can lead to the EICAS nuisance messages.

When the external AC power is connected to the aircraft, both the AVAIL light on the electrical panel and on the electrical/towing service panel illuminate. The Bus Power Control Unit (BPCU) 1 energizes the External Line Contactor (ELC) to connect external power to the aircraft when the EXT PWR PBA in the flight compartment electrical panel is selected ON. The BPCU 1 also provides protection features to protect aircraft systems from potential permanent damage. Following aircraft power-up, several critical systems (Fly-By-Wire, Electrical and others) run their Power-Up Built-In Test (PBIT). The main purpose of PBITis to reduce the complexity of systems on-aircraft testing and removed failure dormancy, thereby decreasing the overall maintenance cost and reducing reliance upon external (pattern-programmed) test equipment for the operators. Any power interruption (Ground Power Unit (GPU) going offline or GPU power quality not meeting requirements) occurring during this critical phase may cause PBIT interruption and latch system failures which will require maintenance actions to clear. Depending on the latched faults, these power interruption events may potentially cause lengthy delays or flight cancellations which can negatively impact operators.

Refer to Table 13 for the external AC power requirements data.

Refer to Table 14 for the external power quality limitations data.

Refer to Table 15 for overcurrent protection ampere versus time delay.

Refer to Table 16 for overvoltage protection versus time delay.

Table 13 External AC power requirements

Voltage	Frequency
115 ±5 V	400 ±15 Hz

Table 14 External power quality limitations

Parameter	Setting limit	Response time
Overcurrent	Table 15	
Overvoltage (highest phase)	Table 16	
Redundant Overvoltage (highest phase)	130 ±3.3 V	0.75 ±0.055 sec
Undervoltage	107 ±2.0 V (lowest phase) or 108.5 ±2.0 V (3-phase average)	4.5 ±0.5 sec
Overfrequency	418 ±2 Hz	4.5 ±0.5 sec

Parameter	Setting limit	Response time
Underfrequency	382 ±2 Hz	4 ±0.5 sec
Phase sequence	A-B-C	0.1 sec
Open sequence	Lowest phase 15 ±5 A and other phase greater than 30 ±5 A	2.0 ±0.5 sec

Table 15 Overcurrent protection ampere versus time delay

Current (A)	Time (s)
230 ±12	300
336 ±12	11.75
337 ±12	11.05
346 ±12	9.4
355 ±12	8.2
370 ±12	6.75
380 ±12	6.1

Table 16 Overvoltage protection versus time delay

Voltage (V)	Time (s)
123	0.6
124	0.5
132	0.3
141	0.14
146	0.1
151	0.05

1.5 Engine starting pneumatic power requirements

The ground air supply requirements for engine starting are shown in Table 17.

Conditions:

- Time allowed during start (to starter cutout) is 90 seconds
- Time-to-IDLE on ground is 45 seconds minimum
- No bleed air extraction is permitted during start sequence

Table 17 Ground pneumatic power requirements – Engine starting

ATS requirements	Inlet Pressure	Airflow
ISA day	45 psig 45 psia	150 lb/min 68.04 kg/min

1.6 Ground pneumatic power requirements

1.6.1 Heating

This section provides the ground pneumatic power requirements for heating the cabin with specific conditions.

Refer to Fig. 16 for heating pull-up graphic.

Table 18 Ground air supply requirements for heating (Pull up)

Requirements	Pressure	Airflow	Temperature
To heat cabin to 69.8 °F (21 °C) in 30 minutes Conditions - Outside air temperature: -40 °F (-40 °C) - Initial cabin and cockpit temperature: -9.4 °F (-23 °C) - Cockpit, FWD & AFT CABIN Temp Selector: Full Hot (86 °F (30 °C)) - Recirculation fan: On - Trim air: On - No passenger	31 psig (45.7 psia)	203 lb/min (92.1 kg/min)	280 ºF (138 ºC)

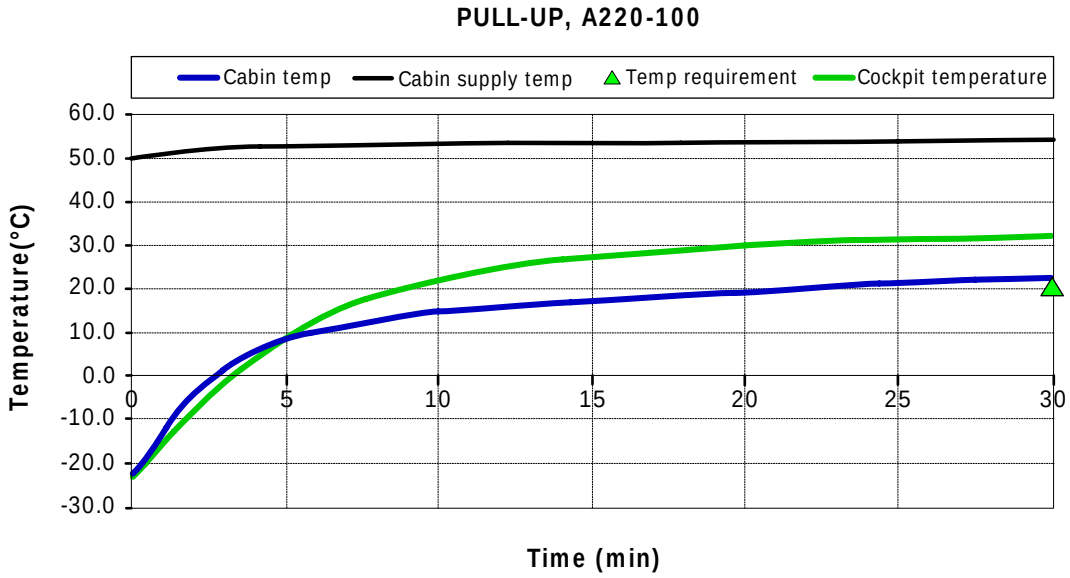

ICN-BD500-A-J000000-A-3AB48-22378-A-002-01

Figure 16 Ground pneumatic requirements - Heating

Table 19 Ground air supply requirements for heating at a steady state

Requirements	Pressure	Airflow	Temperature
Conditions - Outside air temperature: -40 °F (-40 °C) - Steady state Cockpit & Cabin temperature: 75.2 °F (24 °C) - Cockpit, FWD & AFT CABIN Temp Selector: Mid selection (75.2 °F (24 °C)) - Recirculation fan: On - Trim air: On - 15 passengers	25.4 psig (40.1 psia)	166 lb/min (73.3 kg/min)	253 ºF (123 ºC)

1.6.2 Cooling

This section provides the ground pneumatic power requirements for cooling the cabin with specific conditions.

Refer to Fig. 17 for the cooling pull-down graphic.

Table 20 Ground air supply requirements for cooling (Pull down)

Requirements	**Pressure**	**Airflow**	**Temperature**
To cool cabin to 80.6 °F (27 °C) in 30 minutes Conditions - Outside air temperature: 104 °F (40 C) - Initial cabin and cockpit temperature: 114.8 °F (46 °C) - Cockpit, FWD & AFT CABIN Temp Selector: Full Cold (64.4 °F (18 °C)) - Recirculation fan: On - Trim air: On - No passenger	38 psig (52.7 psia)	140 lb/min (63.5 kg/min)	437 ºF (225 ºC)

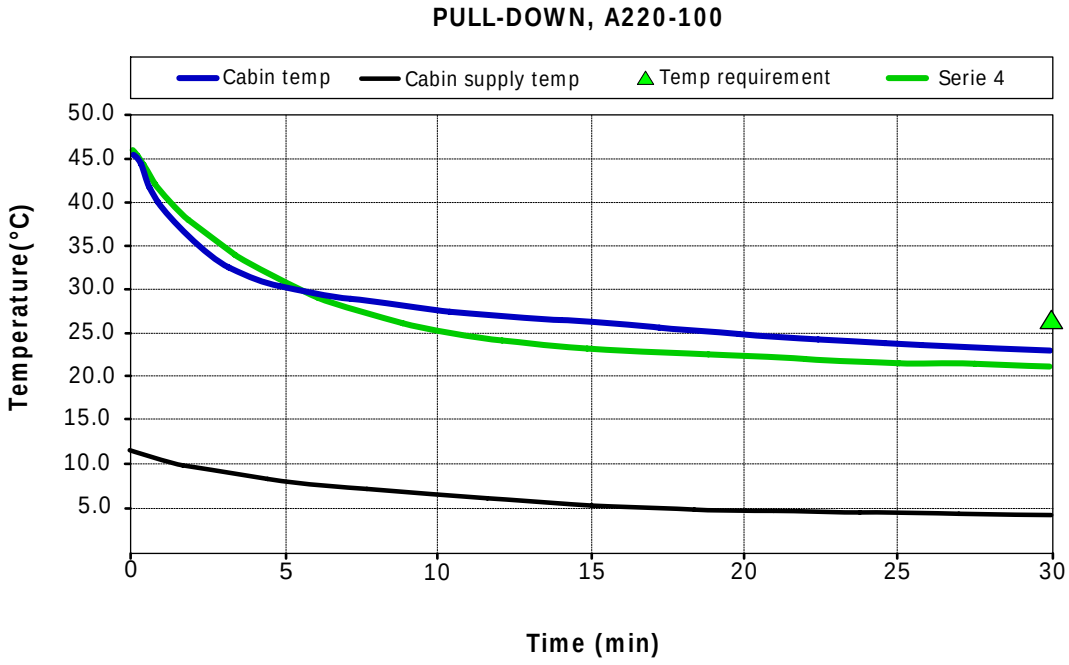

ICN-BD500-A-J000000-A-3AB48-22379-A-002-01

Figure 17 Ground pneumatic requirements - Cooling

Table 21 Ground air supply requirements for cooling at a steady state

Requirements	Pressure	Airflow	Temperature
Conditions - Outside air temperature: 104 °F (40 °C) - Steady state Cockpit & Cabin temperature: 75.2 °F (24 °C) - Cockpit, FWD & AFT CABIN Temp Selector: Mid selection (75.2 °F (24 °C)) - Recirculation fan: On - Trim air: On - 130 passengers	31 psig (45.7 psia)	203 lb/min (92.1 kg/min)	280 ºF (138 ºC)

1.7 Preconditioned airflow requirements

The ground air supply requirements for air conditioning and airflow requirements are shown in Table 22 for the LPGC.

Table 22 Preconditioned airflow requirements

Requirements	**Pressure**	**Airflow**	**Temperature**
To cool cabin to 75.2 °F (24 °C) Conditions - Outside air temperature is 104 °F (40 °C) - Recirculation fan is on - 130 passenger	0.6 psig (15.2 psia) (4.1 kPa)	125 lb/min (54.4 kg/min)	41 ºF (5 ºC)
To heat cabin to 75.2 °F (24 °C) Conditions - Outside air temperature is -40 °F (-40 °C) - Recirculation fan is on - 15 passenger	0.6 psig (15.2 psia) (4.1 kPa)	125 lb/min (54.4 kg/min)	104 ºF (40 ºC)

1.8 Ground towing requirements

The aircraft is designed with means for conventional or towbarless towing. Information and procedures can be found for both in the Aircraft Maintenance Manual (AMM) 09.

Status on towbarless towing equipment qualification can be found in CS-SL-09-10-0001.

1.9 Aircraft

This section shows the chart to determine the draw bar pull and tow tractor mass requirement as a function of the following physical characteristics:

- Model: A220-100
- Number of engines at idle

- Slope

The chart is based on the engine type with the highest idle thrust level. Refer to Fig. 18 and Fig. 19.

1.10 Towbar design guidelines

The towbar shall comply with the standards that follow:

- SAE AS 1614 - Main Line Aircraft Towbar Attach Fitting Interface
- ISO 8267-1 - Aircraft - Towbar Attachment Fitting - Interface Requirements - Part 1: Main Line Aircraft
- ISO 9667 - Aircraft Ground Support Equipment - Towbar
- SAE ARP 1915 - Aircraft Towbar

Recommended references

- IATA Airport Handling Manual AHM 958 - Functional Specification for an Aircraft Towbar
- EN 12312-7, Aircraft Ground Support Equipment - Specific Requirements - Part 7 Aircraft movement Equipment

A conventional type towbar is required which should be equipped with a damping system (to protect the nose gear against jerks) and with towing shear pins:

- A traction shear pin calibrated at 17,400 lbs (77 394 N),
- - A torsion pin calibrated at 59 940 In-lbs (6 772 N-m)

The towing head is designed according to SAE AS 1614, cat I.

For towing and pushing operations, controls are provided to accommodate the following conditions:

- Aircraft not powered (see note below):
  A control panel is provided on the left side of the aircraft by the nose NLG. A push-button on the control panel can be toggled to engage power to begin the towing sequence (Navigation lights are lit automatically). The parking brake can be deactivated by way of a switch located on this panel. Annunciation lights on the NLG indicate when the parking brake is deactivated and the aircraft is ready for towing.

  Note

  Availability of the controls to facilitate towing the aircraft with the flight deck vacant does not constitute an approval to conduct such operations.

- Aircraft powered, and flight deck occupied:
  Two separate controls, one to deactivate the nose wheel steering, and one to deactivate the parking brake, are located in both the flight deck and on the control panel located in the vicinity of the nose landing gear. Headset jacks are provided on this control panel to allow for communication between personnel on the flight deck and on the ground. Annunciation lights on the control panel indicate when the aircraft is ready for towing.
  With the torque links connected, towing up to ±130 degrees nose wheel angle is possible.
  The ground towing requirements are described in the illustration below.
  For more information related to towing, refer to the AMP.

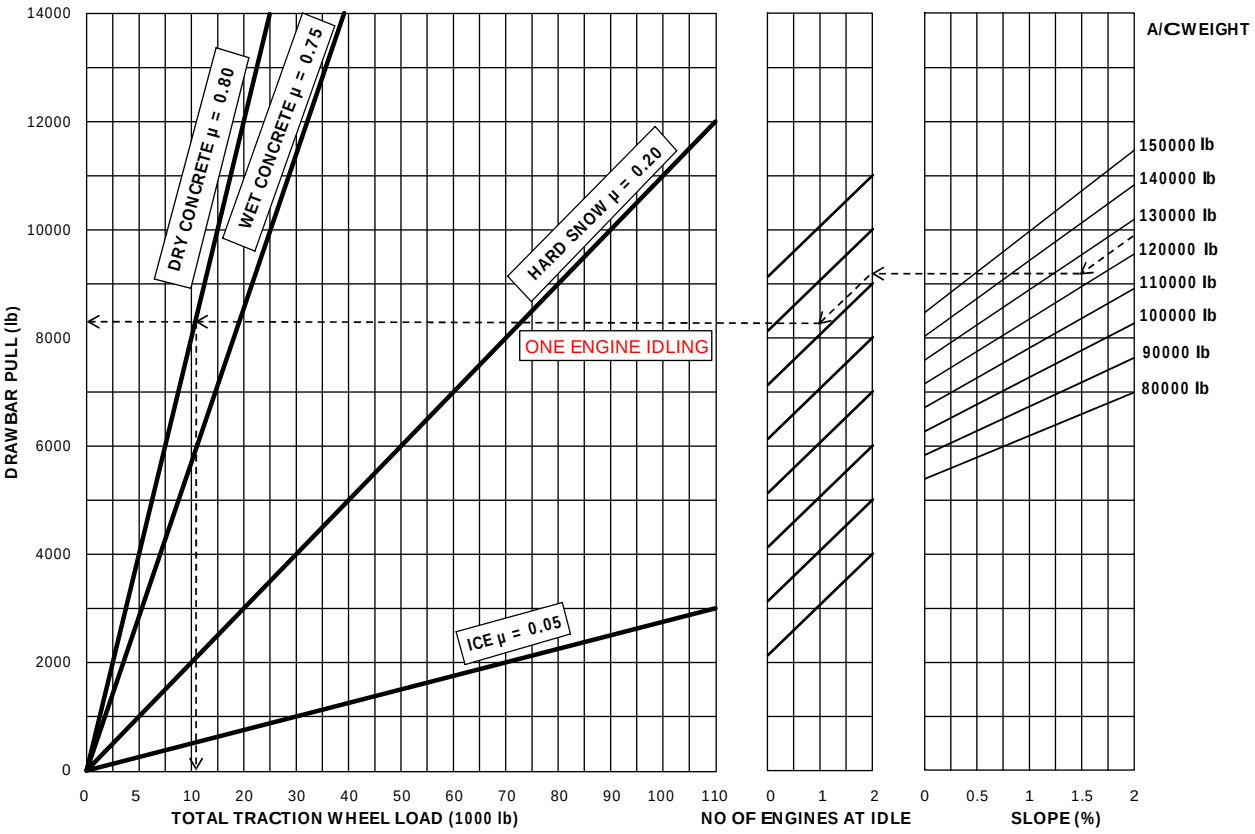

NOTES

1. Unusual breakaway conditions not reflected.
2. Estimated for rubber - tired tow vehicles.
3. Coefficient of friction (μ) approximate.
4. Example: At an aircraft gross weight of 125000lbs (56699 Kg), an uphill slope of 1.5%, with one engine ON and with a dry concrete surface, the corresponding draw bar pull or push required is 8000 lb (35.6 kN) and the total tractor weight of approximately 10 500 lbs (4762 Kg).

ICN-BD500-A-J000000-A-3AB48-22839-A-001-01

Figure 18 Ground towing requirements (imperial unit)

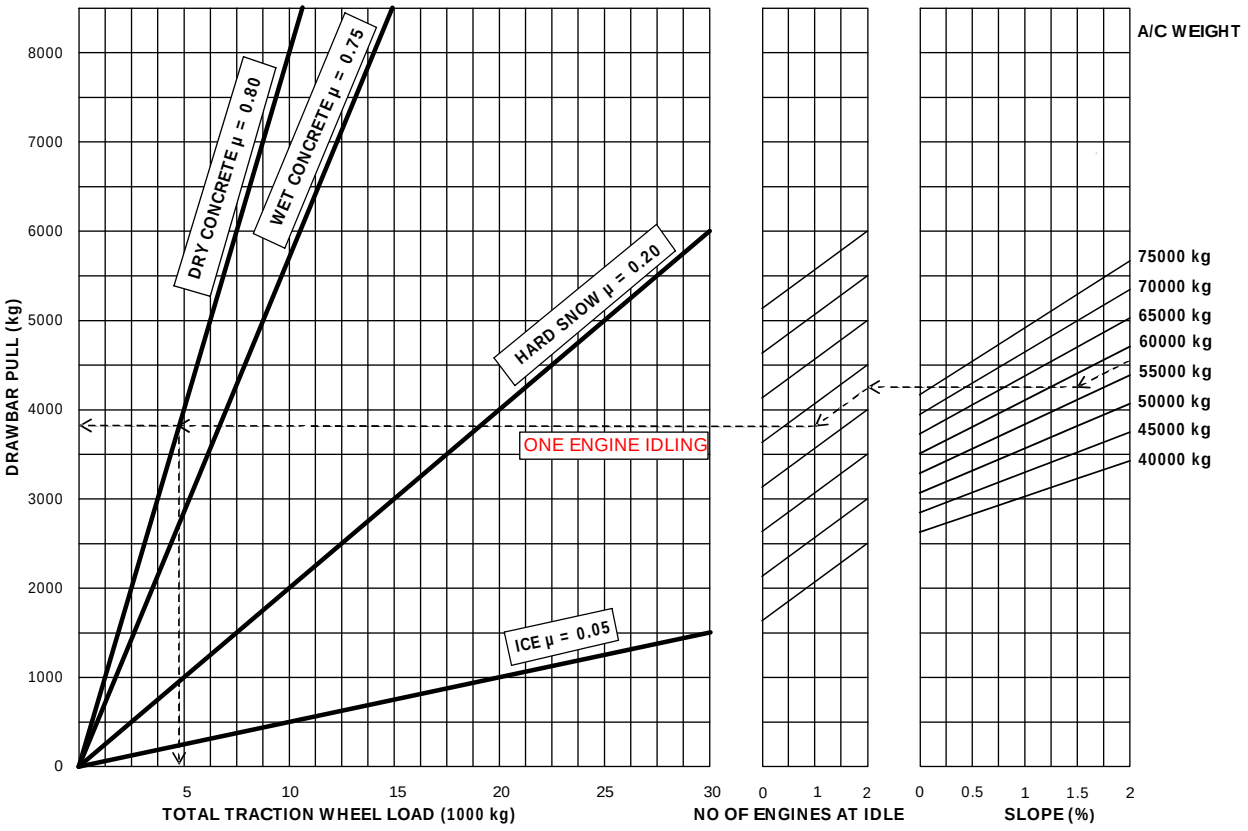

NOTES

1. Unusual breakaway conditions not reflected.
2. Estimated for rubber - tired tow vehicles.
3. Coefficient of friction (μ) approximate.
4. Example: At an aircraft gross weight of 125000lbs (56699 Kg), an uphill slope of 1.5%, with one engine ON and with a dry concrete surface, the corresponding draw bar pull or push required is 8000 lb (35.6 kN) and the total tractor weight of approximately 10 500 lbs (4762 Kg).

ICN-BD500-A-J000000-A-3AB48-22840-A-001-01

Figure 19 Ground towing requirements (metric unit)

A220

Terminal servicing - Technical data

Applicability:
55001-59999

Table of contents

Page

Terminal servicing - Technical data 1
References 2
Description 2
1 Introduction 2
1.1 Aircraft servicing arrangement 2
1.2 Terminal operations 4
1.3 Ground servicing connections 6
1.4 Ground electrical power requirements 31
1.5 Engine starting pneumatic power requirements 32
1.6 Ground pneumatic power requirements 33
1.6.1 Heating 33
1.6.2 Cooling 35
1.7 Preconditioned airflow requirements 37
1.8 Ground towing requirements 37
1.9 Aircraft 37
1.10 Towbar design guidelines 37

List of tables

Page

1 References 2
2 Hydraulic system 8
3 Hydraulic system - Accumulator charging 10
4 Waste system 12
5 Potable water system 14
6 Pneumatic system 16
7 Electrical System 19
8 Oxygen system 21
9 Grounding points 23
10 Fuel system Refuel/Defuel adapter 25
11 Fuel system control panel 27
12 Oil system 29
13 External AC power requirements 31
14 External power quality limitations 31
15 Overcurrent protection ampere versus time delay 32
16 Overvoltage protection versus time delay 32
17 Ground pneumatic power requirements – Engine starting 33
18 Ground air supply requirements for heating (Pull-up) 33
19 Ground air supply requirements for heating at a steady state 35
20 Ground air supply requirements for cooling (Pull down) 35
21 Ground air supply requirements for cooling at a steady state 37
22 Preconditioned airflow requirements 37

List of figures

Page

1 Aircraft servicing arrangement 3
2 Turnaround time analysis 5
3 Ground servicing connections 7
4 Ground servicing system 9

5 Accumulator charging valves..... 11
6 Waste system access panel..... 13
7 Potable water system service panel..... 15
8 Low pressure ground system..... 17
9 High pressure ground system..... 18
10 Electrical service panel..... 20
11 Crew oxygen system..... 22
12 Landing gears grounding points..... 24
13 Refuel adapter..... 26
14 Refuel/Defuel system..... 28
15 Oil storage system..... 30
16 Ground pneumatic requirements - Heating..... 34
17 Ground Pneumatic Requirements - Cooling..... 36
18 Ground towing requirements (imperial unit)..... 39
19 Ground towing requirements (metric unit)..... 40

References

Table 1 References

Data Module/Technical Publication	Title
None	

Description

1 Introduction

This data module contains data related to the preparation of an aircraft for flight from a terminal. This data is provided to show the general types of tasks involved in terminal operations. Each airline has different operating conditions and practices, which can result in changes in the operating procedures and time intervals to do the tasks specified. Because of this, requirements for ground operations should be approved with the specified airline(s) before ramp planning is started. This section presents the following topics:

- Aircraft servicing arrangement
- Terminal operations
- Ground servicing connections
- Ground electrical power requirements
- Ground pneumatic power requirements – Engine starting
- Preconditioned airflow requirements – Air conditioning
- Ground towing requirements.

Note

All applicable procedures and limitations are provided in the Aircraft Maintenance Publication (AMP) BD500-3AB48-10200-00.

1.1 Aircraft servicing arrangement

Refer to Fig. 1 for the aircraft servicing arrangement.

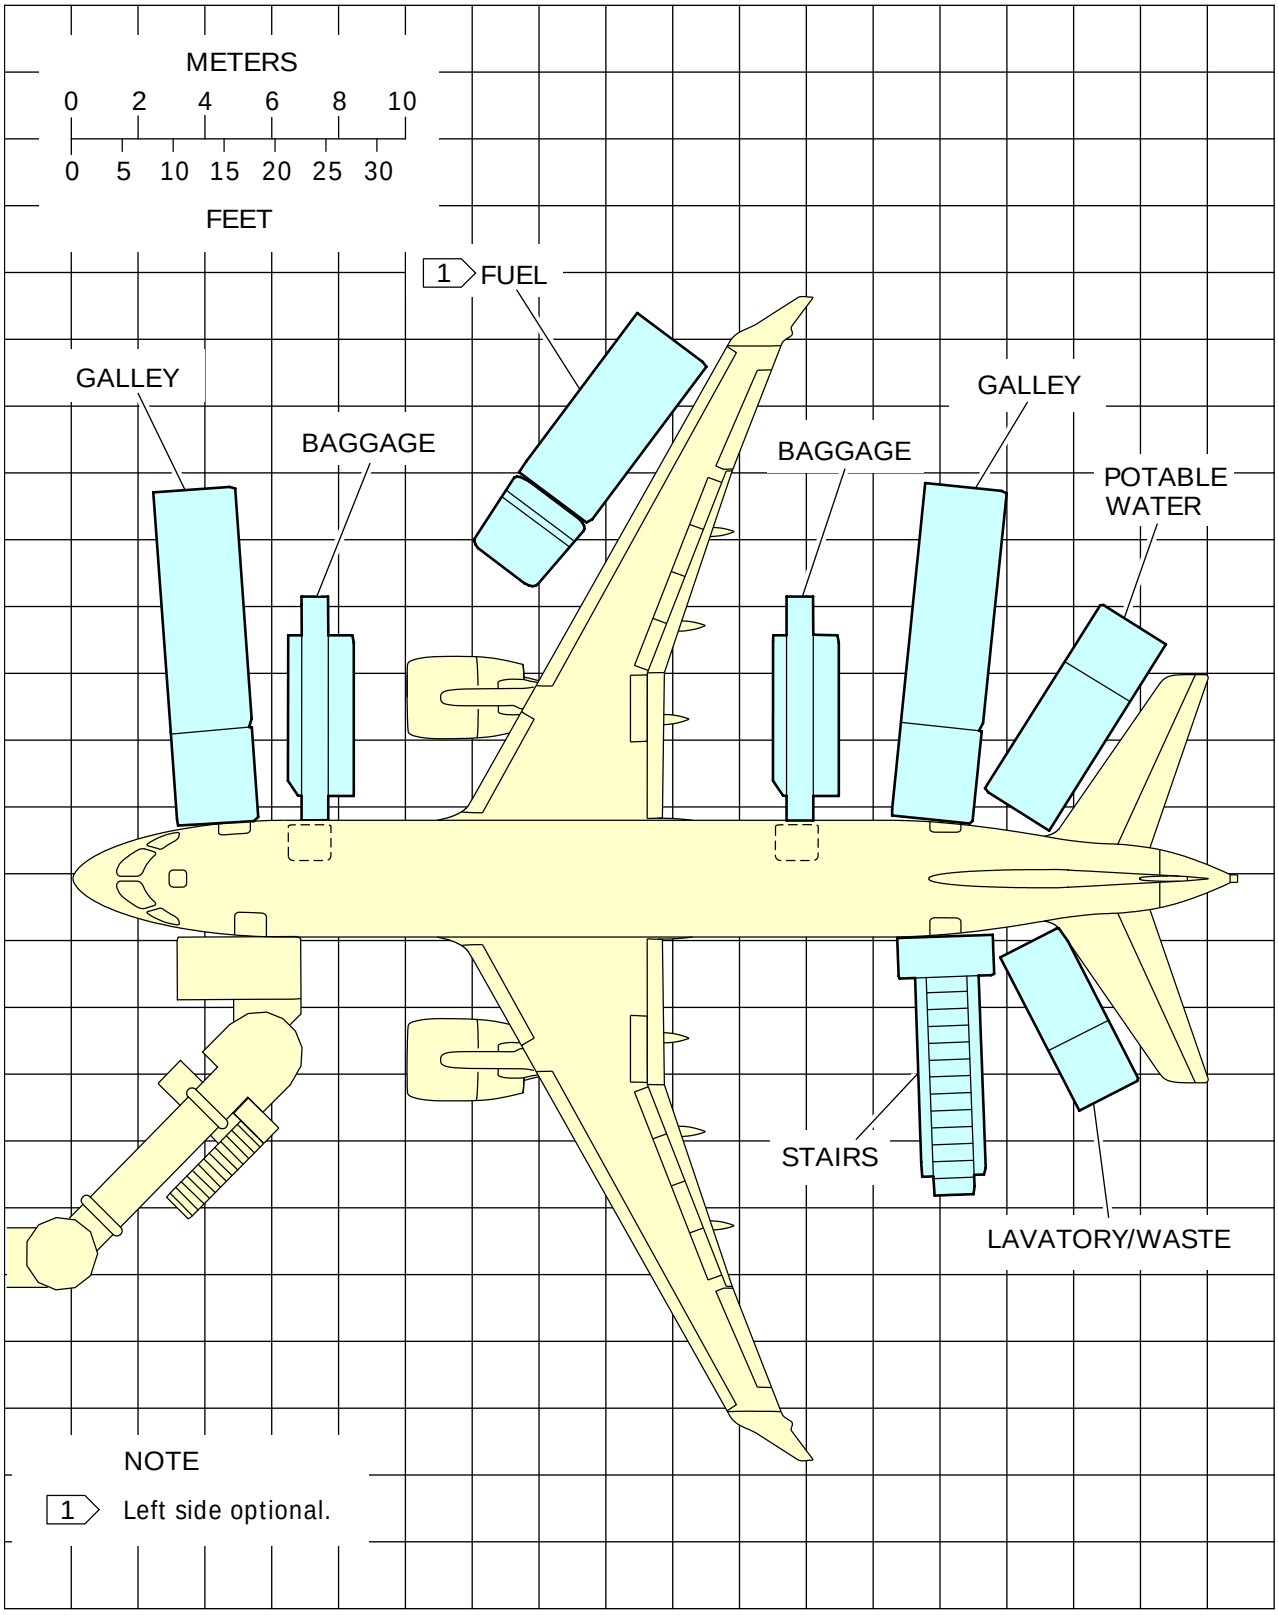

ICN-BD500-A-J000000-A-3AB48-21739-A-001-01

Figure 1 Aircraft servicing arrangement

1.2 Terminal operations

Refer to refer to Fig. 2 for the turnaround station operations.

The turnaround time analysis is based on the following parameters:

- 100% Pax/baggage exchange
- 115 passengers (A220-300) (85% load factor) / 1 class / 1 door
- 2 Galley service trucks
- Water/Waste servicing is sequential
- Cabin servicing during available time
- Passenger deplane rate is 18 per minute per door
- Passenger boarding rate is 12 per minute per door
- 2 bulk-loading belt-loaders
- 59 bags forward / 79 bags aft (1.2 x 4 ft^3 (1.2 X 0.11 m^3) per passenger)
- Bag loading/unloading rates are 10 and 15 bags per minute
- Fuel loaded via one refuel/defuel adapter
- Refuel adapter rate at 50 psi (344.74 kPa) is as follows:

  1 When refueling tree (3) tanks simultaneously (the center tank and two wing tanks), the refuel rate is 260 gpm (984 L/min).

  2 When refueling two (2) wing tanks, the refuel rate is 140 gpm (530 L/min).

  3 When refueling the center tank only, the refuel rate is 140 gpm (530 L/min).

- Mission range is 1200 NM (2222.4 km)
- Refueling performed while deplaning/boarding.

Note

All equipment is assumed to function properly and weather condition to be normal. This data is provided to illustrate the general scope and type of operations involved in a terminal gate environment. Varying operating practices and circumstances may result in different task sequences and durations.

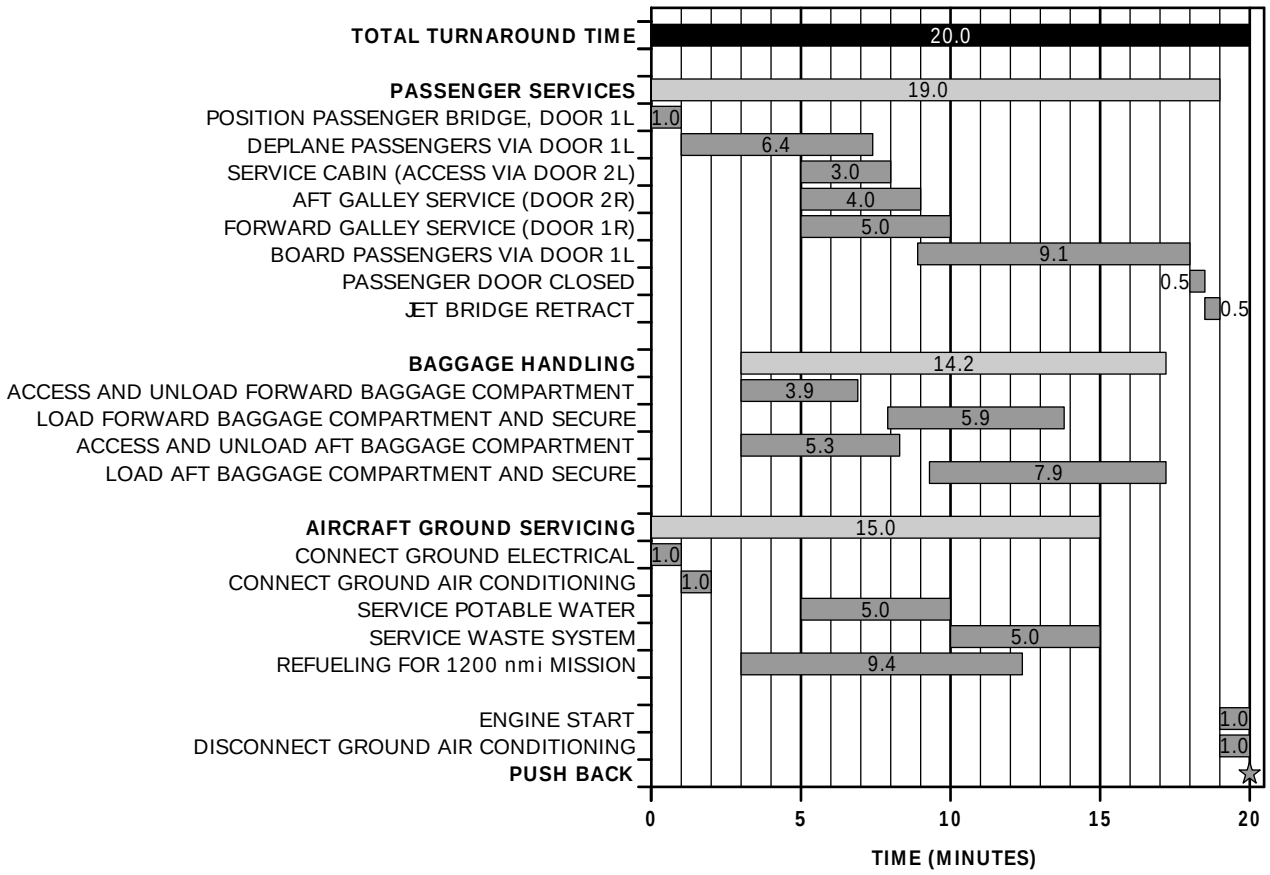

ICN-BD500-A-J000005-A-3AB48-00067-A-001-01

Figure 2 Turnaround time analysis

1.3 Ground servicing connections

Refer to Fig. 3 for the ground servicing connection points. For servicing procedures, refer to the AMP.

All servicing points are designed and positioned to consider accessibility and compatibility with industry standard vehicles and other Ground Support Equipment (GSE). All applicable procedures and limitations are provided in the AMP.

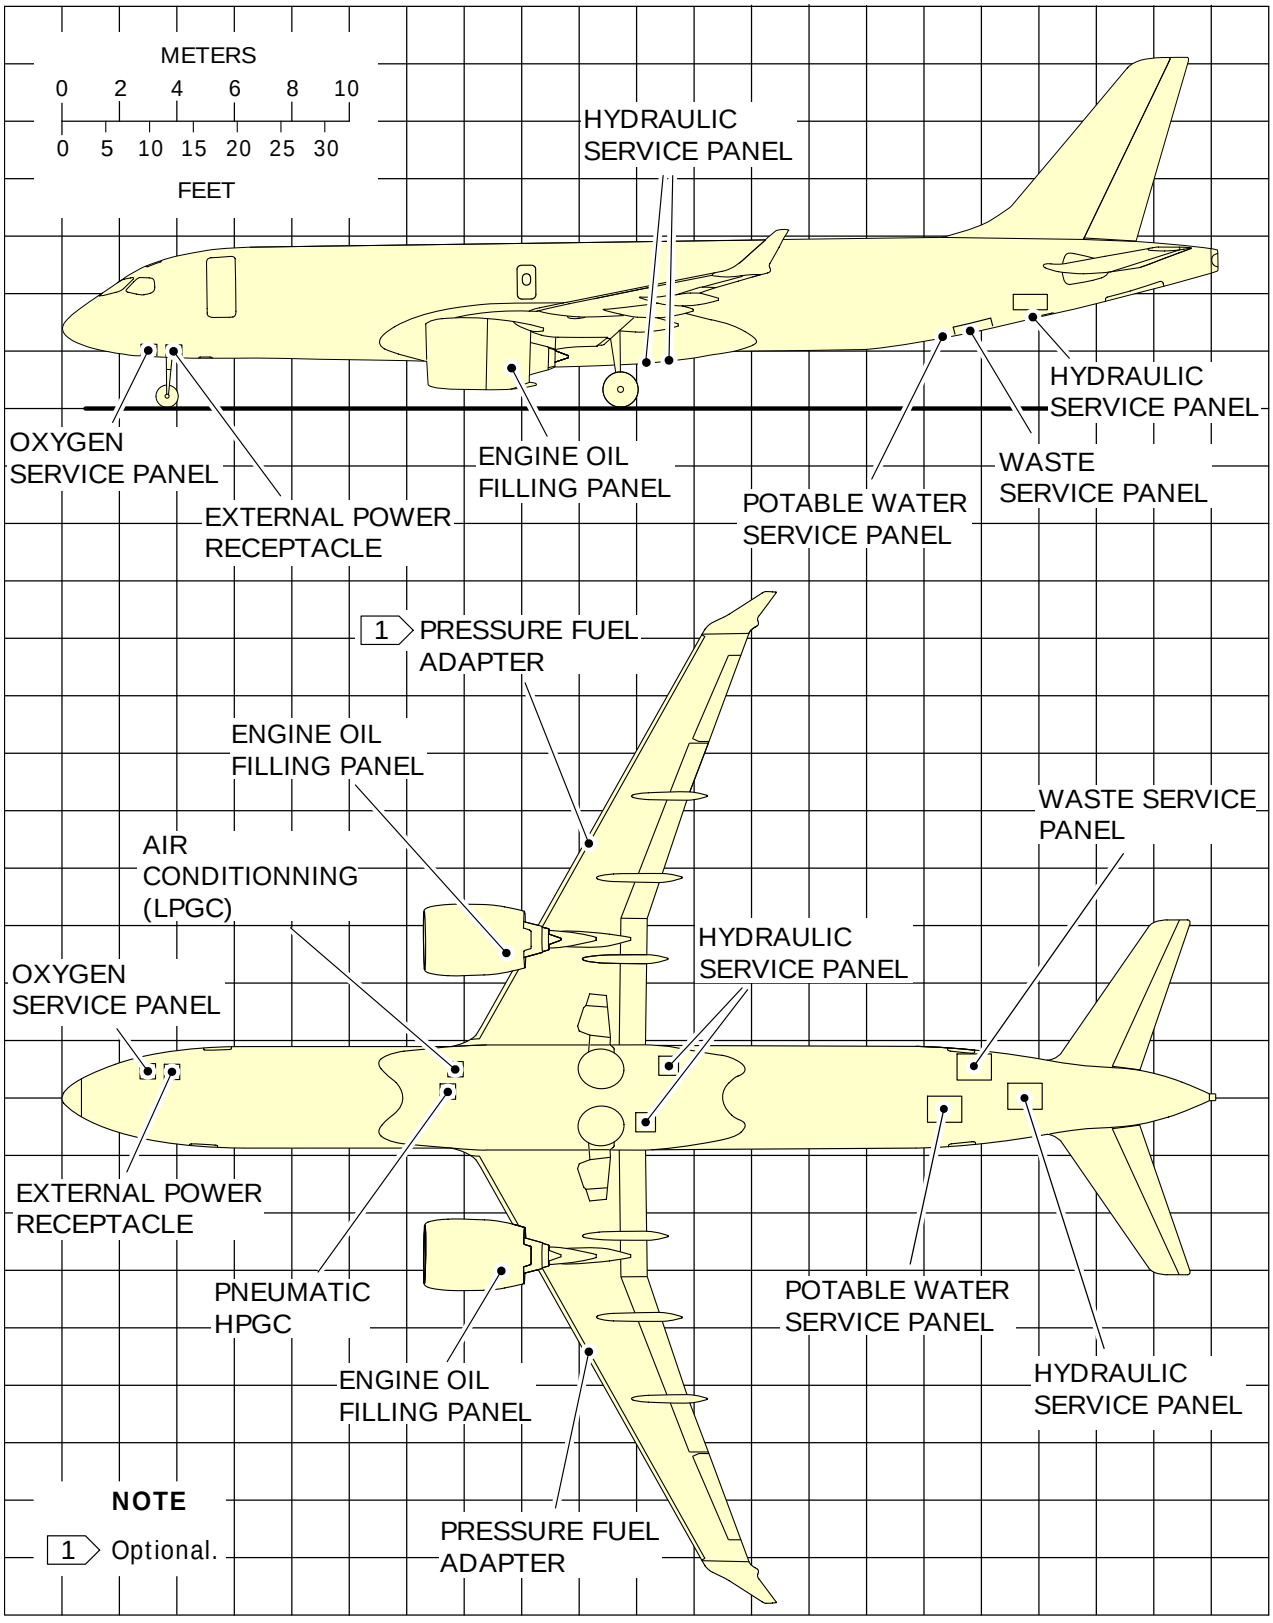

ICN-BD500-A-J000000-A-3AB48-25644-A-001-01

Figure 3 Ground servicing connections

Table 2 Hydraulic system

Access	Aft of nose ft (m)	Position from aircraft Centerline		Mean height from ground ft (m)
		RH side ft (m)	LH side ft (m)	
System # 1 Access door 195CB	67.96 (20.71)	-	3.93 (8.20)	5.82 (1.77)
System # 2 Access door 195AB	65.543 (19.98)	2.795 (0.85)	-	5.57 (1.70)
System # 3 Aft equipment bay door	107.42 (32.74)	On centerline of the aircraft		8.77 (2.67)

Note

All distances are approximate.

All height from ground distances are approximate and will vary with aircraft configuration and loading conditions.

Technical specifications

- Nominal pressure: 3000 psig (206.84 bar)
- Fitting connectors
  - Fitting dimension: Draining: 4 in. (10.16 cm)
  - Fitting dimension: Rinsing: 1 in. (2.54 cm)

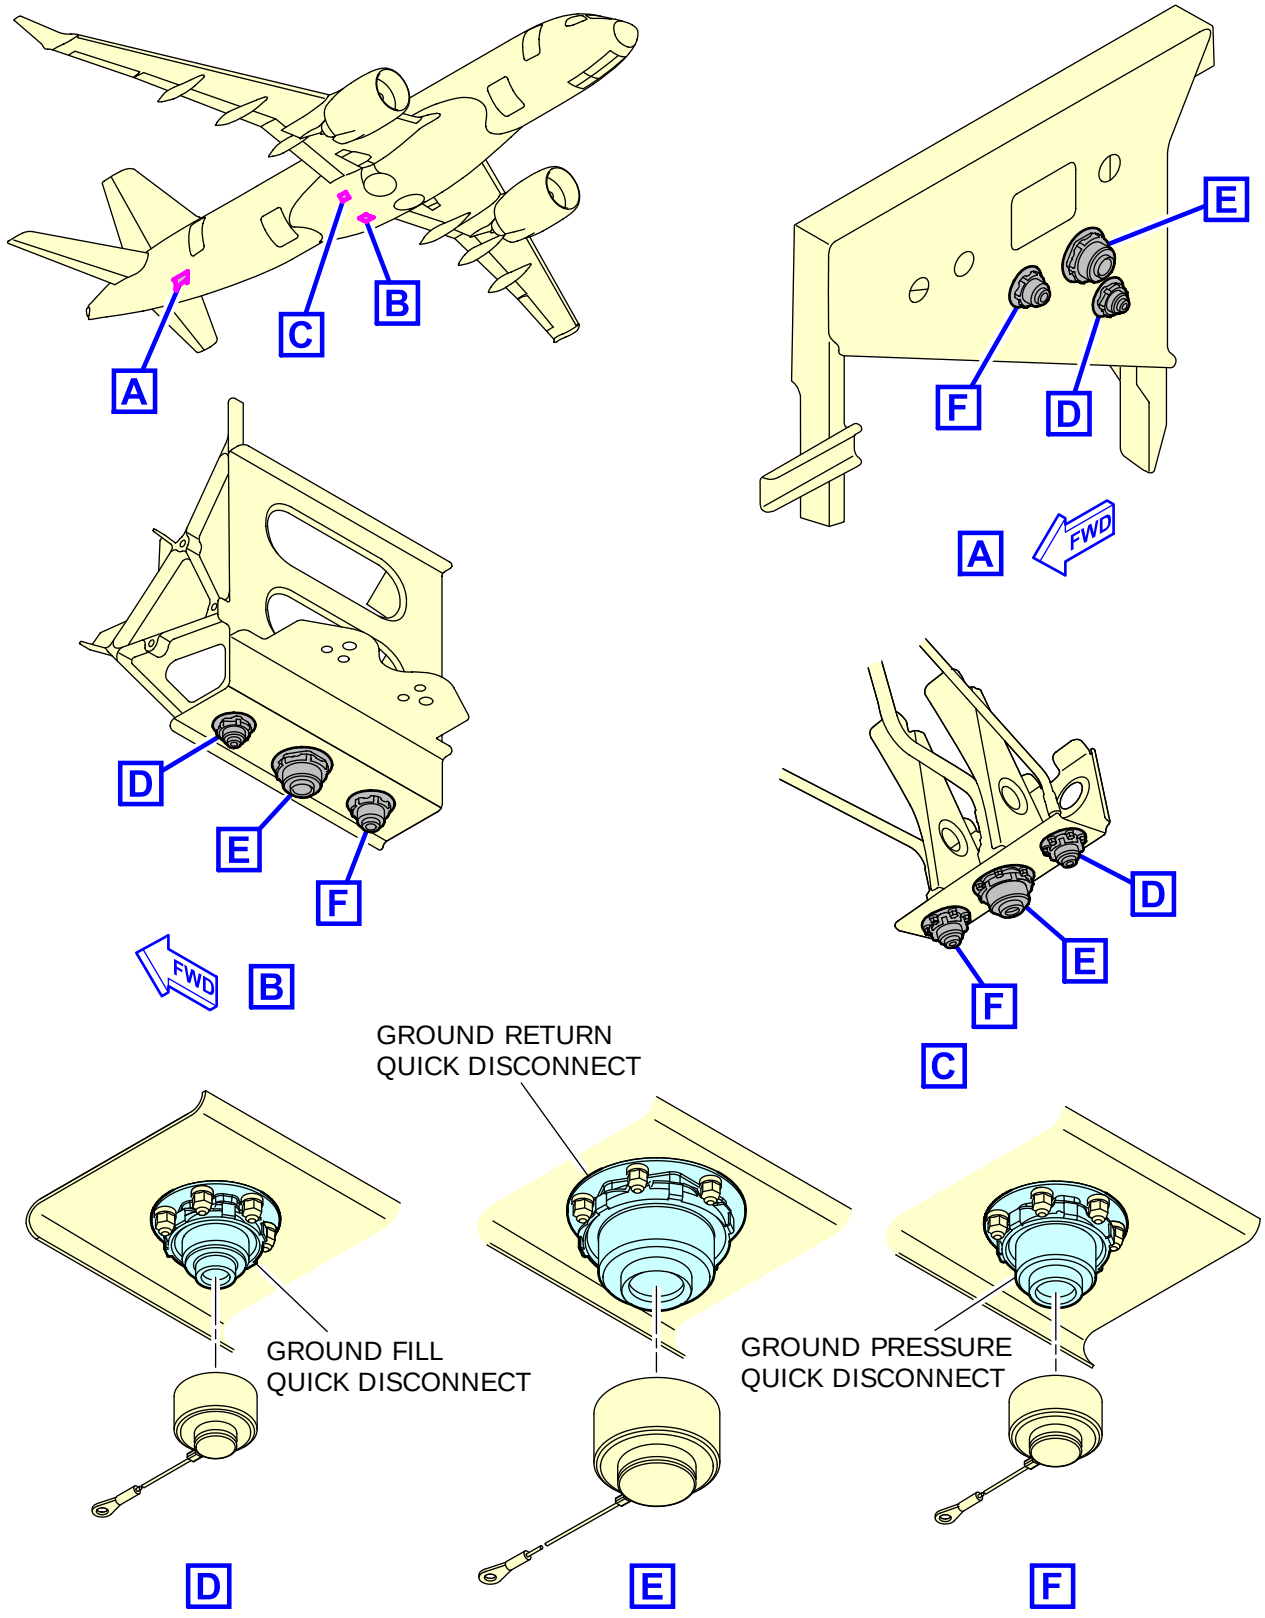

ICN-BD500-A-J291400-C-3AB48-15827-A-001-01

Figure 4 Ground servicing system

Table 3 Hydraulic system - Accumulator charging

Access	Aft of nose ft (m)	Position from aircraft Centerline		Mean height from ground ft (m)
		RH side ft (m)	LH side ft (m)	
Aft equipment bay door	107.42 (32.74)	On centerline of the aircraft		8.77 (2.67)

Note

All distances are approximate.

All height from ground distances are approximate and will vary with aircraft configuration and loading conditions.

Technical specifications

- Operating pressure: 3000 psig (206.84 bar)
- Accumulator pressure gauge range: 0 to 5000 psig (344.74 bar)
- Gauge accuracy: ±75 psig (5.17 bar)

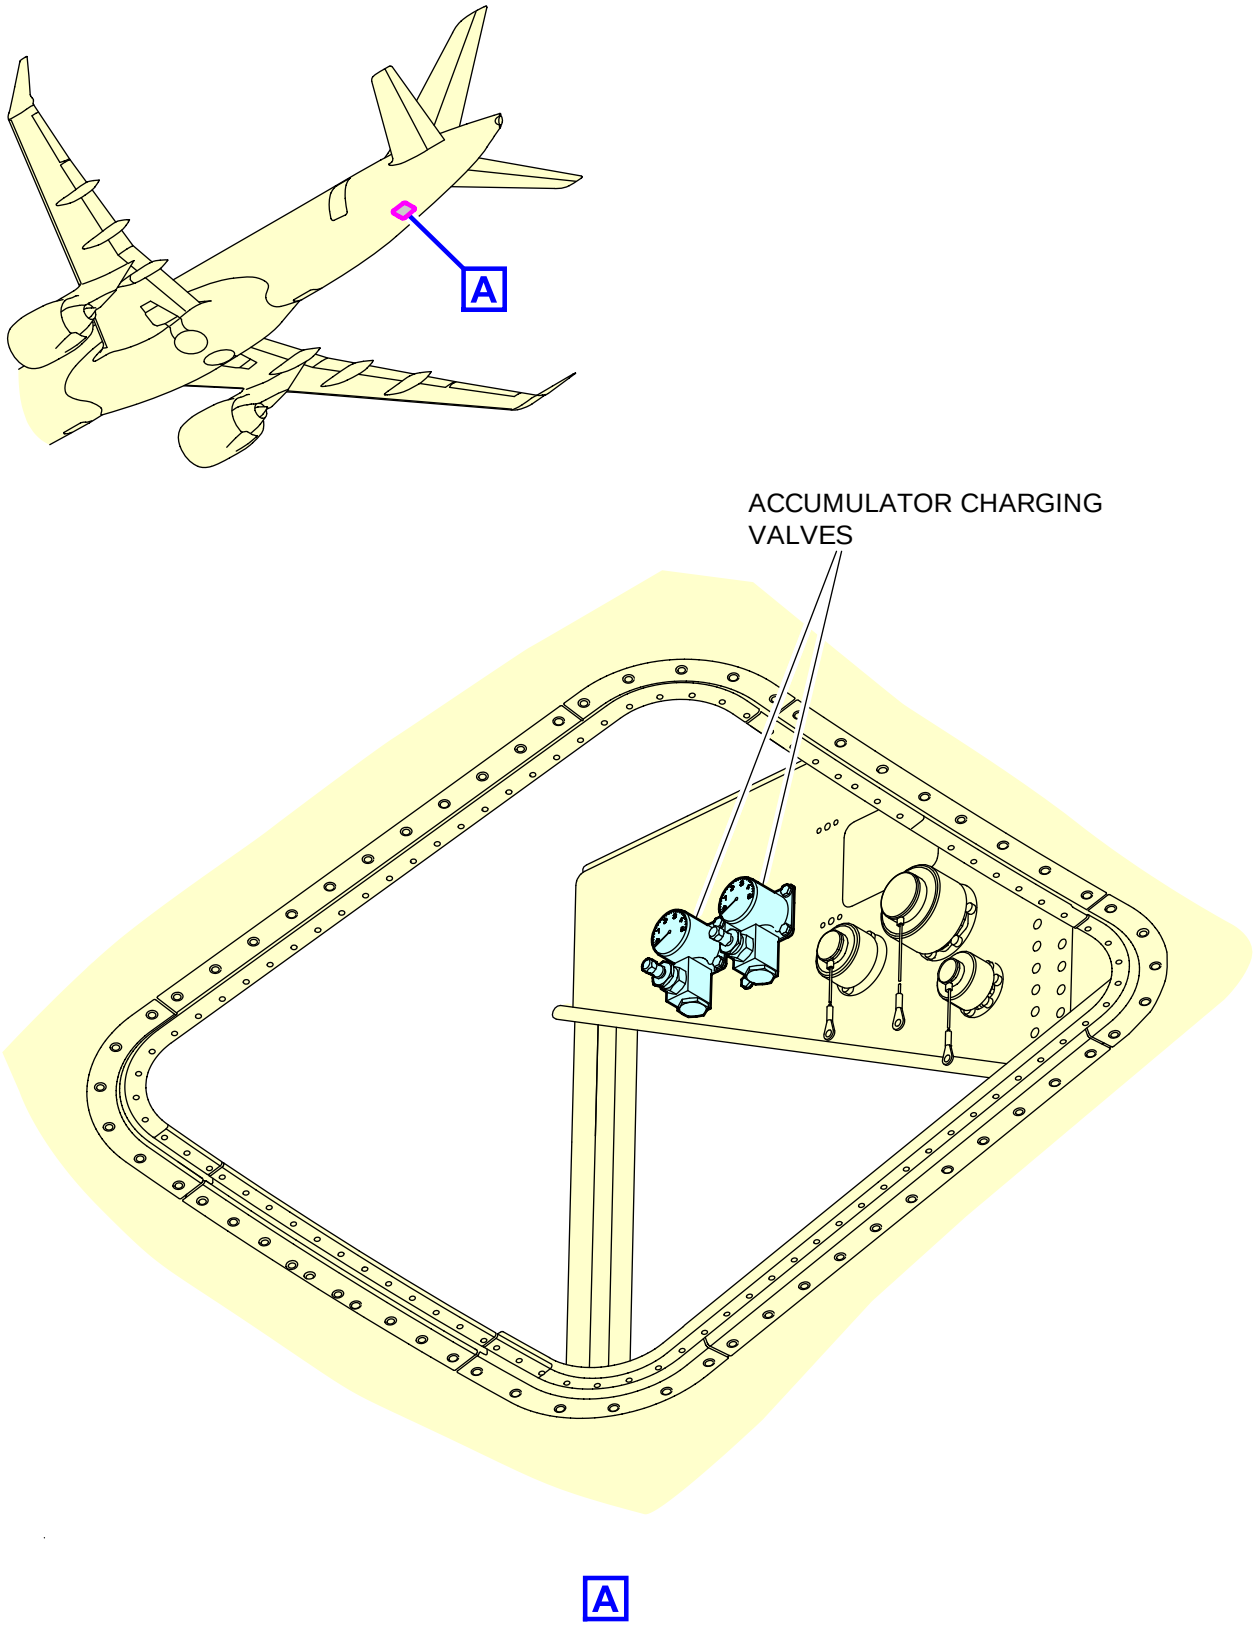

ICN-BD500-A-J000000-A-3AB48-22071-A-001-01

Figure 5 Accumulator charging valves

Table 4 Waste system

Access	Aft of nose ft (m)	Position from aircraft Centerline		Mean height from ground ft (m)
		RH side ft (m)	LH side ft (m)	
Access door 146BR	99.10 (30.21)	-	1.21 (0.37)	7.14 (2.18)

Note

All distances are approximate.

All height from ground distances are approximate and will vary with aircraft configuration and loading conditions.

Technical specifications

- Usable volume: 38 U.S. gal (143.85 L)
- Fitting connectors
  - Fitting dimension: Draining: 4 in. (10.16 cm)
  - Fitting dimension: Rinsing: 1 in. (2.54 cm)

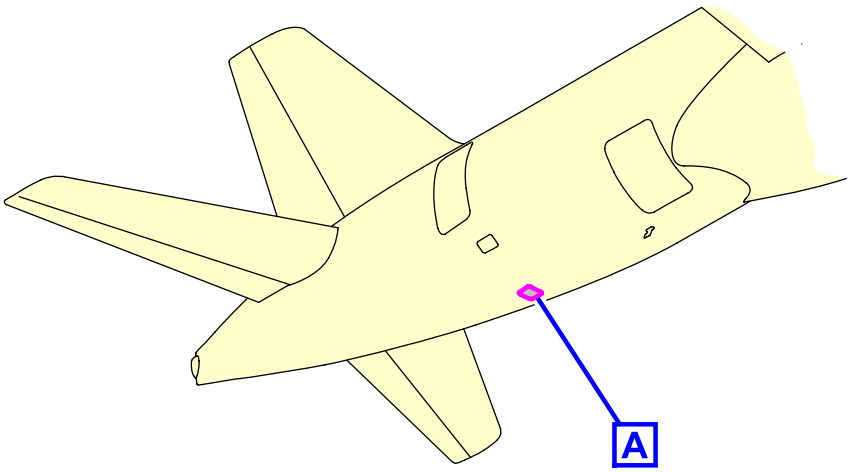

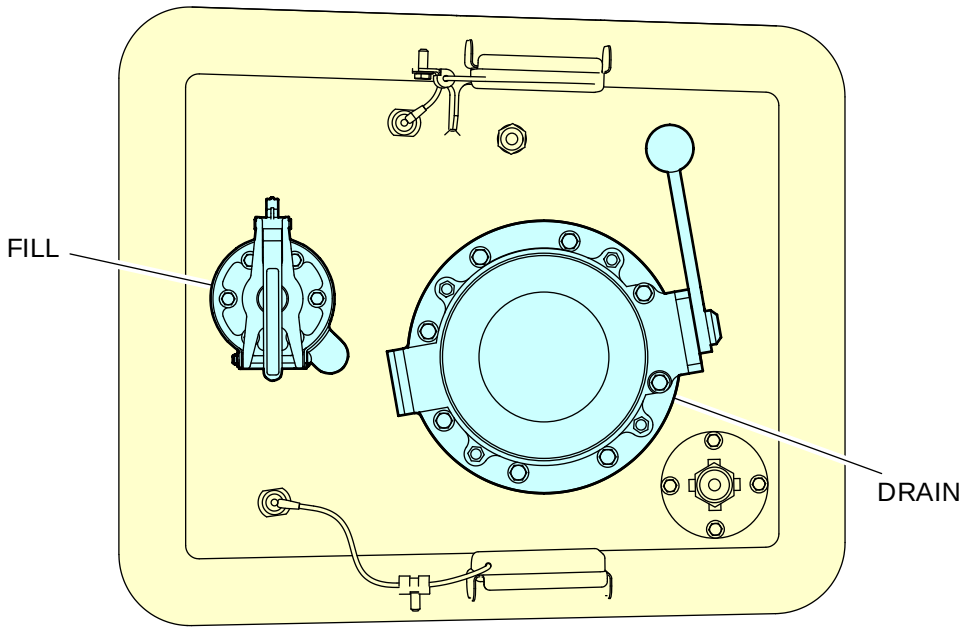

WASTE ACCESS PANEL

A

ICN-BD500-A-J000000-A-3AB48-22008-A-001-01

Figure 6 Waste system access panel

Table 5 Potable water system

Access	Aft of nose ft (m)	Position from aircraft Centerline		Mean height from ground ft (m)
		RH side ft (m)	LH side ft (m)	
Access door 146CR	97.05 (29.58)	3.661 (1.11)	-	7.75 (2.36)

Note

All distances are approximate.

All height from ground distances are approximate and will vary with aircraft configuration and loading conditions.

Technical specifications

- Usable volume: 42 U.S. gal (158.99 L)
- Fitting dimension: Filling/Draining: 3/4 in. (1.905 cm)

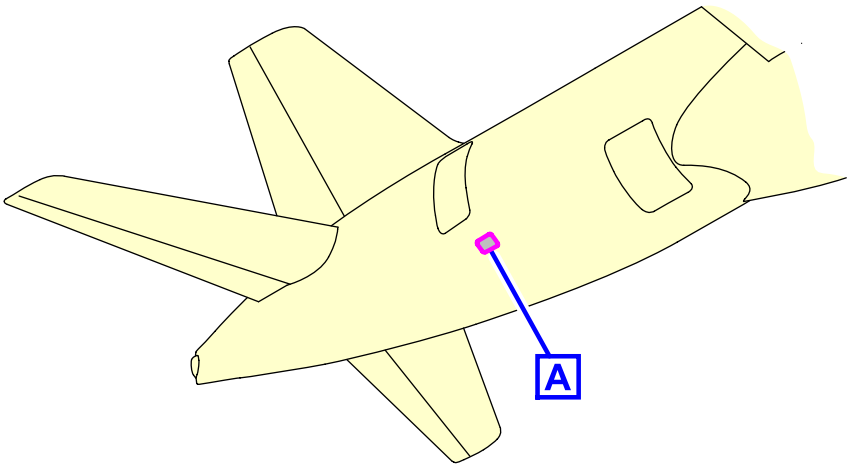

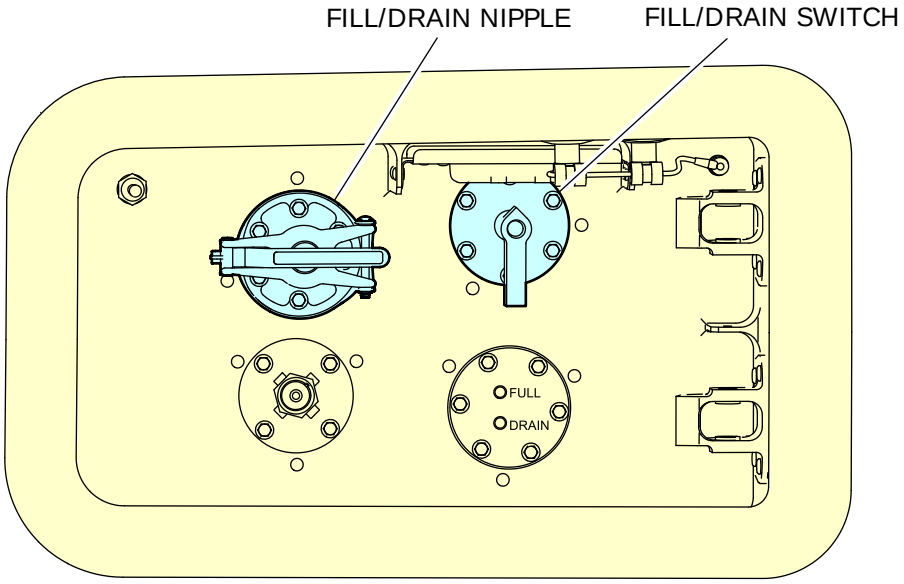

POTABLE WATER SERVICE PANEL

A

ICN-BD500-A-J000000-A-3AB48-22007-A-001-01

Figure 7 Potable water system service panel

Table 6 Pneumatic system

Access	Aft of nose ft (m)	Position from aircraft Centerline		Mean height from ground ft (m)
		RH side ft (m)	LH side ft (m)	
LPGC Access door 191BB	44.76 (13.64)	-	4.33 (1.32)	5.30 (1.61)
HPGC Access door 191AB	44.38 (13.53)	-	1.30 (0.40)	4.62 (1.41)

Note

All distances are approximate.

All height from ground distances are approximate and will vary with aircraft configuration and loading conditions.

Technical specifications

- **Low Pressure Ground Connection (LPGC) Spec**
  - Discharge pressure range: 0.7 to 1.0 psig maximum (0.05 to 0.07 bar maximum)
  - Temp range: 41 to 122 °F maximum (5 to 50 °C maximum)
  - Max airflow: 140 lb/min
  - Fitting dimension: 8 in. (20.32 cm)
  - LP Ground Cart Standard pneumatic connection per ISO 1034 or MS 33562
- **High Pressure Ground Connection (HPGC) Spec**
  - Bleed pressure range: 30 to 45 psig maximum (2.07 to 3.10 bar maximum)
  - Bleed temperature range: 338 to 450 °F (170 to 232 °C)
  - Airflow range: 100 to 140 lb/min
  - Fitting dimension: 3 in. (7.62 cm)
  - HP Ground Cart Standard pneumatic connection per ISO 2026 or MS 33740

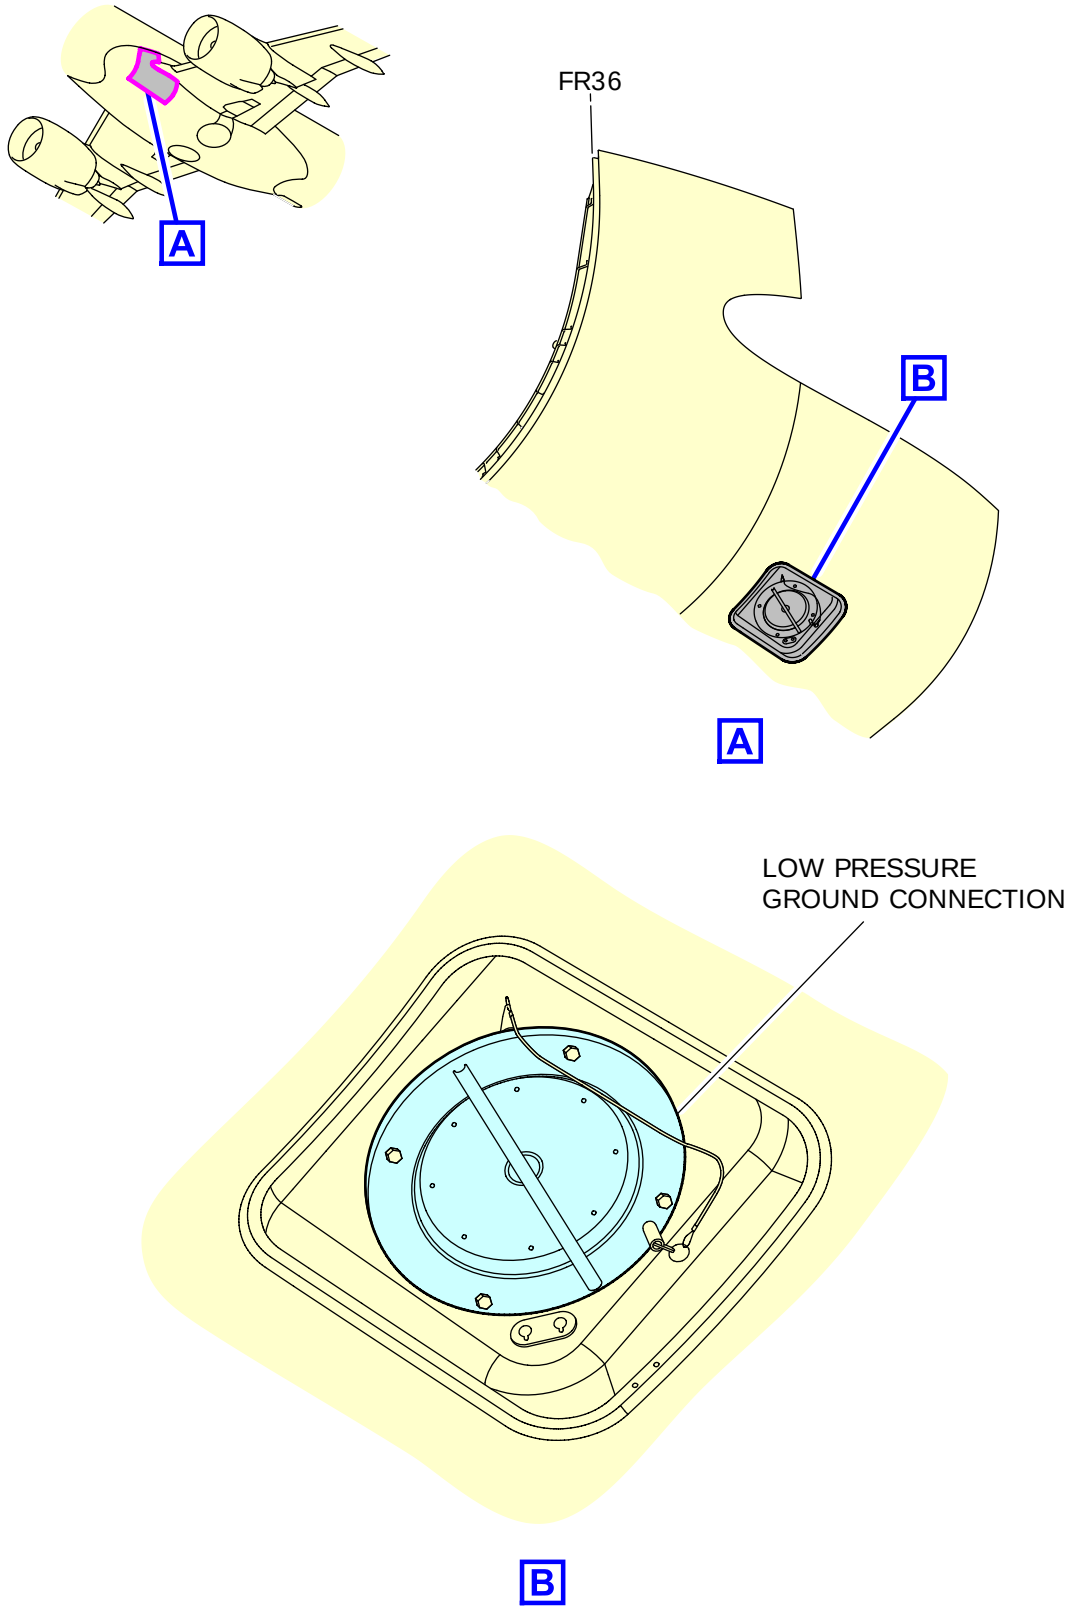

ICN-BD500-A-J212100-C-3AB48-19016-A-001-01

Figure 8 Low pressure ground system

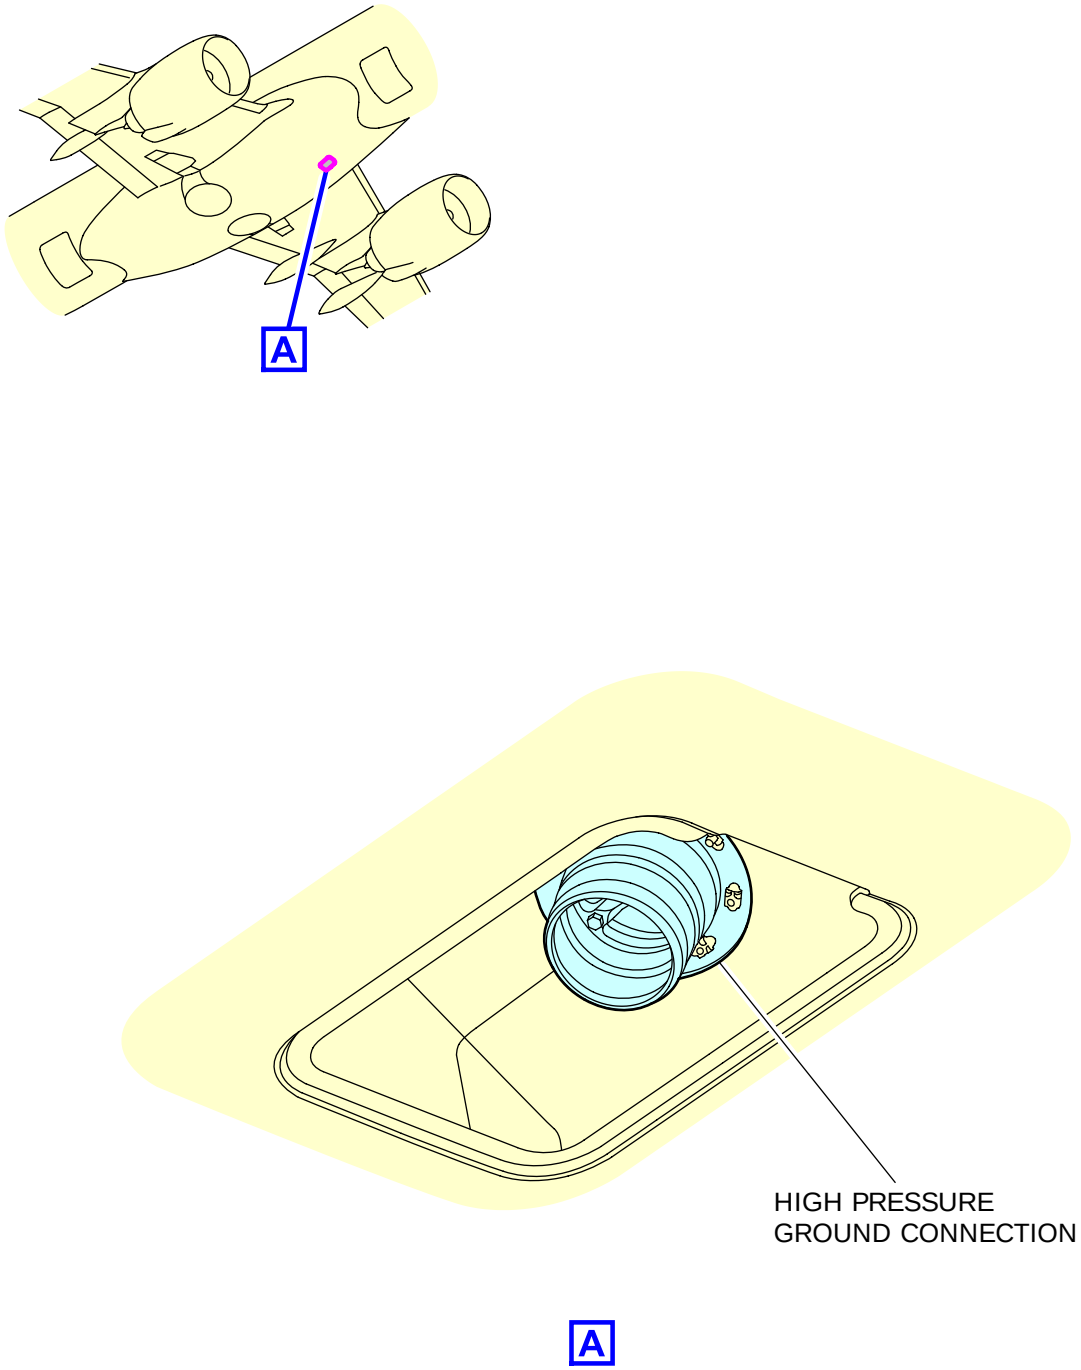

ICN-BD500-A-J361500-C-3AB48-15114-A-001-01

Figure 9 High pressure ground system

Table 7 Electrical System

Access	Aft of nose ft (m)	Position from aircraft Centerline		Mean height from ground ft (m)
		RH side ft (m)	LH side ft (m)	
Access door Access door 115DL	11.71 (3.57)	-	2.68 (0.82)	6.37 (1.94)

Note

All distances are approximate.

All height from ground distances are approximate and will vary with aircraft configuration and loading conditions.

Technical specifications

- Power supply: 115 V Alternating Current (AC) External Power Receptacle

Note

For more specification about the electrical system, refer to Para. 1.4 .

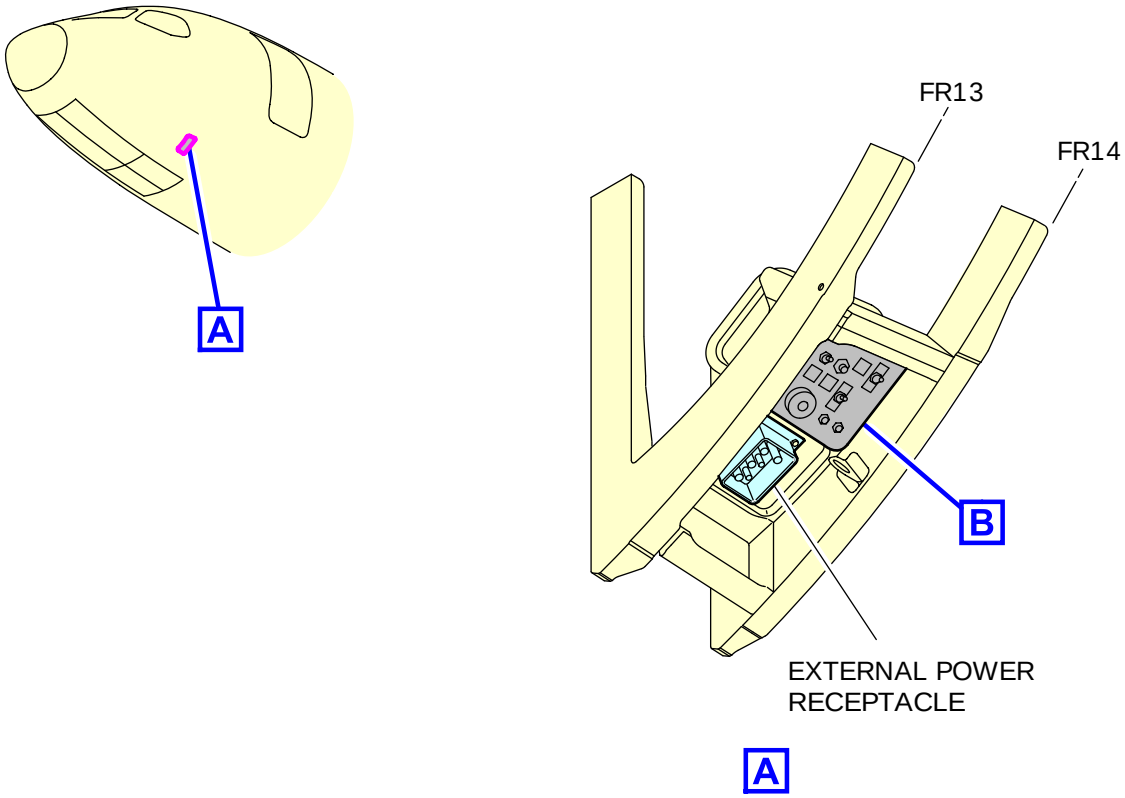

A

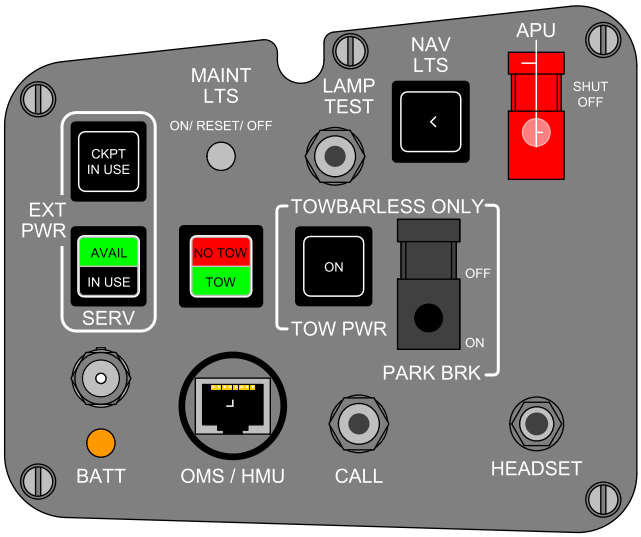

ELECTRICAL/TOWING SERVICE PANEL

B

ICN-BD500-A-J000000-A-3AB48-22070-A-001-01

Figure 10 Electrical service panel

Table 8 Oxygen system

Access	Aft of nose ft (m)	Position from aircraft Centerline		Mean height from ground ft (m)
		RH side ft (m)	LH side ft (m)	
Access door 115CL	10.20 (3.11)	-	2.60 (0.79)	6.44 (1.96)

Note

All distances are approximate.

All height from ground distances are approximate and will vary with aircraft configuration and loading conditions.

Technical Specifications

- Nominal working pressure: 1850 psig (128 bar)
- Capacity: 77 ft³ (2180 L)

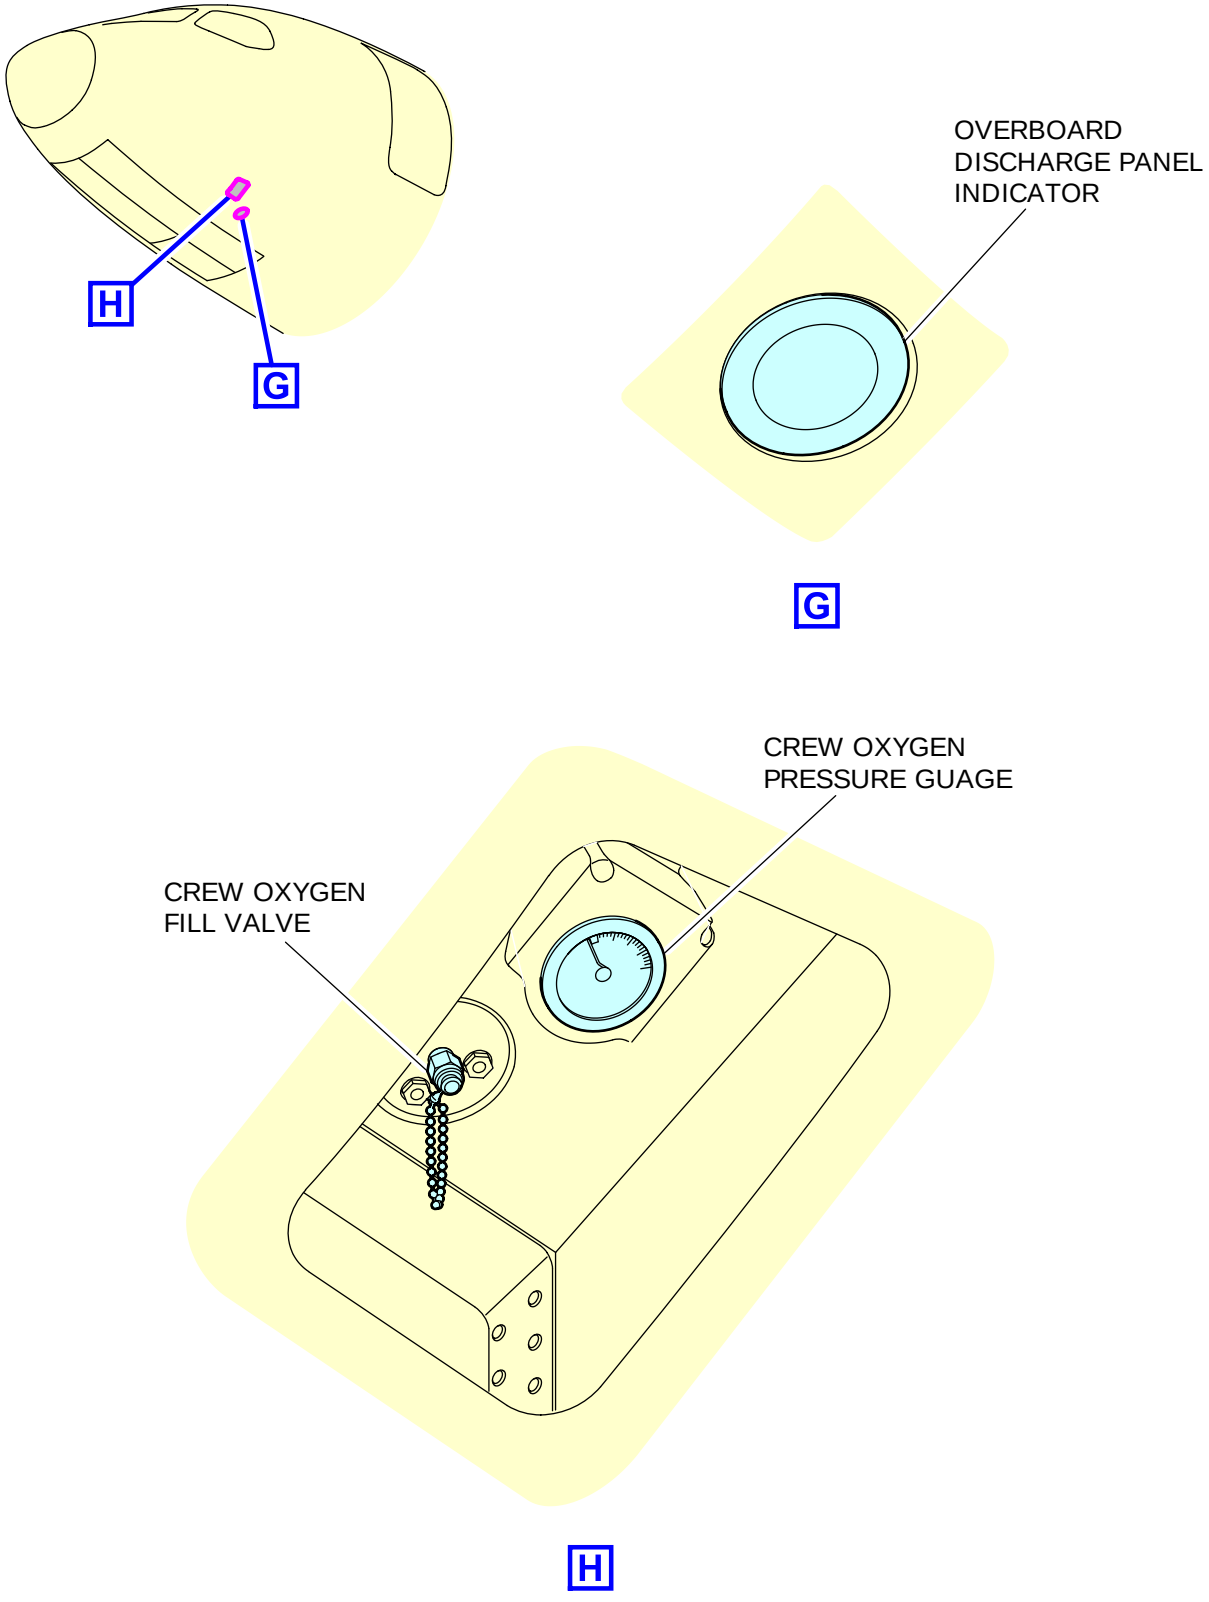

ICN-BD500-A-J351100-C-3AB48-20623-A-001-01

Figure 11 Crew oxygen system

Table 9 Grounding points

Access	Aft of nose ft (m)	Position from aircraft Centerline	Mean height from ground ft (m)	
		RH side ft (m)		LH side ft (m)
NLG leg	11.73 (3.58)	On aircraft centerline	5.00 (1.51)	
Left MLG leg	60.23 (18.36)	-	10.75 (3.27)	2.85 (0.87)
Right MLG leg	60.23 (18.36)	10.75 (3.27)	-	2.85 (0.87)
LH Refuel/Defuel Access door 621FB (Optional)	58.32 (17.78)	-	27.31 (8.32)	10.93 (3.33)
RH Refuel/Defuel Access door 521FB Fig. 13	58.32 (17.78)	27.31 (8.32)	-	10.93 (3.33)

Note

All distances are approximate.

All height from ground distances are approximate and will vary with aircraft configuration and loading conditions.

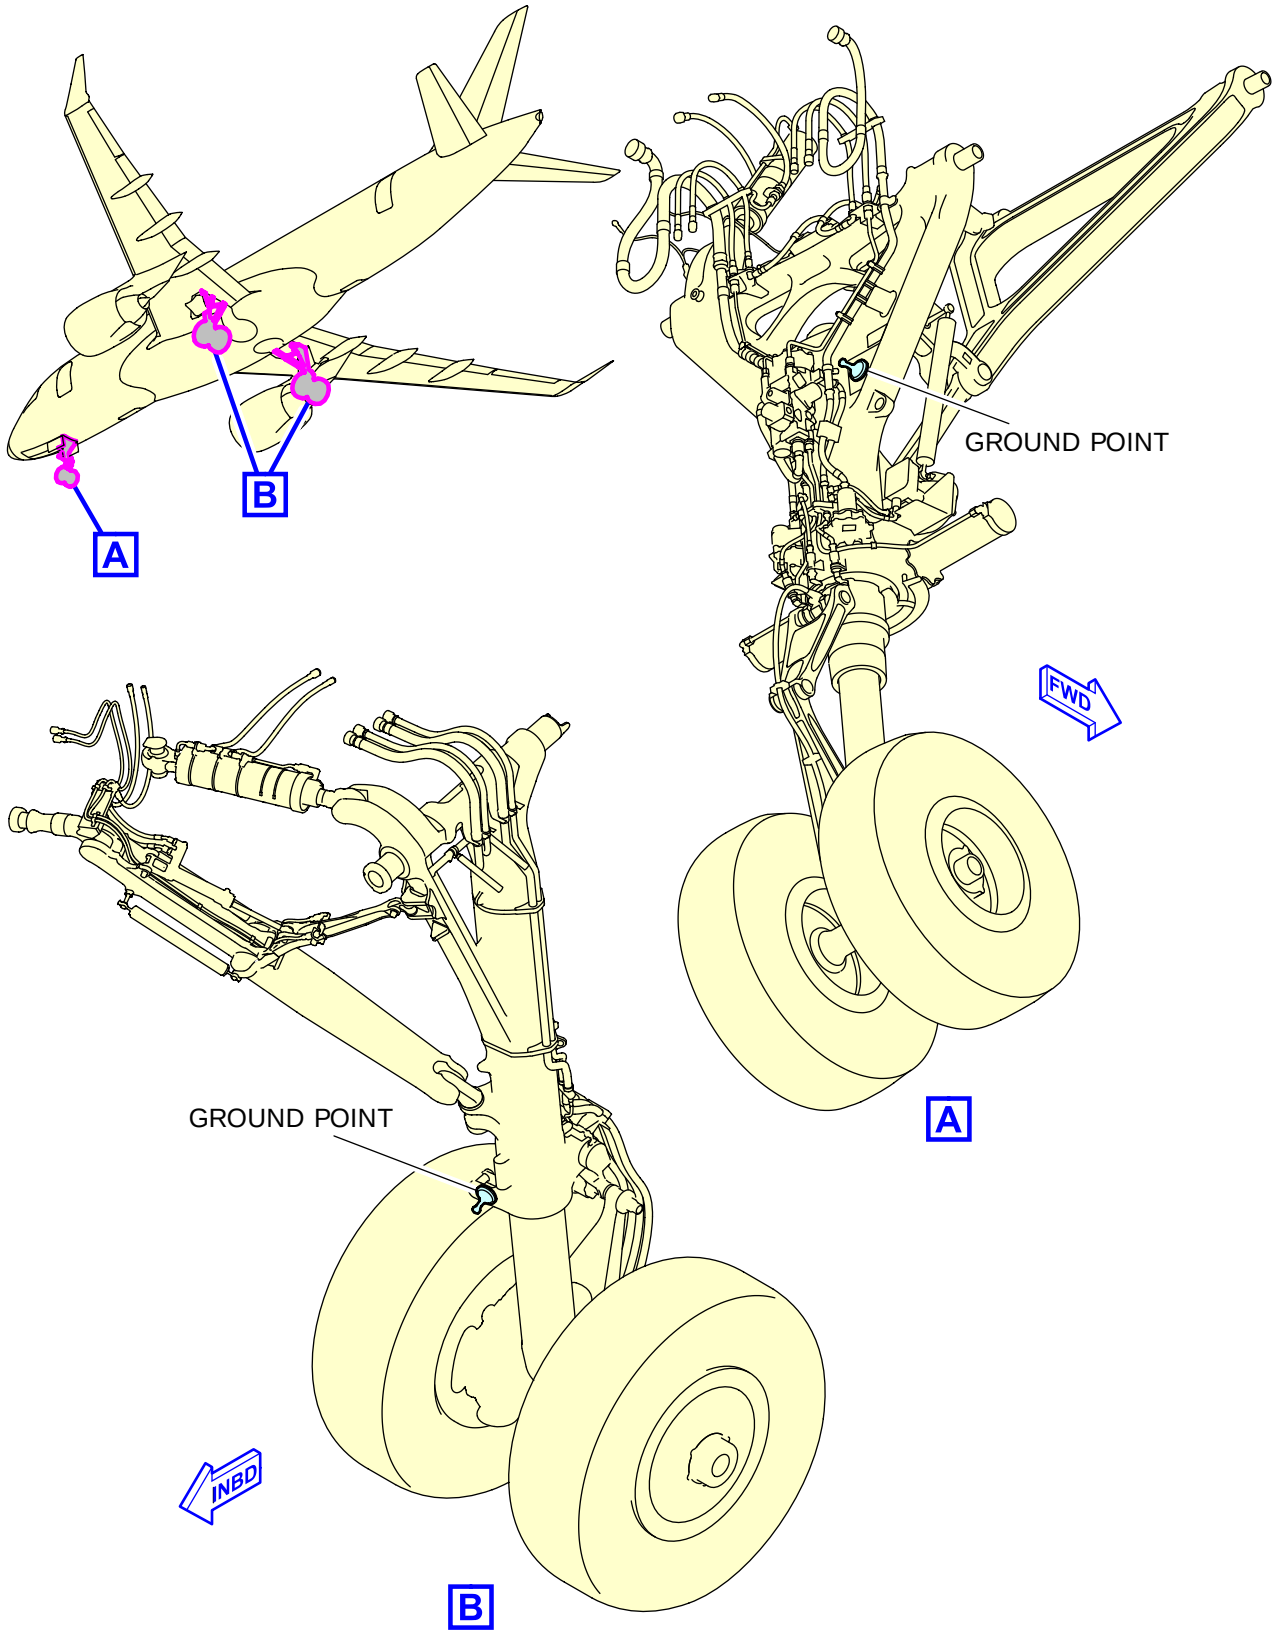

ICN-BD500-A-J000000-A-3AB48-22049-A-001-01

Figure 12 Landing gears grounding points

Table 10 Fuel system Refuel/Defuel adapter

Access	Aft of nose ft (m)	Position from aircraft Centerline		Mean height from ground ft (m)
		RH side ft (m)	LH side ft (m)	
LH Refuel/Defuel Access door 621FB (Optional)	58.32 (17.78)	-	27.31 (8.32)	10.93 (3.33)
RH Refuel/Defuel Access door 521FB	58.32 (17.78)	27.31 (8.32)	-	10.93 (3.33)

Note

All distances are approximate.

All height from ground distances are approximate and will vary with aircraft configuration and loading conditions.

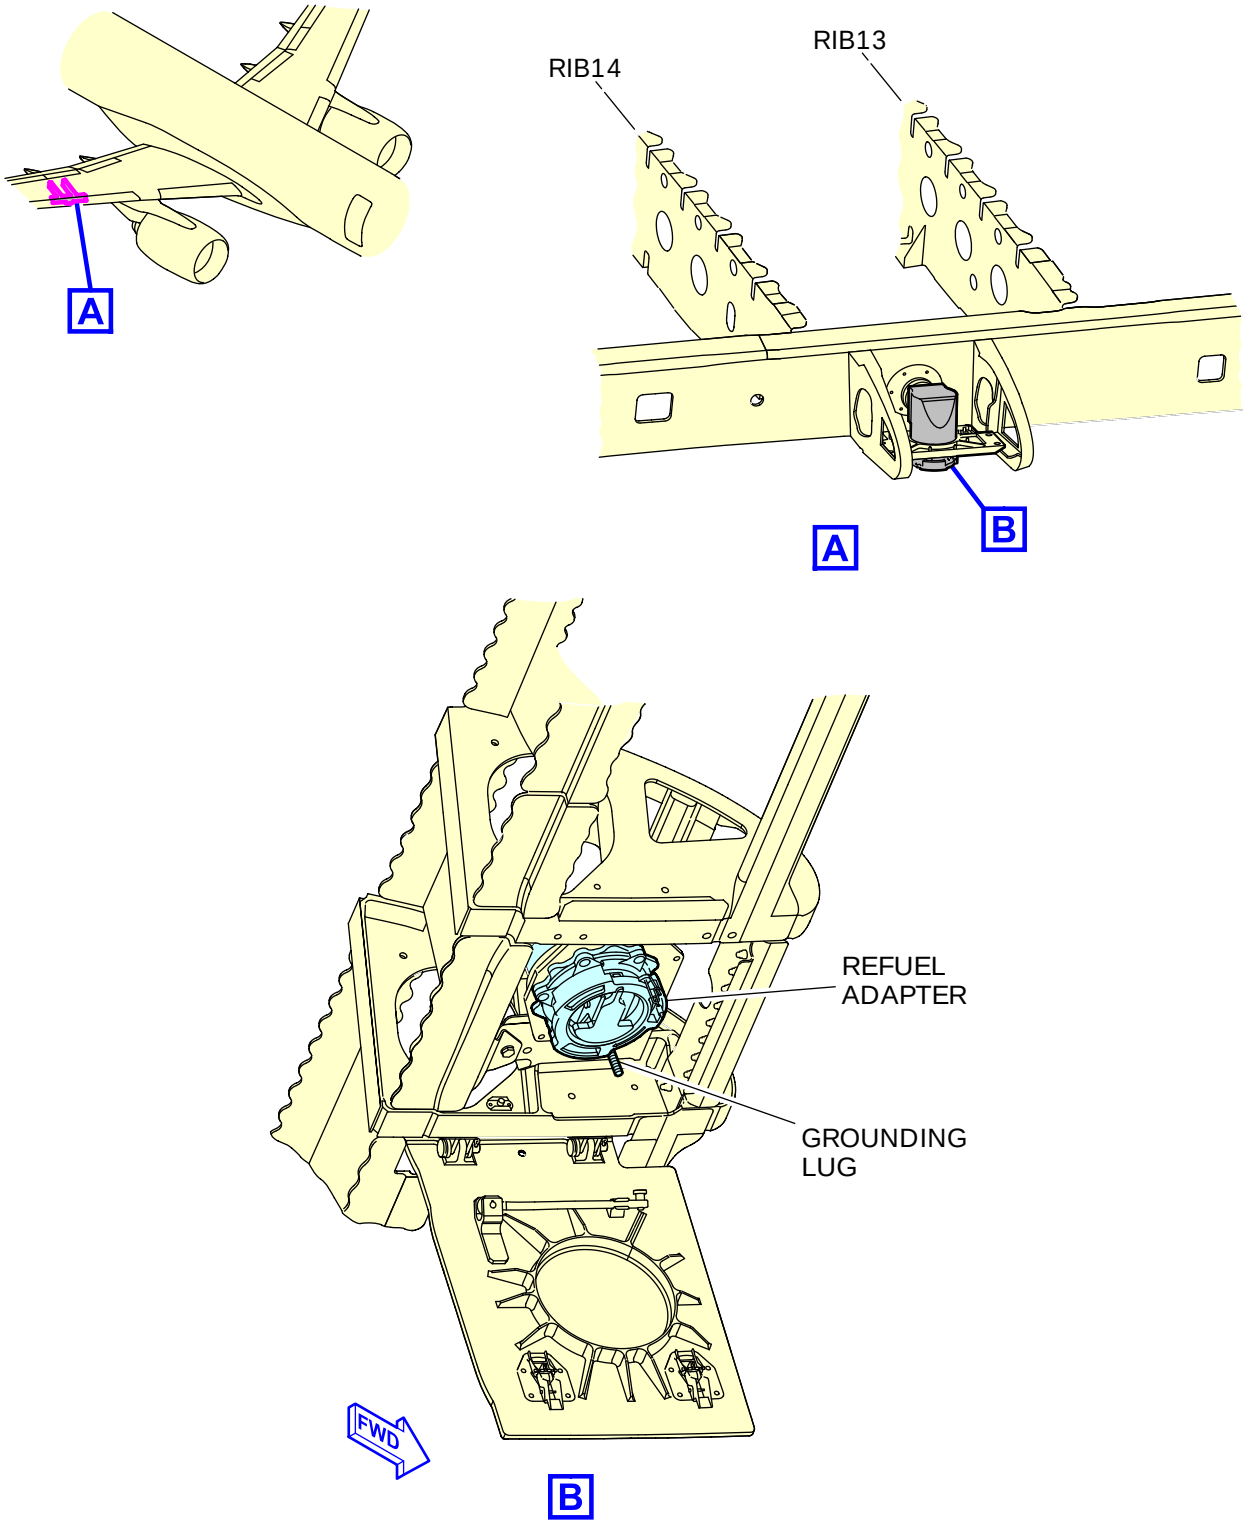

NOTES

1. Refuel adapter is optional on the left side.

ICN-BD500-A-J000000-A-3AB48-22099-A-002-01

Figure 13 Refuel adapter

Table 11 Fuel system control panel

Access	Aft of nose ft (m)	Position from aircraft Centerline		Mean height from ground ft (m)
		RH side ft (m)	LH side ft (m)	
Access door 192AB	42.76 (13.03)	4.98 (1.52)	-	6.12 (1.86)

Note

All distances are approximate.

All height from ground distances are approximate and will vary with aircraft configuration and loading conditions.

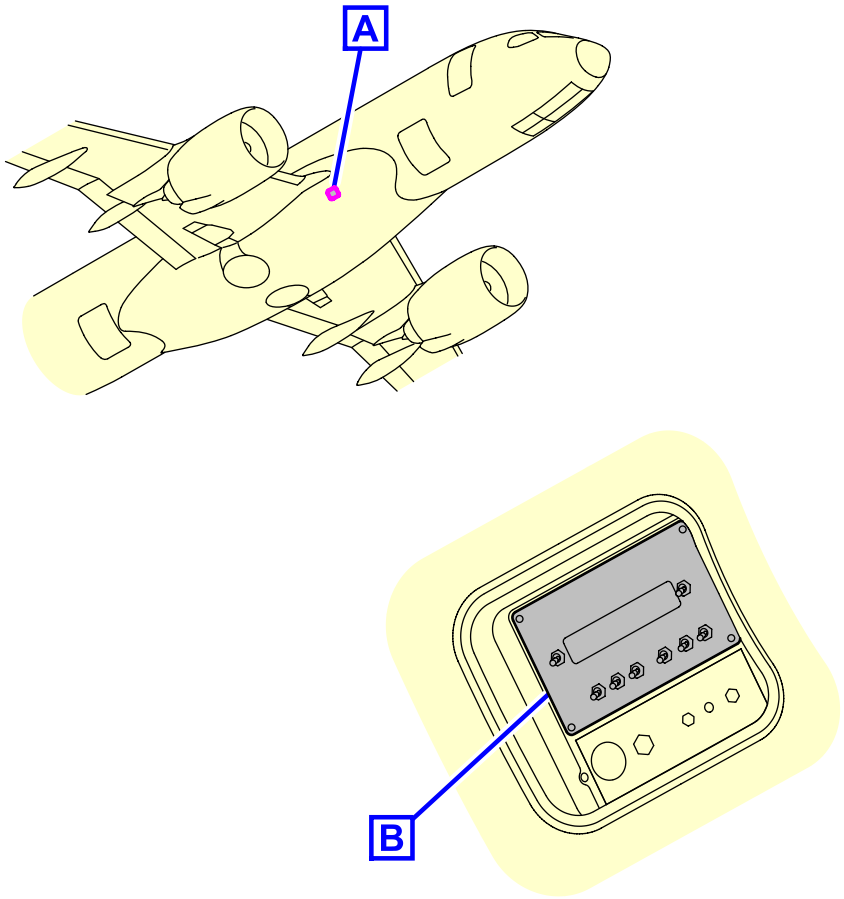

REFUEL/DEFUEL CONTROL PANEL

ICN-BD500-A-J282300-C-3AB48-12260-A-001-01

Figure 14 Refuel/Defuel system

Table 12 Oil system

Access	Aft of nose ft (m)	Position from aircraft Centerline		Mean height from ground ft (m)
		RH side ft (m)	LH side ft (m)	
Engine Oil Filling Cap Access door (LH) 475CR (RH) 485CR	42.76 (13.03)	19.60 (5.97)	16.16 (4.93)	5.50 (1.68)

Note

All distances are approximate.

All height from ground distances are approximate and will vary with aircraft configuration and loading conditions.

Technical Specifications

- Oil tank capacity: 6.8 U.S. gal (25.7 L)

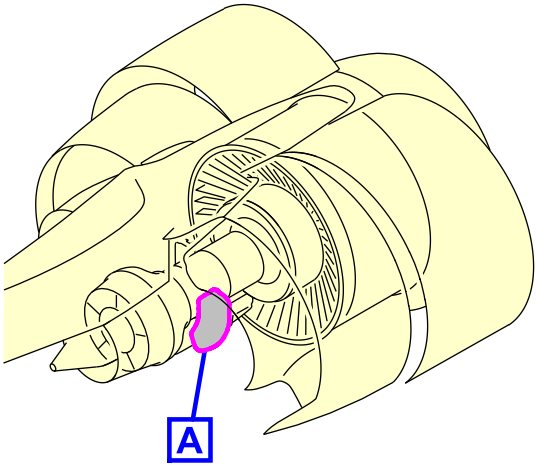

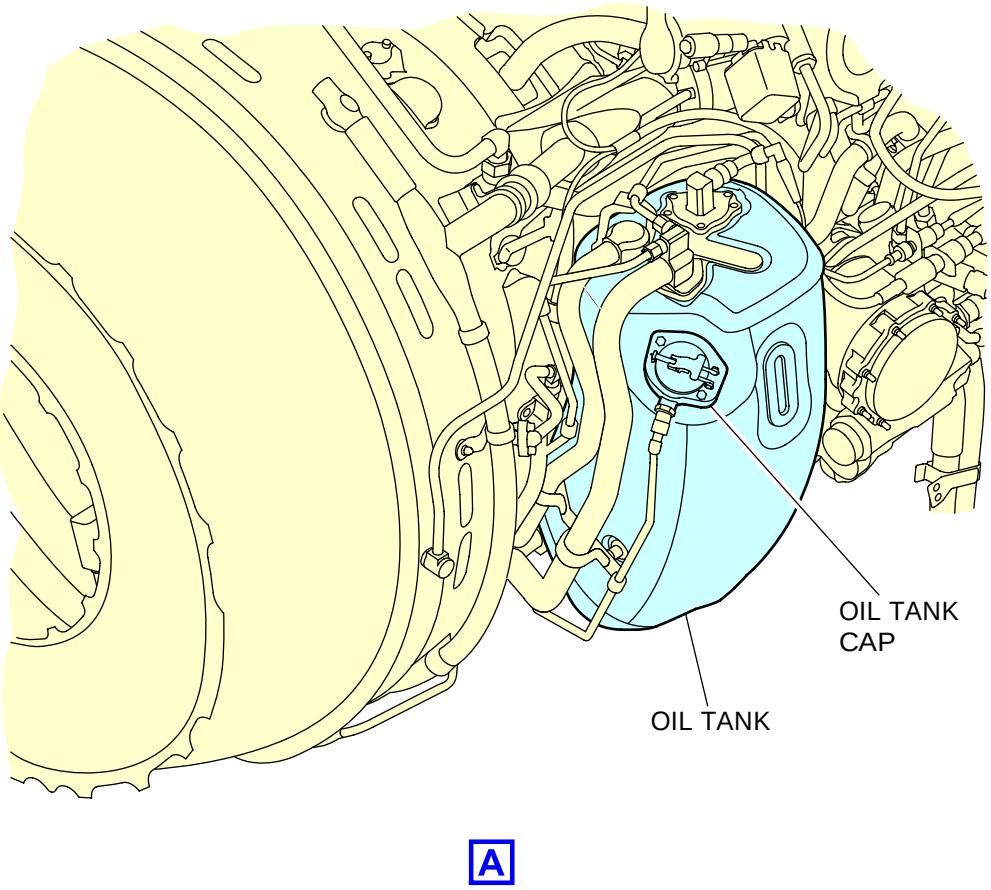

ICN-BD500-A-J791100-C-3AB48-09787-A-001-01

Figure 15 Oil storage system

1.4 Ground electrical power requirements

The external power system is used to connect AC electrical power from a ground cart. There are no provisions to connect DC power from an external ground cart. External AC can be used to power the complete AC distribution system or only those buses that provide power to the passenger compartment.

Note

It is recommended to use ground cart standard 75 KVA and higher. Using ground cart 60 KVA standard can lead to the EICAS nuisance messages.

Note

When the external AC power is connected to the aircraft, both the AVAIL light on the electrical panel and on the electrical/towing service panel illuminate. The Bus Power Control Unit (BPCU) 1 energizes the External Line Contactor (ELC) to connect external power to the aircraft when the EXT PWR PBA in the flight compartment electrical panel is selected ON. The BPCU 1 also provides protection features to protect aircraft systems from potential permanent damage. Following aircraft power-up, several critical systems (Fly-By-Wire, Electrical and others) run their Power-Up Built-In Test (PBIT). The main purpose of PBITis to reduce the complexity of systems on-aircraft testing and removed failure dormancy, thereby decreasing the overall maintenance cost and reducing reliance upon external (pattern-programmed) test equipment for the operators. Any power interruption (Ground Power Unit (GPU) going offline or GPU power quality not meeting requirements) occurring during this critical phase may cause PBIT interruption and latch system failures which will require maintenance actions to clear. Depending on the latched faults, these power interruption events may potentially cause lengthy delays or flight cancellations which can negatively impact operators.

Refer to Table 13 for the external AC power requirements data.

Refer to Table 14 for the external power quality limitations data.

Refer to Table 15 for overcurrent protection ampere versus time delay.

Refer to Table 16 for overvoltage protection versus time delay.

Table 13 External AC power requirements

Voltage	Frequency
115 ±5 V	400 ±15 Hz

Table 14 External power quality limitations

Parameter	Setting limit	Response time
Overcurrent	Table 15	
Overvoltage (highest phase)	Table 16	
Redundant Overvoltage (highest phase)	130 ±3.3 V	0.75 ±0.055 sec
Undervoltage	107 ±2.0 V (lowest phase) or 108.5 ±2.0 V (3-phase average)	4.5 ±0.5 sec

Parameter	Setting limit	Response time
Overfrequency	418 ±2 Hz	4.5 ±0.5 sec
Underfrequency	382 ±2 Hz	4 ±0.5 sec
Phase sequence	A-B-C	0.1 sec
Open sequence	Lowest phase 15 ±5 A and other phase greater than 30 ±5 A	2.0 ±0.5 sec

Table 15 Overcurrent protection ampere versus time delay

Current (A)	Time (s)
230 ±12	300
336 ±12	11.75
337 ±12	11.05
346 ±12	9.4
355 ±12	8.2
370 ±12	6.75
380 ±12	6.1

Table 16 Overvoltage protection versus time delay

Voltage (V)	Time (s)
123	0.6
124	0.5
132	0.3
141	0.14
146	0.1
151	0.05

1.5 Engine starting pneumatic power requirements

The ground air supply requirements for engine starting are shown in Table 17 .

Conditions:

- Time allowed during start (to starter cutout) is 90 seconds
- Time-to-IDLE on ground is 45 seconds minimum
- No bleed air extraction is permitted during start sequence

Table 17 Ground pneumatic power requirements – Engine starting

ATS requirements	Inlet Pressure	Airflow
ISA day	45 psig 45 psia	150 lb/min 68.04 kg/min

1.6 Ground pneumatic power requirements

1.6.1 Heating

This section provides the ground pneumatic power requirements for heating the cabin

Refer to Fig. 16 for heating pull-up graphic.

Table 18 Ground air supply requirements for heating (Pull-up)

Requirements	Pressure	Airflow	Temperature
To cool cabin to 69.8 °F (21 °C) after 30 minutes Conditions - Outside air temperature: -104 °F (-40 °C) - Initial cabin and cockpit temperature: -9.4 °F (-23 °C) - Cockpit, FWD & AFT CABIN Temp Selector: Full Hot (86 °F (30 °C)) - Recirculation fan: On - No passenger	31 psig (45.7 psia)	203 lb/min (92.1 kg/min)	280 ºF (138 ºC)

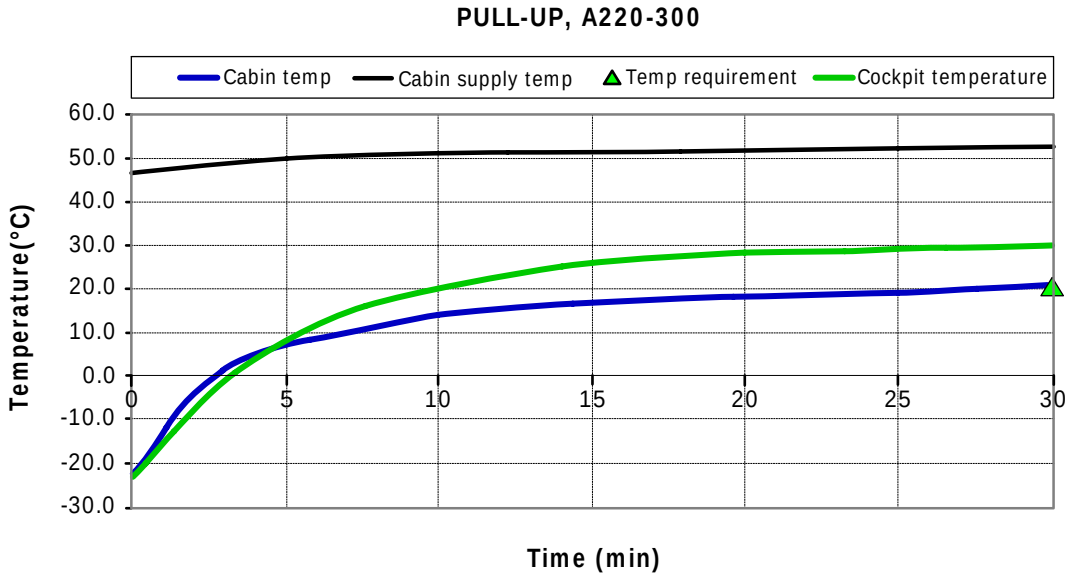

ICN-BD500-A-J000000-A-3AB48-22775-A-002-01

Figure 16 Ground pneumatic requirements - Heating

Table 19 Ground air supply requirements for heating at a steady state

Requirements	Pressure	Airflow	Temperature
Conditions - Outside air temperature: -40 °F (-40 °C) - Steady state Cockpit & Cabin temperature: 75.2 °F (24 °C) - Cockpit, FWD & AFT CABIN Temp Selector: Mid selection (75.2 °F (24 °C)) - Recirculation fan: On - Trim air: On - 15 passengers	25.4 psig (40.1 psia)	166 lb/min (73.3 kg/min)	253 ºF (123 ºC)

1.6.2 Cooling

This section provides the ground pneumatic power requirements for cooling the cabin

Refer to Fig. 17 for the cooling pull-down graphic.

Table 20 Ground air supply requirements for cooling (Pull down)

Requirements	**Pressure**	**Airflow**	**Temperature**
To cool cabin to 80.6 °F (27 °C) after 30 minutes Conditions - Outside air temperature: 104 °F (40 °C) - Initial cabin and cockpit temperature: 114.8 °F (46 °C) - Cockpit, FWD & AFT CABIN Temp Selector: Full Cold (64.4 °F (18 °C)) - Recirculation fan: On - No passenger	38 psig (52.7 psia)	140 lb/min (63.5 kg/min)	437 ºF (225 ºC)

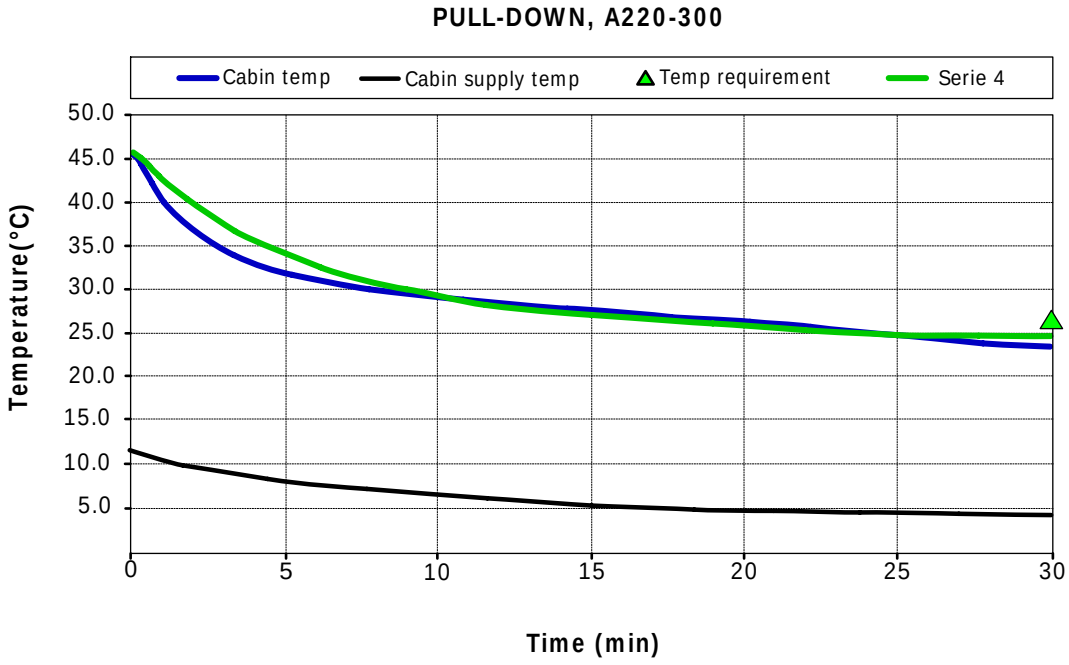

ICN-BD500-A-J000000-A-3AB48-22776-A-002-01

Figure 17 Ground Pneumatic Requirements - Cooling

Table 21 Ground air supply requirements for cooling at a steady state

Requirements	Pressure	Airflow	Temperature
Conditions - Outside air temperature: 104 °F (40 °C) - Steady state Cockpit & Cabin temperature: 75.2 °F (24 °C) - Cockpit, FWD & AFT CABIN Temp Selector: Mid selection (75.2 °F (24 °C)) - Recirculation fan: On - Trim air: On - 130 passengers	31 psig (45.7 psia)	203 lb/min (92.1 kg/min)	280 ºF (138 ºC)

1.7 Preconditioned airflow requirements

The ground air supply requirements for air conditioning and airflow requirements are shown in Table 22 for the for the LPGC.

Table 22 Preconditioned airflow requirements

Requirements	**Pressure**	**Airflow**	**Temperature**
To cool cabin to 75.2 °F (24 °C) (recirculation fan on)	0.6 psig (4.1 kPa)	135 lb/min (61 kg/min)	41 ºF (5 ºC)
To heat cabin to 75.2 °F (24 °C) (recirculation fan on)	0.9 psig (6.2 kPa)	135 lb/min (61 kg/min)	104 ºF (40 ºC)

1.8 Ground towing requirements

The aircraft is designed with means for conventional or towbarless towing. Information and procedures can be found for both in the Aircraft Maintenance Manual (AMM) 09.

Status on towbarless towing equipment qualification can be found in CS-SL-09-10-0001.

1.9 Aircraft

This section shows the chart to determine the draw bar pull and tow tractor mass requirement as a function of the following physical characteristics:

- Model: A220-100
- Number of engines at idle
- Slope

The chart is based on the engine type with the highest idle thrust level. Refer to Fig. 18 and Fig. 19 .

1.10 Towbar design guidelines

The towbar shall comply with the standards that follow:

- SAE AS 1614 - Main Line Aircraft Towbar Attach Fitting Interface

- ISO 8267-1 - Aircraft - Towbar Attachment Fitting - Interface Requirements - Part 1: Main Line Aircraft
- ISO 9667 - Aircraft Ground Support Equipment - Towbar
- SAE ARP 1915 - Aircraft Towbar

Recommended references

- IATA Airport Handling Manual AHM 958 - Functional Specification for an Aircraft Towbar
- EN 12312-7, Aircraft Ground Support Equipment - Specific Requirements - Part 7 Aircraft movement Equipment

A conventional type towbar is required which should be equipped with a damping system (to protect the nose gear against jerks) and with towing shear pins:

- A traction shear pin calibrated at 17,400 lbs (77 394 N),
- - A torsion pin calibrated at 59 940 In-lbs (6 772 N-m)

The towing head is designed according to SAE AS 1614, cat I.

For towing and pushing operations, controls are provided to accommodate the following conditions:

- Aircraft not powered (see note below):
  A control panel is provided on the left side of the aircraft by the nose Nose Landing Gear (NLG). A push-button on the control panel can be toggled to engage power to begin the towing sequence (Navigation lights are lit automatically). The parking brake can be deactivated by way of a switch located on this panel. Annunciation lights on the NLG indicate when the parking brake is deactivated and the aircraft is ready for towing.

  Note

  Availability of the controls to facilitate towing the aircraft with the flight deck vacant does not constitute an approval to conduct such operations.

- Aircraft powered, and flight deck occupied:
  Two separate controls, one to deactivate the nose wheel steering, and one to deactivate the parking brake, are located in both the flight deck and on the control panel located in the vicinity of the nose landing gear. Headset jacks are provided on this control panel to allow for communication between personnel on the flight deck and on the ground. Annunciation lights on the control panel indicate when the aircraft is ready for towing.
  With the torque links connected, towing up to ±130 degrees nose wheel angle is possible.
  The ground towing requirements are described in the illustration below.
  For more information related to towing, refer to the AMP.

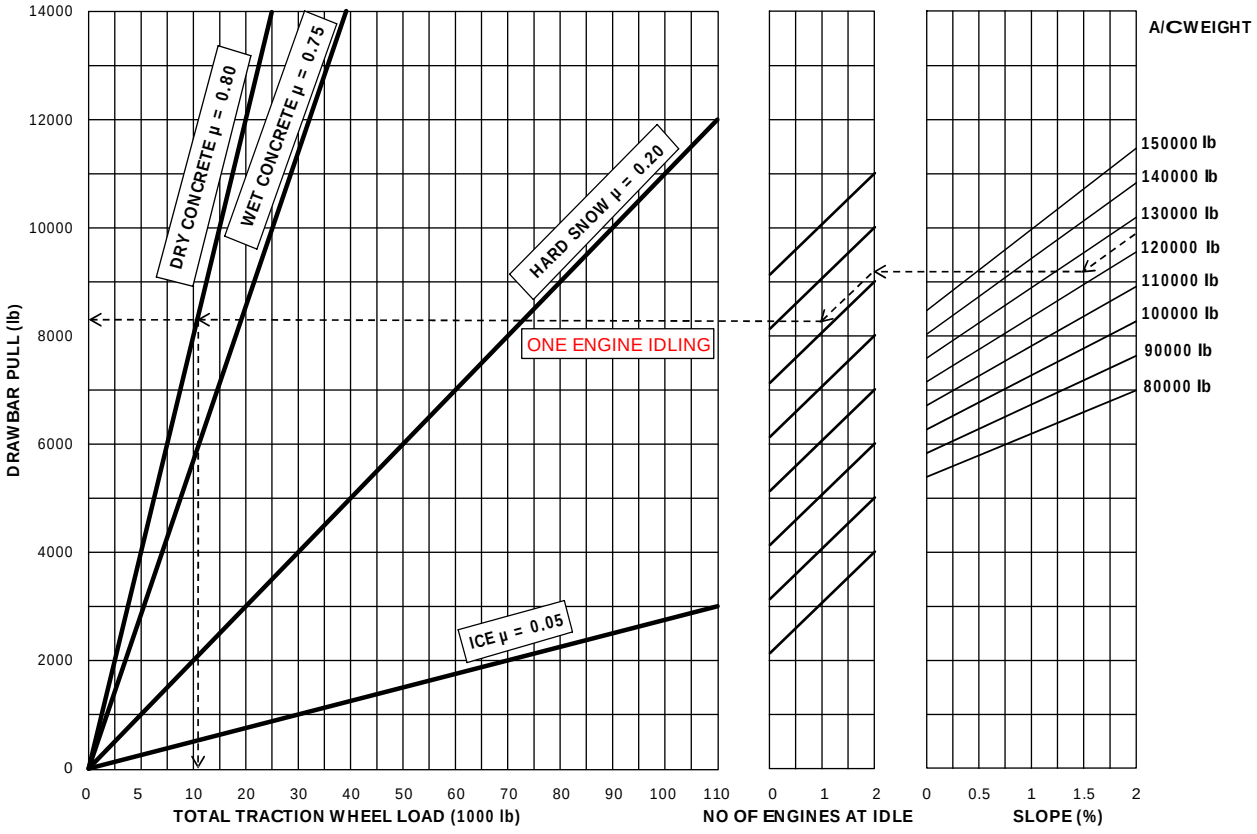

NOTES

1. Unusual breakaway conditions not reflected.
2. Estimated for rubber - tired tow vehicles.
3. Coefficient of friction (μ) approximate.
4. Example: At an aircraft gross weight of 125000lbs (56699 Kg), an uphill slope of 1.5%, with one engine ON and with a dry concrete surface, the corresponding draw bar pull or push required is 8000 lb (35.6 kN) and the total tractor weight of approximately 10 500 lbs (4762 Kg).

ICN-BD500-A-J000000-A-3AB48-22839-A-001-01

Figure 18 Ground towing requirements (imperial unit)

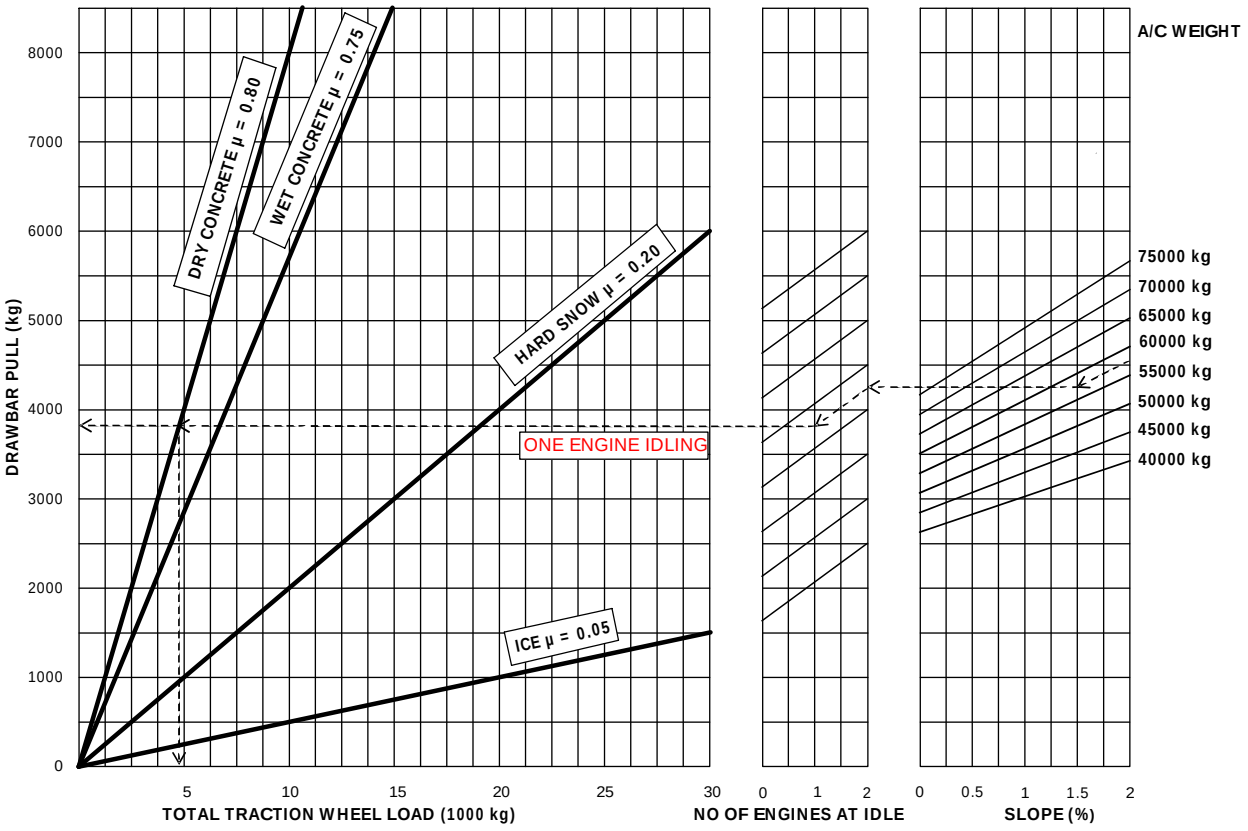

NOTES

1. Unusual breakaway conditions not reflected.
2. Estimated for rubber - tired tow vehicles.
3. Coefficient of friction (μ) approximate.
4. Example: At an aircraft gross weight of 125000lbs (56699 Kg), an uphill slope of 1.5%, with one engine ON and with a dry concrete surface, the corresponding draw bar pull or push required is 8000 lb (35.6 kN) and the total tractor weight of approximately 10 500 lbs (4762 Kg).

ICN-BD500-A-J000000-A-3AB48-22840-A-001-01

Figure 19 Ground towing requirements (metric unit)

Refueling - rate and time - Technical data

Applicability:
55001-59999

Table of contents

Page

Refueling - rate and time - Technical data 1
References 1
Description 1

List of tables

Page

1 References 1

List of figures

Page

1 1,850 lbs per wing to full - Refueling time versus quantity 3
2 1,850 lbs per wing to full - Refueling time versus refueling nozzle pressure 4
3 0 lbs per wing to full - Refueling time versus quantity 5
4 0 lbs - Refueling time versus refueling nozzle pressure 6

References

Table 1 References

Data Module/Technical Publication	Title
BD500-A-J12-10-28-02AAA-211A-A	Automatic - Refuel
BD500-A-J12-10-28-01AAA-211A-A	Manual - Refuel

Description

This data module shows the estimated refuel rate and time in graphic information to support the automatic refueling procedure, refer to BD500-A-J12-10-28-02AAA-211A-A and manual refueling procedure, refer to BD500-A-J12-10-28-01AAA-211A-A.

This data module shows the estimated refueling time in specific conditions and the graphics take into account the assumptions that follow:

- 70 F° fuel temperature
- 50 psig available at the refuel adaptor
- A fuel density of 0.803 kg/l, (0.803 kg/l = 0.029010215 lbs/in3)
- No head pressure effect considered on the fuel
- The maximum fuel quantities are based on 17 646 Kg, (17 646 Kg x 2.2046 lb/kg =38,902 lbs).

The first graphic shows the estimation of the refueling time and the evolution of the fuel quantity when the refuel starts with a fuel reserve of 1,850 lbs in each of the wing tank for a total fuel reserve of 3,700 lbs at the time of 0 second. Refer to Fig. 1

The second graphic shows the refueling time estimated from 1,850 lbs of fuel reserve in each of the wing tank to full fuel in all three tanks using various refuel pressures at the refuel adaptor. Refer to Fig. 2

The third graphic shows the estimation of the refueling time and the evolution of the fuel quantity when the refuel starts from empty in all three tanks. Refer to Fig. 3

The fourth graphic shows the refueling time estimated from empty to full using various refueling pressures at the refuel adaptor. Refer to Fig. 4.

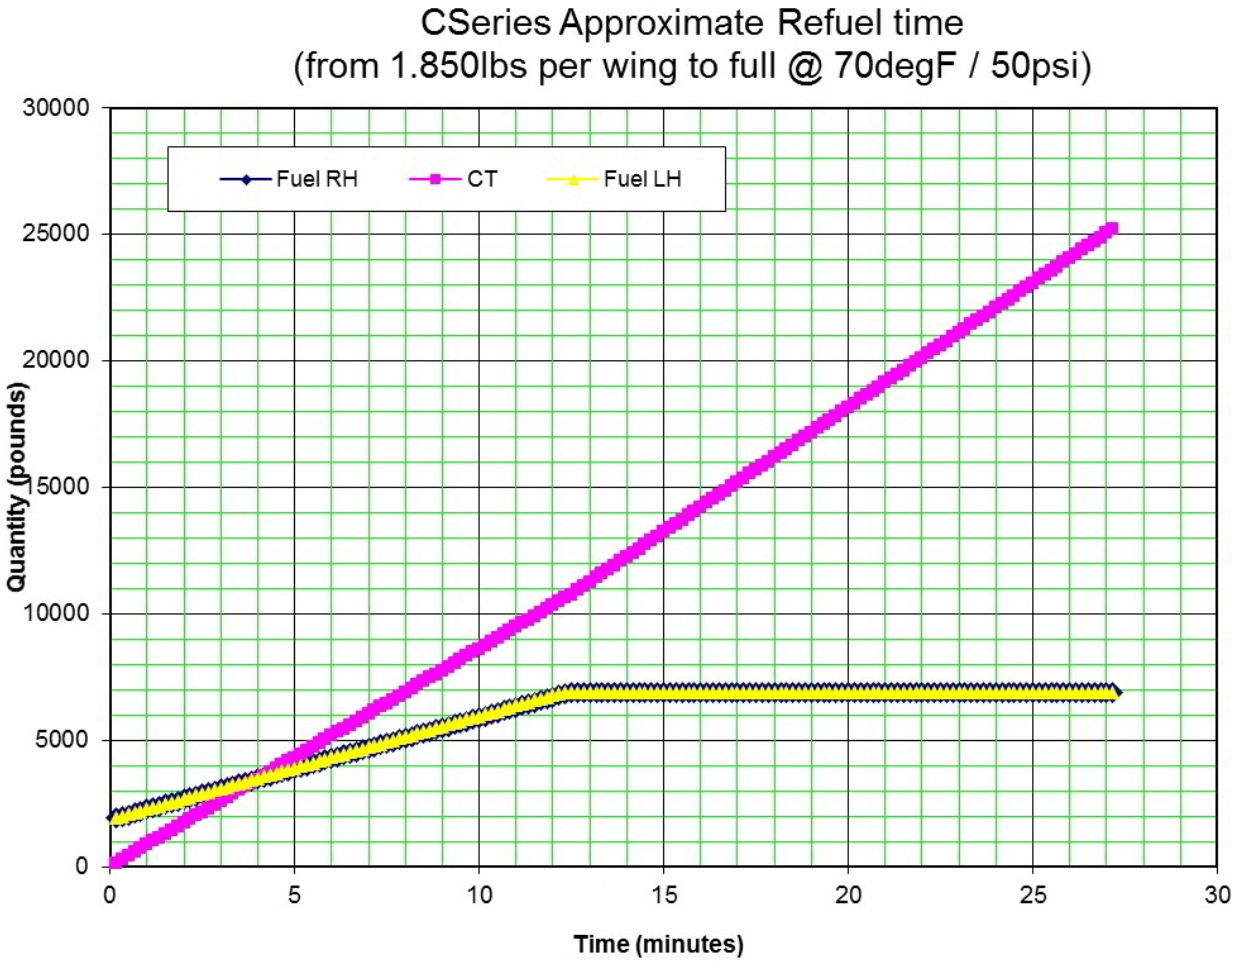

ICN-BD500-A-J121028-A-3AB48-40429-A-002-01

Figure 1 1,850 lbs per wing to full - Refueling time versus quantity

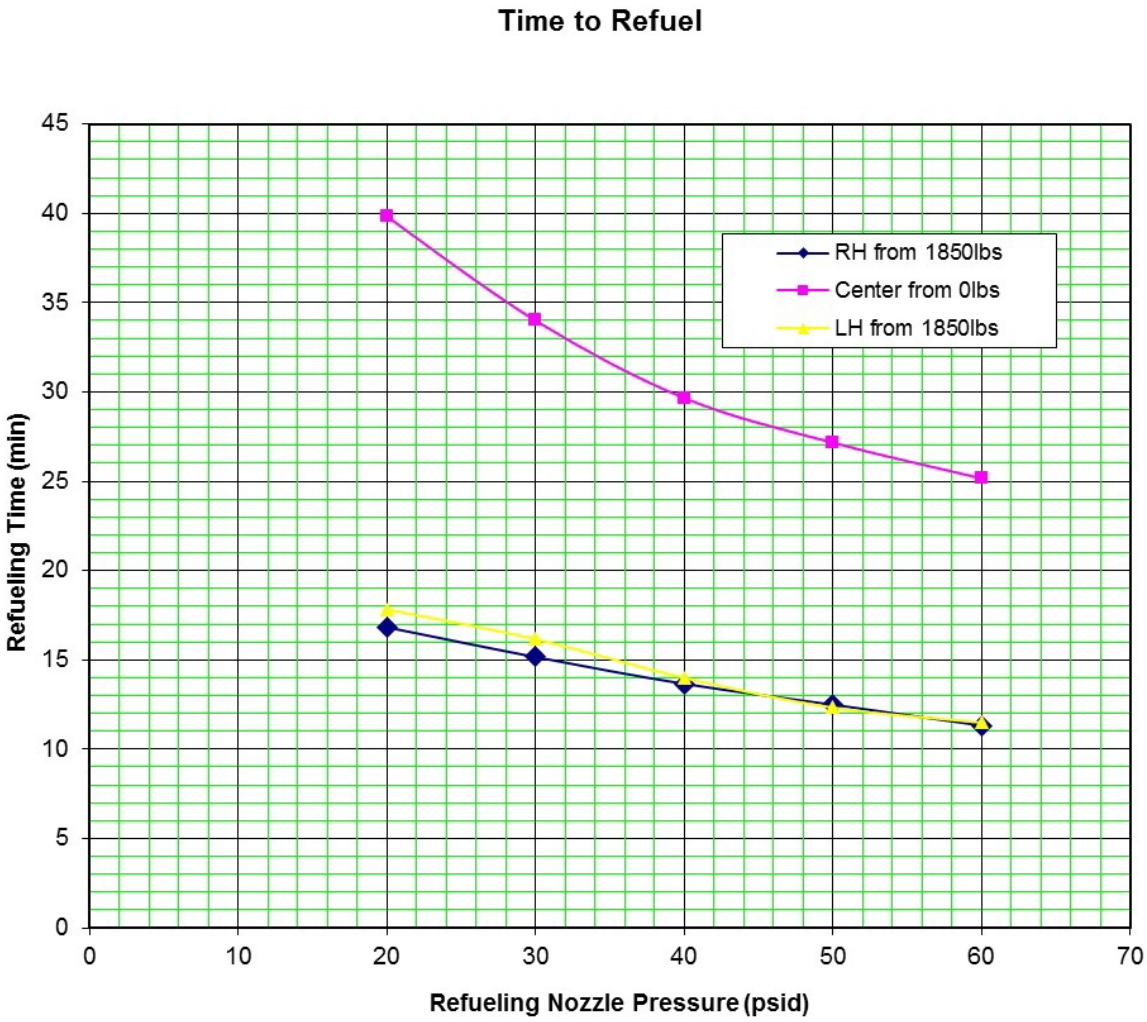

ICN-BD500-A-J121028-A-3AB48-40430-A-002-01

Figure 2 1,850 lbs per wing to full - Refueling time versus refueling nozzle pressure

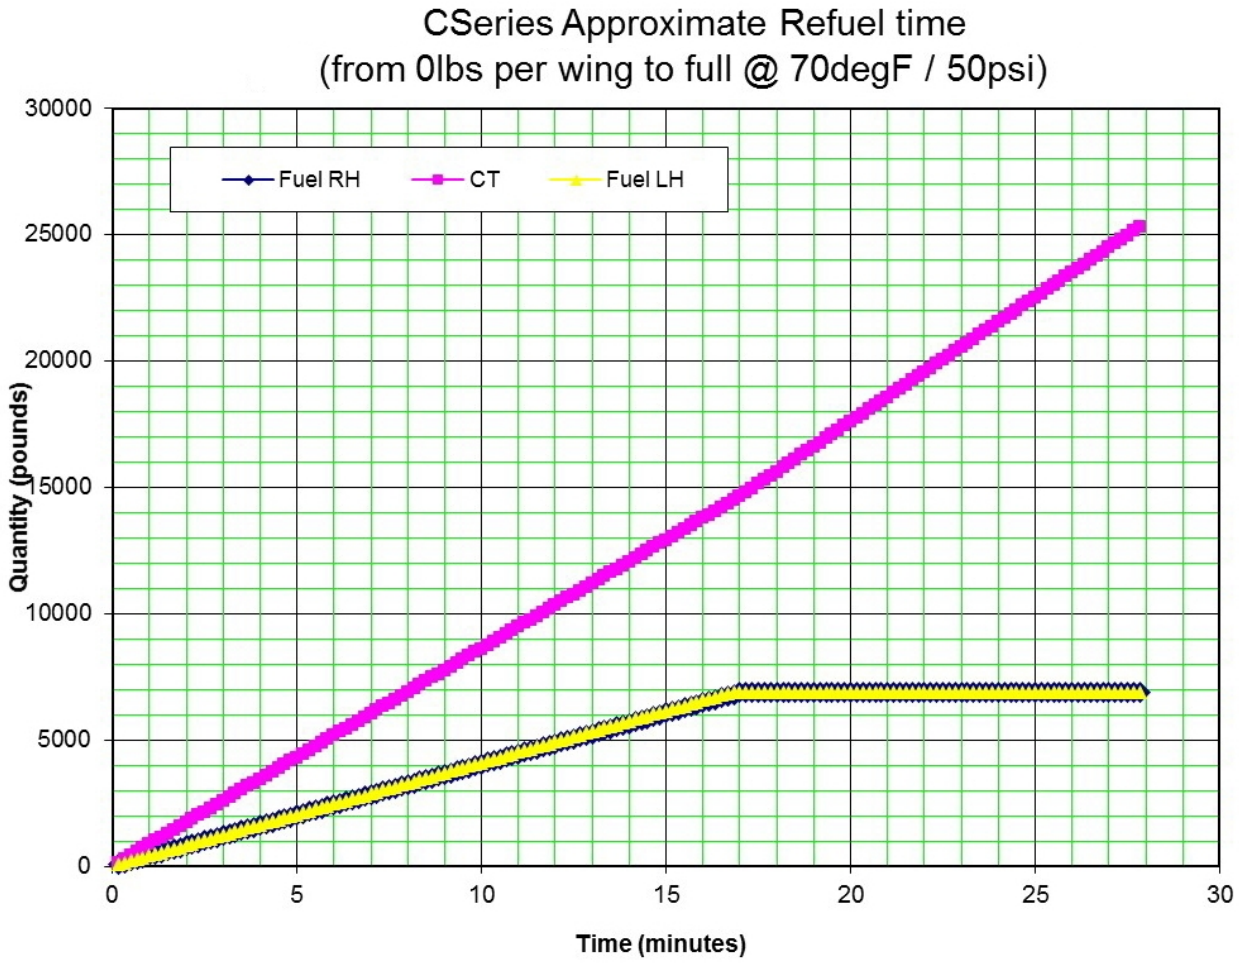

ICN-BD500-A-J121028-A-3AB48-40431-A-003-01

Figure 3 0 lbs per wing to full - Refueling time versus quantity

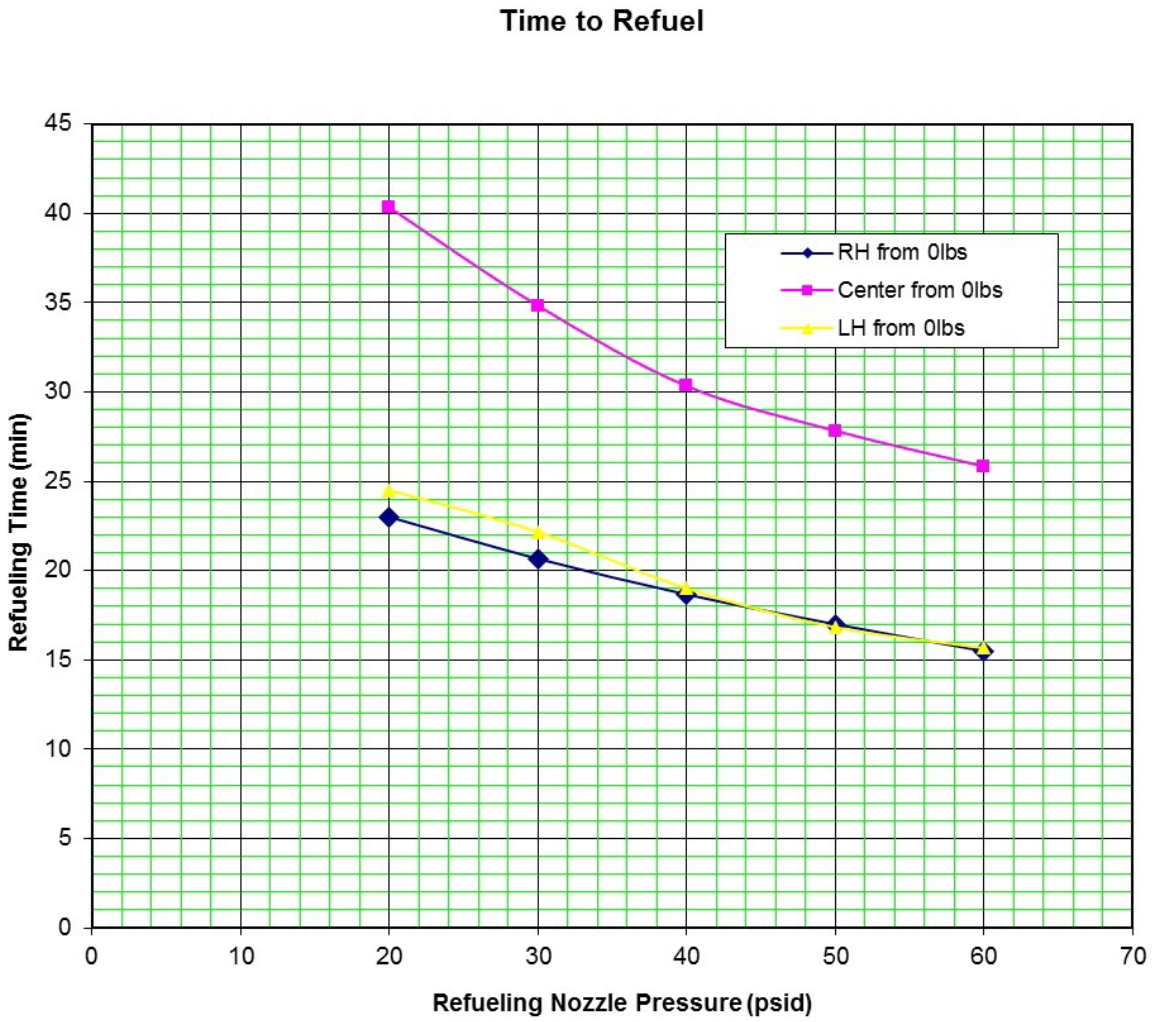

ICN-BD500-A-J121028-A-3AB48-40773-A-001-01

Figure 4 0 lbs - Refueling time versus refueling nozzle pressure

Deicing/Anti-icing - Remove ice

Applicability:
50001-54999, 55001-59999

Table of contents

Page

Deicing/Anti-icing - Remove ice 1
References 1
Common information 1
Preliminary requirements 1
Procedure 2
Requirements after job completion 2

List of tables

Page

1 References 1
2 Required conditions 1
3 Support equipment 2
4 Consumables, materials, and expendables 2
5 Spares 2
6 Required conditions 2

References

Table 1 References

Data Module/Technical Publication	Title
BD500-A-J12-30-30-01AAA-261A-A	Deicing - Anti-icing - Remove ice

Common information

The content in this DM is moved to the DM BD500-A-J12-30-30-01AAA-261A-A.

Preliminary requirements

Required conditions

Table 2 Required conditions

Action/Condition	Data Module/Technical publication
None	

Support equipment

Table 3 Support equipment

Name	Identification/Reference	Quantity	Remark
None			

Consumables, materials, and expendables

Table 4 Consumables, materials, and expendables

Name	Identification/Reference	Quantity	Remark
None			

Spares

Table 5 Spares

Name	Identification/Reference	Quantity	Remark
None			

Safety conditions

None

Procedure

1 The content in this DM is moved to the DM BD500-A-J12-30-30-01AAA-261A-A.

Requirements after job completion

Required conditions

Table 6 Required conditions

Action/Condition	Data Module/Technical publication
None	

A220

Chapter 6: Operating conditions

Intentionally left blank

A220

Crew safety precautions - dangerous areas - Technical data

Applicability:
50001-54999

Table of contents

Page

Crew safety precautions - dangerous areas - Technical data 1
References 1
Description 1
1 Information 1
2 Weather radar dangerous area 1
3 Engine intake and engine exhaust dangerous areas 2

List of tables

Page

1 References 1

List of figures

Page

1 Weather radar area 3

References

Table 1 References

Data Module/Technical Publication	Title
BD500-A-J71-00-00-00AAA-012A-A	Power plant - General warnings and cautions and related safety data

Description

1 Information

This data module identifies, for the crew, the aircraft dangerous areas around the weather radar, the engine intake and the engine exhaust.

2 Weather radar dangerous area

WARNING

Make sure the Weather Radar is in STBY at all times when Ground mapping or WXMode is not required. Make sure non-personnel are within scan radius of antenna when the Weather Radar is ON and not in STBY or TEST. Transmission of microwave radiation can be harmful to personnel and potential fire hazards (for flammable materials) up to 3 ft. (1 m) from antenna array.

Refer to Fig. 1.

3 Engine intake and engine exhaust dangerous areas

WARNINGS

- **Stay away from the exhaust nozzle of the engine. When an engine operates, the engine exhaust is hot and of sufficiently high velocity to cause injury. Immediately after the engine is stopped, the engine exhaust parts are hot and can cause burns.**

- **Stay away from the engine exhaust area when the engine starts or operates. Do not breathe the exhaust gas or let the exhaust gas go into the eyes. The exhaust gas can injure the lungs and eyes in areas of high concentration.**

Do not operate engine with persons, vehicles, other aircraft or buildings in engine exhaust (jet wake) dangerous area. Refer to BD500-A-J71-00-00-00AAA-012A-A.

Do not go near an operating engine without ear protection. Be aware of engine noise dangerous areas.

1 Loud noise from a jet engine can cause temporary or permanent damage to a person's ability to hear. This damage can occur in a very short time, if ears are not protected, and results in hearing loss decreased sense of balance.

2 Risk of ear damage increases with nearness to engine when ears are not protected.

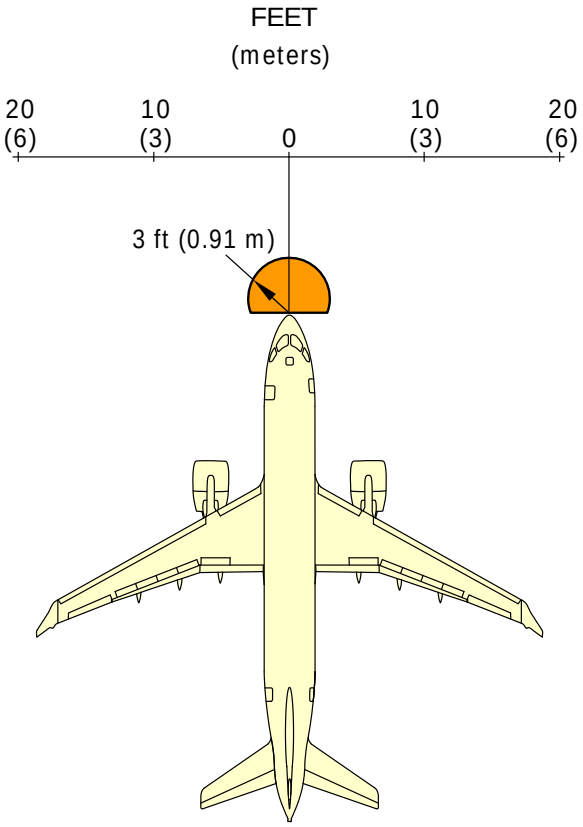

ICN-BD500-A-J153010-A-3AB48-31148-A-002-01

Figure 1 Weather radar area

Intentionally left blank

A220

Chapter 7: Pavement data

Intentionally left blank

A220

Pavement data - Technical data

Applicability:
50001-54999

Table of contents

		Page
Pavement data - Technical data		1
References		2
Description		3
1	Introduction	3
1.1	Aircraft Classification Number (ACN) / Pavement Classification Number (PCN) Introduction	3
1.1.1	Aircraft Classification Number (ACN)	3
1.1.2	Pavement Classification Number (PCN)	3
1.1.3	Load Classification Number (LCN)	4
2	Aircraft Classification Number (ACN) results for most aft C.G. position	4
3	Aircraft Classification Number (ACN) results for most forward C.G. positions	24
4	Aircraft Classification Rating (ACR)	43
4.4	Aircraft Classification Rating (ACR) Data	44
4.4.2	Aircraft Classification Rating (ACR)	45
5	Load Classification Number (LCN) results for most aft C.G. positions	66
6	Required Pavement Thickness	84
7	Landing gear footprint	87
8	Maximum pavement loads	89

List of tables

		Page
1	References	2
2	Airport method to show Pavement Classification Number (PCN)	4
3	Subgrade strength categories	4
4	Aircraft Classification Number (ACN) RESULTS FOR MOST AFT C.G. RIGID PAVEMENT	5
5	Aircraft Classification Number (ACN) RESULTS FOR MOST AFT C.G. RIGID PAVEMENT	7
6	Aircraft Classification Number (ACN) RESULTS FOR MOST AFT C.G. RIGID PAVEMENT	10
7	Aircraft Classification Number (ACN) RESULTS FOR MOST AFT C.G. FLEXIBLE PAVEMENT	15
8	Aircraft Classification Number (ACN) RESULTS FOR MOST AFT C.G. FLEXIBLE PAVEMENT	17
9	Aircraft Classification Number (ACN) RESULTS FOR MOST AFT C.G. FLEXIBLE PAVEMENT	20
10	Aircraft Classification Number (ACN) RESULTS FOR MOST FWD C.G. RIGID PAVEMENT	24
11	Aircraft Classification Number (ACN) RESULTS FOR MOST FWD C.G. RIGID PAVEMENT	27
12	Aircraft Classification Number (ACN) RESULTS FOR MOST FWD C.G. RIGID PAVEMENT	29
13	Aircraft Classification Number (ACN) RESULTS FOR MOST FWD C.G. FLEXIBLE PAVEMENT	34
14	Aircraft Classification Number (ACN) RESULTS FOR MOST FWD C.G. FLEXIBLE PAVEMENT	36

15 Aircraft Classification Number (ACN) RESULTS FOR MOST FWD C.G. FLEXIBLE PAVEMENT 39
16 Aircraft Classification Rating (ACR)-PCR pavement subgrade categories are defined as follows 44
17 A220-100 Most AFT C.G 44
18 A220-100 Most FWD C.G 45
19 Aircraft Classification Rating (ACR) results for most aft C.G. positions for flexible pavement 45
20 Aircraft Classification Rating (ACR) results for most forward C.G. positions for flexible pavement 51
21 Aircraft Classification Rating (ACR) results for most aft C.G. positions for rigid pavement 56
22 Aircraft Classification Rating (ACR) results for most forward C.G. positions for rigid pavement 61
23 Load Classification Number (LCN) RESULTS FOR MOST AFT C.G. RIGID PAVEMENT 66
24 Load Classification Number (LCN) RESULTS FOR MOST AFT C.G. RIGID PAVEMENT 68
25 Load Classification Number (LCN) RESULTS FOR MOST AFT C.G. RIGID PAVEMENT 71
26 Load Classification Number (LCN) RESULTS FOR MOST AFT C.G. FLEXIBLE PAVEMENT 75
27 Load Classification Number (LCN) RESULTS FOR MOST AFT C.G. FLEXIBLE PAVEMENT 77
28 Load Classification Number (LCN) RESULTS FOR MOST AFT C.G. FLEXIBLE PAVEMENT 80
29 Landing gear footprint 87

List of figures

Page

1 ACN results - Rigid pavement 14
2 ACN results - Flexible pavement 23
3 ACN results - Rigid pavement 33
4 ACN results - Flexible pavement 42
5 Flexible ACR (Most AFt C.G) 49
6 Flexible ACR (Most FWD C.G) 54
7 Rigid ACR (Most AFT C.G) 59
8 Rigid ACR (Most FWD C.G) 64
9 LCN results - Rigid pavement 74
10 LCN results - Flexible pavement 83
11 Flexible pavement required thickness 85
12 Rigid pavement required thickness 86
13 Landing gear footprint 88
14 Maximum Pavement Load 90

References

Table 1 References

Data Module/Technical Publication	Title
None	

Description

1 Introduction

This data module contains data related to the pavement design specifications, including aircraft footprints, pavement loading during standard operations, and aircraft/pavement rating systems. Also given are the flotation classification for different weights, fixed tire pressure, and aft Center of Gravity (CG), with the Aircraft Classification Number (ACN) methods.

This section is divided into the subsections that follow:

- ACN
  Landing gear footprint
- Maximum pavement load
- Landing gear loading on pavement

Note

Runway strength data shown in this publication is derived from available information and is a realistic estimate of capability at an average level of activity. It is not intended as a maximum allowable weight or as an operating limitation. Many airport pavements are capable of supporting limited operations with gross weights in excess of published figures. Permissible operating weight, insofar as runway strengths are concerned, are a matter of agreement between the owner and user.

For more information about the Pavement Classification Number (PCN), please contact the concerned airport authority.

1.1 Aircraft Classification Number (ACN) / Pavement Classification Number (PCN) Introduction

1.1.1 Aircraft Classification Number (ACN)

The ACN value is a number which expresses the relative structural effect of an aircraft on different pavement types for specified standard subgrade strengths in terms of a standard single wheel load.

An aircraft will have eight (8) ACN numbers for any given aircraft weight and tire pressure: four (4) for flexible pavement and four (4) for rigid pavement.

1.1.2 Pavement Classification Number (PCN)

The PCN value is a number which expresses the relative load carrying capacity of a pavement in terms of a standard single wheel load.

An airport determined and published PCN can be compared with an aircraft's ACN. An aircraft that has an ACN equal to or less than the PCN of a given pavement can operate without restriction on the pavement. (Ref. International Civil Aviation Organization (ICAO) State Letter AN411.1.17−8019. Ref. US FAA Advisory Circular 150153355 15/06/83).

For example, if the published airport PCN is 52/R/B/Y/T, it means that the aircraft ACN must be less than 52 for rigid pavement type, with medium subgrade strenght, and the tire pressure of the aircraft must be less than 145 psi (1.0 MPa). The PCN also shows that the value was arrived at through a technical review.

Table 2 Airport method to show Pavement Classification Number (PCN).

Pavement type	Pavement type	Tire pressure category psi (MPa)	Evaluation
R = Rigid F = Flexible	A = High B = Medium C = Low D = Ultra Low	W = No limit X = To 254 (1.75) Y = To 181 (1.25) Z = To 73 (0.5)	T = Technical U = Using aircraft

Table 3 Subgrade strength categories

Subgrade categories	Flexible pavement		Rigid pavement	
	Characterization	CBR range	Characterization	k-Value Range
A	CBR 15	Above 13	k = 150MN/m3 (550 pci)	Above 120MN/m3 (442pci)
B	CBR 10	From 8 to 13	k = 80MN/m3 (300 pci)	From 60 to 120 MN/m3 (221 to 442pci)
C	CBR 6	From 4 to 8	k = 80MN/m3 (300 pci)	From 25 to 60 MN/m3 (92 to 221pci)
D	CBR 3	Below 4	k=20MN/m3 (75pci)	Below 25 MN/m3 (92pci)

1.1.3 Load Classification Number (LCN)

The Load Classification Number (LCN) is a method of flotation analysis by the International Civil Aviation Organization (ICAO).

An aircraft will have two (2) LCN numbers for any given aircraft weight and tire pressure: one (1) for rigid pavement usually concrete and second (2) for flexible pavement usually layered asphalt.

2 Aircraft Classification Number (ACN) results for most aft C.G. position

Refer to Table 4 for tabular format and Fig. 1 for graphical format for the ACN results for rigid pavement and Table 7 for tabular format and Fig. 2 for graphical format for the ACN results for flexible pavement.

Applicability:

Table 4 Aircraft Classification Number (ACN) RESULTS FOR MOST AFT C.G. RIGID PAVEMENT

A/C Gross Weight (lb)	A/C Gross Weight (Kg)	MLG Load (lb)	MLG Load (Kg)	ACN High Strength K=150 MN/m3	ACN Medium Strength K=80 MN/m3	ACN Low Strength K=40 MN/m3	ACN Ultra-Low Strength K=20 MN/m3
141500	64183	130042	58986	36.6	38.7	40.8	42.5
140500	63729	129272	58636	36.4	38.5	40.5	42.2
140000	63502	128876	58457	36.2	38.3	40.3	42.0
139000	63049	128085	58098	36.0	38.19	40.0	41.7
138000	62595	127294	57739	35.7	37.8	39.8	41.4
137000	62142	126503	57380	35.5	37.5	39.5	41.1
136000	61688	125711	57021	35.2	37.2	39.2	40.8
135000	61234	124920	56662	34.9	37.0	38.9	40.6
134000	60781	124129	56303	34.7	36.7	38.6	40.3
133000	60327	123338	55945	34.4	36.4	38.3	40.0
132000	59874	122546	55585	34.2	36.1	38.0	39.7
131000	59420	121755	55227	33.9	35.9	37.8	39.4
130000	58967	120964	54868	33.6	35.6	37.5	39.1
129000	58513	120173	54509	33.4	35.3	37.2	38.8
128000	58059	119381	54150	33.1	35.1	36.9	38.5
127000	57606	118590	53791	32.9	34.8	36.6	38.2
126000	57152	117799	53432	32.6	34.5	36.3	37.9
125000	56699	117008	53073	32.3	34.2	36.1	37.6
124000	56245	116216	52714	32.1	34.0	35.8	37.3
123000	55791	115425	52355	31.8	33.7	35.5	37.0
122000	55338	114634	51997	31.6	33.4	35.2	36.7
121000	54884	113843	51638	31.3	33.1	34.9	36.4
120500	54657	113447	51458	31.2	33.0	34.8	36.3
120000	54431	113048	51277	31.0	32.9	34.6	36.1

A/C Gross Weight (lb)	A/C Gross Weight (Kg)	MLG Load (lb)	MLG Load (Kg)	ACN High Strength K=150 MN/m3	ACN Medium Strength K=80 MN/m3	ACN Low Strength K=40 MN/m3	ACN Ultra-Low Strength K=20 MN/m3
119500	54204	112649	51096	30.9	32.7	34.5	36.0
119000	53977	112177	50882	30.7	32.6	34.3	35.8
118000	53523	111234	50454	30.4	32.2	34.0	35.5
117000	53070	110290	50026	30.1	31.9	33.7	35.1
116000	52616	109347	49598	29.8	31.6	33.3	34.8
115000	52163	108404	49171	29.5	31.3	33.0	34.4
114000	51709	107461	48743	29.2	31.0	32.7	34.1
113000	51255	106517	48315	28.9	30.7	32.3	33.8
112000	50802	105574	47887	28.6	30.3	32.0	33.4
111000	50348	104631	47459	28.3	30.0	31.7	33.1
110000	49895	103688	47032	28.0	29.7	31.3	32.7
109000	49441	102744	46603	27.7	29.4	31.0	32.4
108000	48987	101801	46176	27.4	29.1	30.7	32.1
107000	48534	100858	45748	27.1	28.8	30.4	31.7
106000	48080	99915	45320	26.8	28.5	30.0	31.4
105000	47627	98971	44892	26.6	28.1	29.7	31.0
104000	47173	98028	44464	26.3	27.8	29.4	30.7
103000	46720	97085	44037	26.0	27.5	29.0	30.4
102000	46266	96142	43609	25.7	27.2	28.7	30.0
101000	45812	95198	43181	25.4	26.9	28.4	29.7
100000	45359	94255	42753	25.1	26.6	28.1	29.3
99000	44905	93247	42296	24.8	26.2	27.7	29.0
98000	44452	92239	41838	24.5	25.9	27.4	28.6
97000	43998	91231	41381	24.1	25.6	27.0	28.3
96000	43544	90223	40924	23.8	25.3	26.7	27.9
95000	43091	89215	40467	23.5	24.9	26.4	27.6

A/C Gross Weight (lb)	A/C Gross Weight (Kg)	MLG Load (lb)	MLG Load (Kg)	ACN High Strength K=150 MN/m3	ACN Medium Strength K=80 MN/m3	ACN Low Strength K=40 MN/m3	ACN Ultra-Low Strength K=20 MN/m3
94000	42637	88207	40010	23.2	24.6	26.0	27.2
93000	42184	87199	39552	22.9	24.3	25.7	26.9
92000	41730	86191	39095	22.6	24.0	25.3	26.5
91000	41276	85183	38638	22.3	23.7	25.0	26.2
90000	40823	84175	38181	22.0	23.3	24.7	25.8
89000	40369	83167	37723	21.7	23.0	24.3	25.5
88000	39916	82159	37266	21.4	22.7	24.0	25.1
87000	39462	81151	36809	21.1	22.4	23.6	24.8
86000	39008	80143	36352	20.8	22.0	23.3	24.4
85000	38555	79135	35895	20.5	21.7	23.0	24.1
84000	38101	78127	35437	20.2	21.4	22.6	23.7
83000	37648	77119	34980	19.9	21.1	22.3	23.4
82000	37194	76111	34523	19.6	20.8	21.9	23.0
81000	36740	75103	34066	19.3	20.4	21.6	22.6
80000	36287	74095	33608	19.0	20.1	21.3	22.3
79000	35833	73087	33151	18.7	19.8	20.9	21.9
78000	35380	72079	32694	18.4	19.5	20.6	21.6
77000	34926	71071	32237	18.1	19.1	20.3	21.2

Applicability:
50020-50067

Table 5 Aircraft Classification Number (ACN) RESULTS FOR MOST AFT C.G. RIGID PAVEMENT

A/C Gross Weight (lb)	A/C Gross Weight (Kg)	MLG Load (lb)	MLG Load (Kg)	ACN High Strength K=150 MN/m3	ACN Medium Strength K=80 MN/m3	ACN Low Strength K=40 MN/m3	ACN Ultra-Low Strength K=20 MN/m3
135000	61234	126967	57591	36	38	40	41

A/C Gross Weight (lb)	A/C Gross Weight (Kg)	MLG Load (lb)	MLG Load (Kg)	ACN High Strength K=150 MN/m3	ACN Medium Strength K=80 MN/m3	ACN Low Strength K=40 MN/m3	ACN Ultra-Low Strength K=20 MN/m3
134000	60781	126280	57279	35	37	39	41
133000	60327	125592	56967	35	37	39	41
132000	59874	124904	56655	35	37	39	41
131000	59420	124216	56343	35	37	39	40
130000	58967	123528	56031	34	36	38	40
129000	58513	122840	55719	34	36	38	40
128000	58059	122153	55407	34	36	38	40
127000	57606	121465	55095	34	36	38	39
126000	57152	120777	54783	34	36	37	39
125000	56699	120089	54471	33	35	37	39
124000	56245	119401	54159	33	35	37	38
123000	55791	118713	53847	33	35	37	38
122000	55338	118026	53535	33	35	36	38
121000	54884	117338	53223	32	34	36	38
120500	54657	116994	53067	32	34	36	38
120000	54431	116539	52861	32	34	36	37
119000	53977	115629	52448	32	34	36	37
118000	53523	114720	52036	32	33	35	37
117000	53070	113810	51623	31	33	35	36
116000	52616	112901	51210	31	33	35	36
115000	52163	111828	50724	31	32	34	36
114000	51709	110756	50238	30	32	34	35
113000	51255	109683	49751	30	32	33	35
112000	50802	108610	49264	30	31	33	35
111000	50348	107538	48778	29	31	33	34
110000	49895	106465	48291	29	31	32	34

A/C Gross Weight (lb)	A/C Gross Weight (Kg)	MLG Load (lb)	MLG Load (Kg)	ACN High Strength K=150 MN/m3	ACN Medium Strength K=80 MN/m3	ACN Low Strength K=40 MN/m3	ACN Ultra-Low Strength K=20 MN/m3
109000	49441	105393	47805	29	30	32	33
108000	48987	104320	47318	28	30	32	33
107000	48534	103248	46832	28	30	31	33
106000	48080	102175	46345	28	29	31	32
105000	47627	101103	45859	27	29	31	32
104000	47173	100030	45372	27	29	30	32
103000	46720	98958	44886	27	28	30	31
102000	46266	97885	44399	26	28	29	31
101000	45812	96813	43913	26	28	29	30
100000	45359	95740	43426	26	27	29	30
99000	44905	94668	42940	25	27	28	30
98000	44452	93595	42453	25	26	28	29
97000	43998	92523	41967	25	26	28	29
96000	43544	91450	41480	24	26	27	28
95000	43091	90378	40994	24	25	27	28
94000	42637	89305	40508	24	25	26	28
93000	42184	88232	40021	23	25	26	27
92000	41730	87160	39535	23	24	26	27
91000	41276	86087	39048	23	24	25	27
90000	40823	85015	38562	22	24	25	26
89000	40369	83942	38075	22	23	25	26
88000	39916	82870	37589	22	23	24	25
87000	39462	81797	37102	21	23	24	25
86000	39008	80725	36616	21	22	24	25
85000	38555	79652	36129	21	22	23	24
84000	38101	78580	35643	20	22	23	24

A/C Gross Weight (lb)	A/C Gross Weight (Kg)	MLG Load (lb)	MLG Load (Kg)	ACN High Strength K=150 MN/m3	ACN Medium Strength K=80 MN/m3	ACN Low Strength K=40 MN/m3	ACN Ultra-Low Strength K=20 MN/m3
83000	37648	77507	35156	20	21	22	23
82000	37194	76435	34670	20	21	22	23
81000	36740	75362	34183	19	21	22	23
80000	36287	74290	33697	19	20	21	22
79000	35833	73217	33210	19	20	21	22
78000	35380	72145	32724	18	19	21	22
77000	34926	71072	32237	18	19	20	21

Applicability:
50069, 50071, 50078, 50086

Table 6 Aircraft Classification Number (ACN) RESULTS FOR MOST AFT C.G. RIGID PAVEMENT

A/C Gross Weight (lb)	A/C Gross Weight (Kg)	MLG Load (lb)	MLG Load (Kg)	ACN High Strength K=150 MN/m3	ACN Medium Strength K=80 MN/m3	ACN Low Strength K=40 MN/m3	ACN Ultra-Low Strength K=20 MN/m3
139000	63049	129719	58839	37	39	41	42
138000	62595	129031	58527	36	38	40	42
137000	62142	128343	58215	36	38	40	42
136000	61688	127655	57903	36	38	40	42
135000	61234	126967	57591	36	38	40	41
134000	60781	126280	57279	35	37	39	41
133000	60327	125592	56967	35	37	39	41
132000	59874	124904	56655	35	37	39	41
131000	59420	124216	56343	35	37	39	40
130000	58967	123528	56031	34	36	38	40
129000	58513	122840	55719	34	36	38	40
128000	58059	122153	55407	34	36	38	40

A/C Gross Weight (lb)	A/C Gross Weight (Kg)	MLG Load (lb)	MLG Load (Kg)	ACN High Strength K=150 MN/m3	ACN Medium Strength K=80 MN/m3	ACN Low Strength K=40 MN/m3	ACN Ultra-Low Strength K=20 MN/m3
127000	57606	121465	55095	34	36	38	39
126000	57152	120777	54783	34	36	37	39
125000	56699	120089	54471	33	35	37	39
124000	56245	119401	54159	33	35	37	38
123000	55791	118713	53847	33	35	37	38
122000	55338	118026	53535	33	35	36	38
121000	54884	117338	53223	32	34	36	38
120500	54657	116994	53067	32	34	36	38
120000	54431	116539	52861	32	34	36	37
119000	53977	115629	52448	32	34	36	37
118000	53523	114720	52036	32	33	35	37
117000	53070	113810	51623	31	33	35	36
116000	52616	112901	51210	31	33	35	36
115000	52163	111828	50724	31	32	34	36
114000	51709	110756	50238	30	32	34	35
113000	51255	109683	49751	30	32	33	35
112000	50802	108610	49264	30	31	33	35
111000	50348	107538	48778	29	31	33	34
110000	49895	106465	48291	29	31	32	34
109000	49441	105393	47805	29	30	32	33
108000	48987	104320	47318	28	30	32	33
107000	48534	103248	46832	28	30	31	33
106000	48080	102175	46345	28	29	31	32
105000	47627	101103	45859	27	29	31	32
104000	47173	100030	45372	27	29	30	32
103000	46720	98958	44886	27	28	30	31

A/C Gross Weight (lb)	A/C Gross Weight (Kg)	MLG Load (lb)	MLG Load (Kg)	ACN High Strength K=150 MN/m3	ACN Medium Strength K=80 MN/m3	ACN Low Strength K=40 MN/m3	ACN Ultra-Low Strength K=20 MN/m3
102000	46266	97885	44399	26	28	29	31
101000	45812	96813	43913	26	28	29	30
100000	45359	95740	43426	26	27	29	30
99000	44905	94668	42940	25	27	28	30
98000	44452	93595	42453	25	26	28	29
97000	43998	92523	41967	25	26	28	29
96000	43544	91450	41480	24	26	27	28
95000	43091	90378	40994	24	25	27	28
94000	42637	89305	40508	24	25	26	28
93000	42184	88232	40021	23	25	26	27
92000	41730	87160	39535	23	24	26	27
91000	41276	86087	39048	23	24	25	27
90000	40823	85015	38562	22	24	25	26
89000	40369	83942	38075	22	23	25	26
88000	39916	82870	37589	22	23	24	25
87000	39462	81797	37102	21	23	24	25
86000	39008	80725	36616	21	22	24	25
85000	38555	79652	36129	21	22	23	24
84000	38101	78580	35643	20	22	23	24
83000	37648	77507	35156	20	21	22	23
82000	37194	76435	34670	20	21	22	23
81000	36740	75362	34183	19	21	22	23
80000	36287	74290	33697	19	20	21	22
79000	35833	73217	33210	19	20	21	22
78000	35380	72145	32724	18	19	21	22

A/C Gross Weight (lb)	A/C Gross Weight (Kg)	MLG Load (lb)	MLG Load (Kg)	ACN High Strength K=150 MN/m3	ACN Medium Strength K=80 MN/m3	ACN Low Strength K=40 MN/m3	ACN Ultra-Low Strength K=20 MN/m3
77000	34926	71072	32237	18	19	20	21

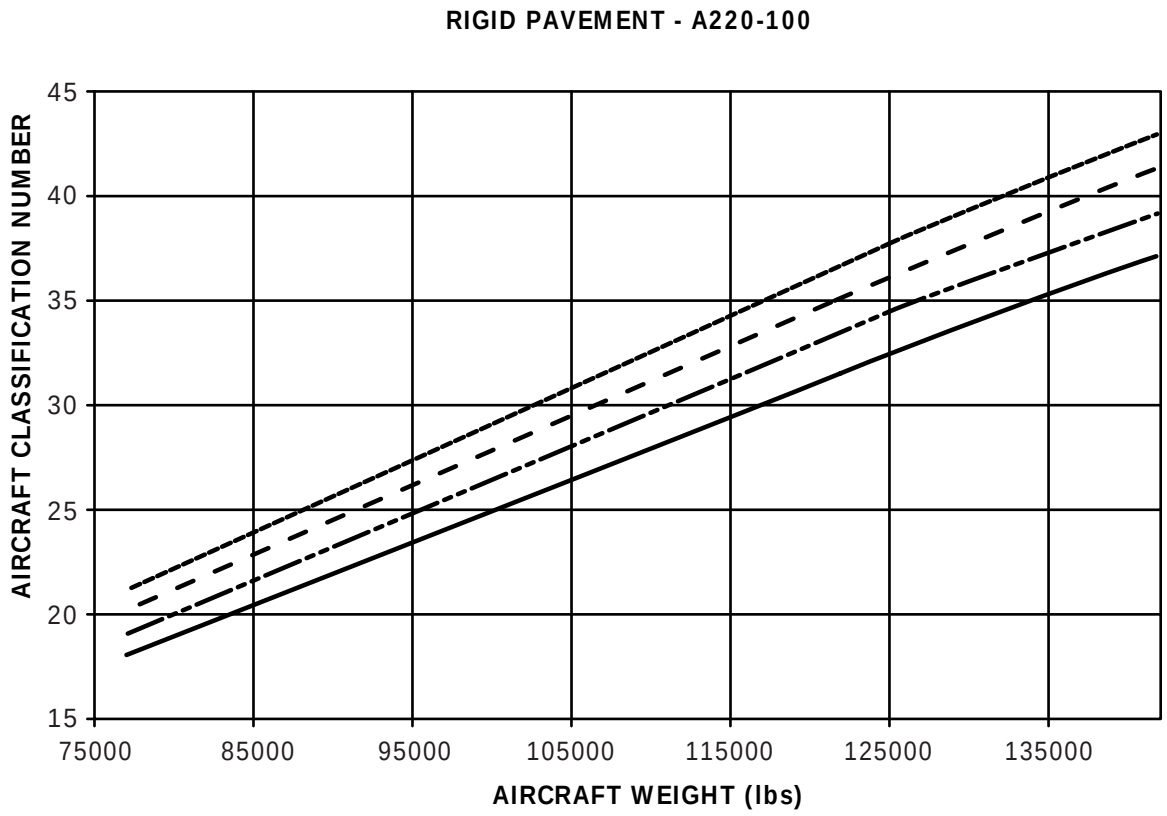

LEGEND

- Ultra low strength k= 20 mn/m³.
- Low strength k= 40 mn/m³.
- Medium strength k= 80 mn/m³.
- High strength k= 150 mn/m³.

ICN-BD500-A-J000000-C-3AB48-57663-A-004-01

Figure 1 ACN results - Rigid pavement

Applicability:

Table 7 Aircraft Classification Number (ACN) RESULTS FOR MOST AFT C.G. FLEXIBLE PAVEMENT

A/C Gross Weight (lb)	A/C Gross Weight (kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength CBR=15	ACN Medium Strength CBR=10	ACN Low Strength CBR=6	ACN Ultra-Low Strength CBR=3
141500	64183	130042	58986	32.4	33.5	37.0	42.3
140500	63729	129272	58636	32.2	33.3	36.7	42.0
140000	63502	128876	58457	32.1	33.2	36.6	41.8
139000	63049	128085	58098	31.8	33.0	36.3	41.5
138000	62595	127294	57739	31.6	32.7	36.0	41.2
137000	62142	126503	57380	31.4	32.5	35.7	40.9
136000	61688	125711	57021	31.2	32.3	35.4	40.6
135000	61234	124920	56662	30.9	32.0	35.2	40.3
134000	60781	124129	56303	30.71	31.8	34.9	40.0
133000	60327	123338	55945	30.5	31.6	34.6	39.7
132000	59874	122546	55585	30.2	31.3	34.3	39.4
131000	59420	121755	55227	30.0	31.1	34.1	39.1
130000	58967	120964	54868	29.8	30.9	33.8	38.8
129000	58513	120173	54509	29.5	30.6	33.5	38.5
128000	58059	119381	54150	29.3	30.4	33.2	38.2
127000	57606	118590	53791	29.1	30.2	32.9	37.9
126000	57152	117799	53432	28.9	29.9	32.7	37.6
125000	56699	117008	53073	28.6	29.7	32.4	37.3
124000	56245	116216	52714	28.4	29.5	32.1	37.0
123000	55791	115425	52355	28.2	29.2	31.8	36.7
122000	55338	114634	51997	27.9	29.0	31.6	36.4
121000	54884	113843	51638	27.7	28.8	31.3	36.1
120500	54657	113447	51458	27.6	28.6	31.1	36.0
120000	54431	113048	51277	27.5	28.5	31.0	35.9

A/C Gross Weight (lb)	A/C Gross Weight (kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength CBR=15	ACN Medium Strength CBR=10	ACN Low Strength CBR=6	ACN Ultra-Low Strength CBR=3
119500	54204	112649	51096	27.4	28.4	30.9	35.7
119000	53977	112177	50882	27.2	28.2	30.7	35.5
118000	53523	111234	50454	27.0	27.9	30.4	35.2
117000	53070	110290	50026	26.7	27.7	30.1	34.8
116000	52616	109347	49598	26.4	27.4	29.7	34.5
115000	52163	108404	49171	26.2	27.1	29.4	34.1
114000	51709	107461	48743	25.9	26.8	29.1	33.7
113000	51255	106517	48315	25.7	26.5	28.8	33.4
112000	50802	105574	47887	25.4	26.2	28.5	33.0
111000	50348	104631	47459	25.1	25.9	28.2	32.7
110000	49895	103688	47032	24.9	25.7	27.9	32.3
109000	49441	102744	46603	24.6	25.4	27.6	32.0
108000	48987	101801	46176	24.4	25.1	27.3	31.6
107000	48534	100858	45748	24.1	24.8	26.9	31.3
106000	48080	99915	45320	23.9	24.5	26.6	30.9
105000	47627	98971	44892	23.6	24.2	26.3	30.6
104000	47173	98028	44464	23.3	23.9	26.0	30.2
103000	46720	97085	44037	23.1	23.7	25.7	29.9
102000	46266	96142	43609	22.8	23.4	25.4	29.5
101000	45812	95198	43181	22.6	23.1	25.1	29.2
100000	45359	94255	42753	22.3	22.8	24.8	28.8
99000	44905	93247	42296	22.1	22.5	24.5	28.4
98000	44452	92239	41838	21.8	22.3	24.2	28.1
97000	43998	91231	41381	21.5	22.0	23.8	27.7
96000	43544	90223	40924	21.3	21.7	23.5	27.3
95000	43091	89215	40467	21.0	21.4	23.2	26.9

A/C Gross Weight (lb)	A/C Gross Weight (kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength CBR=15	ACN Medium Strength CBR=10	ACN Low Strength CBR=6	ACN Ultra-Low Strength CBR=3
94000	42637	88207	40010	20.8	21.2	22.9	26.6
93000	42184	87199	39552	20.5	20.9	22.6	26.2
92000	41730	86191	39095	20.2	20.6	22.3	25.8
91000	41276	85183	38638	20.0	20.3	22.0	25.4
90000	40823	84715	38181	19.7	20.1	21.7	25.1
89000	40369	83167	37723	19.5	19.8	21.4	24.7
88000	39916	82159	37266	19.2	19.5	21.1	24.3
87000	39462	81151	36809	19.0	19.2	20.8	23.9
86000	39008	80143	36352	18.7	19.0	20.5	23.6
85000	38555	79135	35895	18.4	18.7	20.2	23.2
84000	38101	78127	35437	18.2	18.4	19.9	22.8
83000	37648	77119	34980	17.9	18.1	19.6	22.4
82000	37194	76111	34523	17.7	17.9	19.2	22.1
81000	36740	75103	34066	17.4	17.6	18.9	21.7
80000	36287	74095	33608	17.2	17.3	18.6	21.3
79000	35833	73087	33151	16.9	17.0	18.3	20.9
78000	35380	72079	32694	16.6	16.8	18.0	20.6
77000	34926	71071	32237	16.4	16.5	17.7	20.2

Applicability:
50020-50067

Table 8 Aircraft Classification Number (ACN) RESULTS FOR MOST AFT C.G. FLEXIBLE PAVEMENT

A/C Gross Weight (lb)	A/C Gross Weight (kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength CBR=15	ACN Medium Strength CBR=10	ACN Low Strength CBR=6	ACN Ultra-Low Strength CBR=3
135000	61234	126967	57591	32	33	36	41
134000	60781	126280	57279	31	32	36	41

A/C Gross Weight (lb)	A/C Gross Weight (kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength CBR=15	ACN Medium Strength CBR=10	ACN Low Strength CBR=6	ACN Ultra-Low Strength CBR=3
133000	60327	125592	56967	31	32	35	41
132000	59874	124904	56655	31	32	35	40
131000	59420	124216	56343	31	32	35	40
130000	58967	123528	56031	31	32	35	40
129000	58513	122840	55719	30	31	34	40
128000	58059	122153	55407	30	31	34	39
127000	57606	121465	55095	30	31	34	39
126000	57152	120777	54783	30	31	34	39
125000	56699	120089	54471	30	31	33	38
124000	56245	119401	54159	29	30	33	38
123000	55791	118713	53847	29	30	33	38
122000	55338	118026	53535	29	30	33	38
121000	54884	117338	53223	29	30	33	37
120500	54657	116994	53067	29	30	32	37
120000	54431	116539	52861	28	30	32	37
119000	53977	115629	52448	28	29	32	37
118000	53523	114720	52036	28	29	32	36
117000	53070	113810	51623	28	29	31	36
116000	52616	112901	51210	27	29	31	36
115000	52163	111828	50724	27	28	31	35
114000	51709	110756	50238	27	28	30	35
113000	51255	109683	49751	27	28	30	35
112000	50802	108610	49264	26	27	30	34
111000	50348	107538	48778	26	27	29	34
110000	49895	106465	48291	26	27	29	33
109000	49441	105393	47805	25	26	29	33

A/C Gross Weight (lb)	A/C Gross Weight (kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength CBR=15	ACN Medium Strength CBR=10	ACN Low Strength CBR=6	ACN Ultra-Low Strength CBR=3
108000	48987	104320	47318	25	26	28	33
107000	48534	103248	46832	25	26	28	32
106000	48080	102175	46345	25	25	28	32
105000	47627	101103	45859	24	25	27	31
104000	47173	100030	45372	24	25	27	31
103000	46720	98958	44886	24	25	27	31
102000	46266	97885	44399	23	24	26	30
101000	45812	96813	43913	23	24	26	30
100000	45359	95740	43426	23	24	26	29
99000	44905	94668	42940	23	23	25	29
98000	44452	93595	42453	22	23	25	29
97000	43998	92523	41967	22	23	25	28
96000	43544	91450	41480	22	22	24	28
95000	43091	90378	40994	21	22	24	27
94000	42637	89305	40508	21	22	23	27
93000	42184	88232	40021	21	21	23	27
92000	41730	87160	39535	21	21	23	26
91000	41276	86087	39048	20	21	22	26
90000	40823	85015	38562	20	21	22	25
89000	40369	83942	38075	20	20	22	25
88000	39916	82870	37589	20	20	21	25
87000	39462	81797	37102	19	20	21	24
86000	39008	80725	36616	19	19	21	24
85000	38555	79652	36129	19	19	20	23
84000	38101	78580	35643	18	19	20	23
83000	37648	77507	35156	18	18	20	23

A/C Gross Weight (lb)	A/C Gross Weight (kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength CBR=15	ACN Medium Strength CBR=10	ACN Low Strength CBR=6	ACN Ultra-Low Strength CBR=3
82000	37194	76435	34670	18	18	19	22
81000	36740	75362	34183	18	18	19	22
80000	36287	74290	33697	17	17	19	21
79000	35833	73217	33210	17	17	18	21
78000	35380	72145	32724	17	17	18	21
77000	34926	71072	32237	16	17	18	20

Applicability:
50069, 50071, 50078, 50086

Table 9 Aircraft Classification Number (ACN) RESULTS FOR MOST AFT C.G. FLEXIBLE PAVEMENT

A/C Gross Weight (lb)	A/C Gross Weight (kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength CBR=15	ACN Medium Strength CBR=10	ACN Low Strength CBR=6	ACN Ultra-Low Strength CBR=3
139000	63049	129719	58839	32	33	37	42
138000	62595	129031	58527	32	33	37	42
137000	62142	128343	58215	32	33	36	42
136000	61688	127655	57903	32	33	36	41
135000	61234	126967	57591	32	33	36	41
134000	60781	126280	57279	31	32	36	41
133000	60327	125592	56967	31	32	35	41
132000	59874	124904	56655	31	32	35	40
131000	59420	124216	56343	31	32	35	40
130000	58967	123528	56031	31	32	35	40
129000	58513	122840	55719	30	31	34	40
128000	58059	122153	55407	30	31	34	39
127000	57606	121465	55095	30	31	34	39
126000	57152	120777	54783	30	31	34	39

A/C Gross Weight (lb)	A/C Gross Weight (kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength CBR=15	ACN Medium Strength CBR=10	ACN Low Strength CBR=6	ACN Ultra-Low Strength CBR=3
125000	56699	120089	54471	30	31	33	38
124000	56245	119401	54159	29	30	33	38
123000	55791	118713	53847	29	30	33	38
122000	55338	118026	53535	29	30	33	38
121000	54884	117338	53223	29	30	33	37
120500	54657	116994	53067	29	30	32	37
120000	54431	116539	52861	28	30	32	37
119000	53977	115629	52448	28	29	32	37
118000	53523	114720	52036	28	29	32	36
117000	53070	113810	51623	28	29	31	36
116000	52616	112901	51210	27	29	31	36
115000	52163	111828	50724	27	28	31	35
114000	51709	110756	50238	27	28	30	35
113000	51255	109683	49751	27	28	30	35
112000	50802	108610	49264	26	27	30	34
111000	50348	107538	48778	26	27	29	34
110000	49895	106465	48291	26	27	29	33
109000	49441	105393	47805	25	26	29	33
108000	48987	104320	47318	25	26	28	33
107000	48534	103248	46832	25	26	28	32
106000	48080	102175	46345	25	25	28	32
105000	47627	101103	45859	24	25	27	31
104000	47173	100030	45372	24	25	27	31
103000	46720	98958	44886	24	25	27	31
102000	46266	97885	44399	23	24	26	30
101000	45812	96813	43913	23	24	26	30

A/C Gross Weight (lb)	A/C Gross Weight (kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength CBR=15	ACN Medium Strength CBR=10	ACN Low Strength CBR=6	ACN Ultra-Low Strength CBR=3
100000	45359	95740	43426	23	24	26	29
99000	44905	94668	42940	23	23	25	29
98000	44452	93595	42453	22	23	25	29
97000	43998	92523	41967	22	23	25	28
96000	43544	91450	41480	22	22	24	28
95000	43091	90378	40994	21	22	24	27
94000	42637	89305	40508	21	22	23	27
93000	42184	88232	40021	21	21	23	27
92000	41730	87160	39535	21	21	23	26
91000	41276	86087	39048	20	21	22	26
90000	40823	85015	38562	20	21	22	25
89000	40369	83942	38075	20	20	22	25
88000	39916	82870	37589	20	20	21	25
87000	39462	81797	37102	19	20	21	24
86000	39008	80725	36616	19	19	21	24
85000	38555	79652	36129	19	19	20	23
84000	38101	78580	35643	18	19	20	23
83000	37648	77507	35156	18	18	20	23
82000	37194	76435	34670	18	18	19	22
81000	36740	75362	34183	18	18	19	22
80000	36287	74290	33697	17	17	19	21
79000	35833	73217	33210	17	17	18	21
78000	35380	72145	32724	17	17	18	21
77000	34926	71072	32237	16	17	18	20

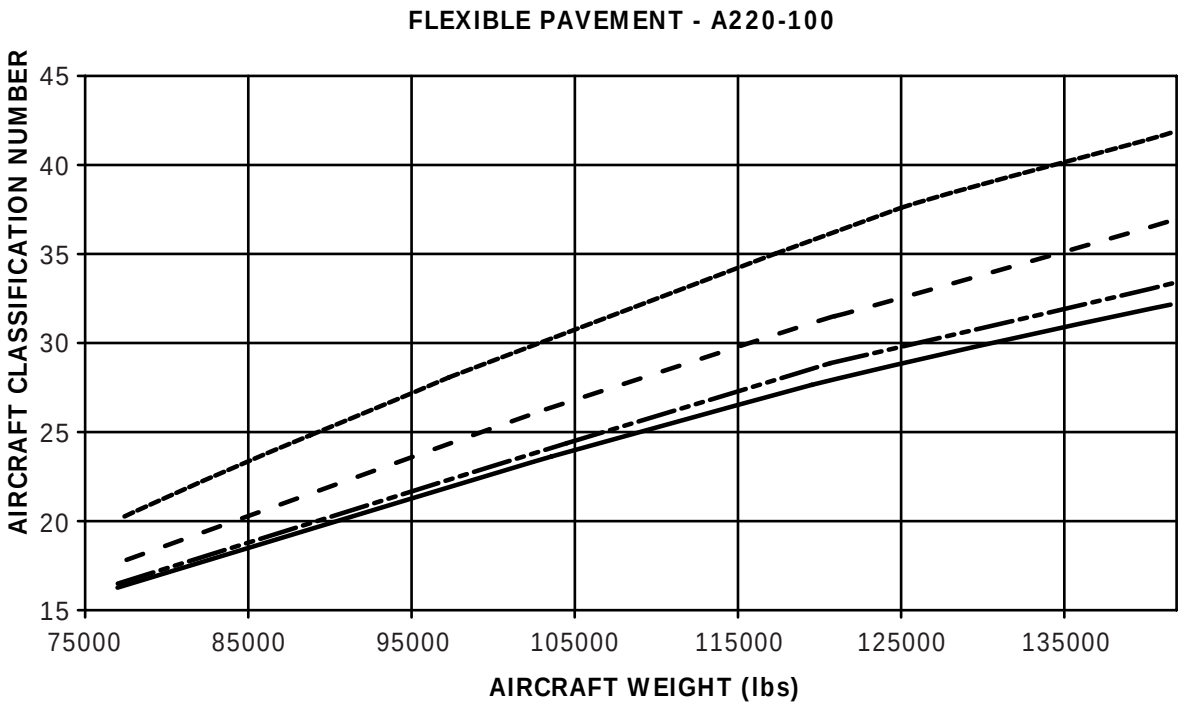

LEGEND

- Ultra low strength california bearing ratio= 3.
- Low strength california bearing ratio= 6.
- Medium strength california bearing ratio= 10.
- High strength california bearing ratio= 15.

ICN-BD500-A-J000000-C-3AB48-57664-A-004-01

Figure 2 ACN results - Flexible pavement

3 Aircraft Classification Number (ACN) results for most forward C.G. positions

Refer to Table 10 for tabular format and Fig. 3 for graphical format for the ACN results for rigid pavement and Table 13 for tabular format and Fig. 4 for graphical format for the ACN results for flexible pavement.

Applicability:

Table 10 Aircraft Classification Number (ACN) RESULTS FOR MOST FWD C.G. RIGID PAVEMENT

A/C Gross Weight (lb)	A/C Gross Weight (Kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength K=150 MN/m3	ACN Medium Strength K=80 MN/m3	ACN Low Strength K=40 MN/m3	ACN Ultra-Low Strength K=20 MN/m3
141500	64183	126993	57603	35.6	37.7	39.6	41.3
140500	63729	125971	57139	35.3	37.3	39.3	40.9
140000	63502	125477	56915	35.1	37.2	39.1	40.7
139000	63049	124489	56467	34.8	36.8	38.7	40.4
138000	62595	123501	56019	34.5	36.5	38.4	40.0
137000	62142	122513	55570	34.1	36.1	38	39.7
136000	61688	121525	55122	33.8	35.8	37.7	39.3
135000	61234	120537	54674	33.5	35.5	37.3	38.9
134000	60781	119549	54226	33.2	35.1	37.0	38.6
133000	60327	118561	53778	32.9	34.8	36.6	38.2
132000	59874	117573	53330	32.5	34.4	36.3	37.8
131000	59420	116585	52882	32.2	34.1	35.9	37.5
130000	58967	115597	52433	31.9	33.8	35.6	37.1
129000	58513	114609	51985	31.6	33.4	35.2	36.7
128000	58059	113621	51537	31.2	33.1	34.9	36.4
127000	57606	112633	51089	30.9	32.7	34.5	36.0
126000	57152	111645	50641	30.6	32.4	34.2	35.6
125000	56699	110657	50193	30.3	32.1	33.8	35.3
124000	56245	109669	49745	30.0	31.7	33.4	34.9
123000	55791	108681	49296	29.6	31.4	33.1	34.6

A/C Gross Weight (lb)	A/C Gross Weight (Kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength K=150 MN/m3	ACN Medium Strength K=80 MN/m3	ACN Low Strength K=40 MN/m3	ACN Ultra-Low Strength K=20 MN/m3
122000	55338	107693	48848	29.3	31.0	32.7	34.2
121000	54884	106705	48400	29.0	30.7	32.4	33.8
120500	54657	106211	48176	28.8	30.5	32.2	33.6
120000	54431	105721	47954	28.7	30.4	32.0	33.5
119000	53977	104741	47509	28.4	30.0	31.7	33.1
118000	53523	103762	47065	28.1	29.7	31.3	32.8
117000	53070	102782	46621	27.7	29.4	31.0	32.4
116000	53070	101802	46176	27.4	29.1	30.7	32.1
115000	52616	100845	45742	27.1	28.7	30.3	31.7
114000	52163	99888	45308	26.8	28.4	30.0	31.4
113425	51448	99338	45058	26.7	28.2	29.8	31.2
113000	51255	98967	44890	26.5	28.1	29.7	31.0
112000	50802	98094	44494	26.3	27.8	29.4	30.7
111000	50348	97220	44098	26.0	27.6	29.1	30.5
110000	49895	96347	43702	25.7	27.3	28.8	30.1
109000	49441	95474	43306	25.5	27.0	28.5	29.8
108000	48987	94601	42910	25.2	26.7	28.2	29.5
107000	48534	93727	42513	25.0	26.4	27.9	29.2
106000	48080	92854	42117	24.7	26.2	27.6	28.9
105000	47627	91981	41721	24.4	25.9	27.3	28.6
104000	47173	91108	41325	24.2	25.6	27.0	28.3
103000	46720	90234	40929	23.9	25.3	26.7	28.0
102000	46266	89361	40533	23.6	25.0	26.4	27.7
101000	45812	88488	40137	23.4	24.8	26.1	27.4
100000	45359	87615	39741	23.1	24.5	25.9	27.1
99000	44905	86741	39345	22.8	24.2	25.6	26.8

A/C Gross Weight (lb)	A/C Gross Weight (Kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength K=150 MN/ m3	ACN Medium Strength K=80 MN/ m3	ACN Low Strength K=40 MN/ m3	ACN Ultra-Low Strength K=20 MN/ m3
98000	44452	85868	38949	22.6	23.9	25.3	26.5
97000	43998	84995	38553	22.3	23.6	25.0	26.1
96000	43544	84122	38157	22.1	23.4	24.7	25.8
95000	43091	83248	37760	21.8	23.1	24.4	25.5
94000	42637	82375	37364	21.5	22.8	24.1	25.2
93000	42184	81502	36968	21.3	22.5	23.8	24.9
92000	41730	80629	36572	21.0	22.2	23.5	24.6
91000	41276	79755	36176	20.7	22.0	23.2	24.3
90000	40823	78882	35780	20.5	21.7	22.9	24.0
89000	40369	78009	35384	20.2	21.4	22.6	23.7
88000	39916	77136	34988	19.9	21.1	22.3	23.4
87000	39462	76262	34591	19.7	20.8	22.0	23.1
86000	39008	75389	34195	19.4	20.6	21.7	22.8
85000	38555	74516	33799	19.2	20.3	21.4	22.5
84000	38101	73643	33403	18.9	20.0	21.1	22.2
83000	37648	72769	33007	18.6	19.7	20.9	21.9
82000	37194	71896	32611	18.4	19.4	20.6	21.6
81000	36740	71023	32215	18.1	19.2	20.3	21.3
80000	36287	70150	31819	17.8	18.9	20.0	21.0
79000	35833	69276	31423	17.6	18.6	19.7	20.7
78000	35380	68403	31027	17.3	18.3	19.4	20.3
77000	34926	67530	30631	17.0	18.1	19.1	20.0

Applicability:
50020-50067

Table 11 Aircraft Classification Number (ACN) RESULTS FOR MOST FWD C.G. RIGID PAVEMENT

A/C Gross Weight (lb)	A/C Gross Weight (Kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength K=150 MN/m3	ACN Medium Strength K=80 MN/m3	ACN Low Strength K=40 MN/m3	ACN Ultra-Low Strength K=20 MN/m3
135000	61234	122584	55603	34	36	38	40
134000	60781	121699	55201	34	36	38	39
133000	60327	120814	54800	34	36	37	39
132000	59874	119929	54398	33	35	37	39
131000	59420	119044	53997	33	35	37	38
130000	58967	118160	53596	33	35	36	38
129000	58513	117275	53195	32	34	36	38
128000	58059	116390	52793	32	34	36	37
127000	57606	115505	52392	32	34	36	37
126000	57152	114620	51990	32	33	35	37
125000	56699	113736	51589	31	33	35	36
124000	56245	112851	51188	31	33	35	36
123000	55791	111966	50786	31	32	34	36
122000	55338	111081	50385	30	32	34	35
121000	54884	110196	49984	30	32	34	35
120500	54657	109754	49783	30	32	34	35
120000	54431	109267	49562	30	32	33	35
119000	53977	108292	49120	30	31	33	34
118000	53523	107318	48678	29	31	33	34
117000	53070	106344	48236	29	31	32	34
116000	53070	105370	47794	29	30	32	33
115000	52616	104400	47355	28	30	32	33
114000	52163	103429	46914	28	30	31	33

A/C Gross Weight (lb)	A/C Gross Weight (Kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength K=150 MN/ m3	ACN Medium Strength K=80 MN/ m3	ACN Low Strength K=40 MN/ m3	ACN Ultra-Low Strength K=20 MN/ m3
113000	51255	102459	46474	28	29	31	32
112000	50802	101489	46034	27	29	31	32
111000	50348	100519	45594	27	29	30	32
110000	49895	99548	45154	27	28	30	31
109000	49441	98578	44714	27	28	30	31
108000	48987	97608	44274	26	28	29	31
107000	48534	96638	43834	26	27	29	30
106000	48080	95668	43394	26	27	29	30
105000	47627	94697	42953	25	27	28	30
104000	47173	93727	42513	25	27	28	29
103000	46720	92757	42073	25	26	28	29
102000	46266	91787	41633	24	26	27	29
101000	45812	90816	41193	24	26	27	28
100000	45359	89846	40753	24	25	27	28
99000	44905	88876	40313	24	25	26	28
98000	44452	87906	39873	23	25	26	27
97000	43998	86935	39433	23	24	26	27
96000	43544	85965	38993	23	24	25	26
95000	43091	84995	38553	22	24	25	26
94000	42637	84025	38113	22	23	25	26
93000	42184	83055	37673	22	23	24	25
92000	41730	82084	37232	21	23	24	25
91000	41276	81114	36792	21	22	24	25
90000	40823	80144	36352	21	22	23	24
89000	40369	79174	35912	21	22	23	24
88000	39916	78203	35472	20	21	23	24

A/C Gross Weight (lb)	A/C Gross Weight (Kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength K=150 MN/m3	ACN Medium Strength K=80 MN/m3	ACN Low Strength K=40 MN/m3	ACN Ultra-Low Strength K=20 MN/m3
87000	39462	77233	35032	20	21	22	23
86000	39008	76263	34592	20	21	22	23
85000	38555	75293	34152	19	21	22	23
84000	38101	74322	33711	19	20	21	22
83000	37648	73352	33271	19	20	21	22
82000	37194	72382	32831	18	20	21	22
81000	36740	71412	32391	18	19	20	21
80000	36287	70442	31951	18	19	20	21
79000	35833	69471	31511	18	19	20	21
78000	35380	68501	31071	17	18	19	20
77000	34926	67531	30631	17	18	19	20

Applicability:
50069, 50071, 50078, 50086

Table 12 Aircraft Classification Number (ACN) RESULTS FOR MOST FWD C.G. RIGID PAVEMENT

A/C Gross Weight (lb)	A/C Gross Weight (Kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength K=150 MN/m3	ACN Medium Strength K=80 MN/m3	ACN Low Strength K=40 MN/m3	ACN Ultra-Low Strength K=20 MN/m3
139000	63049	126123	57208	35	37	39	41
138000	62595	125238	56806	35	37	39	41
137000	62142	124353	56405	35	37	39	40
136000	61688	123469	56004	34	36	38	40
135000	61234	122584	55603	34	36	38	40
134000	60781	121699	55201	34	36	38	39
133000	60327	120814	54800	34	36	37	39
132000	59874	119929	54398	33	35	37	39

A/C Gross Weight (lb)	A/C Gross Weight (Kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength K=150 MN/m3	ACN Medium Strength K=80 MN/m3	ACN Low Strength K=40 MN/m3	ACN Ultra-Low Strength K=20 MN/m3
131000	59420	119044	53997	33	35	37	38
130000	58967	118160	53596	33	35	36	38
129000	58513	117275	53195	32	34	36	38
128000	58059	116390	52793	32	34	36	37
127000	57606	115505	52392	32	34	36	37
126000	57152	114620	51990	32	33	35	37
125000	56699	113736	51589	31	33	35	36
124000	56245	112851	51188	31	33	35	36
123000	55791	111966	50786	31	32	34	36
122000	55338	111081	50385	30	32	34	35
121000	54884	110196	49984	30	32	34	35
120500	54657	109754	49783	30	32	34	35
120000	54431	109267	49562	30	32	33	35
119000	53977	108292	49120	30	31	33	34
118000	53523	107318	48678	29	31	33	34
117000	53070	106344	48236	29	31	32	34
116000	53070	105370	47794	29	30	32	33
115000	52616	104400	47355	28	30	32	33
114000	52163	103429	46914	28	30	31	33
113000	51255	102459	46474	28	29	31	32
112000	50802	101489	46034	27	29	31	32
111000	50348	100519	45594	27	29	30	32
110000	49895	99548	45154	27	28	30	31
109000	49441	98578	44714	27	28	30	31
108000	48987	97608	44274	26	28	29	31
107000	48534	96638	43834	26	27	29	30

A/C Gross Weight (lb)	A/C Gross Weight (Kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength K=150 MN/m3	ACN Medium Strength K=80 MN/m3	ACN Low Strength K=40 MN/m3	ACN Ultra-Low Strength K=20 MN/m3
106000	48080	95668	43394	26	27	29	30
105000	47627	94697	42953	25	27	28	30
104000	47173	93727	42513	25	27	28	29
103000	46720	92757	42073	25	26	28	29
102000	46266	91787	41633	24	26	27	29
101000	45812	90816	41193	24	26	27	28
100000	45359	89846	40753	24	25	27	28
99000	44905	88876	40313	24	25	26	28
98000	44452	87906	39873	23	25	26	27
97000	43998	86935	39433	23	24	26	27
96000	43544	85965	38993	23	24	25	26
95000	43091	84995	38553	22	24	25	26
94000	42637	84025	38113	22	23	25	26
93000	42184	83055	37673	22	23	24	25
92000	41730	82084	37232	21	23	24	25
91000	41276	81114	36792	21	22	24	25
90000	40823	80144	36352	21	22	23	24
89000	40369	79174	35912	21	22	23	24
88000	39916	78203	35472	20	21	23	24
87000	39462	77233	35032	20	21	22	23
86000	39008	76263	34592	20	21	22	23
85000	38555	75293	34152	19	21	22	23
84000	38101	74322	33711	19	20	21	22
83000	37648	73352	33271	19	20	21	22
82000	37194	72382	32831	18	20	21	22
81000	36740	71412	32391	18	19	20	21

A/C Gross Weight (lb)	A/C Gross Weight (Kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength K=150 MN/ m3	ACN Medium Strength K=80 MN/ m3	ACN Low Strength K=40 MN/ m3	ACN Ultra-Low Strength K=20 MN/ m3
80000	36287	70442	31951	18	19	20	21
79000	35833	69471	31511	18	19	20	21
78000	35380	68501	31071	17	18	19	20
77000	34926	67531	30631	17	18	19	20

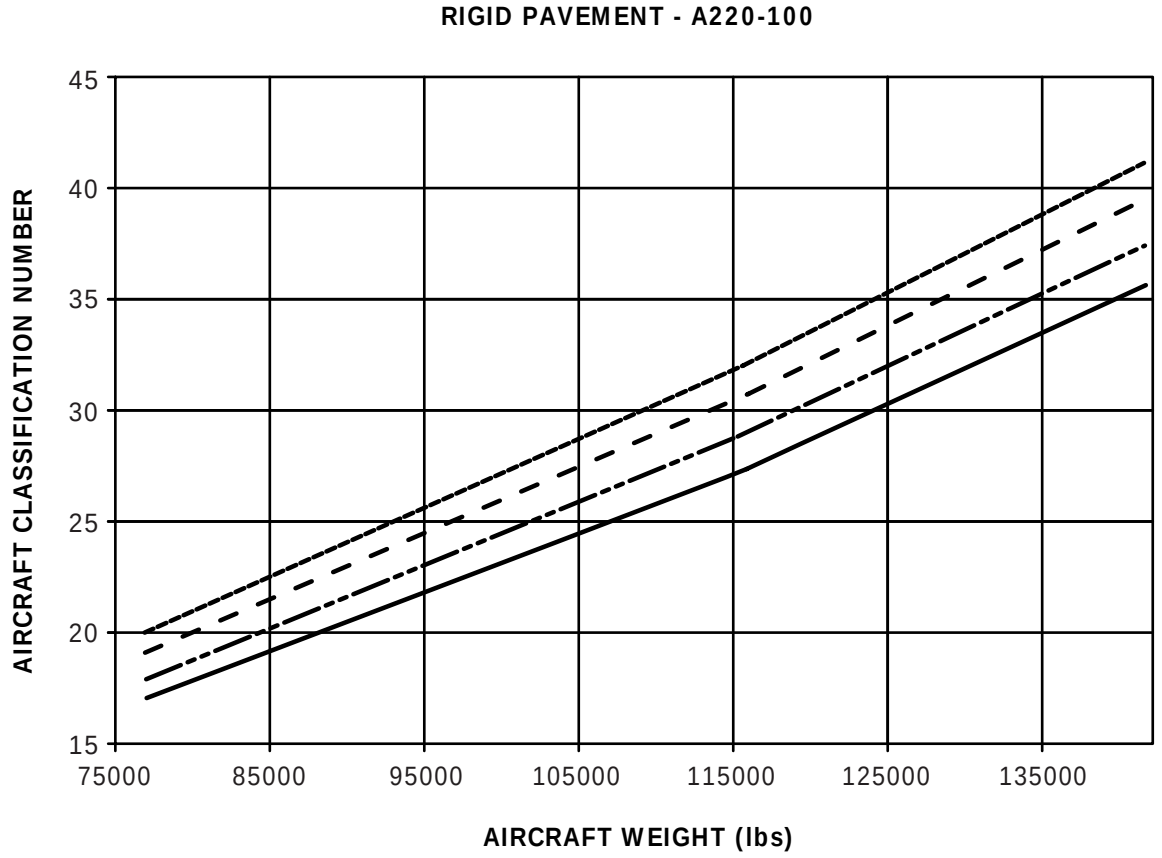

LEGEND

- Ultra low strength k= 20 mn/m³.
- Low strength k= 40 mn/m³.
- Medium strength k= 80 mn/m³.
- High strength k= 150 mn/m³.

ICN-BD500-A-J000000-C-3AB48-57665-A-004-01

Figure 3 ACN results - Rigid pavement

Applicability:

Table 13 Aircraft Classification Number (ACN) RESULTS FOR MOST FWD C.G. FLEXIBLE PAVEMENT

A/C Gross Weight (lb)	A/C Gross Weight (Kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength CBR=15	ACN Medium Strength CBR=10	ACN Low Strength CBR=6	ACN Ultra-Low Strength CBR=3
141500	64183	126993	57603	31.5	32.7	35.9	41.1
140500	63729	125971	57139	31.2	32.4	35.5	40.7
140000	63502	125477	56915	31.1	32.2	35.3	40.5
139000	63049	124489	56467	30.8	31.9	35.0	40.2
138000	62595	123501	56019	30.5	31.6	34.6	39.8
137000	62142	122513	55570	30.2	31.3	34.3	39.4
136000	61688	121525	55122	30.0	31.0	34.0	39.0
135000	61234	120537	54674	29.7	30.7	33.6	38.7
134000	60781	119549	54226	29.4	30.4	33.3	38.3
133000	60327	118561	53778	29.1	30.1	32.9	37.9
132000	59874	117573	53330	28.8	29.8	32.6	37.6
131000	59420	116585	52882	28.5	29.5	32.3	37.2
130000	58967	115597	52433	28.3	29.2	31.9	36.8
129000	58513	114609	51985	28.0	28.9	31.6	36.4
128000	58059	113621	51537	27.7	28.6	31.2	36.1
127000	57606	112633	51089	27.4	28.3	30.9	35.7
126000	57152	111645	50641	27.1	28.0	30.5	35.3
125000	56699	110657	50193	26.8	27.7	30.2	34.9
124000	56245	109669	49745	26.6	27.4	29.9	34.6
123000	55791	108681	49296	26.3	27.1	29.5	34.2
122000	55338	107693	48848	26.0	26.8	29.2	33.8
121000	54884	106705	48400	25.7	26.5	28.8	33.5
120500	54657	106211	48176	25.7	26.4	28.7	33.3
120000	54431	105721	47954	25.4	26.2	28.5	33.1

A/C Gross Weight (lb)	A/C Gross Weight (Kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength CBR=15	ACN Medium Strength CBR=10	ACN Low Strength CBR=6	ACN Ultra-Low Strength CBR=3
119000	54204	104741	47509	25.2	25.9	28.2	32.7
118000	53533	103762	47065	24.9	25.6	27.9	32.4
117000	53070	102782	46621	24.6	25.3	27.6	32.0
116000	52389	101802	46176	24.4	25.0	27.2	31.6
115000	52163	100845	45742	24.1	24.7	26.9	31.3
114000	51709	99888	45308	23.8	24.5	26.6	30.9
113425	51448	99338	45058	23.7	24.3	26.4	30.7
113000	51255	98967	44890	23.6	24.2	26.3	30.6
112000	50802	98094	44494	23.4	24.0	26.0	30.2
111000	50348	97220	44098	23.1	23.7	25.8	29.9
110000	49895	96347	43702	22.9	23.5	25.5	29.6
109000	49441	95474	43306	22.7	23.2	25.2	29.3
108000	48987	94601	42910	22.5	23.0	25.0	29.0
107000	48534	93727	42513	22.2	22.8	24.7	28.6
106000	48080	92854	42117	22.0	22.5	24.4	28.3
105000	47627	91981	41721	21.8	22.3	24.2	28.0
104000	47173	91108	41325	21.6	22.0	23.9	27.7
103000	46720	90234	40929	21.3	21.8	23.6	27.3
102000	46266	89361	40533	21.1	21.6	23.4	27.0
101000	45812	88488	40137	20.9	21.3	23.1	26.7
100000	45359	87615	39741	20.7	21.1	22.8	26.4
99000	44905	86741	39345	20.4	20.8	22.6	26.0
98000	44452	85868	38949	20.2	20.6	22.3	25.7
97000	43998	84995	38553	20.0	20.4	22.0	25.4
96000	43544	84122	38157	19.8	20.1	21.8	25.1
95000	43091	83248	37760	19.5	19.9	21.5	24.8

A/C Gross Weight (lb)	A/C Gross Weight (Kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength CBR=15	ACN Medium Strength CBR=10	ACN Low Strength CBR=6	ACN Ultra-Low Strength CBR=3
94000	42637	82375	37364	19.3	19.7	21.2	24.4
93000	42184	81502	36968	19.1	19.4	21.0	24.1
92000	41730	80629	36572	18.9	19.2	20.7	23.8
91000	41276	79755	36176	18.6	18.9	20.4	23.5
90000	40823	78882	35780	18.4	18.7	20.2	23.1
89000	40369	78009	35384	18.2	18.5	19.9	22.8
88000	39916	77136	34988	18.0	18.2	19.6	22.5
87000	39462	76262	34591	17.7	18.0	19.4	22.2
86000	39008	75389	34195	17.5	17.7	19.1	21.8
85000	38555	74516	33799	17.3	17.5	18.8	21.5
84000	38101	736432	33403	17.1	17.3	18.6	21.2
83000	37648	72769	33007	16.8	17.0	18.3	20.9
82000	37194	71896	32611	16.6	16.8	18.0	20.5
81000	36740	71023	32215	16.4	16.6	17.8	20.2
80000	36287	70150	31819	16.2	16.3	17.5	19.9
79000	35833	69276	31423	15.9	16.1	17.2	19.6
78000	35380	68403	31027	15.7	15.8	17.0	19.3
77000	34926	67530	30631	15.5	15.6	16.7	18.9

Applicability:
50020-50067

Table 14 Aircraft Classification Number (ACN) RESULTS FOR MOST FWD C.G. FLEXIBLE PAVEMENT

A/C Gross Weight (lb)	A/C Gross Weight (Kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength CBR=15	ACN Medium Strength CBR=10	ACN Low Strength CBR=6	ACN Ultra-Low Strength CBR=3
135000	61234	122584	55603	30	31	34	39
134000	60781	121699	55201	30	31	34	39

A/C Gross Weight (lb)	A/C Gross Weight (Kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength CBR=15	ACN Medium Strength CBR=10	ACN Low Strength CBR=6	ACN Ultra-Low Strength CBR=3
133000	60327	120814	54800	30	31	34	39
132000	59874	119929	54398	29	31	33	38
131000	59420	119044	53997	29	30	33	38
130000	58967	118160	53596	29	30	33	38
129000	58513	117275	53195	29	30	32	37
128000	58059	116390	52793	28	29	32	37
127000	57606	115505	52392	28	29	32	37
126000	57152	114620	51990	28	29	32	36
125000	56699	113736	51589	28	29	31	36
124000	56245	112851	51188	27	28	31	36
123000	55791	111966	50786	27	28	31	35
122000	55338	111081	50385	27	28	30	35
121000	54884	110196	49984	27	28	30	35
120500	54657	109754	49783	27	28	30	35
120000	54431	109267	49562	26	27	30	34
119000	54204	108292	49120	26	27	29	34
118000	53533	107318	48678	26	27	29	34
117000	53070	106344	48236	26	26	29	33
116000	52389	105370	47794	25	26	28	33
115000	52163	104400	47355	25	26	28	33
114000	51709	103429	46914	25	26	28	32
113000	51255	102459	46474	25	25	28	32
112000	50802	101489	46034	24	25	27	31
111000	50348	100519	45594	24	25	27	31
110000	49895	99548	45154	24	24	27	31
109000	49441	98578	44714	24	24	26	30

A/C Gross Weight (lb)	A/C Gross Weight (Kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength CBR=15	ACN Medium Strength CBR=10	ACN Low Strength CBR=6	ACN Ultra-Low Strength CBR=3
108000	48987	97608	44274	23	24	26	30
107000	48534	96638	43834	23	24	26	30
106000	48080	95668	43394	23	23	25	29
105000	47627	94697	42953	23	23	25	29
104000	47173	93727	42513	22	23	25	29
103000	46720	92757	42073	22	23	25	28
102000	46266	91787	41633	22	22	24	28
101000	45812	90816	41193	22	22	24	28
100000	45359	89846	40753	21	22	24	27
99000	44905	88876	40313	21	22	23	27
98000	44452	87906	39873	21	21	23	26
97000	43998	86935	39433	21	21	23	26
96000	43544	85965	38993	20	21	22	26
95000	43091	84995	38553	20	20	22	25
94000	42637	84025	38113	20	20	22	25
93000	42184	83055	37673	20	20	22	25
92000	41730	82084	37232	19	20	21	24
91000	41276	81114	36792	19	19	21	24
90000	40823	80144	36352	19	19	21	24
89000	40369	79174	35912	19	19	20	23
88000	39916	78203	35472	18	19	20	23
87000	39462	77233	35032	18	18	20	22
86000	39008	76263	34592	18	18	19	22
85000	38555	75293	34152	18	18	19	22
84000	38101	74322	33711	17	17	19	21
83000	37648	73352	33271	17	17	19	21

A/C Gross Weight (lb)	A/C Gross Weight (Kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength CBR=15	ACN Medium Strength CBR=10	ACN Low Strength CBR=6	ACN Ultra-Low Strength CBR=3
82000	37194	72382	32831	17	17	18	21
81000	36740	71412	32391	17	17	18	20
80000	36287	70442	31951	16	16	18	20
79000	35833	69471	31511	16	16	17	20
78000	35380	68501	31071	16	16	17	19
77000	34926	67531	30631	16	16	17	19

Applicability:
50069, 50071, 50078, 50086

Table 15 Aircraft Classification Number (ACN) RESULTS FOR MOST FWD C.G. FLEXIBLE PAVEMENT

A/C Gross Weight (lb)	A/C Gross Weight (Kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength CBR=15	ACN Medium Strength CBR=10	ACN Low Strength CBR=6	ACN Ultra-Low Strength CBR=3
139000	63049	126123	57208	31	32	36	41
138000	62595	125238	56806	31	32	35	40
137000	62142	124353	56405	31	32	35	40
136000	61688	123469	56004	31	32	35	40
135000	61234	122584	55603	30	31	34	39
134000	60781	121699	55201	30	31	34	39
133000	60327	120814	54800	30	31	34	39
132000	59874	119929	54398	29	31	33	38
131000	59420	119044	53997	29	30	33	38
130000	58967	118160	53596	29	30	33	38
129000	58513	117275	53195	29	30	32	37
128000	58059	116390	52793	28	29	32	37
127000	57606	115505	52392	28	29	32	37
126000	57152	114620	51990	28	29	32	36

A/C Gross Weight (lb)	A/C Gross Weight (Kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength CBR=15	ACN Medium Strength CBR=10	ACN Low Strength CBR=6	ACN Ultra-Low Strength CBR=3
125000	56699	113736	51589	28	29	31	36
124000	56245	112851	51188	27	28	31	36
123000	55791	111966	50786	27	28	31	35
122000	55338	111081	50385	27	28	30	35
121000	54884	110196	49984	27	28	30	35
120500	54657	109754	49783	27	28	30	35
120000	54431	109267	49562	26	27	30	34
119000	54204	108292	49120	26	27	29	34
118000	53533	107318	48678	26	27	29	34
117000	53070	106344	48236	26	26	29	33
116000	52389	105370	47794	25	26	28	33
115000	52163	104400	47355	25	26	28	33
114000	51709	103429	46914	25	26	28	32
113000	51255	102459	46474	25	25	28	32
112000	50802	101489	46034	24	25	27	31
111000	50348	100519	45594	24	25	27	31
110000	49895	99548	45154	24	24	27	31
109000	49441	98578	44714	24	24	26	30
108000	48987	97608	44274	23	24	26	30
107000	48534	96638	43834	23	24	26	30
106000	48080	95668	43394	23	23	25	29
105000	47627	94697	42953	23	23	25	29
104000	47173	93727	42513	22	23	25	29
103000	46720	92757	42073	22	23	25	28
102000	46266	91787	41633	22	22	24	28
101000	45812	90816	41193	22	22	24	28

A/C Gross Weight (lb)	A/C Gross Weight (Kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength CBR=15	ACN Medium Strength CBR=10	ACN Low Strength CBR=6	ACN Ultra-Low Strength CBR=3
100000	45359	89846	40753	21	22	24	27
99000	44905	88876	40313	21	22	23	27
98000	44452	87906	39873	21	21	23	26
97000	43998	86935	39433	21	21	23	26
96000	43544	85965	38993	20	21	22	26
95000	43091	84995	38553	20	20	22	25
94000	42637	84025	38113	20	20	22	25
93000	42184	83055	37673	20	20	22	25
92000	41730	82084	37232	19	20	21	24
91000	41276	81114	36792	19	19	21	24
90000	40823	80144	36352	19	19	21	24
89000	40369	79174	35912	19	19	20	23
88000	39916	78203	35472	18	19	20	23
87000	39462	77233	35032	18	18	20	22
86000	39008	76263	34592	18	18	19	22
85000	38555	75293	34152	18	18	19	22
84000	38101	74322	33711	17	17	19	21
83000	37648	73352	33271	17	17	19	21
82000	37194	72382	32831	17	17	18	21
81000	36740	71412	32391	17	17	18	20
80000	36287	70442	31951	16	16	18	20
79000	35833	69471	31511	16	16	17	20
78000	35380	68501	31071	16	16	17	19
77000	34926	67531	30631	16	16	17	19

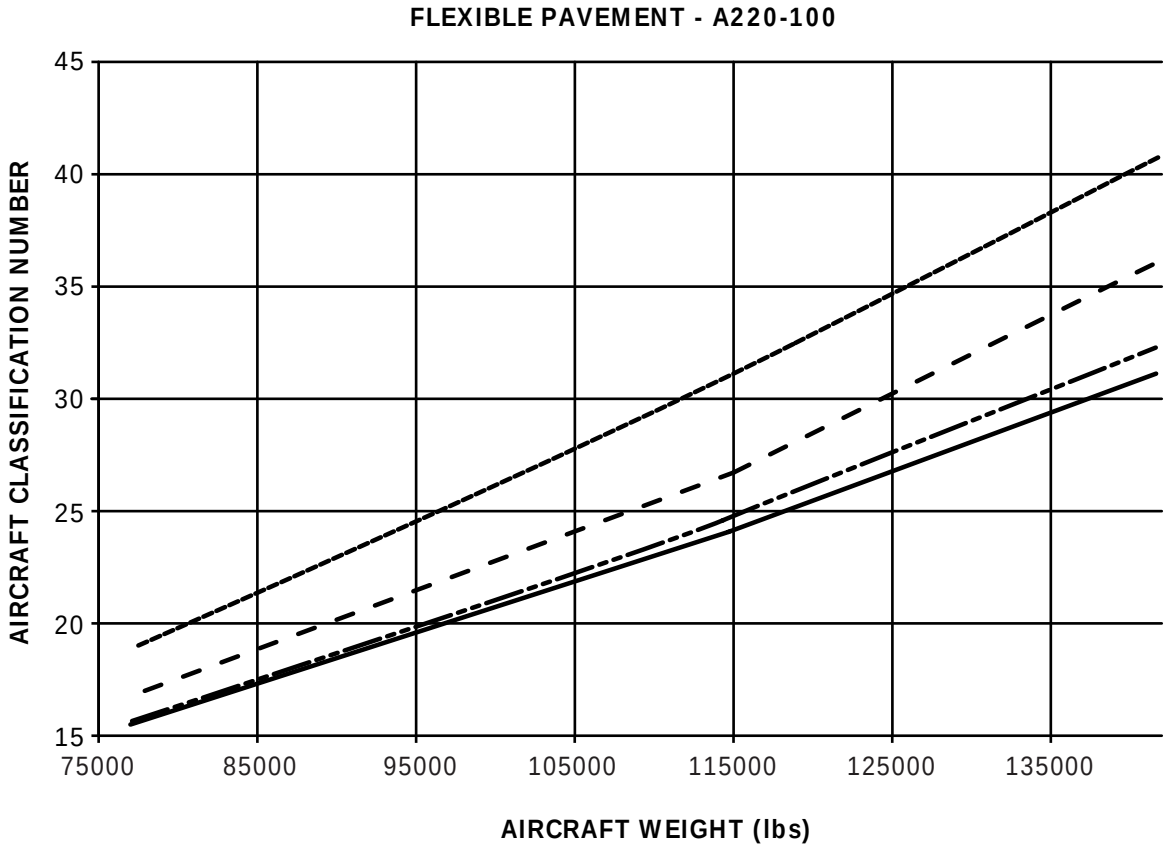

LEGEND

- Ultra low strength california bearing ratio= 3.
- Low strength california bearing ratio= 6.
- Medium strength california bearing ratio= 10.
- High strength california bearing ratio= 15.

ICN-BD500-A-J000000-C-3AB48-57666-A-004-01

Figure 4 ACN results - Flexible pavement

4 Aircraft Classification Rating (ACR)

The Aircraft Classification Rating (ACR) is a number expressing the relative effect of an aircraft on a pavement for a specified standard subgrade. It is published by aircraft manufacturers in the ACP. Drivers of the ACR:

- Wheel load (weight of A/C, C.G max): The higher the wheel load, the higher the ACR.
- Landing gear geometry: The more compact, the higher the ACR.
- Tire pressure: The higher the tire pressure, the higher the ACR (second order parameter).

The Pavement Classification Rating (PCR) is a number and series of letters describing the bearing strength of a pavement relative to its traffic for unrestricted operations. It is published by national authorities in the AIP. Drivers of the PCR:

- Pavement structure (material types, layer thicknesses).
- Traffic operating on the structure.

The system relies on the comparison of ACR to PCR. If ACR= PCR, the aircraft can operate on the pavement subject to any limitation on the tire pressure, or aircraft all-up mass for the specified aircraft type(s). For overload operations (i.e., ACR > PCR):

- Optimization may be needed, such as a reduction of aircraft weight to fit the first case, and/or a negotiation with the airport authority for authorization for overload operations, possibly with frequency limitation.
- For flexible and rigid pavements, occasional movements by aircraft with ACR not exceeding 10 per cent above the reported PCR should not adversely affect the pavement.
- Overloads in excess of 10 per cent may be allowed if justified through a technical analysis of the impact on pavement damage, consistent with the PCR philosophy.
- The annual number of overload movements should not exceed approximately 5 per cent of the total annual aircraft movements. Such overload movements should not normally be permitted on pavements exhibiting signs of distress or failure. Furthermore, overloading should be avoided during any periods of thaw following frost penetration, or when the strength of the pavement or its subgrade could be weakened by water.
- Where overload operations are conducted, the appropriate authority should review the relevant pavement condition regularly, and should also review the criteria for overload operations periodically since excessive repetition of overloads can cause severe shortening of pavement life or require major rehabilitation of pavement.

Finally, the ACR system is similar in concept to Aircraft Classification Number (ACN), with the following major differences:

- All structures are layered elastic (rigid and flexible). Alpha factors are not used.
- Retains 4 standard subgrade categories, but defined by modulus E (not CBR or k).
- Flexible ACR considers all wheels in the main landing gear assembly. Rigid ACR considers all wheels in the most demanding single main gear.
- Standard tire pressure increased to 1.5 MPa.
- Standard coverages increased to 36,500 for flexible ACR.
- Derived Single Wheel Load (DSWL) is expressed in 100’s (not 1000’s) of kg. The Aircraft Classification Rating (ACR) numerical value is defined as two times the DSWL (expressed in hundreds of kilograms).

- ACR numerical values are approximately one order of magnitude higher than the equivalent ACN. This is intentional, to prevent confusion between the two systems.

Table 16 Aircraft Classification Rating (ACR)-PCR pavement subgrade categories are defined as follows

Category	**A**	**B**	**C**	**D**
Strength	High	Medium	Low	Ultra-Low
E Value, MPa	200	120	80	50
Range, MPa	E ≥ 150	150 > E ≥ 100	100 > E ≥ 60	60 > E

4.4 Aircraft Classification Rating (ACR) Data

Overview

This section presents the ACR values (rounded to the nearest 10) for the Most AFT and Most FWD configurations as per the C.G envelope charts.

Table 17 A220-100 Most AFT C.G

Most AFT C.G		Flexible				Rigid			
		A High Strength Sub-grade	B Medium Strength Sub-grade	C Low Strength Sub-grade	D Ultra-Low Strength Sub-grade	A High Strength Sub-grade	B Medium Strength Sub-grade	C Low Strength Sub-grade	D Ultra-Low Strength Sub-grade
MFW Aft	77000	160	160	170	180	180	190	200	210
Ground Aft	100000	210	220	230	250	260	270	280	290
MZFW AFT	116000	240	260	270	300	300	320	330	340
Ground AFT	119500	250	260	280	310	320	330	340	360
MLW Aft	120500	250	270	280	310	320	330	350	360
MTOW Aft	140500	290	310	330	370	370	390	400	420
MRW Aft	141500	290	310	330	370	370	390	410	420

Table 18 A220-100 Most FWD C.G

Most FWD C.G		Flexible				Rigid			
		A High Strength Sub-grade	B Medium Strength Sub-grade	C Low Strength Sub-grade	D Ultra-Low Strength Sub-grade	A High Strength Sub-grade	B Medium Strength Sub-grade	C Low Strength Sub-grade	D Ultra-Low Strength Sub-grade
MFW Fwd	77000	150	150	160	170	170	190	190	200
Ground Fwd	113425	220	230	240	270	270	290	300	310
MZFW Fwd	116000	230	240	250	270	280	290	310	320
MLW Fwd	120500	240	250	260	290	290	310	320	330
MTOW Fwd	140500	280	300	320	360	360	380	390	410
MRW Fwd	141500	280	300	320	360	360	380	400	410

4.4.2 Aircraft Classification Rating (ACR)

Table 19 Aircraft Classification Rating (ACR) results for most aft C.G. positions for flexible pavement

Gross Weight (lbs)		% GW on Gear	Tot. Load on MLGs |(lbs	Subgrade Category											
				A			B			C			D		
				Sub-grade Mod-ulus (psi)	Flex-ible ACR Num-ber	ACR Thick-ness t (in)	Sub-grade Mod-ulus (psi)	Flex-ible ACR Num-ber	ACR Thick-ness t (in)	Sub-grade Mod-ulus (psi)	Flex-ible ACR Num-ber	ACR Thick-ness t (in)	Sub-grade Mod-ulus (psi)	Flex-ible ACR Num-ber	ACR Thick-ness t (in)
MFW AFT	77000	92.3	71071	29007.55	556.84	10.62	17404.56	561.25	13.69	11603.02	586.76	16.65	7251.89	977.08	20.2
	78000	92.4	72060	29007.55	559.12	10.69	17404.56	563.70	13.79	11603.02	589.42	16.76	7251.89	980.23	20.32
	79000	92.5	73051	29007.56	561.39	10.77	17404.56	566.16	13.88	11603.02	592.08	16.87	7251.89	983.38	20.43
	80000	92.6	74044	29007.56	563.67	10.84	17404.56	568.61	13.98	11603.02	594.74	16.98	7251.89	986.53	20.55
	81000	92.6	75038	29007.56	565.94	10.91	17404.57	571.07	14.08	11603.02	597.40	17.09	7251.89	989.68	20.67

	82000	92.7	76035	29007.56	568.22	10.98	17404.57	573.52	14.17	11603.02	120.06	17.2	7251.89	92.83	20.78
	83000	92.8	77032	29007.57	570.49	11.06	17404.57	575.98	14.27	11603.02	122.72	17.31	7251.89	95.98	20.90
	84000	92.9	78032	29007.57	572.77	11.13	17404.57	578.43	14.37	11603.02	125.38	17.42	7251.89	99.13	21.02
	85000	93.0	79033	29007.57	575.04	11.20	17404.58	580.88	14.47	11603.02	128.04	17.53	7251.89	102.28	21.13
	86000	93.1	80036	29007.57	577.32	11.27	17404.58	583.34	14.56	11603.02	130.70	17.64	7251.89	105.43	21.25
	87000	93.2	81041	29007.57	579.59	11.35	17404.58	585.79	14.66	11603.02	133.36	17.75	7251.89	108.58	21.37
	88000	93.2	82047	29007.58	581.87	11.42	17404.58	588.25	14.76	11603.02	136.02	17.86	7251.89	111.73	21.48
	89000	93.3	83055	29007.58	584.14	11.49	17404.59	590.70	14.85	11603.02	138.67	17.97	7251.89	114.88	21.60
	90000	93.4	84065	29007.58	586.42	11.56	17404.59	593.16	14.95	11603.02	141.33	18.08	7251.89	118.03	21.71
	91000	93.5	85076	29007.58	588.69	11.64	17404.59	595.61	15.05	11603.02	143.99	18.19	7251.89	121.18	21.83
	92000	93.6	86089	29007.59	590.97	11.71	17404.59	598.07	15.14	11603.02	146.65	18.3	7251.89	124.33	21.95
	93000	93.7	87104	29007.59	593.24	11.78	17404.60	600.52	15.24	11603.02	149.31	18.41	7251.89	127.48	22.06
	94000	93.7	88120	29007.59	595.52	11.85	17404.60	602.97	15.34	11603.02	151.97	18.52	7251.89	130.63	22.18
	95000	93.8	89139	29007.59	597.79	11.93	17404.60	605.43	15.44	11603.02	154.63	18.63	7251.89	133.78	22.30
	96000	93.9	90158	29007.60	600.07	12.00	17404.60	607.88	15.53	11603.02	157.29	18.74	7251.89	136.93	22.41
	97000	94.0	91180	29007.60	602.34	12.07	17404.61	610.34	15.63	11603.02	159.95	18.85	7251.89	140.08	22.53
	98000	94.1	92203	29007.60	604.62	12.14	17404.61	612.79	15.73	11603.02	162.61	18.96	7251.89	143.23	22.65
	99000	94.2	93228	29007.60	606.89	12.22	17404.61	615.25	15.82	11603.02	165.27	19.07	7251.89	146.38	22.76
Ground Aft	100000	94.3	94255	29007.60	609.17	12.29	17404.61	617.70	15.92	11603.02	167.93	19.18	7251.89	149.53	22.88
	101000	94.3	95198	29007.61	611.34	12.35	17404.62	620.07	16.00	11603.02	170.60	19.26	7251.89	152.62	23.00
	101000	95.1	96018	29007.61	613.49	12.59	17404.62	622.58	16.21	11603.02	173.50	19.41	7251.89	156.99	23.14
	102000	94.3	96141	29007.61	613.50	12.41	17404.62	622.45	16.09	11603.02	173.27	19.35	7251.89	155.71	23.11
	103000	94.3	97085	29007.61	615.67	12.47	17404.62	624.82	16.17	11603.02	175.94	19.43	7251.89	158.80	23.23
	104000	94.3	98028	29007.61	617.83	12.54	17404.62	627.19	16.25	11603.02	178.62	19.52	7251.89	161.89	23.34
	105000	94.3	98971	29007.62	620.00	12.60	17404.62	629.57	16.33	11603.02	181.29	19.60	7251.89	164.97	23.46
	106000	94.3	99914	29007.62	622.16	12.66	17404.63	631.94	16.42	11603.02	183.96	19.68	7251.89	168.06	23.57
	107000	94.3	100857	29007.62	624.33	12.72	17404.63	634.31	16.50	11603.02	186.63	19.77	7251.89	171.15	23.69
	108000	94.3	101801	29007.62	626.50	12.78	17404.63	636.69	16.58	11603.02	189.30	19.85	7251.89	174.24	23.80
	109000	94.3	102744	29007.62	628.66	12.84	17404.63	639.06	16.66	11603.02	191.97	19.93	7251.89	177.33	23.92

	110000	94.3	103687	29007.25	250.83	12.90	17404.24	231.43	16.75	11603.02	154.64	20.02	7251.89	80.42	24.03
	111000	94.3	104630	29007.25	252.99	12.96	17404.24	233.80	16.83	11603.02	157.31	20.10	7251.89	83.51	24.15
	112000	94.3	105574	29007.25	255.16	13.03	17404.24	236.18	16.91	11603.02	159.99	20.19	7251.89	86.60	24.26
	113000	94.3	106517	29007.25	257.32	13.09	17404.24	238.55	16.99	11603.02	162.66	20.27	7251.89	89.68	24.38
	114000	94.3	107460	29007.25	259.49	13.15	17404.25	240.92	17.08	11603.02	165.33	20.35	7251.89	92.77	24.49
	115000	94.3	108404	29007.25	261.65	13.21	17404.25	243.30	17.16	11603.02	168.00	20.44	7251.89	95.86	24.61
MZFW Aft	116000	94.3	109347	29007.25	263.82	13.27	17404.25	245.67	17.24	11603.02	170.67	20.52	7251.89	98.95	24.72
	117000	94.3	110290	29007.25	266.01	13.33	17404.25	248.08	17.32	11603.02	173.48	20.60	7251.89	102.10	24.83
	118000	94.3	111234	29007.25	268.20	13.39	17404.26	250.50	17.4	11603.02	176.28	20.68	7251.89	105.26	24.95
	119000	94.3	112177	29007.25	270.39	13.45	17404.26	252.91	17.48	11603.02	179.09	20.76	7251.89	108.41	25.06
Ground Aft	119500	94.3	112649	29007.25	271.48	13.48	17404.26	254.12	17.52	11603.02	180.49	20.80	7251.89	109.99	25.12
	120000	94.2	113048	29007.25	272.30	13.50	17404.26	255.03	17.55	11603.02	181.55	20.83	7251.89	111.17	25.16
MLW Aft	120500	94.1	113447	29007.25	273.12	13.52	17404.26	255.93	17.58	11603.02	182.60	20.86	7251.89	112.35	25.20
	121000	94.1	113853	29007.25	274.05	13.54	17404.26	256.97	17.61	11603.02	183.82	20.89	7251.89	113.71	25.25
	122000	94.0	114664	29007.25	275.92	13.59	17404.26	259.04	17.67	11603.02	186.26	20.96	7251.89	116.42	25.34
	123000	93.9	115472	29007.25	277.78	13.64	17404.27	261.12	17.73	11603.02	188.70	21.02	7251.89	119.13	25.43
	124000	93.8	116278	29007.25	279.64	13.69	17404.27	263.20	17.79	11603.02	191.14	21.09	7251.89	121.85	25.52
	125000	93.7	117082	29007.26	281.51	13.73	17404.27	265.27	17.85	11603.02	193.58	21.15	7251.89	124.56	25.61
	126000	93.6	117884	29007.26	283.37	13.78	17404.27	267.35	17.90	11603.02	196.02	21.22	7251.89	127.27	25.70
	127000	93.5	118684	29007.26	285.23	13.83	17404.27	269.42	17.96	11603.02	198.46	21.28	7251.89	129.98	25.79
	128000	93.3	119482	29007.26	287.10	13.88	17404.28	271.50	18.02	11603.03	200.90	21.35	7251.89	132.70	25.89
	129000	93.2	120277	29007.26	288.96	13.92	17404.28	273.58	18.08	11603.03	203.34	21.41	7251.89	135.41	25.98
	130000	93.1	121071	29007.27	290.82	13.97	17404.28	275.65	18.14	11603.03	205.78	21.48	7251.89	138.12	26.07
	131000	93.0	121862	29007.27	292.69	14.02	17404.28	277.73	18.20	11603.03	208.21	21.54	7251.89	140.84	26.16
	132000	92.9	122651	29007.27	294.55	14.07	17404.28	279.80	18.26	11603.03	210.65	21.61	7251.89	143.55	26.25
	133000	92.8	123438	29007.27	296.41	14.11	17404.29	281.88	18.32	11603.03	213.09	21.67	7251.89	146.26	26.34
	134000	92.7	124223	29007.27	298.28	14.16	17404.29	283.96	18.38	11603.03	215.53	21.74	7251.89	148.98	26.44
	135000	92.6	125005	29007.28	300.14	14.21	17404.29	286.03	18.44	11603.03	217.97	21.80	7251.89	151.69	26.53

	136000	92.5	125786	29007.25	252.00	14.26	17404.29	298.11	18.49	11603.02	20.41	21.87	7251.89	54.40	26.62
	137000	92.4	126564	29007.25	253.87	14.30	17404.30	300.18	18.55	11603.02	22.85	21.93	7251.89	57.11	26.71
	138000	92.3	127341	29007.25	255.73	14.35	17404.30	302.26	18.61	11603.02	25.29	22.00	7251.89	59.83	26.80
	139000	92.2	128118	29007.25	257.59	14.40	17404.30	304.34	18.67	11603.02	27.73	22.06	7251.89	62.54	26.89
	140000	92.1	128887	29007.25	259.46	14.45	17404.30	306.41	18.73	11603.02	30.17	22.13	7251.89	65.25	26.98
MTOW Aft	140500	92.0	129272	29007.25	260.39	14.47	17404.30	307.45	18.76	11603.02	31.39	22.16	7251.89	66.61	27.03
	141000	92.0	129657	29007.25	261.32	14.50	17404.30	308.49	18.79	11603.02	32.62	22.19	7251.89	67.96	27.08
MRW Aft	141500	91.9	130042	29007.25	262.24	14.52	17404.30	309.53	18.81	11603.02	33.85	22.22	7251.89	69.31	27.12

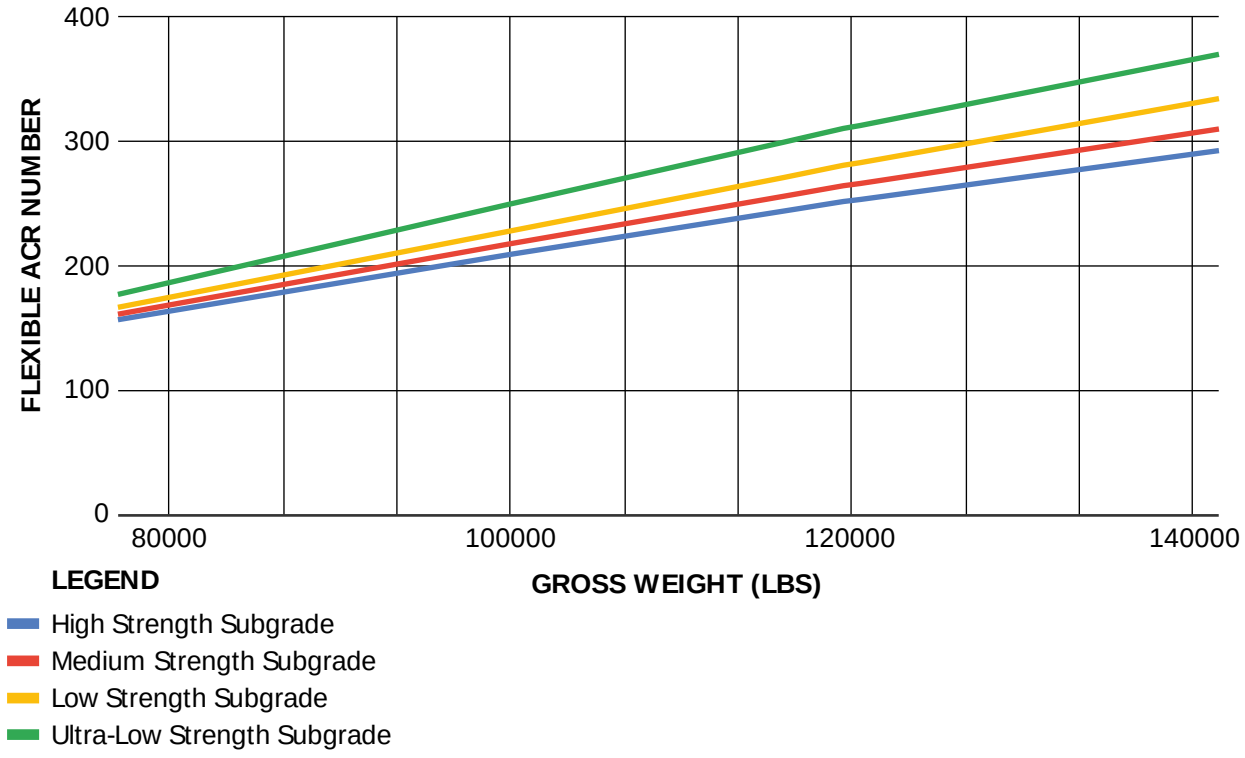

ICN-BD500-A-J000000-A-3AB48-80830-A-001-01

Figure 5 Flexible ACR (Most AFt C.G) - (Sheet 1 of 2)

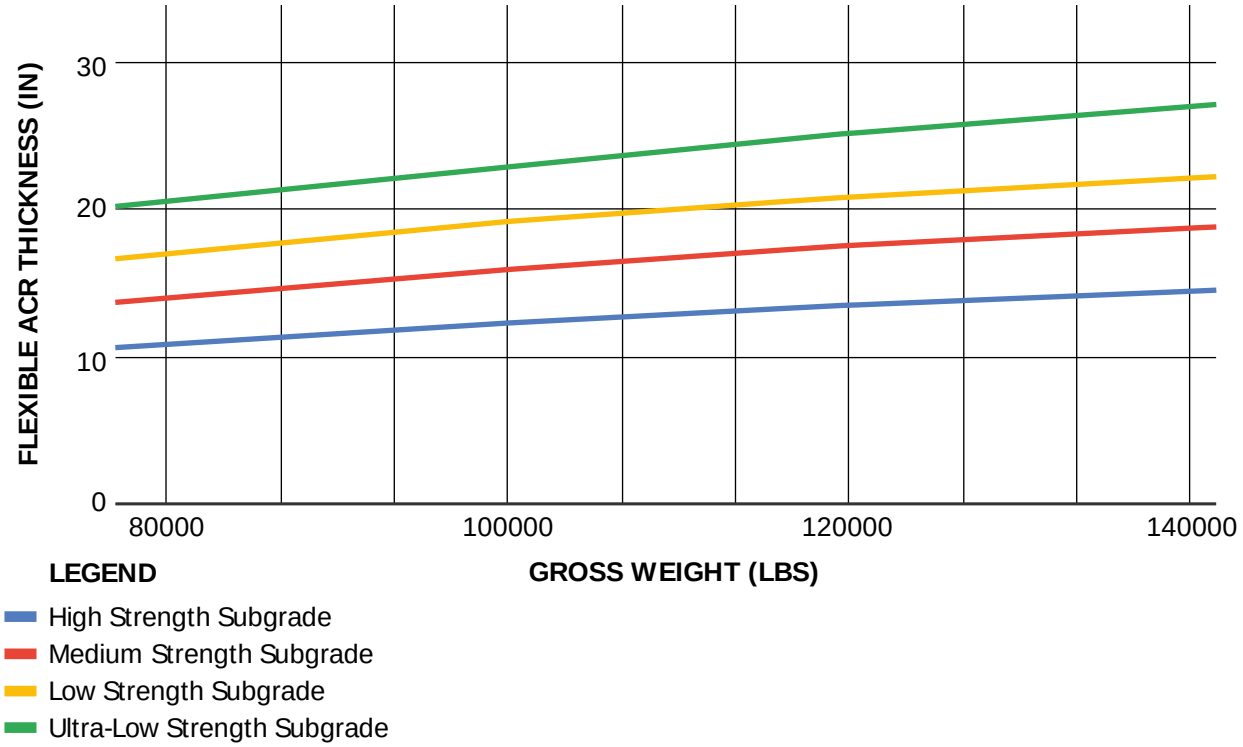

ICN-BD500-A-J000000-A-3AB48-80831-A-001-01

Figure 5 Flexible ACR (Most AFt C.G) - (Sheet 2 of 2)

Table 20 Aircraft Classification Rating (ACR) results for most forward C.G. positions for flexible pavement

Gross Weight (lbs)		% GW on Gear	Tot. Load on MLGs |(lbs	Subgrade Category											
				A			B			C			D		
				Subgrade Modulus (psi)	Flexible ACR Number	ACR Thickness t (in)	Subgrade Modulus (psi)	Flexible ACR Number	ACR Thickness t (in)	Subgrade Modulus (psi)	Flexible ACR Number	ACR Thickness t (in)	Subgrade Modulus (psi)	Flexible ACR Number	ACR Thickness t (in)
MFW Fwd	77000	87.7	67530	29007.54	548.96	10.34	17404.55	52.85	13.33	11603.03	37.79	16.19	7251.89	66.77	19.75
	78000	87.7	68404	29007.55	50.93	10.40	17404.55	54.98	13.41	11603.03	40.10	16.28	7251.89	69.49	19.85
	79000	87.7	69279	29007.55	52.90	10.47	17404.55	57.10	13.50	11603.03	42.41	16.38	7251.89	72.21	19.96
	80000	87.7	70153	29007.55	54.87	10.53	17404.55	59.23	13.58	11603.03	44.71	16.47	7251.89	74.94	20.06
	81000	87.7	71027	29007.55	56.84	10.59	17404.56	61.36	13.66	11603.03	47.02	16.57	7251.89	77.66	20.16
	82000	87.7	71901	29007.55	58.81	10.65	17404.56	63.48	13.75	11603.03	49.33	16.66	7251.89	80.38	20.26
	83000	87.7	72776	29007.56	60.78	10.72	17404.56	65.61	13.83	11603.03	51.64	16.76	7251.89	83.10	20.37
	84000	87.7	73650	29007.56	62.75	10.78	17404.56	67.74	13.91	11603.03	53.95	16.85	7251.89	85.83	20.47
	85000	87.7	74524	29007.56	64.72	10.84	17404.56	69.86	14.00	11603.03	56.26	16.95	7251.89	88.55	20.57
	86000	87.7	75397	29007.56	66.69	10.91	17404.57	71.99	14.08	11603.03	58.56	17.04	7251.89	91.27	20.68
	87000	87.7	76271	29007.56	68.66	10.97	17404.57	74.12	14.16	11603.03	60.87	17.13	7251.89	93.99	20.78
	88000	87.7	77145	29007.57	70.63	11.03	17404.57	76.25	14.25	11603.03	63.18	17.23	7251.89	96.72	20.88
	89000	87.7	78019	29007.57	72.60	11.09	17404.57	78.37	14.33	11603.03	65.49	17.32	7251.89	99.44	20.99
	90000	87.7	78892	29007.57	74.57	11.16	17404.58	80.50	14.41	11603.03	67.80	17.42	7251.89	102.16	21.09
	91000	87.7	79766	29007.57	76.54	11.22	17404.58	82.63	14.50	11603.03	70.11	17.51	7251.89	104.88	21.19
	92000	87.7	80639	29007.57	78.52	11.28	17404.58	84.75	14.58	11603.03	72.41	17.61	7251.89	107.60	21.29
	93000	87.6	81513	29007.58	80.49	11.35	17404.58	86.88	14.67	11603.03	74.72	17.70	7251.89	110.33	21.40
	94000	87.6	82386	29007.58	82.46	11.41	17404.58	89.01	14.75	11603.03	77.03	17.80	7251.89	113.05	21.50
	95000	87.6	83259	29007.58	84.43	11.47	17404.59	91.13	14.83	11603.03	79.34	17.89	7251.89	115.77	21.60
	96000	87.6	84133	29007.58	86.40	11.53	17404.59	93.26	14.92	11603.03	81.65	17.98	7251.89	118.49	21.71
	97000	87.6	85006	29007.58	88.37	11.60	17404.59	95.39	15.00	11603.03	83.96	18.08	7251.89	121.22	21.81
	98000	87.6	85879	29007.59	90.34	11.66	17404.59	97.51	15.08	11603.03	86.26	18.17	7251.89	123.94	21.91
	99000	87.6	86752	29007.59	92.31	11.72	17404.59	99.64	15.17	11603.03	88.57	18.27	7251.89	126.66	22.01

	100000	87.6	87625	29007.59	594.28	11.79	17404.20	201.77	15.25	11603.02	20.88	18.36	7251.89	29.38	22.12
	101000	87.6	88498	29007.59	596.25	11.85	17404.20	203.89	15.33	11603.02	23.19	18.46	7251.89	32.11	22.22
	102000	87.6	89371	29007.59	598.22	11.91	17404.20	206.02	15.42	11603.02	25.50	18.55	7251.89	34.83	22.32
	103000	87.6	90243	29007.26	600.19	11.97	17404.20	208.15	15.50	11603.02	27.81	18.65	7251.89	37.55	22.43
	104000	87.6	91116	29007.26	602.16	12.04	17404.21	210.27	15.58	11603.02	30.11	18.74	7251.89	40.27	22.53
	105000	87.6	91989	29007.26	604.13	12.10	17404.21	212.40	15.67	11603.02	32.42	18.83	7251.89	42.99	22.63
	106000	87.6	92861	29007.26	606.10	12.16	17404.21	214.53	15.75	11603.02	34.73	18.93	7251.89	45.72	22.74
	107000	87.6	93734	29007.26	608.07	12.23	17404.21	216.66	15.83	11603.02	37.04	19.02	7251.89	48.44	22.84
	108000	87.6	94606	29007.25	610.04	12.29	17404.21	218.78	15.92	11603.02	39.35	19.12	7251.89	51.16	22.94
	109000	87.6	95479	29007.25	612.01	12.35	17404.22	220.91	16.00	11603.02	41.66	19.21	7251.89	53.88	23.04
	110000	87.6	96351	29007.25	613.98	12.41	17404.22	223.04	16.08	11603.02	43.96	19.31	7251.89	56.61	23.15
	111000	87.6	97223	29007.25	615.95	12.48	17404.22	225.16	16.17	11603.02	46.27	19.40	7251.89	59.33	23.25
	112000	87.6	98095	29007.25	617.92	12.54	17404.22	227.29	16.25	11603.02	48.58	19.50	7251.89	62.05	23.35
	113000	87.6	98967	29007.25	619.89	12.60	17404.22	229.42	16.33	11603.02	50.89	19.59	7251.89	64.77	23.46
Ground Fwd	113425	87.6	99338	29007.25	620.73	12.63	17404.23	230.32	16.37	11603.02	51.87	19.63	7251.89	65.93	23.50
	114000	87.6	99887	29007.25	622.00	12.67	17404.23	231.71	16.42	11603.02	53.42	19.68	7251.89	67.74	23.57
	115000	87.7	100844	29007.25	624.22	12.73	17404.23	234.14	16.50	11603.02	56.11	19.76	7251.89	70.90	23.69
MZFW Fwd	116000	87.8	101802	29007.25	626.43	12.79	17404.23	236.56	16.59	11603.02	58.81	19.85	7251.89	74.05	23.81
	117000	87.8	102779	29007.25	628.64	12.85	17404.23	238.98	16.67	11603.02	61.56	19.93	7251.89	77.20	23.93
	118000	87.9	103757	29007.25	630.84	12.91	17404.24	241.40	16.75	11603.02	64.31	20.02	7251.89	80.36	24.04
	119000	88.0	104738	29007.25	633.05	12.98	17404.24	243.83	16.84	11603.02	67.06	20.10	7251.89	83.51	24.16
	120000	88.1	105719	29007.25	635.26	13.04	17404.24	246.25	16.92	11603.02	69.81	20.19	7251.89	86.66	24.27
MLW Fwd	120500	88.1	106211	29007.25	636.36	13.07	17404.24	247.46	16.96	11603.02	71.18	20.23	7251.89	88.24	24.33
	121000	88.2	106698	29007.25	637.52	13.10	17404.24	248.75	17.00	11603.02	72.68	20.27	7251.89	89.92	24.39
	122000	88.3	107672	29007.25	639.84	13.16	17404.25	251.32	17.08	11603.02	75.69	20.36	7251.89	93.28	24.50
	123000	88.3	108648	29007.24	642.16	13.22	17404.25	253.89	17.16	11603.02	78.69	20.44	7251.89	96.64	24.62
	124000	88.4	109625	29007.24	644.48	13.28	17404.25	256.46	17.24	11603.02	81.69	20.52	7251.89	100.00	24.74
	125000	88.5	110604	29007.24	646.80	13.34	17404.25	259.03	17.32	11603.02	84.70	20.61	7251.89	103.36	24.85

	126000	88.6	111585	29007.24	249.11	13.40	17404.26	261.60	17.39	11603.02	177.70	20.69	7251.89	906.71	24.97
	127000	88.6	112566	29007.25	251.43	13.46	17404.26	264.17	17.47	11603.02	180.71	20.77	7251.89	910.07	25.09
	128000	88.7	113550	29007.25	253.75	13.52	17404.26	266.74	17.55	11603.02	183.71	20.86	7251.89	913.43	25.20
	129000	88.8	114535	29007.25	256.07	13.58	17404.26	269.31	17.63	11603.02	186.71	20.94	7251.89	916.79	25.32
	130000	88.9	115521	29007.25	258.39	13.64	17404.27	271.88	17.71	11603.02	189.72	21.02	7251.89	920.15	25.44
	131000	88.9	116509	29007.26	260.71	13.71	17404.27	274.45	17.79	11603.02	192.72	21.11	7251.89	923.51	25.55
	132000	89.0	117499	29007.26	263.03	13.77	17404.27	277.02	17.87	11603.02	195.73	21.19	7251.89	926.87	25.67
	133000	89.1	118490	29007.26	265.35	13.83	17404.27	279.59	17.95	11603.02	198.73	21.27	7251.89	930.23	25.79
	134000	89.2	119482	29007.26	267.67	13.89	17404.28	282.16	18.03	11603.03	201.73	21.36	7251.89	933.59	25.90
	135000	89.2	120477	29007.26	269.99	13.95	17404.28	284.73	18.11	11603.03	204.74	21.44	7251.89	936.95	26.02
	136000	89.3	121472	29007.27	272.30	14.01	17404.28	287.30	18.18	11603.03	207.74	21.52	7251.89	940.30	26.14
	137000	89.4	122469	29007.27	274.62	14.07	17404.28	289.87	18.26	11603.03	210.75	21.61	7251.89	943.66	26.25
	138000	89.5	123468	29007.27	276.94	14.13	17404.29	292.44	18.34	11603.03	213.75	21.69	7251.89	947.02	26.37
	139000	89.5	124468	29007.27	279.26	14.19	17404.29	295.01	18.42	11603.03	216.75	21.77	7251.89	950.38	26.49
	140000	89.6	125470	29007.28	281.58	14.25	17404.29	297.58	18.50	11603.03	219.76	21.86	7251.89	953.74	26.60
MTOW Fwd	140503	89.7	125971	29007.28	282.74	14.28	17404.29	298.87	18.54	11603.03	221.26	21.90	7251.89	955.42	26.66
	141000	89.7	126482	29007.28	283.80	14.31	17404.30	300.06	18.57	11603.03	222.66	21.94	7251.89	956.97	26.72
MRW Fwd	141500	89.7	126993	29007.28	284.86	14.33	17404.30	301.25	18.60	11603.03	224.06	21.98	7251.89	958.52	26.77

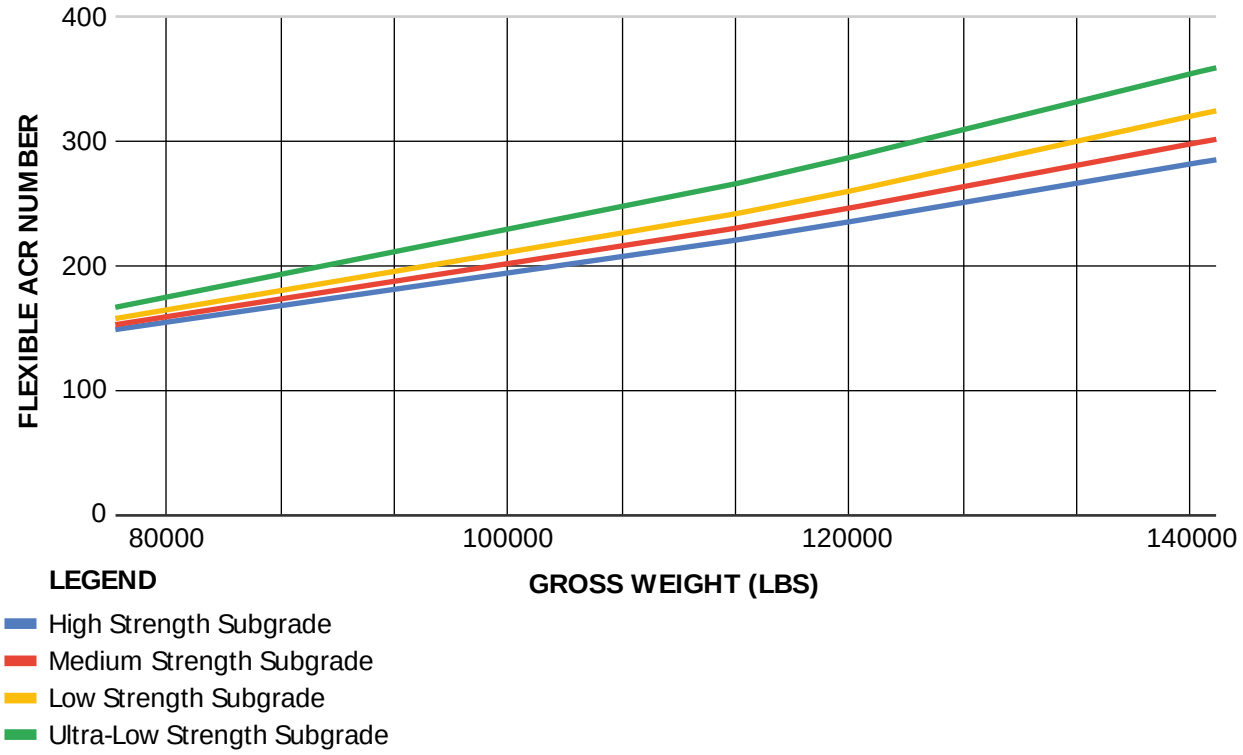

ICN-BD500-A-J000000-A-3AB48-80832-A-001-01

Figure 6 Flexible ACR (Most FWD C.G) - (Sheet 1 of 2)

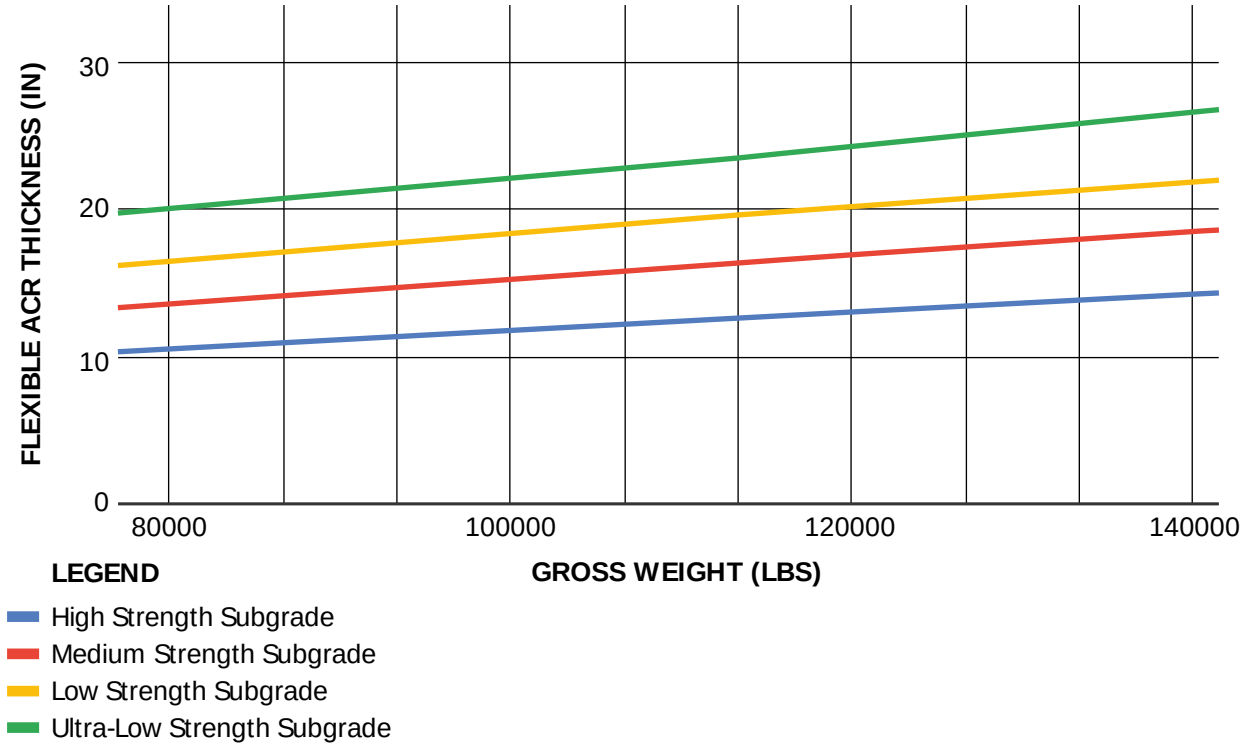

ICN-BD500-A-J000000-A-3AB48-80833-A-001-01

Figure 6 Flexible ACR (Most FWD C.G) - (Sheet 2 of 2)

Table 21 Aircraft Classification Rating (ACR) results for most aft C.G. positions for rigid pavement

Gross Weight (lbs)		% GW on Gear (Total load on gear / 2)	Tot. Load on MLGs |(lbs	Subgrade Category											
				A			B			C			D		
				Sub-grade Mod-ulus (psi)	rigid ACR Num-ber	ACR Thick-ness t (in)	Sub-grade Mod-ulus (psi)	Rigid ACR Num-ber	ACR Thick-ness t (in)	Sub-grade Mod-ulus (psi)	Rigid ACR Num-ber	ACR Thick-ness t (in)	Sub-grade Mod-ulus (psi)	Rigid ACR Num-ber	ACR Thick-ness t (in)
MFW AFT	77000	92.3	71071	29007.55	156.84	10.62	17404.53	161.25	13.69	11603.02	126.76	16.65	7251.89	177.08	20.2
	78000	92.4	72060	29007.55	159.12	10.69	17404.53	163.70	13.79	11603.02	129.42	16.76	7251.89	180.23	20.32
	79000	92.5	73051	29007.55	161.39	10.77	17404.53	166.16	13.88	11603.02	132.08	16.87	7251.89	183.38	20.43
	80000	92.6	74044	29007.55	163.67	10.84	17404.53	168.61	13.98	11603.02	134.74	16.98	7251.89	186.53	20.55
	81000	92.6	75038	29007.55	165.94	10.91	17404.53	171.07	14.08	11603.02	137.40	17.09	7251.89	189.68	20.67
	82000	92.7	76035	29007.55	168.22	10.98	17404.53	173.52	14.17	11603.02	140.06	17.2	7251.89	192.83	20.78
	83000	92.8	77032	29007.55	170.49	11.06	17404.53	175.98	14.27	11603.02	142.72	17.31	7251.89	195.98	20.90
	84000	92.9	78032	29007.55	172.77	11.13	17404.53	178.43	14.37	11603.02	145.38	17.42	7251.89	199.13	21.02
	85000	93.0	79033	29007.55	175.04	11.20	17404.53	180.89	14.47	11603.02	148.04	17.53	7251.89	202.28	21.13
	86000	93.1	80036	29007.55	177.32	11.27	17404.53	183.34	14.56	11603.02	150.70	17.64	7251.89	205.43	21.25
	87000	93.2	81041	29007.55	179.59	11.35	17404.53	185.79	14.66	11603.02	153.36	17.75	7251.89	208.58	21.37
	88000	93.2	82047	29007.55	181.87	11.42	17404.53	188.25	14.76	11603.02	156.02	17.86	7251.89	211.73	21.48
	89000	93.3	83055	29007.55	184.14	11.49	17404.53	190.70	14.85	11603.02	158.67	17.97	7251.89	214.88	21.60
	90000	93.4	84065	29007.55	186.42	11.56	17404.53	193.16	14.95	11603.02	161.33	18.08	7251.89	218.03	21.71
	91000	93.5	85076	29007.55	188.69	11.64	17404.53	195.61	15.05	11603.02	163.99	18.19	7251.89	221.18	21.83
	92000	93.6	86089	29007.55	190.97	11.71	17404.53	198.07	15.14	11603.02	166.65	18.3	7251.89	224.33	21.95
	93000	93.7	87104	29007.55	193.24	11.78	17404.53	200.52	15.24	11603.02	169.31	18.41	7251.89	227.48	22.06
	94000	93.7	88120	29007.55	195.52	11.85	17404.53	202.97	15.34	11603.02	171.97	18.52	7251.89	230.63	22.18
	95000	93.8	89139	29007.55	197.79	11.93	17404.53	205.43	15.44	11603.02	174.63	18.63	7251.89	233.78	22.30
	96000	93.9	90158	29007.55	200.07	12.00	17404.53	207.88	15.53	11603.02	177.29	18.74	7251.89	236.93	22.41
	97000	94.0	91180	29007.55	202.34	12.07	17404.53	210.34	15.63	11603.02	179.95	18.85	7251.89	240.08	22.53
	98000	94.1	92203	29007.55	204.62	12.14	17404.53	212.79	15.73	11603.02	182.61	18.96	7251.89	243.23	22.65
	99000	94.2	93228	29007.55	206.89	12.22	17404.53	215.25	15.82	11603.02	185.27	19.07	7251.89	246.38	22.76

Ground Aft	100000	47.13	47128	29007.25	55.48	8.62	17404.26	69.06	9.33	11603.02	79.14	9.88	7251.82	90.43	10.50
	101000	47.13	47599	29007.25	58.56	8.67	17404.27	72.28	9.38	11603.02	82.47	9.94	7251.82	93.82	10.56
	102000	47.13	48071	29007.26	61.64	8.72	17404.27	75.49	9.44	11603.02	85.79	10.00	7251.82	97.21	10.62
	103000	47.13	48542	29007.26	64.72	8.77	17404.27	78.71	9.49	11603.02	89.12	10.05	7251.83	00.60	10.68
	104000	47.13	49014	29007.26	67.80	8.82	17404.28	81.92	9.55	11603.02	92.45	10.11	7251.83	03.99	10.74
	105000	47.13	49485	29007.27	70.87	8.87	17404.28	85.14	9.60	11603.02	95.77	10.17	7251.83	07.37	10.80
	106000	47.13	49957	29007.27	73.95	8.92	17404.28	88.35	9.66	11603.02	99.10	10.23	7251.83	10.76	10.86
	107000	47.13	50429	29007.27	77.03	8.97	17404.29	91.57	9.71	11603.03	02.42	10.28	7251.83	14.15	10.92
	108000	47.13	50900	29007.28	80.11	9.03	17404.29	94.78	9.77	11603.03	05.75	10.34	7251.83	17.54	10.98
	109000	47.13	51372	29007.28	83.19	9.08	17404.29	98.00	9.82	11603.03	09.08	10.40	7251.83	20.93	11.04
	110000	47.13	51844	29007.28	86.27	9.13	17404.30	01.21	9.87	11603.03	12.40	10.46	7251.83	24.32	11.10
	111000	47.13	52315	29007.28	89.35	9.18	17404.30	04.43	9.93	11603.03	15.73	10.51	7251.83	27.71	11.16
	112000	47.13	52787	29007.29	92.43	9.23	17404.30	07.64	9.98	11603.03	19.06	10.57	7251.83	31.10	11.22
	113000	47.13	53259	29007.29	95.50	9.28	17404.31	10.86	10.04	11603.03	22.38	10.63	7251.83	34.48	11.28
	114000	47.13	53730	29007.29	98.58	9.33	17404.31	14.07	10.09	11603.03	25.71	10.69	7251.83	37.87	11.34
	115000	47.13	54202	29007.30	01.66	9.38	17404.31	17.29	10.15	11603.03	29.03	10.74	7251.83	41.26	11.40
MZFW Aft	116000	47.13	54674	29007.30	04.74	9.43	17404.32	20.50	10.20	11603.03	32.36	10.80	7251.83	44.65	11.46
	117000	47.13	55145	29007.30	07.91	9.48	17404.32	23.79	10.25	11603.03	35.73	10.85	7251.83	48.10	11.52
	118000	47.13	55617	29007.31	11.09	9.53	17404.32	27.07	10.31	11603.03	39.10	10.91	7251.83	51.56	11.57
	119000	47.13	56089	29007.31	14.26	9.58	17404.33	30.36	10.36	11603.04	42.47	10.96	7251.83	55.01	11.63
Ground Aft	119500	47.13	56325	29007.31	15.85	9.60	17404.33	32.00	10.39	11603.04	44.15	10.99	7251.83	56.74	11.66
	120000	47.10	56524	29007.31	17.19	9.62	17404.33	33.40	10.41	11603.04	45.58	11.02	7251.83	58.21	11.69
MLW Aft	120500	47.07	56724	29007.31	18.53	9.64	17404.33	34.79	10.43	11603.04	47.01	11.04	7251.83	59.67	11.71
	121000	47.05	56927	29007.31	19.87	9.66	17404.33	36.19	10.45	11603.04	48.45	11.06	7251.83	61.15	11.73
	122000	46.99	57332	29007.32	22.56	9.70	17404.33	39.00	10.49	11603.05	51.32	11.11	7251.83	64.10	11.78
	123000	46.94	57736	29007.32	25.25	9.74	17404.34	41.81	10.54	11603.05	54.19	11.15	7251.83	67.05	11.83
	124000	46.89	58139	29007.32	27.93	9.78	17404.34	44.62	10.58	11603.05	57.06	11.20	7251.83	70.00	11.87

	125000	46.83	58541	29007.35	350.62	9.82	17404.34	347.43	10.62	11603.02	29.93	11.24	7251.89	72.95	11.92
	126000	46.78	58942	29007.35	353.31	9.86	17404.35	350.23	10.67	11603.02	32.80	11.28	7251.89	75.91	11.97
	127000	46.73	59342	29007.35	356.00	9.90	17404.35	353.04	10.71	11603.02	35.67	11.33	7251.89	78.86	12.01
	128000	46.67	59741	29007.35	358.68	9.94	17404.35	355.85	10.75	11603.02	38.54	11.37	7251.89	81.81	12.06
	129000	46.62	60139	29007.35	361.37	9.98	17404.35	358.66	10.80	11603.02	41.41	11.42	7251.89	84.76	12.11
	130000	46.57	60535	29007.35	364.06	10.02	17404.36	361.47	10.84	11603.02	44.28	11.46	7251.89	87.71	12.15
	131000	46.51	60931	29007.35	366.74	10.05	17404.36	364.27	10.88	11603.02	47.15	11.51	7251.89	90.67	12.20
	132000	46.46	61325	29007.35	369.43	10.09	17404.36	367.08	10.92	11603.02	50.02	11.55	7251.89	93.62	12.24
	133000	46.41	61719	29007.35	372.12	10.13	17404.36	369.89	10.97	11603.02	52.89	11.60	7251.89	96.57	12.29
	134000	46.35	62111	29007.35	374.80	10.17	17404.37	372.70	11.01	11603.02	55.76	11.64	7251.89	99.52	12.34
	135000	46.30	62503	29007.35	377.49	10.21	17404.37	375.51	11.05	11603.02	58.63	11.69	7251.89	102.47	12.38
	136000	46.24	62893	29007.36	380.18	10.25	17404.37	378.31	11.10	11603.02	61.50	11.73	7251.89	105.43	12.43
	137000	46.19	63282	29007.36	382.87	10.29	17404.38	381.12	11.14	11603.02	64.37	11.77	7251.89	108.38	12.48
	138000	46.14	63670	29007.36	385.55	10.33	17404.38	383.93	11.18	11603.02	67.24	11.82	7251.89	111.33	12.52
	139000	46.08	64057	29007.36	388.24	10.37	17404.38	386.74	11.23	11603.02	70.11	11.86	7251.89	114.28	12.57
	140000	46.03	64443	29007.37	390.93	10.41	17404.39	389.55	11.27	11603.02	72.98	11.91	7251.89	117.23	12.62
MTOW Aft	140500	46.00	64636	29007.37	392.27	10.43	17404.39	390.95	11.29	11603.02	74.41	11.93	7251.89	118.71	12.64
	141000	45.98	64829	29007.37	393.62	10.45	17404.39	392.35	11.31	11603.02	75.84	11.95	7251.89	120.16	12.67
MRW Aft	141500	45.95	65021	29007.37	394.96	10.47	17404.39	393.74	11.33	11603.02	77.27	11.97	7251.89	121.60	12.69

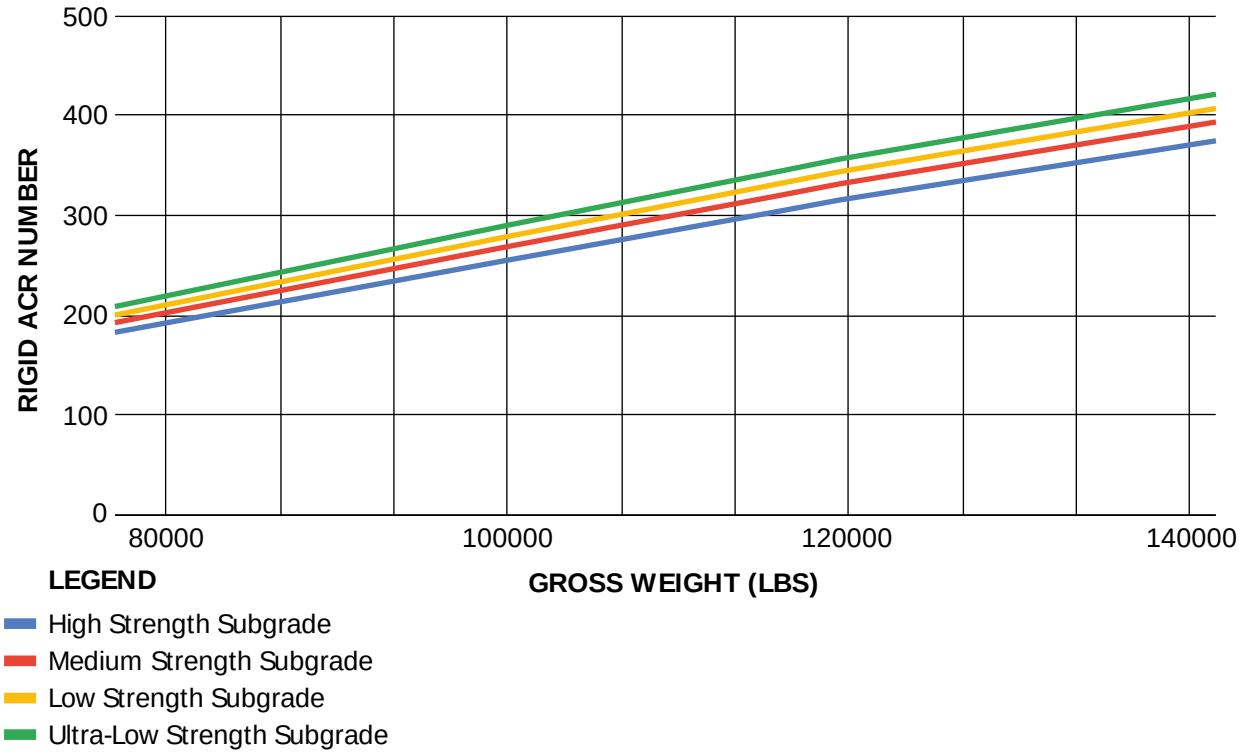

ICN-BD500-A-J000000-A-3AB48-80834-A-001-01

Figure 7 Rigid ACR (Most AFT C.G) - (Sheet 1 of 2)

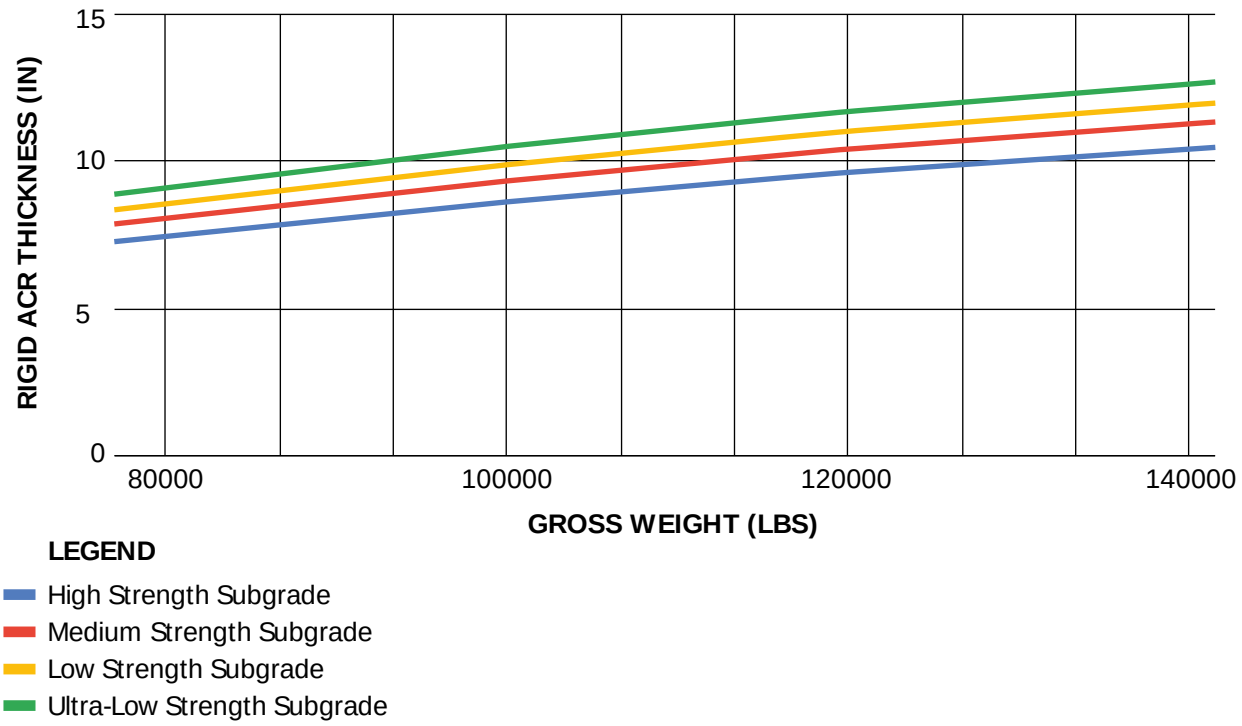

ICN-BD500-A-J000000-A-3AB48-80835-A-001-01

Figure 7 Rigid ACR (Most AFT C.G) - (Sheet 2 of 2)

Table 22 Aircraft Classification Rating (ACR) results for most forward C.G. positions for rigid pavement

Gross Weight (lbs)		% GW on Gear (Total load on gear / 2)	Tot. Load on MLGs |(lbs	Subgrade Category											
				A			B			C			D		
				Sub-grade Mod-ulus (psi)	Rigid ACR-Num-ber	ACR Thick-ness t (in)	Sub-grade Mod-ulus (psi)	Rigid ACR Num-ber	ACR Thick-ness t (in)	Sub-grade Mod-ulus (psi)	Rigid ACR Num-ber	ACR Thick-ness t (in)	Sub-grade Mod-ulus (psi)	Rigid ACR Num-ber	ACR Thick-ness t (in)
MFW Fwd	77000	43.85	33765	29007.57	372.69	7.06	17404.58	381.78	7.64	11603.02	388.89	8.10	7251.89	396.98	8.62
	78000	43.85	34202	29007.57	375.41	7.11	17404.58	384.65	7.69	11603.02	391.85	8.16	7251.89	400.04	8.68
	79000	43.85	34639	29007.57	378.13	7.16	17404.58	387.52	7.75	11603.02	394.82	8.22	7251.89	403.09	8.74
	80000	43.85	35077	29007.57	380.86	7.21	17404.59	390.39	7.80	11603.02	397.78	8.27	7251.89	406.15	8.80
	81000	43.84	35514	29007.57	383.58	7.26	17404.59	393.26	7.86	11603.02	400.75	8.33	7251.89	409.21	8.86
	82000	43.84	35951	29007.57	386.30	7.31	17404.59	396.13	7.91	11603.02	403.71	8.39	7251.89	412.26	8.92
	83000	43.84	36388	29007.57	389.02	7.36	17404.59	399.00	7.97	11603.02	406.68	8.45	7251.89	415.32	8.98
	84000	43.84	36825	29007.57	391.74	7.41	17404.60	401.87	8.02	11603.02	409.64	8.50	7251.89	418.38	9.04
	85000	43.84	37262	29007.57	394.46	7.46	17404.60	404.74	8.08	11603.02	412.61	8.56	7251.89	421.44	9.11
	86000	43.84	37699	29007.57	397.19	7.51	17404.60	407.61	8.13	11603.02	415.57	8.62	7251.89	424.49	9.17
	87000	43.83	38136	29007.57	399.91	7.56	17404.61	410.47	8.19	11603.02	418.53	8.68	7251.89	427.55	9.23
	88000	43.83	38572	29007.57	402.63	7.61	17404.61	413.34	8.24	11603.02	421.50	8.73	7251.89	430.61	9.29
	89000	43.83	39009	29007.57	405.35	7.66	17404.61	416.21	8.30	11603.02	424.46	8.79	7251.89	433.66	9.35
	90000	43.83	39446	29007.57	408.07	7.71	17404.61	419.08	8.35	11603.02	427.43	8.85	7251.89	436.72	9.41
	91000	43.83	39883	29007.57	410.79	7.76	17404.62	421.95	8.40	11603.02	430.39	8.91	7251.89	439.78	9.47
	92000	43.83	40320	29007.57	413.52	7.81	17404.62	424.82	8.46	11603.02	433.36	8.96	7251.89	442.83	9.53
	93000	43.82	40756	29007.57	416.24	7.86	17404.62	427.69	8.51	11603.02	436.32	9.02	7251.89	445.89	9.59
	94000	43.82	41193	29007.57	418.96	7.91	17404.63	430.56	8.57	11603.02	439.29	9.08	7251.89	448.95	9.65
	95000	43.82	41630	29007.57	421.68	7.96	17404.63	433.43	8.62	11603.02	442.25	9.14	7251.89	452.01	9.71
	96000	43.82	42066	29007.57	424.40	8.01	17404.63	436.30	8.68	11603.02	445.21	9.20	7251.89	455.06	9.77
	97000	43.82	42503	29007.57	427.13	8.06	17404.63	439.17	8.73	11603.02	448.18	9.25	7251.89	458.12	9.83
	98000	43.82	42939	29007.57	429.85	8.12	17404.64	442.04	8.79	11603.02	451.14	9.31	7251.89	461.18	9.89
	99000	43.81	43376	29007.57	432.57	8.17	17404.64	444.91	8.84	11603.02	454.11	9.37	7251.89	464.23	9.95

	100000	43.81	43812	29007.25	255.29	8.22	17404.24	247.78	8.90	11603.02	227.07	9.43	7251.89	267.29	10.02
	101000	43.81	44249	29007.25	258.01	8.27	17404.25	250.65	8.95	11603.02	230.04	9.48	7251.89	270.35	10.08
	102000	43.81	44685	29007.25	260.73	8.32	17404.25	253.52	9.01	11603.02	233.00	9.54	7251.89	273.40	10.14
	103000	43.81	45122	29007.25	263.46	8.37	17404.25	256.39	9.06	11603.02	235.97	9.60	7251.89	276.46	10.20
	104000	43.81	45558	29007.25	266.18	8.42	17404.25	259.26	9.12	11603.02	238.93	9.66	7251.89	279.52	10.26
	105000	43.80	45994	29007.25	268.90	8.47	17404.26	262.12	9.17	11603.02	241.89	9.71	7251.89	282.58	10.32
	106000	43.80	46431	29007.25	271.62	8.52	17404.26	264.99	9.22	11603.02	244.86	9.77	7251.89	285.63	10.38
	107000	43.80	46867	29007.25	274.34	8.57	17404.26	267.86	9.28	11603.02	247.82	9.83	7251.89	288.69	10.44
	108000	43.80	47303	29007.25	277.06	8.62	17404.27	270.73	9.33	11603.02	250.79	9.89	7251.89	291.75	10.50
	109000	43.80	47739	29007.25	279.79	8.67	17404.27	273.60	9.39	11603.02	253.75	9.94	7251.89	294.80	10.56
	110000	43.80	48175	29007.26	282.51	8.72	17404.27	276.47	9.44	11603.02	256.72	10.00	7251.89	297.86	10.62
	111000	43.79	48612	29007.26	285.23	8.77	17404.27	279.34	9.50	11603.02	259.68	10.06	7251.89	300.92	10.68
	112000	43.79	49048	29007.26	287.95	8.82	17404.28	282.21	9.55	11603.02	262.65	10.12	7251.89	303.97	10.74
	113000	43.79	49484	29007.27	290.67	8.87	17404.28	285.08	9.61	11603.02	265.61	10.18	7251.89	307.03	10.80
Ground Fwd	113425	43.79	49669	29007.27	291.83	8.89	17404.28	286.30	9.63	11603.02	266.87	10.20	7251.89	308.33	10.83
	114000	43.81	49944	29007.27	293.62	8.92	17404.28	288.19	9.66	11603.02	268.80	10.23	7251.89	310.32	10.86
	115000	43.85	50422	29007.27	296.73	8.98	17404.29	291.47	9.72	11603.03	272.17	10.29	7251.89	313.78	10.92
MZFW Fwd	116000	43.88	50901	29007.27	299.84	9.03	17404.29	294.76	9.78	11603.03	275.53	10.35	7251.89	317.24	10.98
	117000	43.92	51389	29007.28	303.06	9.08	17404.29	298.09	9.84	11603.03	279.01	10.41	7251.89	320.82	11.04
	118000	43.96	51879	29007.28	306.28	9.13	17404.30	301.43	9.89	11603.03	282.50	10.47	7251.89	324.40	11.10
	119000	44.01	52369	29007.28	309.50	9.18	17404.30	304.76	9.95	11603.03	285.98	10.52	7251.89	327.99	11.17
	120000	44.05	52860	29007.29	312.72	9.23	17404.30	308.09	10.00	11603.03	289.47	10.58	7251.89	331.57	11.23
MLW Fwd	120500	44.07	53106	29007.29	314.33	9.26	17404.30	309.76	10.03	11603.03	291.21	10.61	7251.89	333.36	11.26
	121000	44.09	53349	29007.29	316.00	9.29	17404.31	311.50	10.06	11603.03	292.99	10.64	7251.89	335.19	11.29
	122000	44.13	53836	29007.29	319.33	9.34	17404.31	314.97	10.11	11603.03	296.55	10.70	7251.89	338.85	11.35
	123000	44.17	54324	29007.30	322.66	9.39	17404.31	318.44	10.17	11603.03	300.11	10.75	7251.89	342.50	11.41
	124000	44.20	54813	29007.30	325.99	9.44	17404.32	321.91	10.22	11603.03	303.66	10.81	7251.89	346.16	11.47
	125000	44.24	55302	29007.30	329.32	9.49	17404.32	325.38	10.27	11603.03	307.22	10.87	7251.89	349.82	11.53

	126000	44.28	55792	29007.55	52.65	9.54	17404.52	28.86	10.33	11603.02	20.78	10.92	7251.89	53.47	11.59
	127000	44.32	56283	29007.55	55.98	9.59	17404.53	32.33	10.38	11603.02	24.34	10.98	7251.89	57.13	11.65
	128000	44.36	56775	29007.55	59.32	9.64	17404.53	35.80	10.44	11603.02	27.90	11.04	7251.89	60.79	11.71
	129000	44.39	57267	29007.55	62.65	9.69	17404.53	39.27	10.49	11603.03	31.46	11.09	7251.89	64.44	11.77
	130000	44.43	57761	29007.55	65.98	9.74	17404.54	42.74	10.54	11603.03	35.02	11.15	7251.89	68.10	11.83
	131000	44.47	58255	29007.55	69.31	9.79	17404.54	46.22	10.60	11603.03	38.57	11.21	7251.89	71.76	11.88
	132000	44.51	58749	29007.55	72.64	9.84	17404.54	49.69	10.65	11603.03	42.13	11.27	7251.89	75.42	11.94
	133000	44.55	59245	29007.55	75.97	9.89	17404.55	53.16	10.71	11603.03	45.69	11.32	7251.89	79.07	12.00
	134000	44.58	59741	29007.55	79.31	9.94	17404.55	56.63	10.76	11603.03	49.25	11.38	7251.89	82.73	12.06
	135000	44.62	60238	29007.56	82.64	9.99	17404.56	60.10	10.81	11603.03	52.81	11.44	7251.89	86.39	12.12
	136000	44.66	60736	29007.56	85.97	10.04	17404.56	63.58	10.87	11603.03	56.37	11.49	7251.89	90.04	12.18
	137000	44.70	61235	29007.56	89.30	10.09	17404.56	67.05	10.92	11603.03	59.93	11.55	7251.89	93.70	12.24
	138000	44.73	61734	29007.56	92.63	10.14	17404.57	70.52	10.98	11603.03	63.48	11.61	7251.89	97.36	12.30
	139000	44.77	62234	29007.56	95.96	10.19	17404.57	73.99	11.03	11603.03	67.04	11.66	7251.89	101.01	12.36
	140000	44.81	62735	29007.56	99.29	10.24	17404.57	77.46	11.08	11603.03	70.60	11.72	7251.89	104.67	12.42
MTOW Fwd	140500	44.83	62986	29007.56	100.96	10.27	17404.57	79.20	11.11	11603.03	72.38	11.75	7251.89	106.50	12.45
	141000	44.85	63241	29007.56	102.70	10.30	17404.58	81.00	11.14	11603.03	74.23	11.78	7251.89	108.38	12.48
MRW Fwd	141500	44.87	63497	29007.56	104.43	10.32	17404.58	82.80	11.17	11603.03	76.07	11.80	7251.89	110.25	12.51

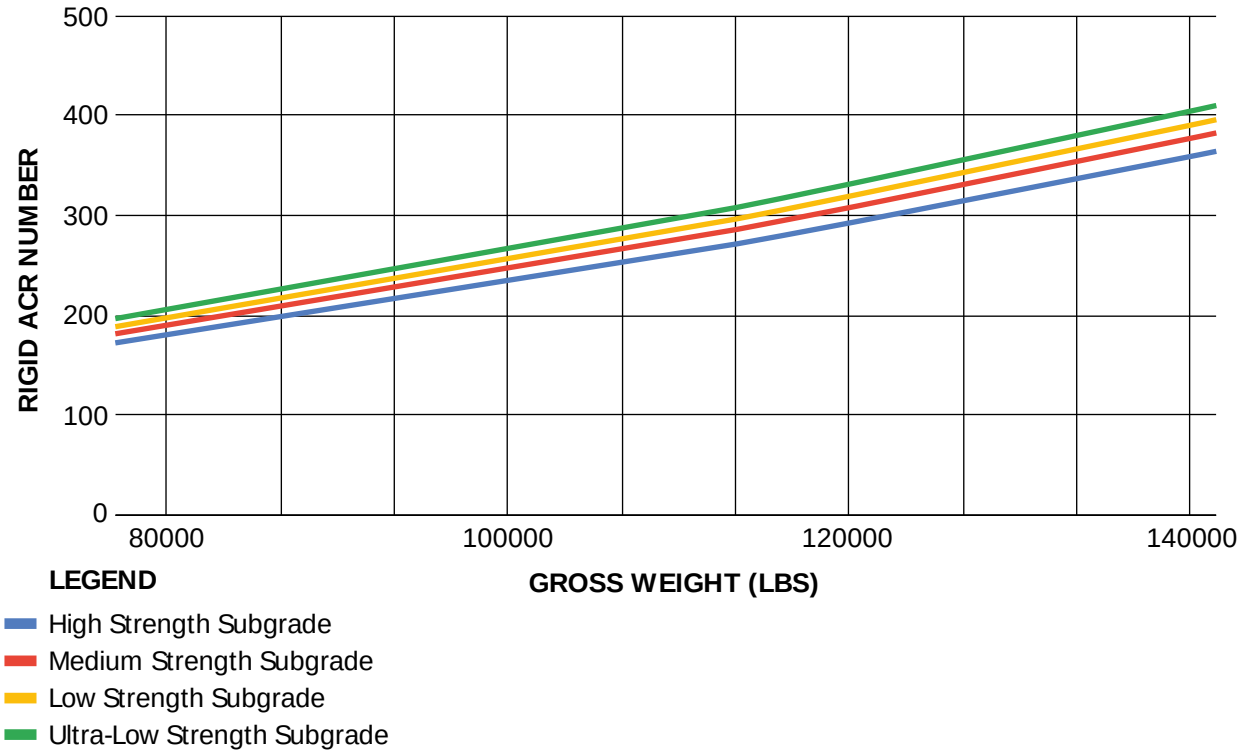

ICN-BD500-A-J000000-A-3AB48-80836-A-001-01

Figure 8 Rigid ACR (Most FWD C.G) - (Sheet 1 of 2)

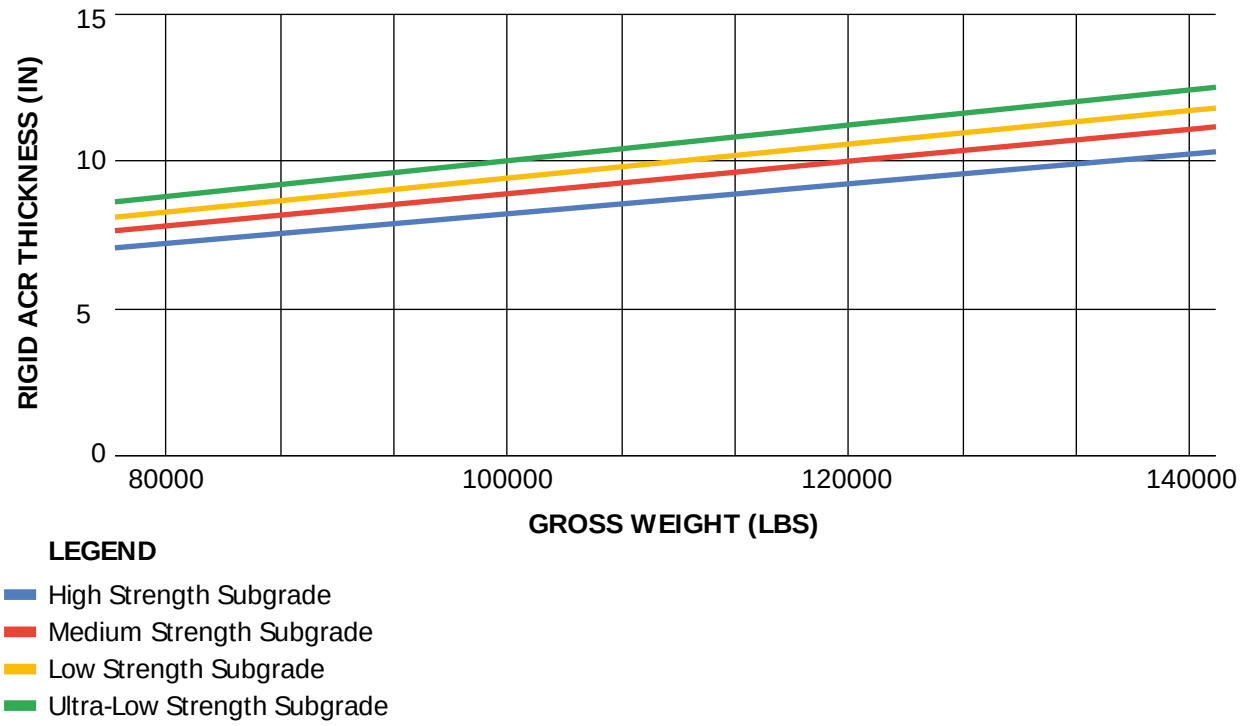

ICN-BD500-A-J000000-A-3AB48-80837-A-001-01

Figure 8 Rigid ACR (Most FWD C.G) - (Sheet 2 of 2)

5 Load Classification Number (LCN) results for most aft C.G. positions

Refer to Table 23 for tabular format and Fig. 9 for graphical format for the LCN results for rigid pavement and Table 26 for tabular format and Fig. 10 for graphical format for the LCN results for flexible pavement.

Applicability:

Table 23 Load Classification Number (LCN) RESULTS FOR MOST AFT C.G. RIGID PAVEMENT

Aircraft Weight (lbs)	Aircraft Weight (Kg)	Tire Pressure (psi)	L = 30 inches		L = 40 inches		L = 50 inches	
			ESWL	LCN	ESWL	LCN	ESWL	LCN
77000	34926	200	22634	38	23691	40	24678	43
78000	35380	200	23041	39	24108	41	25114	44
79000	35833	200	23447	39	24525	41	25550	44
80000	36287	200	23854	40	24943	42	25986	45
81000	36740	200	24260	41	25360	43	26422	46
82000	37194	200	24667	41	25777	43	26858	47
83000	37648	200	25073	42	26195	44	27294	47
84000	38101	200	25480	43	26612	45	27730	48
85000	38555	200	25886	44	27029	46	28166	49
86000	39008	200	26293	44	27447	46	28602	50
87000	39462	200	26699	45	27864	47	29038	50
88000	39916	200	27106	46	28281	48	29474	51
89000	40369	200	27512	46	28699	48	29910	52
90000	40823	200	27919	47	29116	49	30346	53
91000	41276	200	28325	48	29533	50	30782	53
92000	41730	200	28732	48	29951	50	31218	54
93000	42184	200	29138	49	30368	51	31654	55
94000	42637	200	29545	50	30785	52	32090	56
95000	43091	200	29951	51	31202	53	32526	56
96000	43544	200	30358	51	31620	53	32962	57
97000	43998	200	30764	52	32037	54	33398	58

Aircraft Weight (lbs)	Aircraft Weight (Kg)	Tire Pressure (psi)	L = 30 inches		L = 40 inches		L = 50 inches	
			ESWL	LCN	ESWL	LCN	ESWL	LCN
98000	44452	200	31171	53	32454	55	33834	59
99000	44905	200	31577	53	32872	55	34270	59
100000	45359	200	31984	54	33289	56	34706	60
101000	45812	200	32306	55	33642	57	35057	60
102000	46266	200	32628	55	33994	57	35408	61
103000	46719	200	32950	56	34347	58	35759	61
104000	47173	200	33272	56	34700	58	36110	62
105000	47627	200	33594	57	35052	59	364616	62
106000	48080	200	33917	57	35405	59	36812	63
107000	48534	200	34239	58	35757	60	37163	63
108000	48987	200	34561	59	36110	61	37514	64
109000	49441	200	34883	59	36463	61	37865	64
110000	49895	200	35205	60	36815	62	38216	64
111000	50348	200	35527	60	37168	62	38567	65
112000	50802	200	35850	61	37521	63	38917	65
113000	51255	200	36172	61	38873	63	39268	66
114000	51709	200	36494	62	38226	64	39619	66
115000	52163	200	36816	62	38578	64	39970	67
116000	52616	200	37138	63	38931	65	40321	67
117000	53070	200	37520	63	39256	65	40743	67
118000	53523	200	37903	64	39581	66	41165	68
119000	53977	200	38285	64	39906	66	41587	68
119500	54204	200	38476	64	40068	66	41798	68
120000	54431	200	38608	65	40206	67	41941	69
120500	54657	200	38740	65	40343	67	42084	69
121000	54884	200	38868	65	40469	67	42216	69
122000	55338	200	39125	66	40722	68	42481	70

Aircraft Weight (lbs)	Aircraft Weight (Kg)	Tire Pressure (psi)	L = 30 inches		L = 40 inches		L = 50 inches	
			ESWL	LCN	ESWL	LCN	ESWL	LCN
123000	55791	200	39382	66	40975	68	42745	70
124000	56245	200	39639	66	41228	68	43010	70
125000	56699	200	39895	67	41480	69	43274	71
126000	57152	200	40152	67	41733	69	43539	71
127000	57606	200	40409	67	41986	69	43803	71
128000	58059	200	40666	68	42239	70	44068	72
129000	58513	200	40923	68	42492	70	44332	72
130000	58966	200	41179	68	42745	70	44596	72
131000	59420	200	41436	69	42997	71	44861	73
132000	59874	200	41693	69	43250	71	45125	73
133000	60327	200	41950	69	43503	71	45390	73
134000	60781	200	42207	70	43756	72	45654	74
135000	61234	200	42463	70	44009	72	45919	74
136000	61688	200	42720	70	44262	72	46183	74
137000	62142	200	42977	71	44514	73	46448	75
138000	62595	200	43234	71	44767	73	46712	75
139000	63049	200	43491	71	45020	73	46977	75
140000	63502	200	43747	72	45273	74	47241	76
140500	63729	200	43876	72	45399	74	47373	76
141500	64183	200	44432	72	45985	74	47651	76

Applicability:
50020-50067

Table 24 Load Classification Number (LCN) RESULTS FOR MOST AFT C.G. RIGID PAVEMENT

Aircraft Weight (lbs)	Aircraft Weight (Kg)	Tire Pressure (psi)	L = 30 inches		L = 40 inches		L = 50 inches	
			ESWL	LCN	ESWL	LCN	ESWL	LCN
77000	34926	200	22634	38	23691	40	24850	43
78000	35380	200	23013	39	24081	41	25254	44

Aircraft Weight (lbs)	Aircraft Weight (Kg)	Tire Pressure (psi)	L = 30 inches		L = 40 inches		L = 50 inches	
			ESWL	LCN	ESWL	LCN	ESWL	LCN
79000	35833	200	23391	39	24472	41	25659	44
80000	36287	200	23769	40	24863	42	26063	45
81000	36740	200	24147	40	25254	42	26467	45
82000	37194	200	24525	41	25645	43	26871	46
83000	37648	200	24904	42	26035	44	27275	47
84000	38101	200	25282	42	26426	44	27679	47
85000	38555	200	25660	43	26817	45	28083	48
86000	39008	200	26038	44	27208	46	28488	49
87000	39462	200	26416	44	27599	46	28892	49
88000	39916	200	26795	45	27989	47	29296	50
89000	40369	200	27173	45	28380	47	29700	50
90000	40823	200	27551	46	28771	48	30104	51
91000	41276	200	27929	47	29162	49	30508	52
92000	41730	200	28307	47	29552	49	30912	52
93000	42184	200	28686	48	29943	50	31317	53
94000	42637	200	29064	48	30334	50	31721	53
95000	43091	200	29442	49	30725	51	32125	54
96000	43544	200	29820	50	31116	52	32529	55
97000	43998	200	30198	50	31506	52	32933	55
98000	44452	200	30577	51	31897	53	33337	56
99000	44905	200	30955	52	32288	54	33741	57
100000	45359	200	31333	52	32679	54	34146	57
101000	45812	200	31711	53	33069	55	34550	58
102000	46266	200	32089	53	33460	55	34954	58
103000	46719	200	32468	54	33851	56	35358	59
104000	47173	200	32846	55	34242	57	35762	60
105000	47627	200	33224	55	34633	57	36166	60

Aircraft Weight (lbs)	Aircraft Weight (Kg)	Tire Pressure (psi)	L = 30 inches		L = 40 inches		L = 50 inches	
			ESWL	LCN	ESWL	LCN	ESWL	LCN
106000	48080	200	33602	56	35023	58	36570	61
107000	48534	200	33980	56	35414	58	36974	61
108000	48987	200	34359	57	35805	59	37379	62
109000	49441	200	34737	58	36196	60	37783	63
110000	49895	200	35115	58	36587	60	38187	63
111000	50348	200	35493	59	36977	61	38591	64
112000	50802	200	35871	60	37368	62	38995	65
113000	51255	200	36250	60	37759	62	39399	65
114000	51709	200	36628	61	38150	63	39803	66
115000	52163	200	37006	61	38540	63	40208	66
116000	52616	200	37384	62	38931	64	40612	67
117000	53070	200	37686	62	39245	65	40939	67
118000	53523	200	37987	63	39559	65	41266	67
119000	53977	200	38288	63	39872	66	41593	68
120000	54431	200	38589	64	40186	67	41921	68
120500	54657	200	38740	64	40343	67	42084	68
121000	54884	200	38868	64	40477	67	42216	68
122000	55338	200	39125	65	40746	67	42481	69
123000	55791	200	39382	65	41015	68	42745	69
124000	56245	200	39639	65	41283	68	43010	69
125000	56699	200	39895	66	41552	68	43274	70
126000	57152	200	40152	66	41821	69	43539	70
127000	57606	200	40409	66	42089	69	43803	70
128000	58059	200	40666	67	42358	69	44068	71
129000	58513	200	40923	67	42627	70	44332	71
130000	58966	200	41179	67	42895	70	44596	71
131000	59420	200	41436	68	43164	70	44861	72

Aircraft Weight (lbs)	Aircraft Weight (Kg)	Tire Pressure (psi)	L = 30 inches		L = 40 inches		L = 50 inches	
			ESWL	LCN	ESWL	LCN	ESWL	LCN
132000	59874	200	41693	68	43433	70	45125	72
133000	60327	200	41950	68	43702	71	45390	72
134000	60781	200	42207	69	43970	71	45654	73
135000	61234	200	42463	69	44239	71	45919	73

Applicability:
50069, 50071, 50078, 50086

Table 25 Load Classification Number (LCN) RESULTS FOR MOST AFT C.G. RIGID PAVEMENT

Aircraft Weight (lbs)	Aircraft Weight (Kg)	Tire Pressure (psi)	L = 30 inches		L = 40 inches		L = 50 inches	
			ESWL	LCN	ESWL	LCN	ESWL	LCN
77000	34926	200	22634	38	23691	40	24850	43
78000	35380	200	23013	39	24081	41	25254	44
79000	35833	200	23391	39	24472	41	25659	44
80000	36287	200	23769	40	24863	42	26063	45
81000	36740	200	24147	40	25254	42	26467	45
82000	37194	200	24525	41	25645	43	26871	46
83000	37648	200	24904	42	26035	44	27275	47
84000	38101	200	25282	42	26426	44	27679	47
85000	38555	200	25660	43	26817	45	28083	48
86000	39008	200	26038	44	27208	46	28488	49
87000	39462	200	26416	44	27599	46	28892	49
88000	39916	200	26795	45	27989	47	29296	50
89000	40369	200	27173	45	28380	47	29700	50
90000	40823	200	27551	46	28771	48	30104	51
91000	41276	200	27929	47	29162	49	30508	52
92000	41730	200	28307	47	29552	49	30912	52
93000	42184	200	28686	48	29943	50	31317	53
94000	42637	200	29064	48	30334	50	31721	53

Aircraft Weight (lbs)	Aircraft Weight (Kg)	Tire Pressure (psi)	L = 30 inches		L = 40 inches		L = 50 inches	
			ESWL	LCN	ESWL	LCN	ESWL	LCN
95000	43091	200	29442	49	30725	51	32125	54
96000	43544	200	29820	50	31116	52	32529	55
97000	43998	200	30198	50	31506	52	32933	55
98000	44452	200	30577	51	31897	53	33337	56
99000	44905	200	30955	52	32288	54	33741	57
100000	45359	200	31333	52	32679	54	34146	57
101000	45812	200	31711	53	33069	55	34550	58
102000	46266	200	32089	53	33460	55	34954	58
103000	46719	200	32468	54	33851	56	35358	59
104000	47173	200	32846	55	34242	57	35762	60
105000	47627	200	33224	55	34633	57	36166	60
106000	48080	200	33602	56	35023	58	36570	61
107000	48534	200	33980	56	35414	58	36974	61
108000	48987	200	34359	57	35805	59	37379	62
109000	49441	200	34737	58	36196	60	37783	63
110000	49895	200	35115	58	36587	60	38187	63
111000	50348	200	35493	59	36977	61	38591	64
112000	50802	200	35871	60	37368	62	38995	65
113000	51255	200	36250	60	37759	62	39399	65
114000	51709	200	36628	61	38150	63	39803	66
115000	52163	200	37006	61	38540	63	40208	66
116000	52616	200	37384	62	38931	64	40612	67
117000	53070	200	37686	62	39245	65	40939	67
118000	53523	200	37987	63	39559	65	41266	67
119000	53977	200	38288	63	39872	66	41593	68
120000	54431	200	38589	64	40186	67	41921	68
120500	54657	200	38740	64	40343	67	42084	68

Aircraft Weight (lbs)	Aircraft Weight (Kg)	Tire Pressure (psi)	L = 30 inches		L = 40 inches		L = 50 inches	
			ESWL	LCN	ESWL	LCN	ESWL	LCN
121000	54884	200	38868	64	40477	67	42216	68
122000	55338	200	39125	65	40746	67	42481	69
123000	55791	200	39382	65	41015	68	42745	69
124000	56245	200	39639	65	41283	68	43010	69
125000	56699	200	39895	66	41552	68	43274	70
126000	57152	200	40152	66	41821	69	43539	70
127000	57606	200	40409	66	42089	69	43803	70
128000	58059	200	40666	67	42358	69	44068	71
129000	58513	200	40923	67	42627	70	44332	71
130000	58966	200	41179	67	42895	70	44596	71
131000	59420	200	41436	68	43164	70	44861	72
132000	59874	200	41693	68	43433	70	45125	72
133000	60327	200	41950	68	43702	71	45390	72
134000	60781	200	42207	69	43970	71	45654	73
135000	61234	200	42463	69	44239	71	45919	73
136000	61688	200	42720	69	44508	72	46183	73
137000	62142	200	42977	70	44776	72	46448	74
138000	62595	200	43234	70	45045	72	46712	74
139000	63049	200	43491	70	45314	73	46977	74

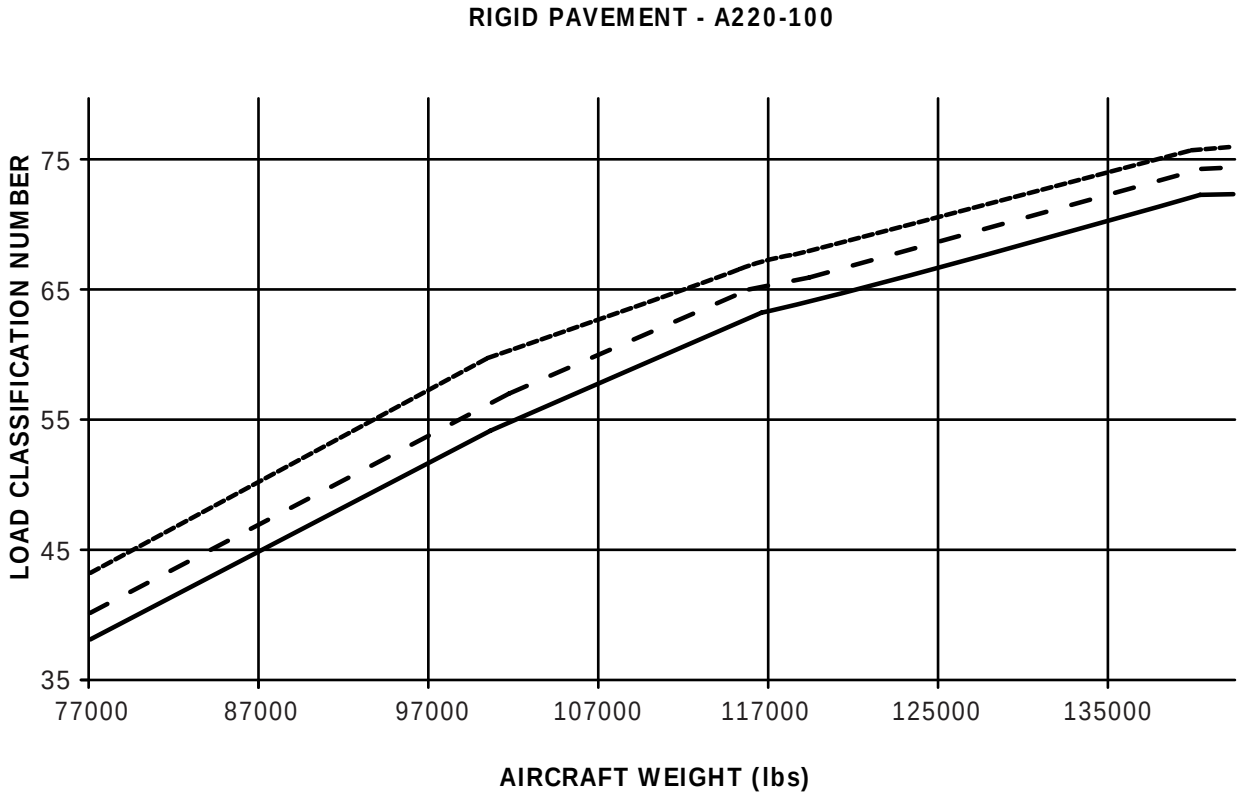

LEGEND

- Radius of relative stiffness L= 50.00 in. (1270.00 mm).
- Radius of relative stiffness L= 40.00 in. (1016.00 mm).
- Radius of relative stiffness L= 30.00 in. (762.00 mm).

ICN-BD500-A-J000000-C-3AB48-57667-A-004-01

Figure 9 LCN results - Rigid pavement

Applicability:

Table 26 Load Classification Number (LCN) RESULTS FOR MOST AFT C.G. FLEXIBLE PAVEMENT

Aircraft Weight (lbs)	Aircraft Weight (Kg)	Tire Pres-sure (psi)	Pavement Thickness 10 inches		Pavement Thickness 15 inches		Pavement Thickness 20 inches		Pavement Thickness 30 inches	
			ESWL	LCN	ESWL	LCN	ESWL	LCN	ESWL	LCN
77000	34926	200	17768	31	18843	33	21213	36	25068	43
78000	35380	200	22994	32	19178	34	21584	37	25498	44
79000	35833	200	23061	32	19512	34	21956	37	25928	44
80000	36287	200	23128	33	19847	35	22327	38	26357	45
81000	36740	200	23195	33	20181	35	22698	39	26787	46
82000	37194	200	23262	34	20516	36	23069	39	27217	47
83000	37648	200	23329	34	20851	36	23440	40	27646	47
84000	38101	200	23396	35	21185	37	23812	41	28076	48
85000	38555	200	23463	35	21520	38	24183	42	28505	49
86000	39008	200	23530	36	21854	38	24554	42	28935	50
87000	39462	200	23597	36	22189	39	24925	43	29365	50
88000	39916	200	23664	37	22523	39	25296	44	29794	51
89000	40369	200	23731	37	22858	40	25668	44	30224	52
90000	40823	200	23798	38	23192	40	26039	45	30654	53
91000	41276	200	23865	38	23527	41	26410	46	31083	53
92000	41730	200	23932	39	23861	41	26781	46	31513	54
93000	42184	200	23999	39	24196	42	27152	47	31943	55
94000	42637	200	24066	40	24531	43	27524	48	32372	56
95000	43091	200	24133	40	24865	43	27895	49	32802	56
96000	43544	200	24200	41	25200	44	28266	49	33231	57
97000	43998	200	24267	41	25534	44	28637	50	33661	58
98000	44452	200	24334	42	25869	45	29008	51	34091	59
99000	44905	200	24401	42	26203	45	29379	51	34520	59
100000	45359	200	24468	43	26538	46	29751	52	34950	60

Aircraft Weight (lbs)	Aircraft Weight (Kg)	Tire Pres-sure (psi)	Pavement Thickness 10 inches		Pavement Thickness 15 inches		Pavement Thickness 20 inches		Pavement Thickness 30 inches	
			ESWL	LCN	ESWL	LCN	ESWL	LCN	ESWL	LCN
101000	45812	200	24702	43	26814	46	30056	52	35301	60
102000	46266	200	24937	44	27090	47	30361	53	35652	61
103000	46719	200	25172	44	27367	47	30666	53	36003	61
104000	47173	200	25407	45	27643	48	30971	54	36354	62
105000	47627	200	25642	45	27919	48	31276	54	36705	62
106000	48080	200	25877	45	28195	49	31582	55	37056	63
107000	48534	200	26111	46	28471	49	31887	55	37407	63
108000	48987	200	26346	46	28748	50	32192	56	37758	64
109000	49441	200	26581	46	29024	50	32497	56	38109	64
110000	49895	200	26816	47	29300	50	32802	56	38460	64
111000	50348	200	27051	47	29576	51	33107	57	38811	65
112000	50802	200	27286	48	29853	51	33412	57	39162	65
113000	51255	200	27520	48	30129	52	33717	58	39513	66
114000	51709	200	27755	48	30405	52	34023	58	39864	66
115000	52163	200	27990	49	30681	53	34328	59	40215	67
116000	52616	200	28225	49	30957	53	34633	59	40566	67
117000	53070	200	28461	49	31237	53	34941	60	40920	68
118000	53523	200	28696	50	31517	54	35250	60	41274	68
119000	53977	200	28907	50	31797	54	35558	61	41628	69
119500	54204	200	29050	50	317937	54	35713	61	41805	69
120000	54431	200	29149	51	32055	55	35843	62	41954	70
120500	54657	200	29249	51	32173	55	35974	62	42104	70
121000	54884	200	29334	51	32276	55	36087	62	42234	70
122000	55338	200	29506	52	32483	56	36314	62	42494	70
123000	55791	200	29678	52	32689	56	36541	63	42753	71
124000	56245	200	29850	52	32895	56	36768	63	43013	71

Aircraft Weight (lbs)	Aircraft Weight (Kg)	Tire Pres-sure (psi)	Pavement Thickness 10 inches		Pavement Thickness 15 inches		Pavement Thickness 20 inches		Pavement Thickness 30 inches	
			ESWL	LCN	ESWL	LCN	ESWL	LCN	ESWL	LCN
125000	56699	200	30022	53	33101	57	36995	63	43273	71
126000	57152	200	30194	53	33307	57	37222	64	43532	71
127000	57606	200	30366	53	33513	57	37448	64	43792	72
128000	58059	200	30538	54	33719	58	37675	64	44052	72
129000	58513	200	30710	54	33925	58	37902	65	44312	72
130000	58966	200	30882	54	34131	58	38129	65	44571	72
131000	59420	200	31054	55	34337	59	38356	65	44831	73
132000	59874	200	31226	55	34544	59	38583	65	45091	73
133000	60327	200	31398	55	34750	59	38810	66	45350	73
134000	60781	200	31570	56	34956	60	39037	66	45610	73
135000	61234	200	31742	56	35162	60	39264	66	45870	74
136000	61688	200	31914	56	35368	60	39490	67	46130	74
137000	62142	200	32086	57	35574	61	39717	67	46389	74
138000	62595	200	32258	57	35780	61	39944	67	46649	74
139000	63049	200	32430	57	35986	61	40171	68	46909	75
140000	63502	200	32602	58	36192	62	40398	68	47168	75
140500	63729	200	32688	58	36295	62	40512	68	47298	75
141500	64183	200	32880	59	36527	63	40766	68	47589	76

Applicability:
50020-50067

Table 27 Load Classification Number (LCN) RESULTS FOR MOST AFT C.G. FLEXIBLE PAVEMENT

Aircraft Weight (lbs)	Aircraft Weight (Kg)	Tire Pres-sure (psi)	Pavement Thickness 10 inches		Pavement Thickness 15 inches		Pavement Thickness 20 inches		Pavement Thickness 30 inches	
			ESWL	LCN	ESWL	LCN	ESWL	LCN	ESWL	LCN
77000	34926	200	17768	31	18843	34	21213	39	25068	45

Aircraft Weight (lbs)	Aircraft Weight (Kg)	Tire Pres-sure (psi)	Pavement Thickness 10 inches		Pavement Thickness 15 inches		Pavement Thickness 20 inches		Pavement Thickness 30 inches	
			ESWL	LCN	ESWL	LCN	ESWL	LCN	ESWL	LCN
78000	35380	200	18036	31	19154	34	21557	40	25466	46
79000	35833	200	18304	32	19464	35	21901	40	25863	46
80000	36287	200	18572	32	19775	35	22246	41	26261	47
81000	36740	200	18841	33	20086	36	22590	41	26658	47
82000	37194	200	19109	33	20396	36	22934	42	27055	48
83000	37648	200	19377	34	20707	37	23278	42	27453	48
84000	38101	200	19645	34	21018	37	23622	43	27850	49
85000	38555	200	19913	35	21328	38	23966	43	28247	49
86000	39008	200	20181	35	21639	38	24310	44	28645	50
87000	39462	200	20449	36	21949	39	24654	44	29042	50
88000	39916	200	20717	36	22260	39	24998	45	29440	51
89000	40369	200	20986	37	22571	40	25342	45	29837	51
90000	40823	200	21254	37	22881	40	25687	46	30234	52
91000	41276	200	21522	37	23192	41	26031	46	30632	53
92000	41730	200	21790	38	23503	41	26375	47	31029	53
93000	42184	200	22058	38	23813	42	26719	47	31426	54
94000	42637	200	22326	39	24124	42	27063	48	31824	54
95000	43091	200	22594	39	24434	43	27407	48	32221	55
96000	43544	200	22863	40	24745	43	27751	49	32619	55
97000	43998	200	23131	40	25056	44	28095	49	33016	56
98000	44452	200	23399	41	25366	44	28439	50	33413	56
99000	44905	200	23667	41	25677	45	28783	50	33811	57
100000	45359	200	23935	42	25988	45	29128	51	34208	57
101000	45812	200	24203	42	26298	46	29472	51	34605	58
102000	46266	200	24471	43	26609	46	29816	52	35003	58
103000	46719	200	24739	43	26919	47	30160	52	35400	59

Aircraft Weight (lbs)	Aircraft Weight (Kg)	Tire Pres-sure (psi)	Pavement Thickness 10 inches		Pavement Thickness 15 inches		Pavement Thickness 20 inches		Pavement Thickness 30 inches	
			ESWL	LCN	ESWL	LCN	ESWL	LCN	ESWL	LCN
104000	47173	200	25008	43	27230	47	30504	53	35798	60
105000	47627	200	25276	44	27541	48	30848	53	36195	60
106000	48080	200	25544	44	27851	48	31192	54	36592	61
107000	48534	200	25812	45	28162	49	31536	54	36990	61
108000	48987	200	26080	45	28473	49	31880	55	37387	62
109000	49441	200	26348	46	28783	50	32224	55	37784	62
110000	49895	200	26616	46	29094	50	32568	56	38182	63
111000	50348	200	26884	47	29404	51	32913	56	38579	63
112000	50802	200	27153	47	29715	51	33257	57	38977	64
113000	51255	200	27421	48	30026	52	33601	57	39374	64
114000	51709	200	27689	48	30336	52	33945	58	39771	65
115000	52163	200	27957	49	30647	53	34289	58	40169	65
116000	52616	200	28225	49	30958	53	34633	59	40566	66
117000	53070	200	28453	49	31228	53	34931	59	40908	66
118000	53523	200	28680	49	31498	53	35229	60	41250	67
119000	53977	200	28907	50	31768	54	35527	60	41591	67
120000	54431	200	29135	50	32038	54	35825	61	41933	68
120500	54657	200	29248	50	32173	54	35974	61	42104	68
121000	54884	200	29334	50	32276	54	36087	61	42234	68
122000	55338	200	29506	50	32482	55	36314	61	42494	69
123000	55791	200	29678	51	32689	55	36541	62	42753	69
124000	56245	200	29850	51	32895	55	36768	62	43013	69
125000	56699	200	30022	51	33101	56	36995	62	43273	70
126000	57152	200	30194	52	33307	56	37222	62	43532	70
127000	57606	200	30366	52	33513	56	37448	63	43792	71
128000	58059	200	30538	52	33719	57	37675	63	44052	71

Aircraft Weight (lbs)	Aircraft Weight (Kg)	Tire Pres-sure (psi)	Pavement Thickness 10 inches		Pavement Thickness 15 inches		Pavement Thickness 20 inches		Pavement Thickness 30 inches	
			ESWL	LCN	ESWL	LCN	ESWL	LCN	ESWL	LCN
129000	58513	200	30710	53	33925	57	37902	63	44312	71
130000	58966	200	30882	53	34131	57	38129	63	44571	72
131000	59420	200	31054	53	34337	58	38356	64	44831	72
132000	59874	200	31226	53	34544	58	38583	64	45091	73
133000	60327	200	31398	54	34750	58	38810	64	45350	73
134000	60781	200	31570	54	34956	59	39037	64	45610	73
135000	61234	200	31742	54	35162	59	39264	65	45870	74

Applicability:
50069, 50071, 50078, 50086

Table 28 Load Classification Number (LCN) RESULTS FOR MOST AFT C.G. FLEXIBLE PAVEMENT

Aircraft Weight (lbs)	Aircraft Weight (Kg)	Tire Pres-sure (psi)	Pavement Thickness 10 inches		Pavement Thickness 15 inches		Pavement Thickness 20 inches		Pavement Thickness 30 inches	
			ESWL	LCN	ESWL	LCN	ESWL	LCN	ESWL	LCN
77000	34926	200	17768	31	18843	34	21213	39	25068	45
78000	35380	200	18036	31	19154	34	21557	40	25466	46
79000	35833	200	18304	32	19464	35	21901	40	25863	46
80000	36287	200	18572	32	19775	35	22246	41	26261	47
81000	36740	200	18841	33	20086	36	22590	41	26658	47
82000	37194	200	19109	33	20396	36	22934	42	27055	48
83000	37648	200	19377	34	20707	37	23278	42	27453	48
84000	38101	200	19645	34	21018	37	23622	43	27850	49
85000	38555	200	19913	35	21328	38	23966	43	28247	49
86000	39008	200	20181	35	21639	38	24310	44	28645	50
87000	39462	200	20449	36	21949	39	24654	44	29042	50
88000	39916	200	20717	36	22260	39	24998	45	29440	51

Aircraft Weight (lbs)	Aircraft Weight (Kg)	Tire Pres-sure (psi)	Pavement Thickness 10 inches		Pavement Thickness 15 inches		Pavement Thickness 20 inches		Pavement Thickness 30 inches	
			ESWL	LCN	ESWL	LCN	ESWL	LCN	ESWL	LCN
89000	40369	200	20986	37	22571	40	25342	45	29837	51
90000	40823	200	21254	37	22881	40	25687	46	30234	52
91000	41276	200	21522	37	23192	41	26031	46	30632	53
92000	41730	200	21790	38	23503	41	26375	47	31029	53
93000	42184	200	22058	38	23813	42	26719	47	31426	54
94000	42637	200	22326	39	24124	42	27063	48	31824	54
95000	43091	200	22594	39	24434	43	27407	48	32221	55
96000	43544	200	22863	40	24745	43	27751	49	32619	55
97000	43998	200	23131	40	25056	44	28095	49	33016	56
98000	44452	200	23399	41	25366	44	28439	50	33413	56
99000	44905	200	23667	41	25677	45	28783	50	33811	57
100000	45359	200	23935	42	25988	45	29128	51	34208	57
101000	45812	200	24203	42	26298	46	29472	51	34605	58
102000	46266	200	24471	43	26609	46	29816	52	35003	58
103000	46719	200	24739	43	26919	47	30160	52	35400	59
104000	47173	200	25008	43	27230	47	30504	53	35798	60
105000	47627	200	25276	44	27541	48	30848	53	36195	60
106000	48080	200	25544	44	27851	48	31192	54	36592	61
107000	48534	200	25812	45	28162	49	31536	54	36990	61
108000	48987	200	26080	45	28473	49	31880	55	37387	62
109000	49441	200	26348	46	28783	50	32224	55	37784	62
110000	49895	200	26616	46	29094	50	32568	56	38182	63
111000	50348	200	26884	47	29404	51	32913	56	38579	63
112000	50802	200	27153	47	29715	51	33257	57	38977	64
113000	51255	200	27421	48	30026	52	33601	57	39374	64
114000	51709	200	27689	48	30336	52	33945	58	39771	65

Aircraft Weight (lbs)	Aircraft Weight (Kg)	Tire Pres-sure (psi)	Pavement Thickness 10 inches		Pavement Thickness 15 inches		Pavement Thickness 20 inches		Pavement Thickness 30 inches	
			ESWL	LCN	ESWL	LCN	ESWL	LCN	ESWL	LCN
115000	52163	200	27957	49	30647	53	34289	58	40169	65
116000	52616	200	28225	49	30958	53	34633	59	40566	66
117000	53070	200	28453	49	31228	53	34931	59	40908	66
118000	53523	200	28680	49	31498	53	35229	60	41250	67
119000	53977	200	28907	50	31768	54	35527	60	41591	67
120000	54431	200	29135	50	32038	54	35825	61	41933	68
120500	54657	200	29248	50	32173	54	35974	61	42104	68
121000	54884	200	29334	50	32276	54	36087	61	42234	68
122000	55338	200	29506	50	32482	55	36314	61	42494	69
123000	55791	200	29678	51	32689	55	36541	62	42753	69
124000	56245	200	29850	51	32895	55	36768	62	43013	69
125000	56699	200	30022	51	33101	56	36995	62	43273	70
126000	57152	200	30194	52	33307	56	37222	62	43532	70
127000	57606	200	30366	52	33513	56	37448	63	43792	71
128000	58059	200	30538	52	33719	57	37675	63	44052	71
129000	58513	200	30710	53	33925	57	37902	63	44312	71
130000	58966	200	30882	53	34131	57	38129	63	44571	72
131000	59420	200	31054	53	34337	58	38356	64	44831	72
132000	59874	200	31226	53	34544	58	38583	64	45091	73
133000	60327	200	31398	54	34750	58	38810	64	45350	73
134000	60781	200	31570	54	34956	59	39037	64	45610	73
135000	61234	200	31742	54	35162	59	39264	65	45870	74
136000	61688	200	31914	55	35368	59	39491	65	46130	74
137000	62142	200	32086	55	35574	60	39717	65	46389	75
138000	62595	200	32258	55	35780	60	39944	65	46649	75
139000	63049	200	32430	56	35986	60	40171	66	46909	75

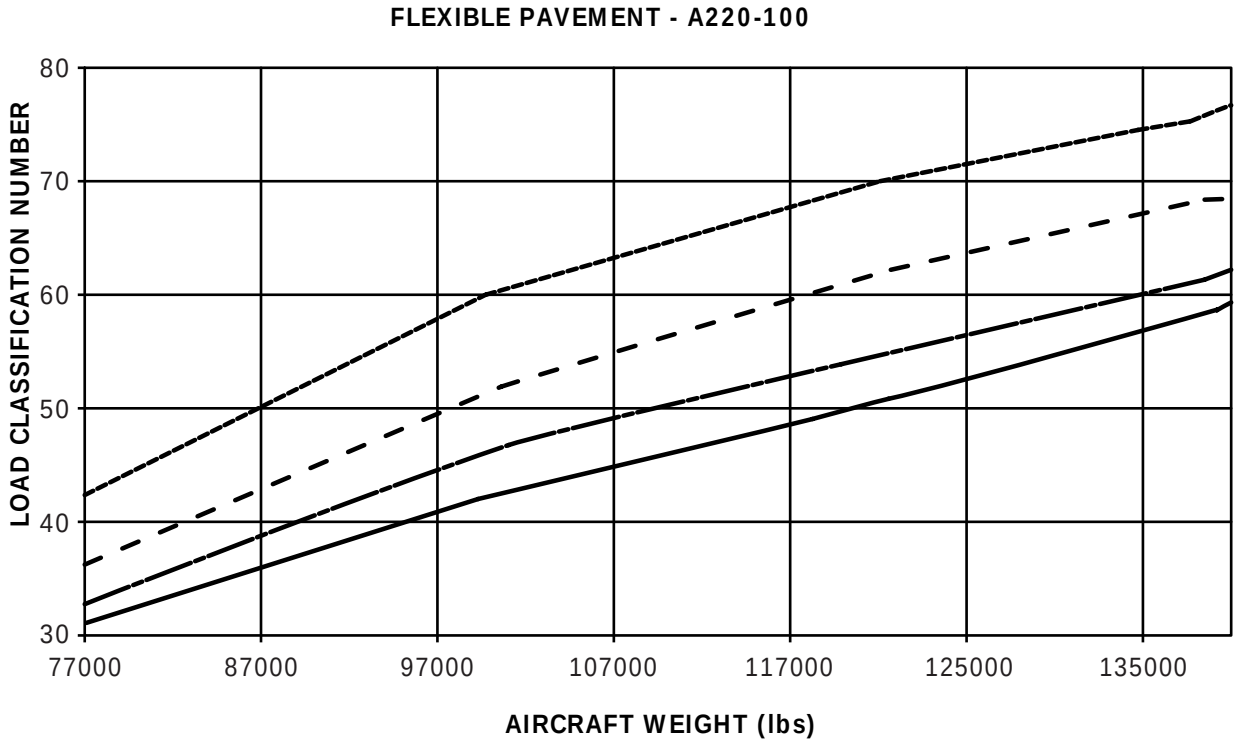

LEGEND

- Radius of relative stiffness L= 30.00 in. (762.00 mm).
- Radius of relative stiffness L= 20.00 in. (508.00 mm).
- Radius of relative stiffness L= 15.00 in. (381.00 mm).
- Radius of relative stiffness L= 10.00 in. (254.00 mm).

ICN-BD500-A-J000000-C-3AB48-57668-A-004-01

Figure 10 LCN results - Flexible pavement

6 Required Pavement Thickness

An essential parameter to calculate the PCN is the required pavement thickness.Fig. 11 and Fig. 12. provide a graphical way to determine the required rigid or flexible pavement thickness based on the pavement strength, aircraft load applied to the pavement, and the annual departure rate. Normally, each airport calculates the PCN based on the different aircraft types which operate to and from that airport considering the number of annual departure for each aircraft type. Using the graphs in this section, one can conclude on the impact of annual departure on required pavement thickness. This material gives the user another mean to evaluate the considered airport for operating the A220 more realistically based on more realistic number of annual departure.

Note

Number of annual departure starts from 300 (close to 1 flight per day). In fact, this gives the reader a better idea about required pavement thickness on those small airports that might not have a very high usage rate.

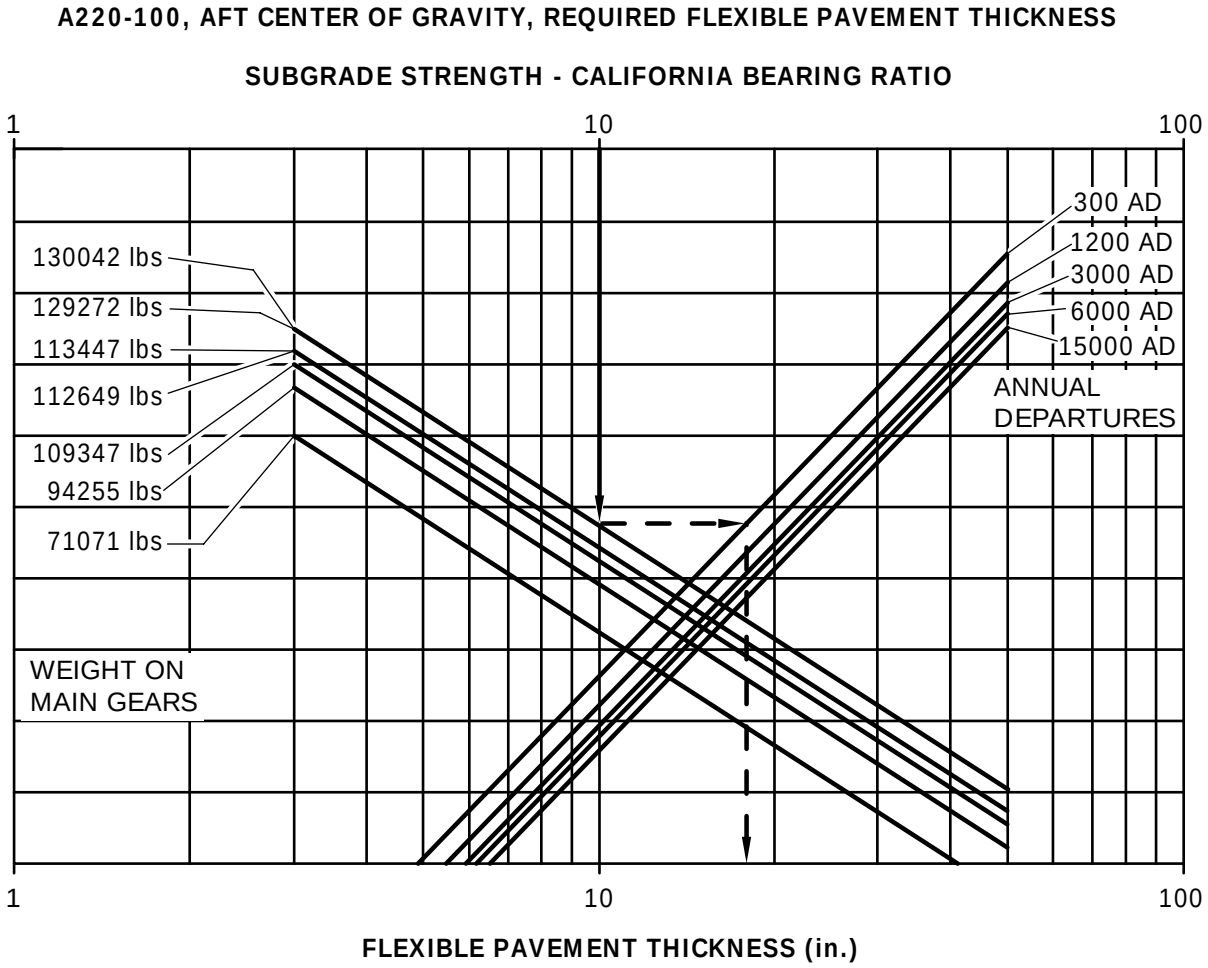

ICN-BD500-A-J000000-C-3AB48-57669-A-004-01

Figure 11 Flexible pavement required thickness

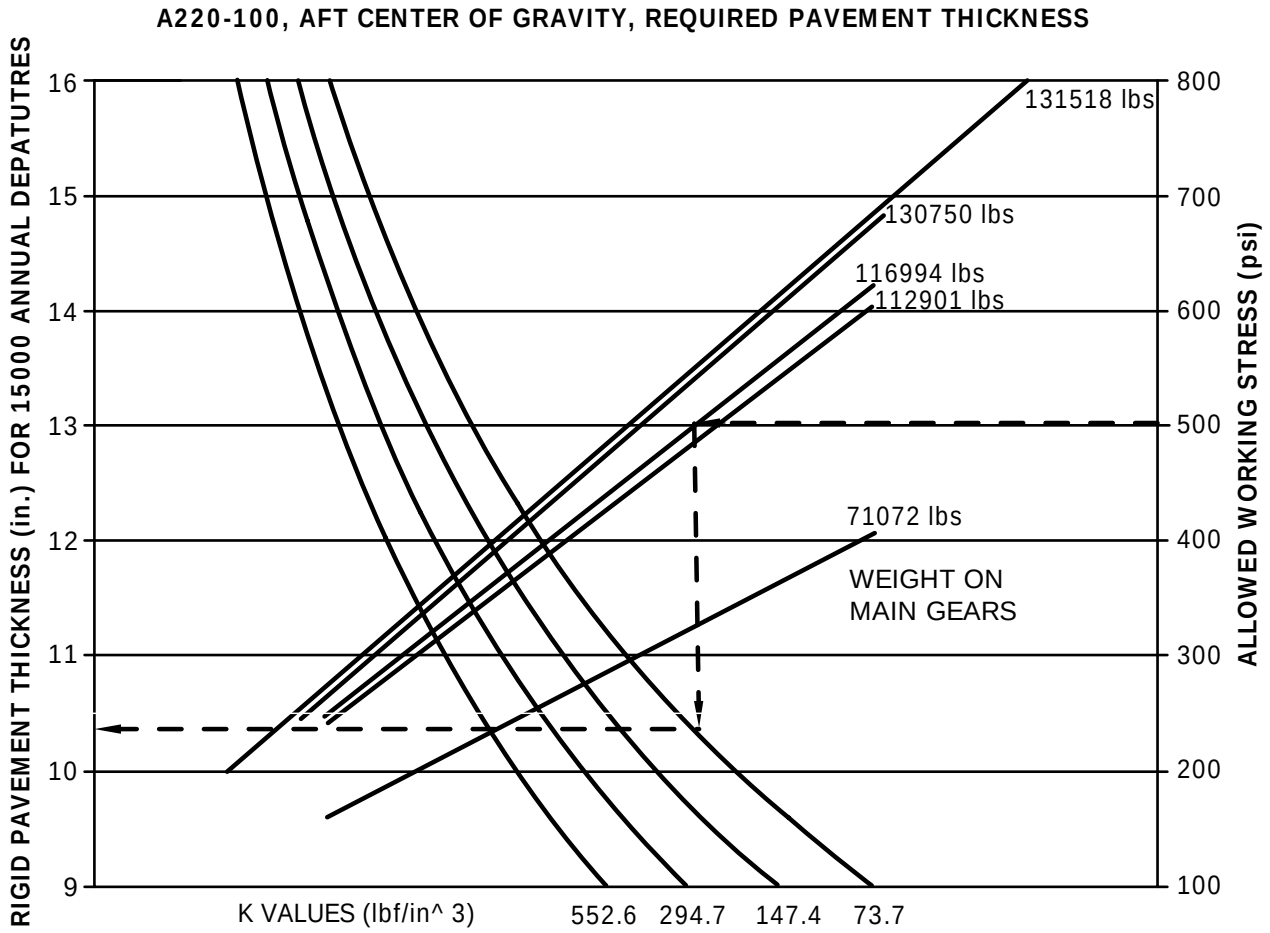

ICN-BD500-A-J000000-C-3AB48-57670-A-003-01

Figure 12 Rigid pavement required thickness

7 Landing gear footprint

Refer to Fig. 13 for the landing gear footprint.

Table 29 Landing gear footprint

Aircraft (A/C) code	A-B-C-D-E-F-G-H-I-J-K-L-M-N
Percentage of weight on main gear group	Refer to section 4
Nose gear tire size	27 x 8.5 R12 16 PR
Nose gear tire pressure	146 PSIG (10 Bar)
Main gear tire size	H42 x 15.0 R21 26 PR
Main gear tire pressure	200 PSIG (1379 kPa)

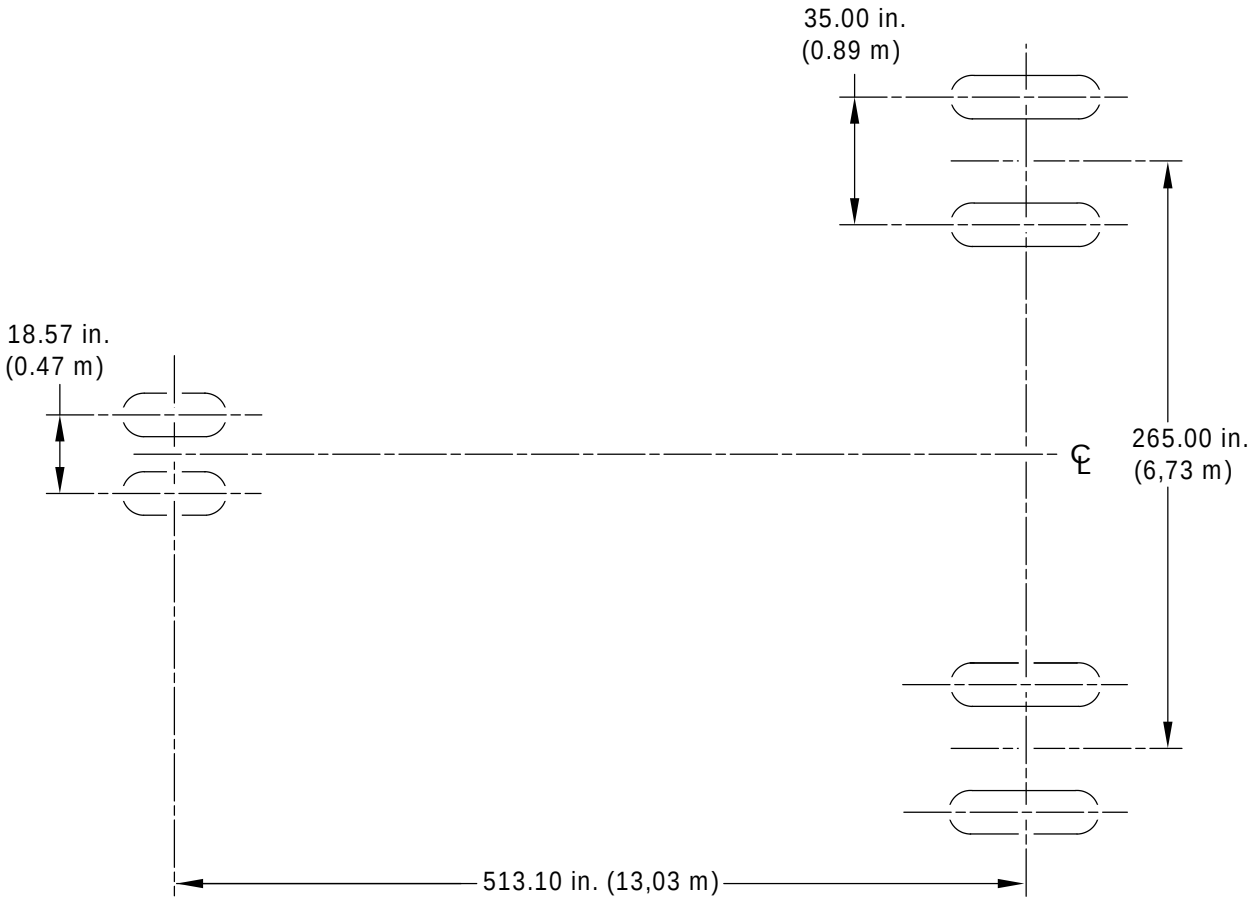

NOTE

Not to scale.

ICN-BD500-A-J000000-A-3AB48-21628-A-002-01

Figure 13 Landing gear footprint

8 Maximum pavement loads

The maximum pavement load is given at aircraft CG,weight on Main Landing Gear (MLG) and aircraft weight.

Refer to Fig. 14 for graphical format.

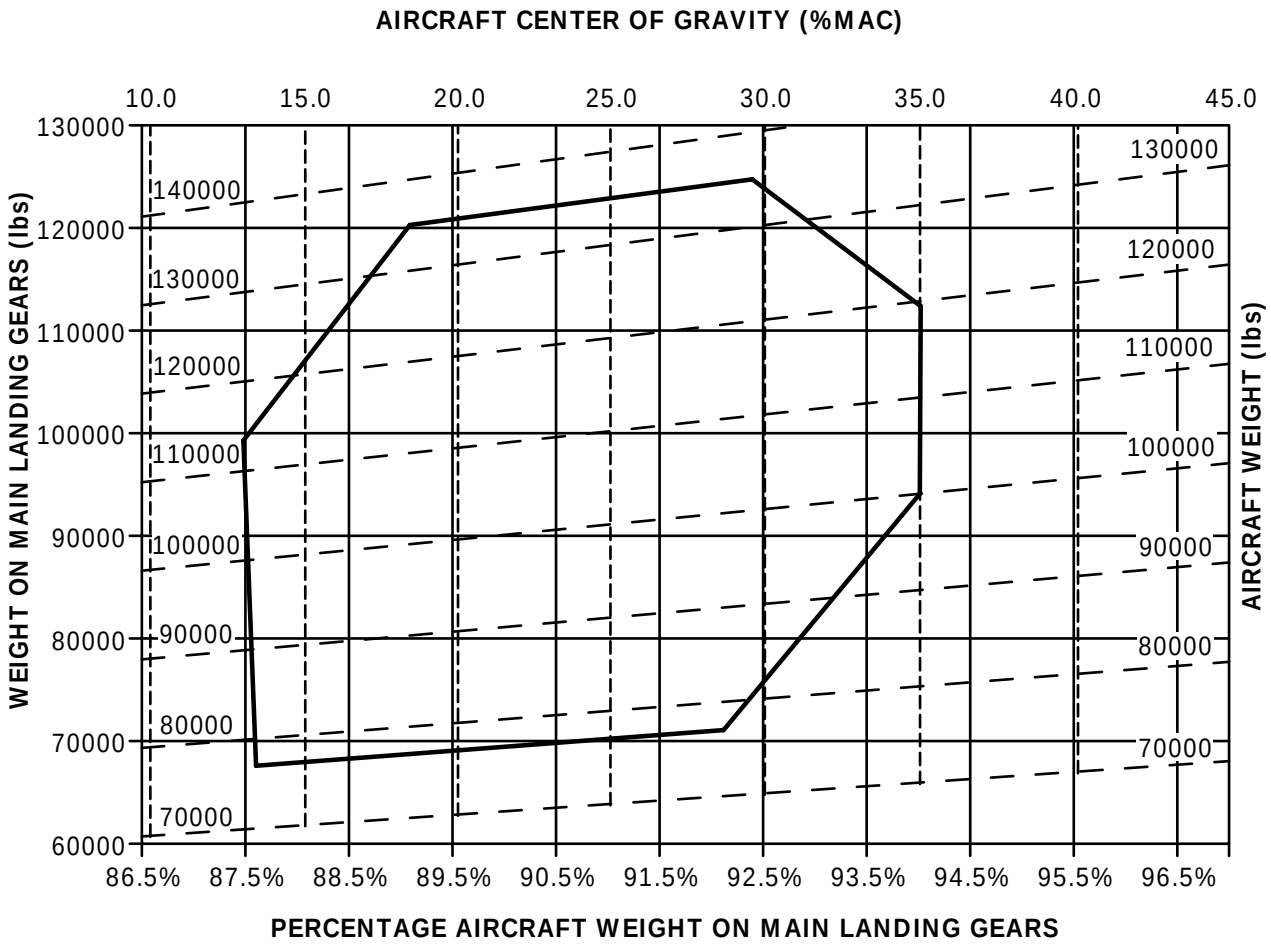

LEGEND

– – – – Aircraft center of gravity.

— — Aircraft weight.

——— A220-100 ground center of gravity envelope.

ICN-BD500-A-J000000-C-3AB48-58656-A-001-01

Figure 14 Maximum Pavement Load

A220

Pavement data - Technical data

Applicability:
55001-59999

Table of contents

		Page
Pavement data - Technical data		1
References		2
Description		2
1	Introduction	2
1.1	Aircraft Classification Number (ACN) / Pavement Classification Number (PCN) Introduction	3
1.1.1	Aircraft Classification Number (ACN)	3
1.1.2	Pavement Classification Number (PCN)	3
1.1.3	Load Classification Number (LCN)	4
2	Aircraft Classification Number (ACN) results for most aft C.G. position	4
3	Aircraft Classification Number (ACN) results for most forward C.G. positions	14
4	Aircraft Classification Rating (ACR)	24
4.4	Aircraft Classification Rating Data	25
4.4.2	Aircraft Classification Rating (ACR)	26
5	Load Classification Number (LCN) results for most aft C.G. positions	50
6	Required Pavement Thickness	60
7	Landing gear footprint	63
8	Maximum pavement loads	65

List of tables

		Page
1	References	2
2	Airport method to show Pavement Classification Number (PCN)	3
3	Subgrade strength categories	3
4	Aircraft Classification Number (ACN) RESULTS FOR MOST AFT C.G. RIGID PAVEMENT	4
5	Aircraft Classification Number (ACN) RESULTS FOR MOST AFT C.G. FLEXIBLE PAVEMENT	9
6	Aircraft Classification Number (ACN) RESULTS FOR MOST FWD C.G. RIGID PAVEMENT	14
7	Aircraft Classification Number (ACN) RESULTS FOR MOST FWD C.G. FLEXIBLE PAVEMENT	19
8	ACR-PCR pavement subgrade categories are defined as follows	25
9	A220-300Most AFT C.G.	25
10	A220-300 MOST FWD C.G.	25
11	Aircraft Classification Rating (ACR) results for most aft C.G. positions for flexible pavement	26
12	Aircraft Classification Rating (ACR) results for most forward C.G. positions for flexible pavement	32
13	Aircraft Classification Rating (ACR) results for most aft C.G. positions for rigid pavement	38
14	Aircraft Classification Rating (ACR) results for most forward C.G. positions for rigid pavement	44
15	LCN RESULTS FOR MOST AFT C.G. RIGID PAVEMENT	50
16	RESULTS FOR MOST AFT C.G. FLEXIBLE PAVEMENT	55
17	Landing gear footprint	63

List of figures

Page

1 ACN results - Rigid pavement.... 8
2 ACN results - Flexible pavement.... 13
3 ACN results - Rigid pavement.... 18
4 ACN results - Flexible pavement.... 23
5 Flexible ACR (Most AFt C.G).... 30
6 Flexible ACR (Most FWD C.G).... 36
7 Rigid ACR (Most AFT C.G).... 42
8 Rigid ACR (Most FWD C.G).... 48
9 LCN results - Rigid pavement.... 54
10 LCN results - Flexible pavement.... 59
11 Flexible pavement required thickness.... 61
12 Rigid pavement required thickness.... 62
13 Landing gear footprint.... 64
14 Maximum pavement load.... 66

References

Table 1 References

Data Module/Technical Publication	Title
None	

Description

1 Introduction

This section contains data related to the pavement design specifications, including aircraft footprints, pavement loading during standard operations, and aircraft/pavement rating systems. Also given are the flotation classification for different weights, fixed tire pressure, and aft Center of Gravity (CG), with the Aircraft Classification Number (ACN) methods.

This section is divided into the subsections that follow:

- ACN
- Landing gear footprint
- Maximum pavement load
- Landing gear loading on pavement

Note

Runway strength data shown in this publication is derived from available information and is a realistic estimate of capability at an average level of activity. It is not intended as a maximum allowable weight or as an operating limitation. Many airport pavements are capable of supporting limited operations with gross weights in excess of published figures. Permissible operating weight, insofar as runway strengths are concerned, are a matter of agreement between the owner and user.

For more information about the Pavement Classification Number (PCN), please contact the concerned airport authority.

Note

- If the aircraft take-off weight is less than or equal to 67 585 kg (149 000 lb), the aircraft is classified as code 3C as perInternational Civil Aviation Organization (ICAO) Aerodrome Reference Code

- If the aircraft take-off weight is more than 67 585 kg (149 000 lb), the aircraft is classified as code 4C as per International Civil Aviation Organization (ICAO) Aerodrome Reference Code.

1.1 Aircraft Classification Number (ACN) / Pavement Classification Number (PCN) Introduction

1.1.1 Aircraft Classification Number (ACN)

The ACN value is a number, which expresses the relative structural effect of an aircraft on different pavement types for specified standard subgrade strengths in terms of a standard single wheel load.

An aircraft will have eight (8) ACN numbers for any given aircraft weight and tire pressure: four (4) for flexible pavement and four (4) for rigid pavement.

1.1.2 Pavement Classification Number (PCN)

The PCN value is a number, which expresses the relative load carrying capacity of a pavement in terms of a standard single wheel load.

An airport determined and published PCN can be compared with an aircraft's ACN. An aircraft that has an ACN equal to or less than the PCN of a given pavement can operated without restriction on the pavement. (Ref. ICAO State Letter AN411.1.17−8019. Ref. US FAA Advisory Circular 150153355 15/06/83).

For example, if the published airport PCN is 52/R/B/Y/T, it means that the aircraft ACN must be less than 52 for rigid pavement type, with medium subgrade strenght, and the tire pressure of the aircraft must be less than 145 psi (1.0 MPa). The PCN also shows that the value was arrived at through a technical review.

Table 2 Airport method to show Pavement Classification Number (PCN)

Pavement type	Subgrade category	Tire pressure category psi (MPa)	Evaluation
R = Rigid F = Flexible	A = High B = Medium C = Low D = Ultra Low	W = No limit X = To 254 (1.75) Y = To 181 (1.25) Z = To 73 (0.5)	T = Technical U = Using aircraft

Table 3 Subgrade strength categories

Subgrade Categories	Flexible pavement		Rigid pavement	
	Characterization	CBR range	Characterization	k-Value Range
A	CBR 15	Above 13	k = 150MN/m3 (550 pci)	Above 120MN/m3 (442pci)

Sub-grade Cate-gories	Flexible pavement		Rigid pavement	
	Characterization	CBR range	Characterization	k-Value Range
B	CBR 10	From 8 to 13	k = 80MN/m3 (300 pci)	From 60 to 120 MN/ m3 (221 to 442pci)
C	CBR 6	From 4 to 8	k = 80MN/m3 (300 pci)	From 25 to 60 MN/ m3 (92 to 221pci)
D	CBR 3	Below 4	k=20MN/m3 (75pci)	Below 25 MN/ m3 (92pci)

1.1.3 Load Classification Number (LCN)

The Load Classification Number (LCN) is a method of flotation analysis by the ICAO.

An aircraft will have two (2) LCN numbers for any given aircraft weight and tire pressure: one (1) for rigid pavement usually concrete and second (2) for flexible pavement usually layered asphalt.

2 Aircraft Classification Number (ACN) results for most aft C.G. position

Refer to Table 4 for tabular format and Fig. 1 for graphical format for the ACN results for rigid pavement and Table 5 for tabular format and Fig. 2 for graphical format for the ACN results for flexible pavement.

Table 4 Aircraft Classification Number (ACN) RESULTS FOR MOST AFT C.G. RIGID PAVEMENT

A/C Gross Weight (lb)	A/C Gross weight (Kg)	MLG Load (lb)	MLG Load (Kg)	ACN High Strength K=150 MN/ m3	ACN Medium Strength K=80 MN/ m3	ACN Medium Strength K=40 MN/ m3	ACN Ultra-Low Strength K=20 MN/ m3
157000	71213	145380	65943	43.2	45.4	47.5	49.2
156000	70760	145323	65917	43.2	45.4	47.5	49.2
155000	70306	144509	65548	42.9	45.1	47.1	48.9
154000	69853	143695	65178	42.6	44.8	46.8	48.6
153000	69399	142881	64809	42.3	44.5	46.5	48.2
152000	68945	142067	64440	42.1	44.2	46.2	47.9
151000	68492	141254	64071	41.8	43.9	45.9	47.6
150000	68038	140438	63533	41.5	43.6	45.6	47.3
149000	67585	139624	63332	41.2	43.3	45.3	47.0
148000	67131	138810	62963	40.9	43.0	45.0	46.7

A/C Gross Weight (lb)	A/C Gross weight (Kg)	MLG Load (lb)	MLG Load (Kg)	ACN High Strength K=150 MN/ m3	ACN Medium Strength K=80 MN/ m3	ACN Medium Strength K=40 MN/ m3	ACN Ultra-Low Strength K=20 MN/ m3
147000	66678	137996	62593	40.6	42.7	44.7	46.4
146000	66224	137182	62224	40.4	42.4	44.4	46.1
145000	65770	136368	61855	40.1	42.1	44.1	45.7
144000	65317	135554	61486	39.8	41.8	43.8	45.4
143000	64863	134740	61117	39.5	41.5	43.5	45.1
142000	64410	133926	60747	39.2	41.2	43.2	44.8
141000	63956	133112	60378	38.9	40.9	42.9	44.5
140000	63502	132298	60009	38.7	40.6	42.6	44.2
139000	63049	131483	59639	38.4	40.4	42.2	43.9
138000	62595	130669	59270	38.1	40.1	41.9	43.5
137000	62142	129855	58901	37.8	39.8	41.6	43.2
136000	61688	129041	58532	37.5	39.5	41.3	42.9
135000	61234	128227	58162	37.2	39.2	41.0	42.6
134500	61008	127820	57978	37.1	39.0	40.9	42.5
134000	60781	127413	57793	37.0	38.9	40.7	42.3
133000	60327	126462	57362	36.6	38.5	40.4	41.9
132000	59874	125510	56930	36.3	38.2	40.0	41.6
131000	59420	124559	56499	36.0	37.9	39.7	41.2
130000	58966	123608	56067	35.7	37.5	39.3	40.8
129000	58513	122656	55635	35.3	37.2	39.0	40.5
128000	58059	121705	55204	35.0	36.8	38.6	40.1
127000	57606	120754	54773	34.7	36.5	38.3	39.8
126000	57152	119802	54341	34.4	36.2	37.9	39.4
125000	56699	118851	53909	34.1	35.9	37.6	39.1
124000	56245	117900	53478	33.7	35.5	37.2	38.7
123000	55791	116948	53046	33.4	35.2	36.9	38.4

A/C Gross Weight (lb)	A/C Gross weight (Kg)	MLG Load (lb)	MLG Load (Kg)	ACN High Strength K=150 MN/ m3	ACN Medium Strength K=80 MN/ m3	ACN Medium Strength K=40 MN/ m3	ACN Ultra-Low Strength K=20 MN/ m3
122000	55338	115997	52615	33.1	34.9	36.6	38.0
121000	54884	115046	52183	32.8	34.5	36.2	37.6
120000	54431	114094	51752	32.5	34.2	35.9	37.3
119000	53977	113143	51320	32.2	33.9	35.5	36.9
118000	53523	112191	50888	31.9	33.5	35.2	36.6
117000	53070	111240	50457	31.5	33.2	34.8	36.2
116000	52616	110289	50026	31.2	32.9	34.5	35.9
115000	52163	109337	49594	30.9	32.6	34.1	35.5
114000	51709	108386	49163	30.6	32.2	33.8	35.2
113000	51255	107435	48731	30.3	31.9	33.5	34.8
112000	50802	106483	48299	30.0	31.6	33.1	34.5
111000	50348	105532	47868	29.7	31.2	32.8	34.1
110000	49895	104581	47437	29.3	30.9	32.4	33.8
109000	49441	103629	47005	29.0	30.6	32.1	33.4
108000	48987	102678	46573	28.7	30.2	31.7	33.1
107000	48534	101727	46142	28.4	29.9	31.4	32.7
106000	48080	100775	45710	28.1	29.6	31.1	32.3
105000	47627	99824	45279	27.8	29.3	30.7	32.0
104000	47173	98872	44847	27.4	28.9	30.4	31.6
103000	46719	97921	44416	27.1	28.6	30.0	31.3
102000	46266	96970	43984	26.8	28.3	29.7	30.9
101000	45812	96018	43553	26.5	27.9	29.3	30.6
100000	45359	95067	43121	26.2	27.6	29.0	30.2
99000	44905	94045	42658	25.9	27.3	28.6	29.9
98000	44452	93023	42194	25.5	26.9	28.3	29.5
97000	43998	92001	41730	25.2	26.6	27.9	29.1

A/C Gross Weight (lb)	A/C Gross weight (Kg)	MLG Load (lb)	MLG Load (Kg)	ACN High Strength K=150 MN/ m3	ACN Medium Strength K=80 MN/ m3	ACN Medium Strength K=40 MN/ m3	ACN Ultra-Low Strength K=20 MN/ m3
96000	43544	90980	41267	24.9	26.3	27.6	28.8
95000	43091	89958	40804	24.6	25.9	27.2	28.4
94000	42637	88936	40340	24.3	25.6	26.9	28.0
93000	42184	87914	39877	23.9	25.2	26.5	27.7
92000	41730	86892	39413	23.6	24.9	26.2	27.3
91000	41276	85870	38949	23.3	24.6	25.8	26.9
90000	40823	84849	38486	23.0	24.2	25.5	26.6
89000	40369	83827	38023	22.7	23.9	25.1	26.2
88000	39916	82805	37559	22.3	23.6	24.8	25.9
87000	39462	81783	37096	22.0	23.2	24.4	25.5
86000	39008	80761	36632	21.7	22.9	24.1	25.1
85000	38555	79739	36169	21.4	22.5	23.7	24.8
84000	38101	78717	35705	21.1	22.2	23.4	24.4
83000	37648	77696	35242	20.7	21.9	23.0	24.0
82000	37194	76674	34778	20.4	21.5	22.6	23.7
81000	36740	75652	34315	20.1	21.2	22.3	23.3
80000	36287	74630	33851	19.8	20.9	21.9	22.9

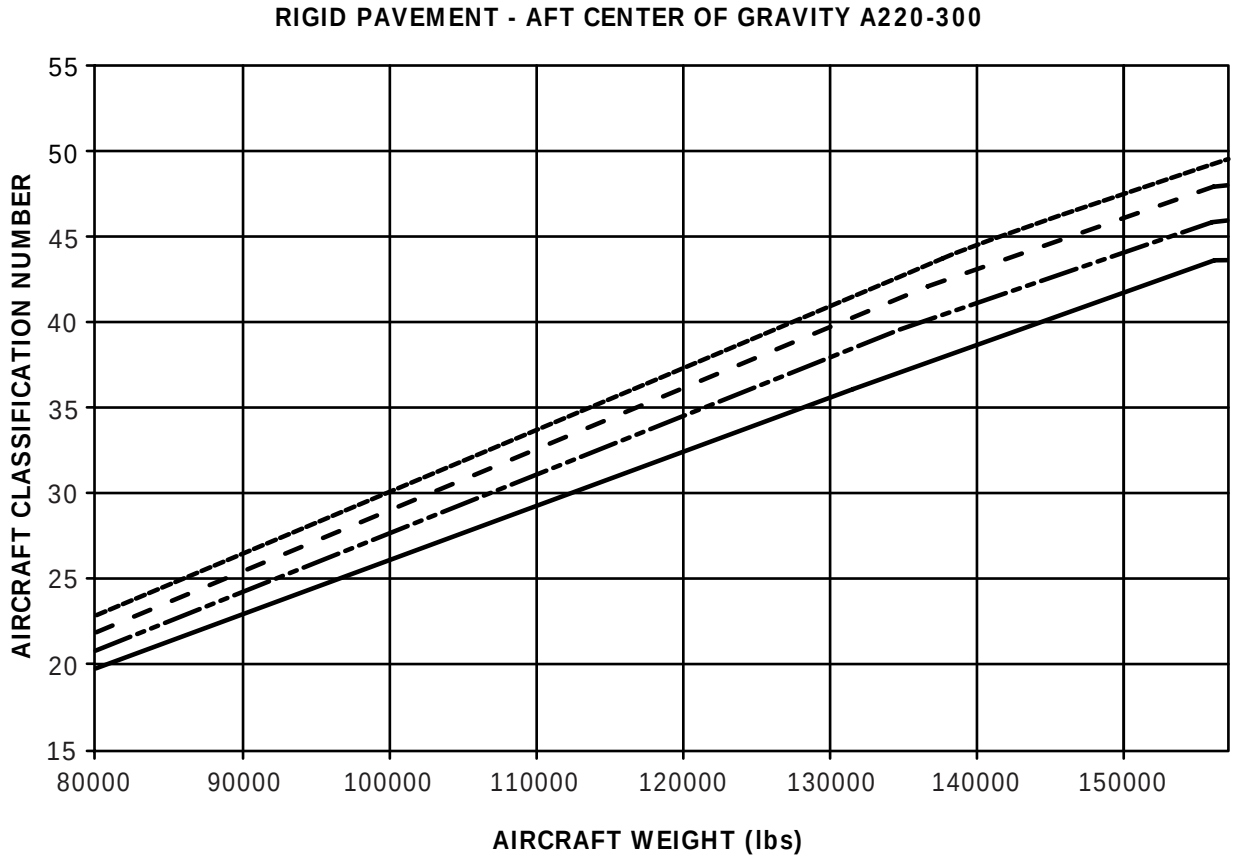

LEGEND

- Ultra low strength k= 20 mn/m³.
- Low strength k= 40 mn/m³.
- Medium strength k= 80 mn/m³.
- High strength k= 150 mn/m³.

ICN-BD500-A-J000000-C-3AB48-57655-A-004-01

Figure 1 ACN results - Rigid pavement

Table 5 Aircraft Classification Number (ACN) RESULTS FOR MOST AFT C.G. FLEXIBLE PAVEMENT

A/C Gross Weight (lb)	A/C Gross Weight (kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength CBR=15	ACN Medium Strength CBR=10	ACN Low Strength CBR=6	ACN Ultra-Low Strength CBR=3
157000	71213	145380	65943	37.4	39.1	42.8	48.1
156000	70760	145323	65917	37.3	39.0	42.8	48.1
155000	70306	144509	65548	37.1	38.8	42.5	47.8
154000	69853	143695	65178	36.8	38.5	42.2	47.5
153000	69399	142881	64801	36.6	38.3	41.9	47.2
152000	68945	142067	64440	36.4	38.0	41.6	46.9
151000	68492	141253	64071	36.1	37.7	41.3	46.6
150000	68038	140438	63701	35.9	37.5	41.0	46.3
149000	67585	139624	63332	35.6	37.2	40.7	46.0
148000	67131	138810	62963	35.4	37.0	40.4	45.7
147000	66678	137996	62593	35.2	36.7	40.1	45.4
146000	66224	137182	62224	34.9	36.4	39.8	45.0
145000	65770	136368	61855	34.7	36.2	39.5	44.7
144000	65317	135554	61486	34.4	35.9	39.2	44.4
143000	64863	134740	61117	34.2	35.7	38.9	44.1
142000	64410	133926	60747	34.0	35.4	38.6	43.8
141000	63956	133112	60378	33.7	35.1	38.3	43.5
140000	63502	132298	60009	33.5	34.9	38.0	43.2
139000	63049	131483	59639	33.2	34.6	37.7	42.9
138000	62595	130669	59270	33.0	34.4	37.4	42.6
137000	62142	129855	58901	32.8	34.1	37.1	42.3
136000	61688	129041	58532	32.5	33.8	36.8	42.0
135000	61234	128277	58185	32.3	33.6	36.5	41.7
134500	61008	127820	57978	32.2	33.5	36.3	41.5
134000	60781	127413	57793	32.0	33.3	36.2	41.4
133000	60327	126462	57362	31.8	33.0	35.8	41.0

A/C Gross Weight (lb)	A/C Gross Weight (kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength CBR=15	ACN Medium Strength CBR=10	ACN Low Strength CBR=6	ACN Ultra-Low Strength CBR=3
132000	59874	125510	56930	31.5	32.7	35.5	40.6
131000	59420	124559	56499	31.2	32.5	35.2	40.3
130000	58966	123608	56067	31.0	32.2	34.8	39.9
129000	58513	122656	55635	30.7	31.9	34.5	39.6
128000	58059	121705	55204	30.4	31.6	34.2	39.2
127000	57606	120754	54773	30.2	31.3	33.8	38.8
126000	57152	119802	54341	29.9	31.0	33.5	38.5
125000	56699	118851	53909	29.6	30.7	33.2	38.1
124000	56245	117900	53478	29.3	30.4	32.9	37.8
123000	55791	116948	53046	29.1	30.1	32.6	37.4
122000	55338	115997	52615	28.8	29.9	32.2	37.1
121000	54884	115046	52183	28.5	29.6	31.9	36.7
120000	54431	114094	51752	28.3	29.3	31.6	36.3
119000	53977	1131434	51320	28.0	29.0	31.3	36.0
118000	53523	112191	50888	27.7	28.7	31.0	35.6
117000	53070	111240	50457	27.5	28.4	30.6	35.3
116000	52616	110289	50026	27.2	28.1	30.3	34.9
115000	52163	109337	49594	26.9	27.9	30.0	34.6
114000	51709	108386	49163	26.7	27.6	29.7	34.2
113000	51255	107435	48731	26.4	27.3	29.4	33.8
112000	50802	106483	48299	26.1	27.0	29.0	33.5
111000	50348	105532	47868	25.9	26.7	28.7	33.1
110000	49895	104581	47437	25.6	26.4	28.4	32.8
109000	49441	103629	47005	25.3	26.1	28.1	32.4
108000	48987	102678	46573	25.1	25.9	27.8	32.1
107000	48534	101727	46142	24.8	25.6	27.5	31.7

A/C Gross Weight (lb)	A/C Gross Weight (kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength CBR=15	ACN Medium Strength CBR=10	ACN Low Strength CBR=6	ACN Ultra-Low Strength CBR=3
106000	48080	100775	45710	24.5	25.3	27.1	31.3
105000	47627	99824	45279	24.3	25.0	26.8	31.0
104000	47173	98872	44847	24.0	24.7	26.5	30.6
103000	46719	97921	44416	23.7	24.4	26.2	30.3
102000	46266	96970	43984	23.5	24.1	25.9	29.9
101000	45812	96018	43553	23.2	23.9	25.5	29.5
100000	45359	95067	43121	22.9	23.6	25.2	29.2
99000	44905	94045	42658	22.7	23.3	24.9	28.8
98000	44452	93023	42194	22.4	23.0	24.6	28.4
97000	43998	92001	41730	22.1	22.7	24.3	28.0
96000	43544	90980	41267	21.8	22.4	24.0	27.7
95000	43091	89958	40804	21.6	22.1	23.6	27.3
94000	42637	88936	40340	21.3	21.8	23.3	27
93000	42184	87914	39877	21.0	21.5	23.0	26.5
92000	41730	86892	39413	20.8	21.2	22.7	26.1
91000	41276	85870	38949	20.5	21.0	22.4	25.7
90000	40823	84849	38486	20.2	20.7	22.1	25.4
89000	40369	83827	38023	20.0	20.4	21.7	25.0
88000	39916	82805	37559	19.7	20.1	21.4	24.6
87000	39462	81783	37096	19.4	19.8	21.1	24.2
86000	39008	807\61	36632	19.1	19.5	20.8	23.8
85000	38555	79739	36169	18.9	19.2	20.5	23.5
84000	38101	78717	35705	18.6	18.9	20.2	23.1
83000	37648	77696	35242	18.3	18.6	19.8	22.7
82000	37194	76674	34778	18.1	18.3	19.5	22.3
81000	36740	75652	34315	17.8	18.1	19.2	21.9

A/C Gross Weight (lb)	A/C Gross Weight (kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength CBR=15	ACN Medium Strength CBR=10	ACN Low Strength CBR=6	ACN Ultra-Low Strength CBR=3
80000	36287	74630	33851	17.5	17.8	18.9	21.5

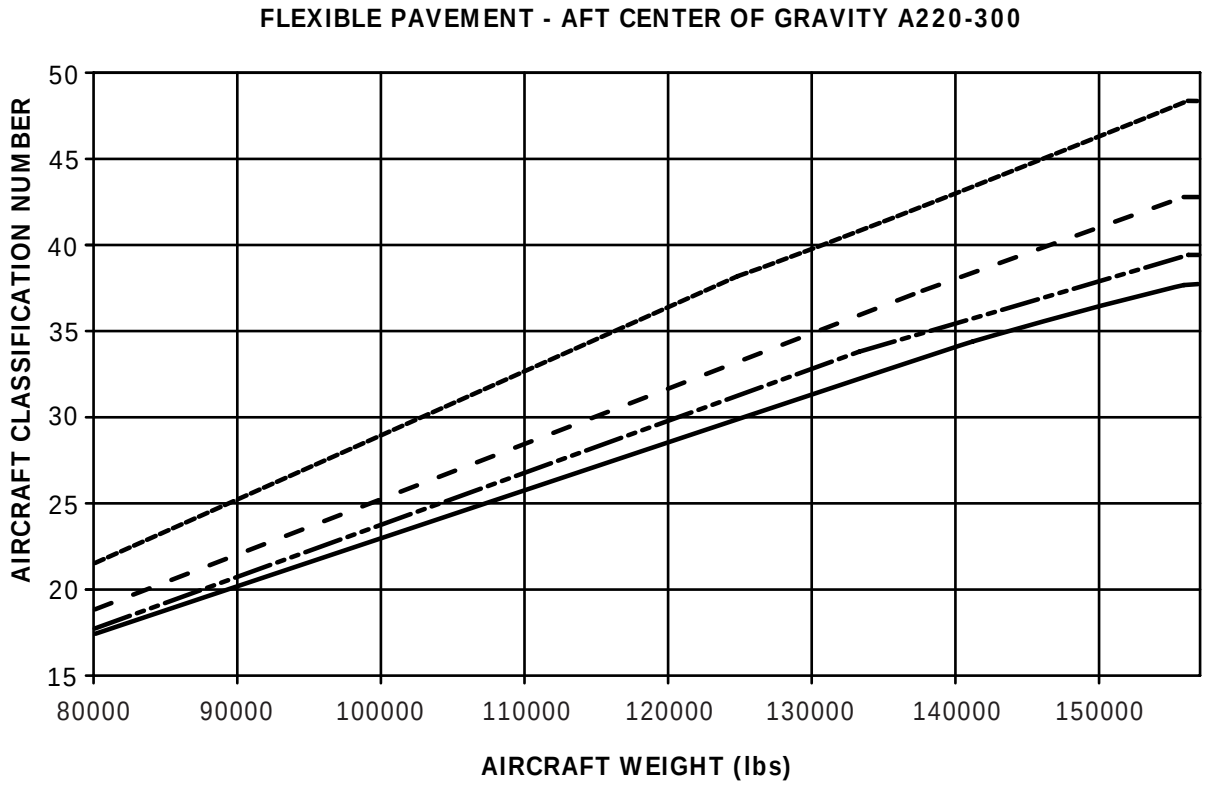

LEGEND

- Ultra low strength california bearing ratio= 3.
- Low strength california bearing ratio= 6.
- Medium strength california bearing ratio= 10.
- High strength california bearing ratio= 15.

ICN-BD500-A-J000000-C-3AB48-57656-A-004-01

Figure 2 ACN results - Flexible pavement

3 Aircraft Classification Number (ACN) results for most forward C.G. positions

Refer to Table 6 for tabular format and Fig. 3 for graphical format for the ACN results for rigid pavement and Table 7 for tabular format and Fig. 4 for graphical format for the ACN results for flexible pavement.

Table 6 Aircraft Classification Number (ACN) RESULTS FOR MOST FWD C.G. RIGID PAVEMENT

A/C Gross Weight (lb)	A/C Gross Weight (Kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength K=150 MN/m3	ACN Medium Strength K=80 MN/m3	ACN Low Strength K=40 MN/m3	ACN Ultra-Low Strength K=20 MN/m3
157000	71213	143077	64898	42.4	44.6	46.6	48.3
156300	70896	142359	64572	42.2	44.3	46.3	48.0
156000	70760	142063	64438	42.0	44.2	46.2	47.9
155000	70306	141075	63990	41.7	43.8	45.8	47.5
154000	69853	140087	63542	41.4	43.5	45.5	47.2
153000	69399	139099	63094	41.0	43.1	45.1	46.8
152000	68945	138111	62646	40.7	42.8	44.7	46.4
151000	68492	137124	62198	40.3	42.4	44.4	46.0
150000	68038	136136	61750	40.0	42.0	44.0	45.6
149000	67585	135148	61302	39.7	41.7	43.6	45.3
148000	67131	134160	60853	39.3	41.3	43.3	44.9
147000	66678	133172	60405	39.0	41.0	42.9	44.5
146000	66224	132185	59958	38.6	40.6	42.5	44.1
145000	65770	131197	59509	38.3	40.3	42.2	43.8
144000	65317	130209	59061	37.9	39.9	41.8	43.4
143000	64863	129221	58613	37.6	39.5	41.4	43.0
142000	64410	128233	58165	37.3	39.2	41.0	42.6
141000	63956	127246	57717	36.9	38.8	40.7	42.2
140000	63502	126258	57269	36.6	38.5	40.3	41.9
139000	63049	125270	56821	36.2	38.1	39.9	41.5
138000	62595	124282	56373	35.9	37.8	39.6	41.1

A/C Gross Weight (lb)	A/C Gross Weight (Kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength K=150 MN/m3	ACN Medium Strength K=80 MN/m3	ACN Low Strength K=40 MN/m3	ACN Ultra-Low Strength K=20 MN/m3
137000	62142	123294	55925	35.6	37.4	39.2	40.7
136000	61688	122307	55477	35.26	37.1	38.8	40.4
135000	61234	121319	55029	34.9	36.7	38.5	40.0
134500	61008	120825	54805	34.7	36.5	38.3	39.8
134000	60781	120339	54584	34.5	36.3	38.1	39.6
133000	60327	119366	54143	34.2	36.0	37.7	39.2
132000	59874	118394	53702	33.9	35.7	37.4	38.9
131000	59420	117421	53261	33.6	35.3	37.0	38.5
130000	58966	116449	52820	33.2	35.0	36.7	38.1
129000	58513	115476	52379	32.9	34.6	36.3	37.8
128000	58059	114504	51938	32.6	34.3	36.0	37.4
127000	57606	113529	51495	32.2	34.0	35.6	37.0
126000	57152	112554	51053	31.9	33.6	35.3	36.7
125972	57139	112527	51041	31.9	33.6	35.3	36.7
125000	56699	111661	50648	31.6	33.3	34.9	36.4
124000	56245	110770	50244	31.4	33.0	34.6	36.0
123000	55791	109880	49840	31.1	32.7	34.3	35.7
122000	55338	108989	49436	30.8	32.4	34.0	35.4
121000	54884	108098	49032	30.5	32.1	33.7	35.1
120000	54431	107207	48628	30.2	31.8	33.4	34.7
119000	53977	106316	48224	29.9	31.5	33.1	34.4
118000	53523	105426	47820	29.6	31.2	32.8	34.1
117000	53070	104535	47416	29.4	30.9	32.5	33.8
116000	52616	103644	47012	29.1	30.6	32.1	33.5
115000	52163	102753	46607	28.8	30.3	31.8	33.1
114000	51709	101863	46204	28.5	30.0	31.5	32.8

A/C Gross Weight (lb)	A/C Gross Weight (Kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength K=150 MN/m3	ACN Medium Strength K=80 MN/m3	ACN Low Strength K=40 MN/m3	ACN Ultra-Low Strength K=20 MN/m3
113000	51255	100972	45800	28.2	29.7	31.2	32.5
112000	50802	100081	45395	27.9	29.4	30.9	32.2
111000	50348	99190	44991	27.7	29.1	30.6	31.8
110000	49895	98299	44587	27.4	28.8	30.3	31.5
109000	49441	97409	44183	27.1	28.5	30.0	31.2
108000	48987	96518	43779	26.8	28.2	29.6	30.9
107000	48534	95627	43375	26.5	27.9	29.3	30.6
106000	48080	94736	42971	26.2	27.6	29.0	30.2
105000	47627	93846	42567	26.0	27.3	28.7	29.9
104000	47173	92955	42163	25.7	27.0	28.4	29.6
103000	46719	92064	41759	25.4	26.7	28.1	29.3
102000	46266	91173	41355	25.1	26.4	27.8	28.9
101000	45812	90282	40952	24.8	26.1	27.5	28.6
100000	45359	89392	40547	24.5	25.8	27.2	28.3
99000	44905	88501	40143	24.2	25.5	26.8	28.0
98000	44452	87610	39739	24.0	25.2	26.5	27.7
97000	43998	86719	39335	23.7	24.9	26.2	27.3
96000	43544	85829	38931	23.4	24.6	25.9	27.0
95000	43091	84938	38527	23.1	24.3	25.6	26.7
94000	42637	84047	38123	22.8	24.1	25.3	26.4
93000	42184	83156	37718	22.5	23.8	25.0	26.0
92000	41730	82265	37314	22.3	23.5	24.7	25.7
91000	41276	81375	36911	22.0	23.2	24.3	25.4
90000	40823	80484	36506	21.7	22.9	24.0	25.1
89000	40369	79593	36102	21.4	22.6	23.7	24.8
88000	39916	78702	35698	21.1	22.3	23.4	24.4

A/C Gross Weight (lb)	A/C Gross Weight (Kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength K=150 MN/m3	ACN Medium Strength K=80 MN/m3	ACN Low Strength K=40 MN/m3	ACN Ultra-Low Strength K=20 MN/m3
87000	39462	77811	35294	20.8	22.0	23.1	24.1
86000	39008	76921	34890	20.6	21.7	22.8	23.8
85000	38555	76030	34486	20.3	21.4	22.5	23.5
84000	38101	75139	34082	20.0	21.1	22.2	23.1
83000	37648	74248	33678	19.7	20.8	21.9	22.8
82000	37194	73358	33274	19.4	20.5	21.5	22.5
81000	36740	72467	32870	19.1	20.2	21.2	22.2
80000	36287	71576	32466	18.9	19.9	20.9	21.9

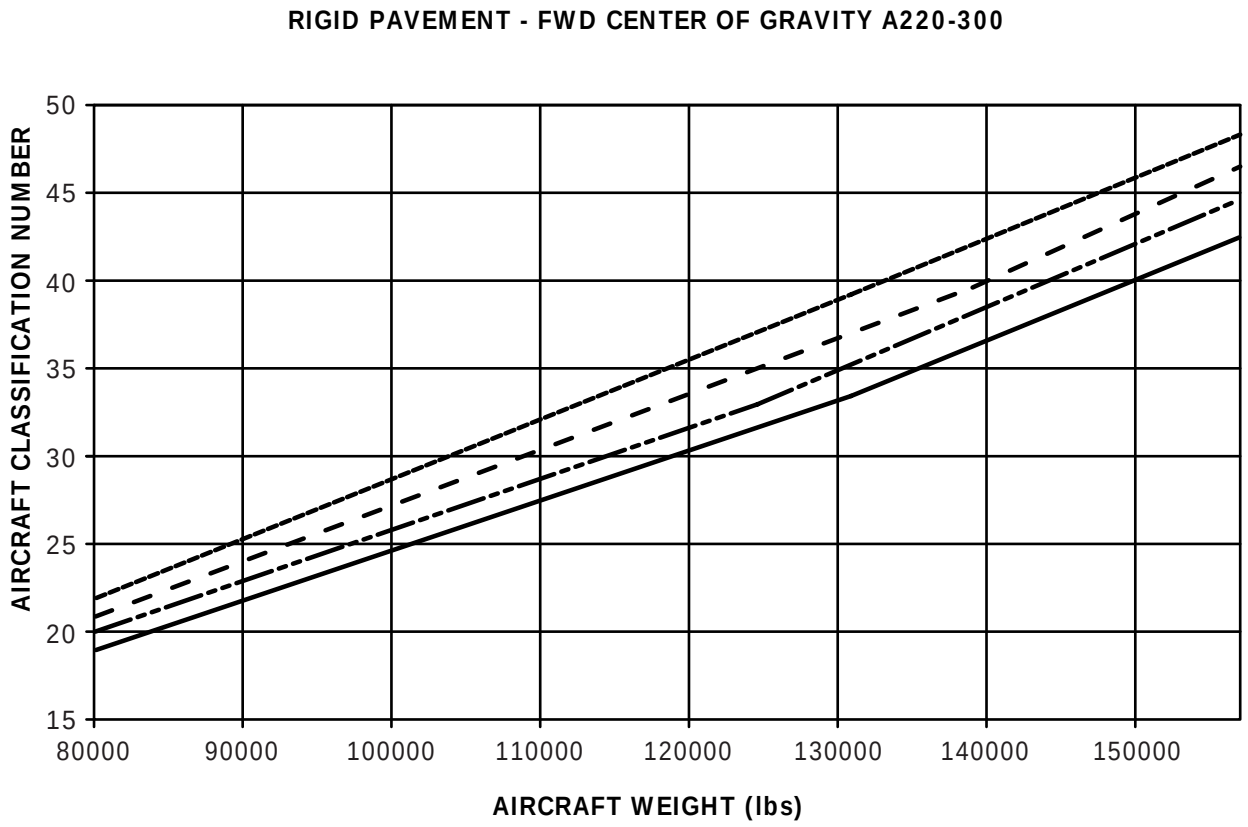

LEGEND

- Ultra low strength k= 20 mn/m³.
- Low strength k= 40 mn/m³.
- Medium strength k= 80 mn/m³.
- High strength k= 150 mn/m³.

ICN-BD500-A-J000000-C-3AB48-57657-A-004-01

Figure 3 ACN results - Rigid pavement

Table 7 Aircraft Classification Number (ACN) RESULTS FOR MOST FWD C.G. FLEXIBLE PAVEMENT

A/C Gross Weight (lb)	A/C Gross Weight (Kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength CBR=15	ACN Medium Strength CBR=10	ACN Low Strength CBR=6	ACN Ultra-Low Strength CBR=3
157000	71213	143077	64898	36.6	38.3	41.9	47.3
156300	70896	142359	64572	36.4	38.1	41.6	47.0
156000	70760	142063	64438	36.3	38.0	41.5	46.9
155000	70306	141075	63990	36.0	37.7	41.2	46.5
154000	69853	140087	63542	35.8	37.3	40.8	46.1
153000	69399	139099	63094	35.5	37.0	40.5	45.8
152000	68945	138111	62646	35.2	36.7	40.1	45.4
151000	68492	137124	62198	34.9	36.4	39.7	45.0
150000	68038	136136	61750	34.6	36.1	39.4	44.7
149000	67585	135148	61302	34.3	35.8	39.0	44.3
148000	67131	134160	60853	34.0	35.5	38.7	43.9
147000	66678	133172	60405	33.8	35.2	38.3	43.5
146000	66224	132185	59958	33.5	34.9	37.9	43.2
145000	65770	131197	59509	33.2	34.6	37.6	42.8
144000	65317	130209	59061	32.9	34.3	37.2	42.4
143000	64863	129221	58613	32.6	33.9	36.9	42.0
142000	64410	128233	58165	32.3	33.6	36.5	41.7
141000	63956	127246	57717	32.0	33.3	36.2	41.3
140000	63502	126258	57269	31.8	33.0	35.8	40.9
139000	63049	125270	56821	31.5	32.7	35.4	40.5
138000	62595	124282	56373	31.2	32.4	35.1	40.2
137000	62142	123294	55925	30.9	32.1	34.7	39.8
136000	61688	122307	55477	30.6	31.8	34.4	39.4
135000	61234	121319	55029	30.3	31.5	34.0	39.1
134500	61008	120825	54805	30.2	31.3	33.8	38.9
134000	60781	120339	54584	30.0	31.2	33.7	38.7

A/C Gross Weight (lb)	A/C Gross Weight (Kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength CBR=15	ACN Medium Strength CBR=10	ACN Low Strength CBR=6	ACN Ultra-Low Strength CBR=3
133000	60327	119366	54143	29.7	30.9	33.3	38.3
132000	59874	118394	53702	29.5	30.6	33.0	38.0
131000	59420	117421	53261	29.2	30.3	32.7	37.6
130000	58966	116449	52820	28.9	30.0	32.3	37.2
129000	58513	115476	52379	28.6	29.7	32.0	36.8
128000	58059	114504	51938	28.3	29.4	31.7	36.5
127000	57606	113529	51495	28.0	29.1	31.3	36.1
126000	57152	112554	51053	27.7	28.8	31.0	35.7
125972	57139	112527	51041	27.7	28.8	31.0	35.7
125000	56699	111661	50648	27.5	28.5	30.7	35.4
124000	56245	110770	50244	27.2	28.3	30.4	35.1
123000	55791	109880	49840	27.0	28.0	30.1	34.7
122000	55338	108989	49436	26.8	27.7	29.9	34.4
121000	54884	108098	49032	26.5	27.5	29.6	34.1
120000	54431	107207	48628	26.3	27.2	29.3	33.7
119000	53977	106316	48224	26.1	27.0	29.0	33.4
118000	53523	105426	47820	25.8	26.7	28.7	33.1
117000	53070	104535	47416	25.6	26.5	28.5	32.7
116000	52616	103644	47012	25.3	26.2	28.2	32.4
115000	52163	102753	46607	25.1	25.9	27.9	32.1
114000	51709	101863	46204	24.9	25.7	27.6	31.7
113000	51255	100972	45800	24.6	25.4	27.3	31.4
112000	50802	100081	45395	24.4	25.2	27.0	31.1
111000	50348	99190	44991	24.1	24.9	26.8	30.7
110000	49895	98299	44587	23.9	24.7	26.5	30.4
109000	49441	97409	44183	23.7	24.4	26.2	30.1

A/C Gross Weight (lb)	A/C Gross Weight (Kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength CBR=15	ACN Medium Strength CBR=10	ACN Low Strength CBR=6	ACN Ultra-Low Strength CBR=3
108000	48987	96518	43779	23.4	24.1	25.9	29.7
107000	48534	95627	43375	23.2	23.9	25.6	29.4
106000	48080	94736	42971	22.9	23.6	25.3	29.1
105000	47627	93846	42567	22.7	23.4	25.1	28.7
104000	47173	92955	42163	22.5	23.1	24.8	28.4
103000	46719	92064	41759	22.2	22.9	24.5	28.1
102000	46266	91173	41355	22.0	22.6	24.2	27.7
101000	45812	90282	40951	21.7	22.3	23.9	27.4
100000	45359	89392	40547	21.5	22.1	23.6	27.1
99000	44905	88501	40143	21.3	21.8	23.4	26.7
98000	44452	87610	39739	21.0	21.6	23.1	26.4
97000	43998	86719	39335	20.8	21.3	22.8	26.1
96000	43544	85829	38931	20.5	21.1	22.5	25.7
95000	43091	84938	38527	20.3	20.8	22.2	25.4
94000	42637	84047	38123	20.1	20.5	21.9	25.1
93000	42184	83156	37718	19.8	20.3	21.7	24.7
92000	41730	82265	37314	19.6	20.0	21.4	24.4
91000	41276	81375	36911	19.4	19.8	21.1	24.1
90000	40823	80484	36506	19.1	19.5	20.8	23.8
89000	40369	79593	36102	18.9	19.2	20.5	23.4
88000	39916	78702	35698	18.6	19.0	20.3	23.1
87000	39462	77811	35294	18.4	18.7	20.0	22.8
86000	39008	76921	34890	18.2	18.5	19.7	22.4
85000	38555	76030	34486	17.9	18.2	19.4	22.1
84000	38101	75139	34082	17.7	18.0	19.1	21.8
83000	37648	74248	33678	17.4	17.7	18.8	21.4

A/C Gross Weight (lb)	A/C Gross Weight (Kg)	MLG Load (lb)	MLG Load (kg)	ACN High Strength CBR=15	ACN Medium Strength CBR=10	ACN Low Strength CBR=6	ACN Ultra-Low Strength CBR=3
82000	37194	73358	33274	17.2	17.4	18.6	21.1
81000	36740	72467	32870	17.0	17.2	18.3	20.8
80000	36287	71576	32466	16.7	16.9	18.0	20.4

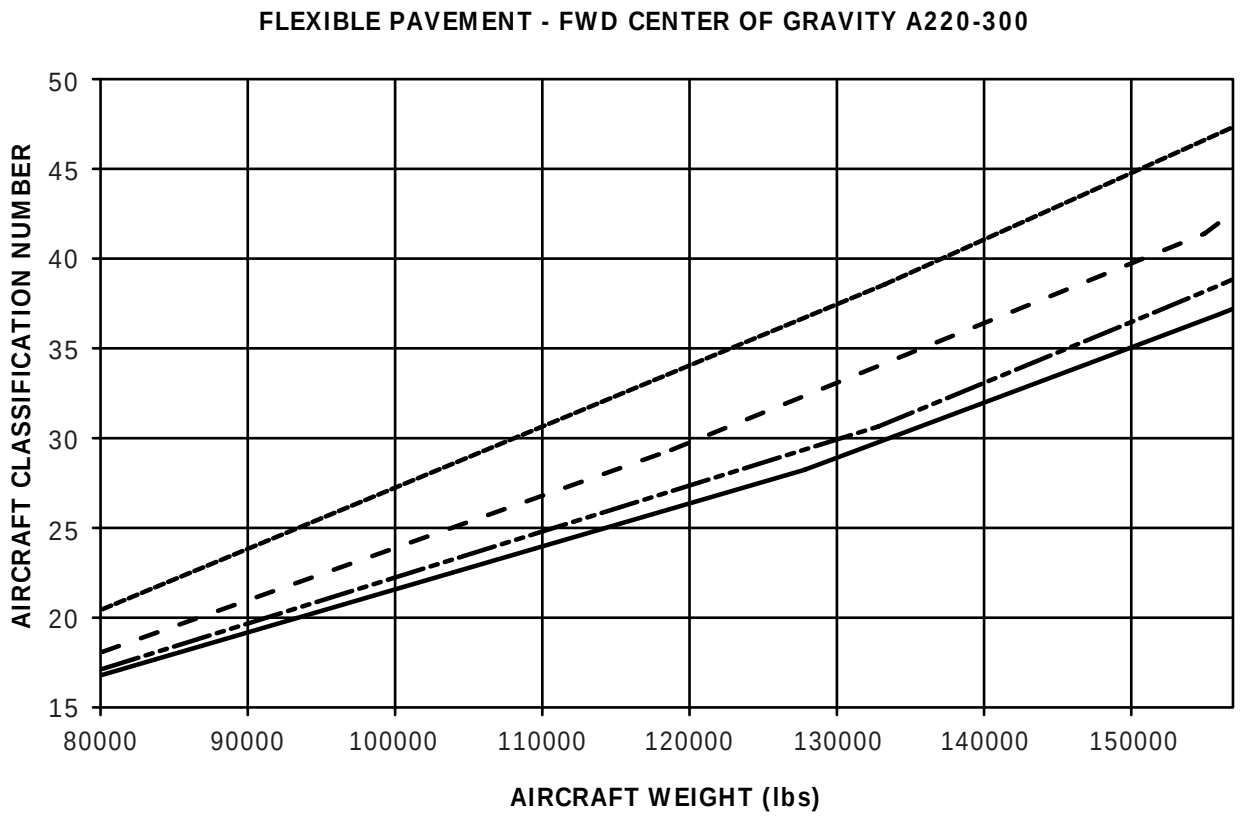

LEGEND

- Ultra low strength california bearing ratio= 3.
- Low strength california bearing ratio= 6.
- Medium strength california bearing ratio= 10.
- High strength california bearing ratio= 15.

ICN-BD500-A-J000000-C-3AB48-57658-A-004-01

Figure 4 ACN results - Flexible pavement

4 Aircraft Classification Rating (ACR)

The ACR is a number expressing the relative effect of an aircraft on a pavement for a specified standard subgrade. It is published by aircraft manufacturers in the ACP. Drivers of the ACR:

- Wheel load (weight of A/C, C.G max): The higher the wheel load, the higher the ACR.
- Landing gear geometry: The more compact, the higher the ACR.
- Tire pressure: The higher the tire pressure, the higher the ACR (second order parameter).

The PCR is a number and series of letters describing the bearing strength of a pavement relative to its traffic for unrestricted operations. It is published by national authorities in the AIP. Drivers of the PCR:

- Pavement structure (material types, layer thicknesses).
- Traffic operating on the structure.

The system relies on the comparison of ACR to PCR. If ACR = PCR, the aircraft can operate on the pavement subject to any limitation on the tire pressure, or aircraft all-up mass for the specified aircraft type(s). For overload operations (i.e., ACR > PCR):

- Optimization may be needed, such as a reduction of aircraft weight to fit the first case, and/or a negotiation with the airport authority for authorization for overload operations, possibly with frequency limitation.
- For flexible and rigid pavements, occasional movements by aircraft with ACR not exceeding 10 per cent above the reported PCR should not adversely affect the pavement.
- Overloads in excess of 10 per cent may be allowed if justified through a technical analysis of the impact on pavement damage, consistent with the PCR philosophy.
- The annual number of overload movements should not exceed approximately 5 per cent of the total annual aircraft movements. Such overload movements should not normally be permitted on pavements exhibiting signs of distress or failure. Furthermore, overloading should be avoided during any periods of thaw following frost penetration, or when the strength of the pavement or its subgrade could be weakened by water.
- Where overload operations are conducted, the appropriate authority should review the relevant pavement condition regularly, and should also review the criteria for overload operations periodically since excessive repetition of overloads can cause severe shortening of pavement life or require major rehabilitation of pavement.

Finally, the ACR system is similar in concept to ACN, with the following major differences:

- All structures are layered elastic (rigid and flexible). Alpha factors are not used.
- Retains 4 standard subgrade categories, but defined by modulus E (not CBR or k).
- Flexible ACR considers all wheels in the main landing gear assembly. Rigid ACR considers all wheels in the most demanding single main gear.
- Standard tire pressure increased to 1.5 MPa.
- Standard coverages increased to 36,500 for flexible ACR.
- DSWL is expressed in 100’s (not 1000’s) of kg. The ACR numerical value is defined as two times the DSWL (expressed in hundreds of kilograms).
- ACR numerical values are approximately one order of magnitude higher than the equivalent ACN. This is intentional, to prevent confusion between the two systems.

Table 8 ACR-PCR pavement subgrade categories are defined as follows

Category	**A**	**B**	**C**	**D**
Strength	High	Medium	Low	Ultra-Low
E Value, MPa	200	120	80	50
Range, MPAa	E ≥ 150	150 > E ≥ 100	100 > E ≥ 60	60 > E

4.4 Aircraft Classification Rating Data

Overview

This section presents the ACR values (rounded to the nearest 10) for the Most AFT and Most FWD configurations as per the C.G envelope charts.

Table 9 A220-300Most AFT C.G

Most AFT C.G		Flexible				Rigid			
		A High Strength Sub-grade	B Medium Strength Sub-grade	C Low Strength Sub-grade	D Ultra-Low Strength Sub-grade	A High Strength Sub-grade	B Medium Strength Sub-grade	C Low Strength Sub-grade	D Ultra-Low Strength Sub-grade
MFW Aft	80000	170	170	180	190	200	210	220	220
Ground Aft	100000	220	220	230	250	270	280	290	300
MZFW AFT	128000	280	290	310	340	360	370	380	400
Ground AFT	134000	290	310	330	360	380	390	400	420
MLW Aft	134500	300	310	330	360	380	390	410	420
MTOW Aft	156000	340	360	390	430	440	4600	470	490
MRW Aft	157000	340	360	390	430	440	460	470	490

Table 10 A220-300 MOST FWD C.G

Most FWD C.G	Flexible				Rigid			
	A	B	C	D	A	B	C	D

		High Strength Sub-grade	Medium Strength Sub-grade	Low Strength Sub-grade	Ultra-Low Strength Sub-grade	High Strength Sub-grade	Medium Strength Sub-grade	Low Strength Sub-grade	Ultra-Low Strength Sub-grade
MFW Fwd	80000	160	170	170	180	190	200	210	210
Ground Fwd	125972	260	270	280	310	320	340	350	360
MZFW Fwd	128000	260	270	290	320	330	350	360	370
MLW Fwd	134500	280	290	310	340	350	370	380	390
MTOW Fwd	156300	330	350	380	420	430	450	460	470
MRW Fwd	157000	330	350	380	420	430	450	460	480

4.4.2 Aircraft Classification Rating (ACR)

Table 11 Aircraft Classification Rating (ACR) results for most aft C.G. positions for flexible pavement

Gross Weight (lbs)		% GW on Gear	Tot. Load on MLGs |(lbs	Subgrade Category											
				A			B			C			D		
				Sub-grade Mod-ulus (psi)	Flex-ible Air-craft Clas-sifi-ca-tion Rat-ing (ACR) Num-ber	ACR Thick-ness t (in)	Sub-grade Mod-ulus (psi)	Flex-ible ACR Num-ber	ACR Thick-ness t (in)	Sub-grade Mod-ulus (psi)	Flexi-bleACR Num-ber	ACR Thick-ness t (in)	Sub-grade Mod-ulus (psi)	Flex-ible ACR-Num-ber	ACR Thick-ness t (in)
MFW AFT	80000	93.3	74630	29007.56	569.58	11.05	17404.53	532.61	14.17	11603.02	527.83	17.20	7251.89	489.04	20.69
	81000	93.4	75635	29007.56	571.96	11.12	17404.53	535.15	14.27	11603.02	530.57	17.31	7251.89	492.28	20.81
	82000	93.5	76642	29007.56	574.34	11.20	17404.53	537.69	14.37	11603.02	533.32	17.41	7251.89	495.52	20.92

	83000	93.6	77650	29007.57	776.73	11.27	17404.58	780.23	14.46	11603.02	826.06	17.52	7251.89	998.76	21.04
	84000	93.6	78660	29007.57	779.11	11.35	17404.58	782.77	14.56	11603.02	828.80	17.63	7251.89	1001.99	21.16
	85000	93.7	79673	29007.58	781.49	11.42	17404.58	785.31	14.66	11603.02	831.55	17.73	7251.89	1005.23	21.28
	86000	93.8	80686	29007.58	783.87	11.49	17404.58	787.85	14.76	11603.02	834.29	17.84	7251.89	1008.47	21.39
	87000	93.9	81702	29007.58	786.25	11.57	17404.59	790.39	14.86	11603.02	837.03	17.95	7251.89	1011.71	21.51
	88000	94.0	82719	29007.58	788.64	11.64	17404.59	792.93	14.95	11603.02	839.77	18.05	7251.89	1014.95	21.63
	89000	94.1	83739	29007.59	791.02	11.72	17404.59	795.47	15.05	11603.02	842.52	18.16	7251.89	1018.19	21.74
	90000	94.2	84760	29007.59	793.40	11.79	17404.59	798.01	15.15	11603.02	845.26	18.27	7251.89	1021.43	21.86
	91000	94.3	85782	29007.59	795.78	11.86	17404.60	800.54	15.25	11603.02	848.00	18.37	7251.89	1024.66	21.98
	92000	94.4	86807	29007.59	798.16	11.94	17404.60	803.08	15.35	11603.02	850.75	18.48	7251.89	1027.90	22.09
	93000	94.4	87833	29007.60	800.55	12.01	17404.60	805.62	15.44	11603.02	853.49	18.58	7251.89	1031.14	22.21
	94000	94.5	88861	29007.60	802.93	12.09	17404.60	808.16	15.54	11603.02	856.23	18.69	7251.89	1034.38	22.33
	95000	94.6	89891	29007.60	805.31	12.16	17404.61	810.70	15.64	11603.02	858.98	18.80	7251.89	1037.62	22.45
	96000	94.7	90923	29007.60	807.69	12.23	17404.61	813.24	15.74	11603.02	861.72	18.90	7251.89	1040.86	22.56
	97000	94.8	91956	29007.61	810.07	12.31	17404.61	815.78	15.84	11603.02	864.46	19.01	7251.89	1044.09	22.68
	98000	94.9	92991	29007.61	812.46	12.38	17404.61	818.32	15.93	11603.02	867.20	19.12	7251.89	1047.33	22.80
	99000	95.0	94028	29007.61	814.84	12.46	17404.62	820.86	16.03	11603.02	869.95	19.22	7251.89	1050.57	22.91
Ground Aft	100000	95.1	95067	29007.62	817.22	12.53	17404.62	823.40	16.13	11603.02	872.69	19.33	7251.89	1053.81	23.03
	101000	95.1	96018	29007.62	819.49	12.59	17404.62	825.87	16.21	11603.02	875.50	19.41	7251.89	1056.99	23.14
	102000	95.1	96969	29007.62	821.76	12.65	17404.62	828.33	16.29	11603.02	878.30	19.50	7251.89	1060.16	23.26
	103000	95.1	97921	29007.62	824.03	12.71	17404.63	830.80	16.37	11603.02	881.11	19.58	7251.89	1063.34	23.37
	104000	95.1	98872	29007.62	826.30	12.77	17404.63	833.26	16.45	11603.02	883.91	19.66	7251.89	1066.52	23.49
	105000	95.1	99823	29007.62	828.57	12.83	17404.63	835.73	16.53	11603.02	886.72	19.74	7251.89	1069.69	23.60
	106000	95.1	100774	29007.63	830.84	12.89	17404.63	838.19	16.61	11603.02	889.53	19.83	7251.89	1072.87	23.72
	107000	95.1	101726	29007.63	833.12	12.96	17404.64	840.66	16.69	11603.02	892.33	19.91	7251.89	1076.05	23.83
	108000	95.1	102677	29007.63	835.39	13.02	17404.64	843.12	16.77	11603.02	895.14	19.99	7251.89	1079.22	23.95
	109000	95.1	103628	29007.63	837.66	13.08	17404.64	845.59	16.85	11603.02	897.94	20.07	7251.89	1082.40	24.06
	110000	95.1	104580	29007.63	839.93	13.14	17404.64	848.05	16.93	11603.02	900.75	20.16	7251.89	1085.57	24.18
	111000	95.1	105531	29007.64	842.20	13.20	17404.65	850.52	17.01	11603.02	903.56	20.24	7251.89	1088.75	24.29

	112000	95.1	106482	29007.24	264.47	13.26	17404.25	252.98	17.09	11603.02	226.36	20.32	7251.89	291.93	24.41
	113000	95.1	107434	29007.24	266.74	13.32	17404.25	255.45	17.17	11603.02	229.17	20.40	7251.89	295.10	24.52
	114000	95.1	108385	29007.24	269.01	13.38	17404.25	257.91	17.25	11603.02	231.98	20.49	7251.89	298.28	24.64
	115000	95.1	109336	29007.25	271.28	13.44	17404.26	260.38	17.32	11603.02	234.78	20.57	7251.89	301.46	24.75
	116000	95.1	110288	29007.25	273.55	13.50	17404.26	262.84	17.40	11603.02	237.59	20.65	7251.89	304.63	24.86
	117000	95.1	111239	29007.25	275.82	13.56	17404.26	265.31	17.48	11603.02	240.39	20.73	7251.89	307.81	24.98
	118000	95.1	112190	29007.25	278.09	13.62	17404.26	267.77	17.56	11603.02	243.20	20.82	7251.89	310.99	25.09
	119000	95.1	113142	29007.26	280.36	13.68	17404.27	270.24	17.64	11603.02	246.01	20.90	7251.89	314.16	25.21
	120000	95.1	114093	29007.26	282.63	13.74	17404.27	272.70	17.72	11603.02	248.81	20.98	7251.89	317.34	25.32
	121000	95.1	115045	29007.26	284.91	13.81	17404.27	275.17	17.80	11603.02	251.62	21.06	7251.89	320.52	25.44
	122000	95.1	115996	29007.26	287.18	13.87	17404.27	277.63	17.88	11603.02	254.42	21.15	7251.89	323.69	25.55
	123000	95.1	116948	29007.26	289.45	13.93	17404.28	280.10	17.96	11603.02	257.23	21.23	7251.89	326.87	25.67
	124000	95.1	117899	29007.27	291.72	13.99	17404.28	282.56	18.04	11603.03	260.04	21.31	7251.89	330.04	25.78
	125000	95.1	118851	29007.27	293.99	14.05	17404.28	285.03	18.12	11603.03	262.84	21.39	7251.89	333.22	25.90
	126000	95.1	119802	29007.27	296.26	14.11	17404.28	287.49	18.20	11603.03	265.65	21.48	7251.89	336.40	26.01
	127000	95.1	120753	29007.27	298.53	14.17	17404.28	289.96	18.28	11603.03	268.45	21.56	7251.89	339.57	26.13
MZFW Aft	128000	95.1	121705	29007.28	300.80	14.23	17404.29	292.42	18.36	11603.03	271.26	21.64	7251.89	342.75	26.24
	129000	95.1	122656	29007.28	303.11	14.29	17404.29	294.97	18.43	11603.03	274.24	21.72	7251.89	346.04	26.35
	130000	95.1	123608	29007.28	305.43	14.35	17404.29	297.52	18.50	11603.03	277.22	21.79	7251.89	349.33	26.46
	131000	95.1	124559	29007.28	307.74	14.41	17404.30	300.08	18.57	11603.03	280.21	21.87	7251.89	352.62	26.57
	132000	95.1	125510	29007.29	310.05	14.46	17404.30	302.63	18.63	11603.03	283.19	21.95	7251.89	355.90	26.67
	133000	95.1	126462	29007.29	312.37	14.52	17404.30	305.18	18.70	11603.03	286.17	22.02	7251.89	359.19	26.78
Ground Aft	134000	95.1	127413	29007.29	314.68	14.58	17404.30	307.73	18.77	11603.03	289.15	22.10	7251.89	362.48	26.89
MLW Aft	134500	95.0	127820	29007.29	315.51	14.60	17404.30	308.65	18.79	11603.03	290.23	22.13	7251.89	363.67	26.93
	135000	95.0	128236	29007.29	316.52	14.62	17404.30	309.78	18.82	11603.03	291.55	22.16	7251.89	365.19	26.98
	136000	94.9	129067	29007.29	318.54	14.67	17404.31	312.04	18.87	11603.03	294.19	22.23	7251.89	368.22	27.07
	137000	94.8	129897	29007.30	320.57	14.72	17404.31	314.30	18.93	11603.03	296.83	22.30	7251.89	371.25	27.16
	138000	94.7	130724	29007.30	322.59	14.76	17404.31	316.56	18.98	11603.03	299.47	22.36	7251.89	374.29	27.25

	139000	94.6	131550	29007.35	354.61	14.81	17404.53	318.82	19.04	11603.02	422.11	22.43	7251.89	977.32	27.34
	140000	94.6	132374	29007.35	356.63	14.86	17404.52	321.07	19.09	11603.02	424.75	22.50	7251.89	980.36	27.43
	141000	94.5	133197	29007.35	358.66	14.91	17404.52	323.33	19.15	11603.02	427.39	22.57	7251.89	983.39	27.52
	142000	94.4	134017	29007.35	360.68	14.95	17404.52	325.59	19.20	11603.02	430.03	22.63	7251.89	986.42	27.61
	143000	94.3	134836	29007.35	362.70	15.00	17404.52	327.85	19.26	11603.02	432.67	22.70	7251.89	989.46	27.70
	144000	94.2	135653	29007.35	364.72	15.05	17404.53	330.11	19.31	11603.02	435.31	22.77	7251.89	992.49	27.80
	145000	94.1	136469	29007.35	366.74	15.09	17404.53	332.37	19.37	11603.02	437.95	22.83	7251.89	995.53	27.89
	146000	94.0	137283	29007.35	368.77	15.14	17404.53	334.63	19.42	11603.02	440.60	22.90	7251.89	998.56	27.98
	147000	93.9	138094	29007.35	370.79	15.19	17404.53	336.89	19.48	11603.02	443.24	22.97	7251.89	1001.59	28.07
	148000	93.9	138905	29007.35	372.81	15.23	17404.53	339.15	19.53	11603.02	445.88	23.03	7251.89	1004.63	28.16
	149000	93.8	139713	29007.35	374.83	15.28	17404.54	341.41	19.59	11603.02	448.52	23.10	7251.89	1007.66	28.25
	150000	93.7	140520	29007.35	376.86	15.33	17404.54	343.67	19.64	11603.02	451.16	23.17	7251.89	1010.70	28.34
	151000	93.6	141325	29007.35	378.88	15.38	17404.54	345.92	19.70	11603.02	453.80	23.24	7251.89	1013.73	28.43
	152000	93.5	142128	29007.35	380.90	15.42	17404.54	348.18	19.75	11603.02	456.44	23.30	7251.89	1016.76	28.53
	153000	93.4	142929	29007.35	382.92	15.47	17404.55	350.44	19.81	11603.02	459.08	23.37	7251.89	1019.80	28.62
	154000	93.3	143729	29007.35	384.95	15.52	17404.55	352.70	19.86	11603.02	461.72	23.44	7251.89	1022.83	28.71
	155000	93.2	144527	29007.35	386.97	15.56	17404.55	354.96	19.92	11603.02	464.36	23.50	7251.89	1025.87	28.80
MTOW Aft	156000	93.2	145323	29007.35	388.99	15.61	17404.55	357.22	19.97	11603.02	467.00	23.57	7251.89	1028.90	28.89
MRW Aft	157000	92.6	145380	29007.35	388.96	15.61	17404.55	357.19	19.96	11603.02	466.97	23.57	7251.89	1028.86	28.89

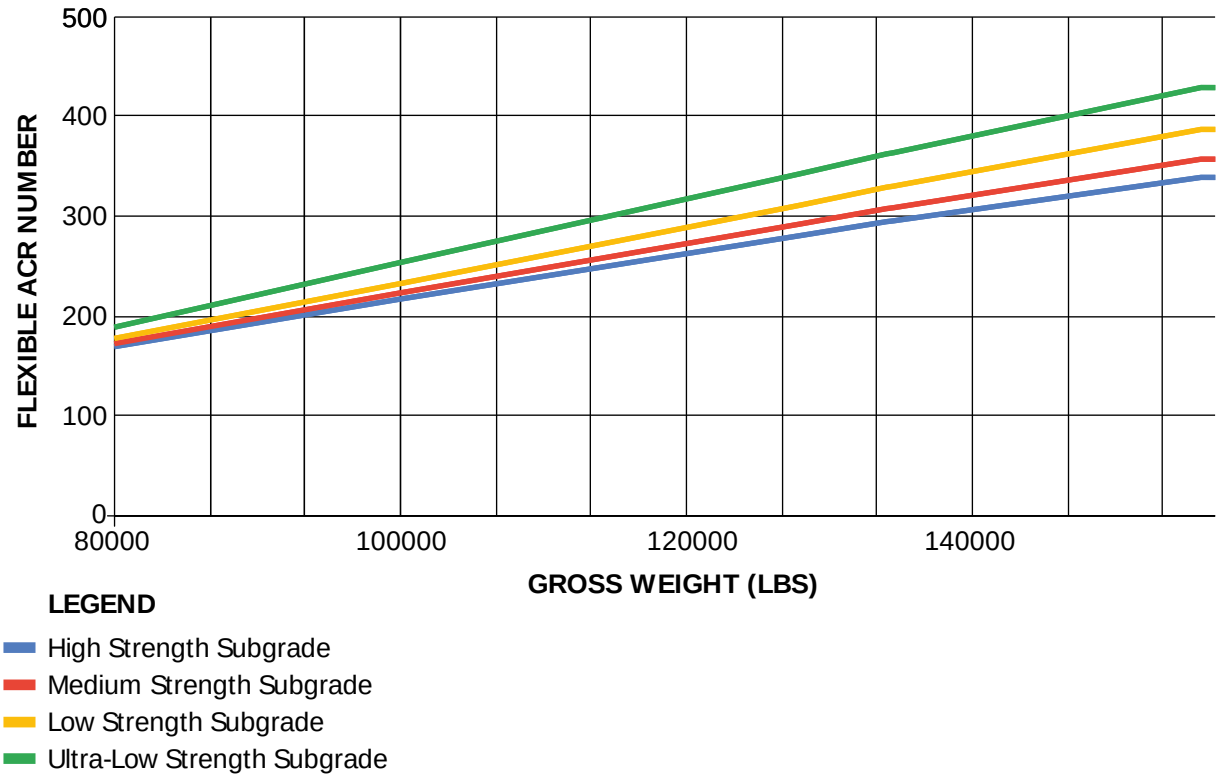

ICN-BD500-A-J000000-A-3AB48-80838-A-001-01

Figure 5 Flexible ACR (Most AFt C.G) - (Sheet 1 of 2)

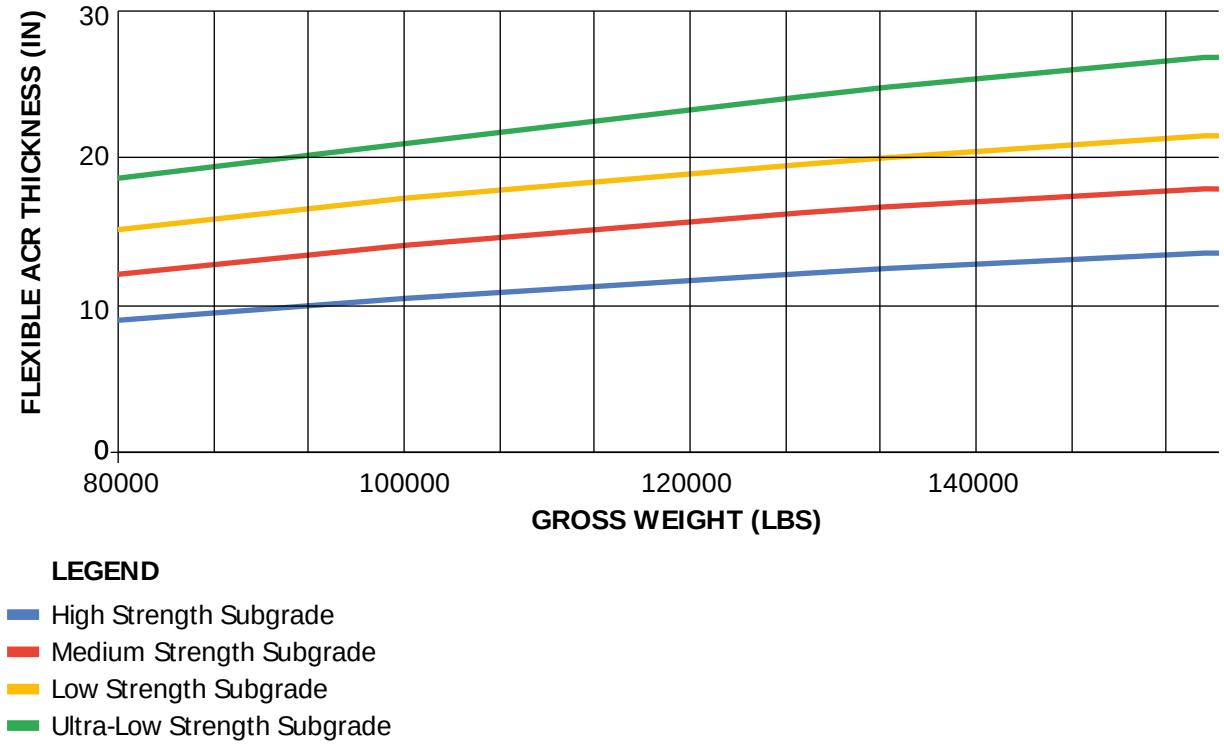

ICN-BD500-A-J000000-A-3AB48-80839-A-001-01

Figure 5 Flexible ACR (Most AFt C.G) - (Sheet 2 of 2)

Table 12 Aircraft Classification Rating (ACR) results for most forward C.G. positions for flexible pavement

Gross Weight (lbs)		% GW on Gear	Tot. Load on MLGs |(lbs	Subgrade Category											
				A			B			C			D		
				Sub-grade Mod-ulus (psi)	Flex-ible ACR Num-ber	ACR Thick-ness t (in)	Sub-grade Mod-ulus (psi)	Flex-ible ACR-Num-ber	ACR Thick-ness t (in)	Sub-grade Mod-ulus (psi)	Flex-ible ACR-Num-ber	ACR Thick-ness t (in)	Sub-grade Mod-ulus (psi)	Flex-ible ACR-Num-ber	ACR Thick-ness t (in)
MFW Fwd	80000	89.5	71576	29007.56	562.57	10.82	17404.56	565.23	13.86	11603.02	569.96	16.81	7251.89	579.88	20.32
	81000	89.5	72468	29007.56	564.66	10.88	17404.56	567.47	13.94	11603.02	572.42	16.90	7251.89	582.74	20.43
	82000	89.5	73360	29007.56	566.74	10.94	17404.56	569.70	14.02	11603.02	574.88	16.99	7251.89	585.60	20.53
	83000	89.5	74252	29007.56	568.83	11.01	17404.57	571.94	14.11	11603.02	577.33	17.07	7251.89	588.46	20.64
	84000	89.5	75144	29007.57	570.92	11.07	17404.57	574.18	14.19	11603.02	579.79	17.16	7251.89	591.31	20.74
	85000	89.5	76036	29007.57	573.01	11.13	17404.57	576.42	14.27	11603.02	582.25	17.25	7251.89	594.17	20.85
	86000	89.5	76928	29007.57	575.09	11.19	17404.57	578.65	14.35	11603.02	584.71	17.34	7251.89	597.03	20.95
	87000	89.4	77820	29007.57	577.18	11.25	17404.58	580.89	14.44	11603.02	587.17	17.43	7251.89	599.89	21.06
	88000	89.4	78712	29007.57	579.27	11.31	17404.58	583.13	14.52	11603.02	589.62	17.52	7251.89	602.75	21.16
	89000	89.4	79603	29007.58	581.36	11.38	17404.58	585.37	14.60	11603.02	592.08	17.60	7251.89	605.61	21.27
	90000	89.4	80495	29007.58	583.44	11.44	17404.58	587.60	14.68	11603.02	594.54	17.69	7251.89	608.46	21.37
	91000	89.4	81387	29007.58	585.53	11.50	17404.58	589.84	14.77	11603.02	597.00	17.78	7251.89	611.32	21.48
	92000	89.4	82278	29007.58	587.62	11.56	17404.59	592.08	14.85	11603.02	599.46	17.87	7251.89	614.18	21.58
	93000	89.4	83169	29007.58	589.71	11.62	17404.59	594.31	14.93	11603.02	601.91	17.96	7251.89	617.04	21.69
	94000	89.4	84061	29007.59	591.79	11.68	17404.59	596.55	15.01	11603.02	604.37	18.05	7251.89	619.90	21.79
	95000	89.4	84952	29007.59	593.88	11.75	17404.59	598.79	15.10	11603.02	606.83	18.13	7251.89	622.76	21.90
	96000	89.4	85843	29007.59	595.97	11.81	17404.60	601.03	15.18	11603.02	609.29	18.22	7251.89	625.62	22.00
	97000	89.4	86735	29007.59	598.06	11.87	17404.60	603.26	15.26	11603.02	611.75	18.31	7251.89	628.47	22.11
	98000	89.4	87626	29007.60	600.14	11.93	17404.60	605.50	15.34	11603.02	614.20	18.40	7251.89	631.33	22.22
	99000	89.4	88517	29007.60	602.23	11.99	17404.60	607.74	15.43	11603.02	616.66	18.49	7251.89	634.19	22.32
	100000	89.4	89408	29007.60	604.32	12.06	17404.60	609.97	15.51	11603.02	619.12	18.58	7251.89	637.05	22.43
	101000	89.4	90299	29007.60	606.40	12.12	17404.61	612.21	15.59	11603.02	621.58	18.66	7251.89	639.91	22.53
	102000	89.4	91190	29007.60	608.49	12.18	17404.61	614.45	15.67	11603.02	624.04	18.75	7251.89	642.77	22.64

	103000	89.4	92080	29007.25	250.5	12.24	17404.23	236.69	15.76	11603.02	26.49	18.84	7251.89	245.63	22.74
	104000	89.4	92971	29007.25	252.6	12.30	17404.23	238.92	15.84	11603.02	28.95	18.93	7251.89	248.48	22.85
	105000	89.4	93862	29007.25	254.7	12.36	17404.23	241.16	15.92	11603.02	31.41	19.02	7251.89	251.34	22.95
	106000	89.4	94752	29007.25	256.8	12.43	17404.23	243.40	16.00	11603.02	33.87	19.11	7251.89	254.20	23.06
	107000	89.4	95643	29007.25	258.9	12.49	17404.23	245.64	16.09	11603.02	36.33	19.19	7251.89	257.06	23.16
	108000	89.4	96534	29007.25	261.0	12.55	17404.23	247.87	16.17	11603.02	38.78	19.28	7251.89	259.92	23.27
	109000	89.4	97424	29007.25	263.1	12.61	17404.23	250.11	16.25	11603.02	41.24	19.37	7251.89	262.78	23.37
	110000	89.4	98314	29007.25	265.1	12.67	17404.23	252.35	16.33	11603.02	43.70	19.46	7251.89	265.63	23.48
	111000	89.4	99205	29007.25	267.2	12.74	17404.23	254.58	16.42	11603.02	46.16	19.55	7251.89	268.49	23.58
	112000	89.4	100095	29007.25	269.3	12.80	17404.23	256.82	16.50	11603.02	48.62	19.64	7251.89	271.35	23.69
	113000	89.4	100985	29007.25	271.4	12.86	17404.23	259.06	16.58	11603.02	51.07	19.72	7251.89	274.21	23.79
	114000	89.4	101875	29007.25	273.5	12.92	17404.24	261.30	16.66	11603.02	53.53	19.81	7251.89	277.07	23.90
	115000	89.4	102765	29007.25	275.6	12.98	17404.24	263.53	16.75	11603.02	55.99	19.90	7251.89	279.93	24.00
	116000	89.4	103655	29007.25	277.7	13.04	17404.24	265.77	16.83	11603.02	58.45	19.99	7251.89	282.79	24.11
	117000	89.4	104545	29007.25	279.8	13.11	17404.24	268.01	16.91	11603.02	60.91	20.08	7251.89	285.64	24.22
	118000	89.4	105435	29007.25	281.8	13.17	17404.25	270.24	16.99	11603.02	63.36	20.17	7251.89	288.50	24.32
	119000	89.3	106325	29007.25	283.9	13.23	17404.25	272.48	17.08	11603.02	65.82	20.25	7251.89	291.36	24.43
	120000	89.3	107215	29007.25	286.0	13.29	17404.25	274.72	17.16	11603.02	68.28	20.34	7251.89	294.22	24.53
	121000	89.3	108104	29007.25	288.1	13.35	17404.25	276.96	17.24	11603.02	70.74	20.43	7251.89	297.08	24.64
	122000	89.3	108994	29007.25	290.2	13.41	17404.25	279.19	17.32	11603.02	73.20	20.52	7251.89	299.94	24.74
	123000	89.3	109884	29007.25	292.3	13.48	17404.26	281.43	17.40	11603.02	75.65	20.61	7251.89	302.79	24.85
	124000	89.3	110773	29007.25	294.4	13.54	17404.26	283.67	17.49	11603.02	78.11	20.70	7251.89	305.65	24.95
	125000	89.3	111663	29007.25	296.5	13.60	17404.26	285.91	17.57	11603.02	80.57	20.78	7251.89	308.51	25.06
Ground Fwd	125972	89.3	112527	29007.25	298.5	13.66	17404.26	288.08	17.65	11603.02	82.96	20.87	7251.89	311.29	25.16
	126000	89.3	112554	29007.25	298.6	13.66	17404.26	288.15	17.65	11603.02	83.05	20.87	7251.89	311.39	25.16
	127000	89.4	113528	29007.26	301.0	13.73	17404.27	290.82	17.74	11603.02	86.13	20.96	7251.89	314.83	25.29
MZFW Fwd	128000	89.5	114504	29007.26	303.4	13.79	17404.27	293.49	17.82	11603.02	89.22	21.05	7251.89	318.28	25.41
	129000	89.5	115473	29007.26	305.8	13.85	17404.27	296.01	17.89	11603.02	92.16	21.13	7251.89	321.54	25.52

	130000	89.6	116444	29007.26	368.11	13.91	17404.27	278.54	17.97	11603.02	25.10	21.21	7251.89	24.81	25.63
	131000	89.6	117415	29007.27	370.42	13.97	17404.28	281.06	18.04	11603.02	28.04	21.29	7251.89	28.07	25.75
	132000	89.7	118388	29007.27	372.73	14.02	17404.28	283.59	18.12	11603.03	30.97	21.37	7251.89	31.34	25.86
	133000	89.7	119362	29007.27	375.04	14.08	17404.28	286.11	18.19	11603.03	33.91	21.45	7251.89	34.60	25.97
	134000	89.8	120337	29007.27	377.35	14.14	17404.28	288.64	18.26	11603.03	36.85	21.53	7251.89	37.87	26.08
MLW Fwd	134500	89.8	120825	29007.27	378.50	14.17	17404.28	289.90	18.30	11603.03	38.32	21.57	7251.89	39.50	26.14
	135000	89.9	121313	29007.27	379.72	14.20	17404.29	291.25	18.33	11603.03	39.90	21.61	7251.89	41.28	26.20
	136000	89.9	122289	29007.28	382.15	14.26	17404.29	293.95	18.40	11603.03	43.06	21.69	7251.89	44.84	26.31
	137000	90.0	123267	29007.28	384.58	14.32	17404.29	296.65	18.47	11603.03	46.22	21.77	7251.89	48.40	26.42
	138000	90.0	124246	29007.28	387.01	14.37	17404.29	299.36	18.54	11603.03	49.39	21.85	7251.89	51.97	26.53
	139000	90.1	125226	29007.28	389.44	14.43	17404.30	302.06	18.60	11603.03	52.55	21.93	7251.89	55.53	26.64
	140000	90.1	126207	29007.29	391.87	14.49	17404.30	304.76	18.67	11603.03	55.71	22.01	7251.89	59.09	26.75
	141000	90.2	127189	29007.29	394.31	14.55	17404.30	307.46	18.74	11603.03	58.87	22.09	7251.89	62.65	26.86
	142000	90.3	128172	29007.29	396.74	14.61	17404.31	310.16	18.81	11603.03	62.03	22.17	7251.89	66.21	26.98
	143000	90.3	129157	29007.29	399.17	14.67	17404.31	312.87	18.87	11603.03	65.20	22.24	7251.89	69.77	27.09
	144000	90.4	130142	29007.30	401.60	14.72	17404.31	315.57	18.94	11603.03	68.36	22.32	7251.89	73.33	27.20
	145000	90.4	131129	29007.30	404.03	14.78	17404.31	318.27	19.01	11603.04	71.52	22.40	7251.89	76.90	27.31
	146000	90.5	132117	29007.30	406.46	14.84	17404.32	320.97	19.08	11603.04	74.68	22.48	7251.89	80.46	27.42
	147000	90.5	133106	29007.30	408.90	14.90	17404.32	323.67	19.14	11603.04	77.84	22.56	7251.89	84.02	27.53
	148000	90.6	134096	29007.31	411.33	14.96	17404.32	326.37	19.21	11603.04	81.01	22.64	7251.89	87.58	27.64
	149000	90.7	135087	29007.31	413.76	15.01	17404.32	329.08	19.28	11603.04	84.17	22.72	7251.89	91.14	27.76
	150000	90.7	136080	29007.31	416.19	15.07	17404.33	331.78	19.35	11603.04	87.33	22.80	7251.89	94.70	27.87
	151000	90.8	137074	29007.31	418.62	15.13	17404.33	334.48	19.41	11603.04	90.49	22.88	7251.89	98.26	27.98
	152000	90.8	138068	29007.32	421.05	15.19	17404.33	337.18	19.48	11603.04	93.65	22.96	7251.89	101.83	28.09
	153000	90.9	139064	29007.32	423.49	15.25	17404.33	339.88	19.55	11603.04	96.82	23.04	7251.89	105.39	28.20
	154000	90.9	140061	29007.32	425.92	15.31	17404.34	342.59	19.61	11603.04	99.98	23.12	7251.89	108.95	28.31
	155000	91.0	141060	29007.32	428.35	15.36	17404.34	345.29	19.68	11603.05	03.14	23.20	7251.89	112.51	28.43
	156000	91.1	142059	29007.33	430.78	15.42	17404.34	347.99	19.75	11603.05	06.30	23.28	7251.89	116.07	28.54

MTOW Fwd	156300	91.1	142359	29007.55	551.51	15.44	17404.54	548.80	19.77	11603.02	27.25	23.30	7251.84	17.14	28.57
MRW Fwd	157000	91.1	143077	29007.55	553.10	15.48	17404.55	550.58	19.81	11603.02	29.32	23.36	7251.84	19.63	28.64

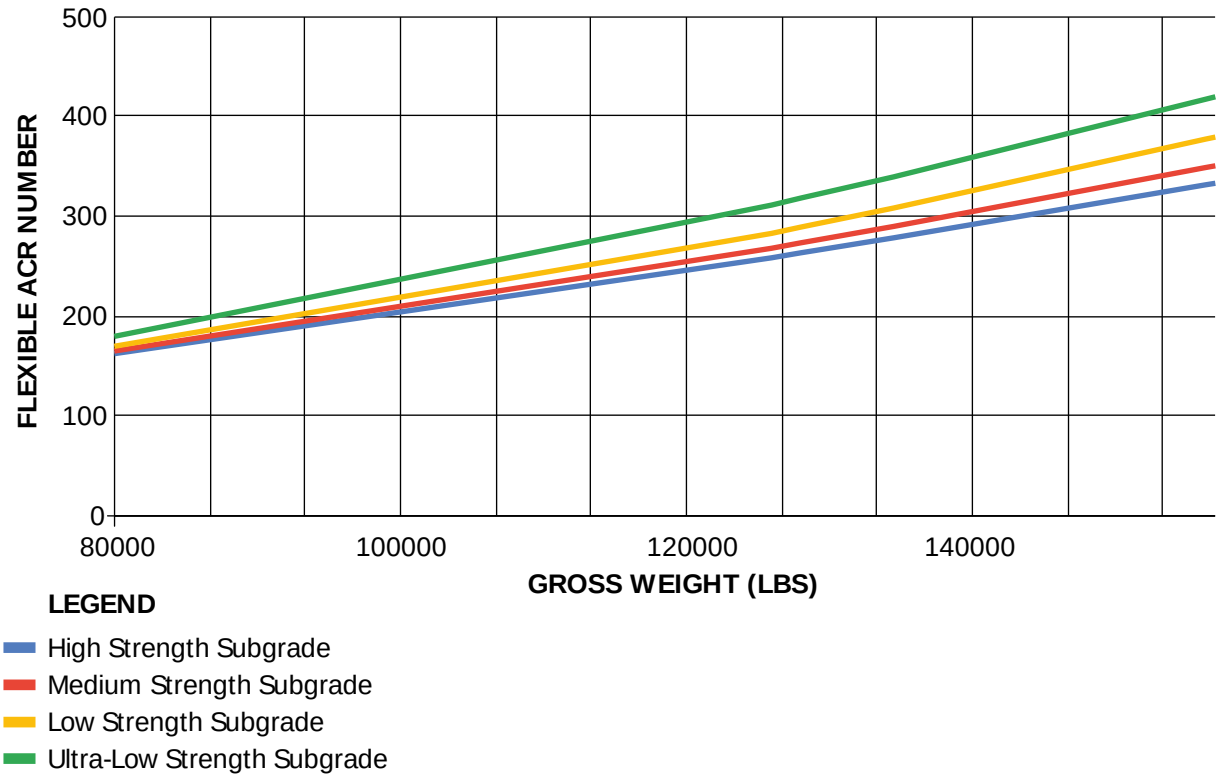

ICN-BD500-A-J000000-A-3AB48-80840-A-001-01

Figure 6 Flexible ACR (Most FWD C.G) - (Sheet 1 of 2)

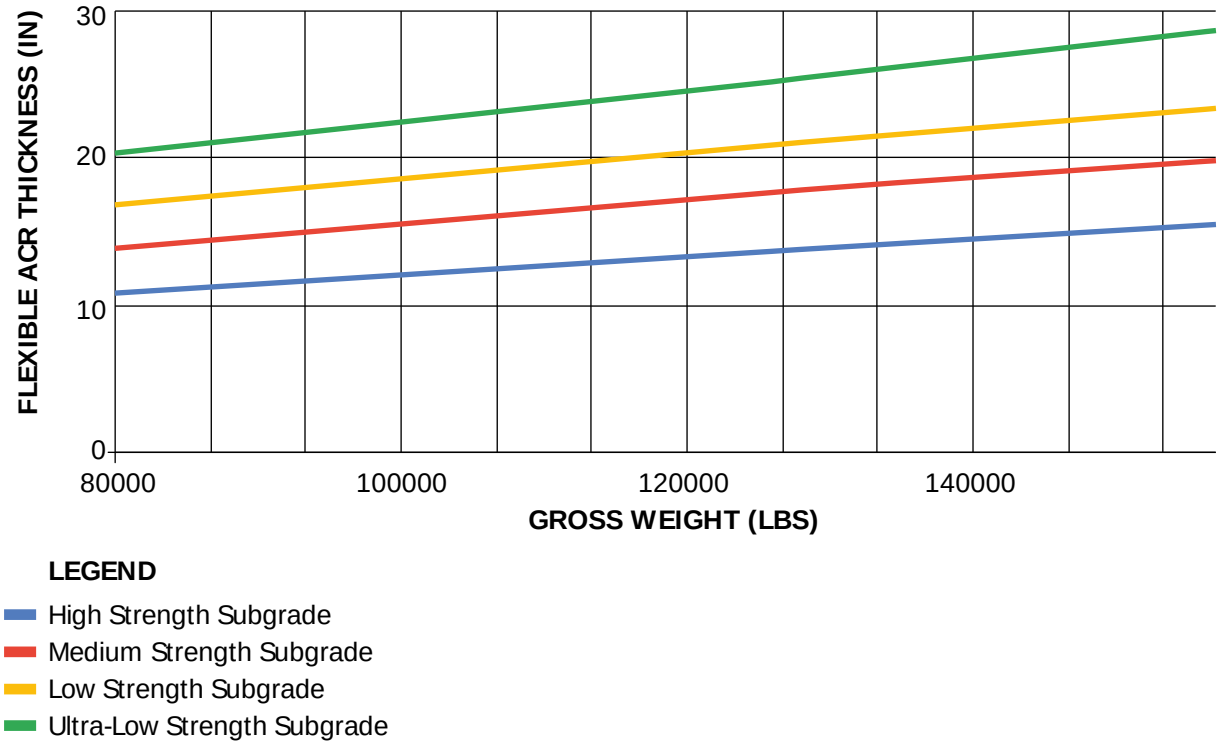

ICN-BD500-A-J000000-A-3AB48-80841-A-001-01

Figure 6 Flexible ACR (Most FWD C.G) - (Sheet 2 of 2)

Table 13 Aircraft Classification Rating (ACR) results for most aft C.G. positions for rigid pavement

Gross Weight (lbs)		% GW on Gear (Total load on gear / 2)	Tot. Load on MLGs |(lbs	Subgrade Category											
				A			B			C			D		
				Sub-grade Mod-ulus (psi)	rigid ACR Num-ber	ACR Thick-ness t (in)	Sub-grade Mod-ulus (psi)	Rigid ACR Num-ber	ACR Thick-ness t (in)	Sub-grade Mod-ulus (psi)	Rigid ACR Num-ber	ACR Thick-ness t (in)	Sub-grade Mod-ulus (psi)	Rigid ACR-Num-ber	ACR Thick-ness t (in)
MFW AFT	80000	46.64	37315	29007.26	260.2	97.61	17404.203	209.5	18.21	11603.022	26.81	8.69	7251.892	24.88	9.22
	81000	46.69	37817	29007.26	263.5	77.67	17404.203	212.9	58.27	11603.022	20.34	8.757	7251.892	28.52	9.29
	82000	46.73	38321	29007.26	266.8	57.73	17404.203	216.3	88.34	11603.022	23.87	8.824	7251.892	32.16	9.36
	83000	46.78	38825	29007.26	270.1	37.79	17404.203	219.8	28.40	11603.022	27.40	8.891	7251.892	35.80	9.43
	84000	46.82	39330	29007.26	273.4	17.85	17404.203	223.2	58.47	11603.022	20.94	8.958	7251.892	39.44	9.50
	85000	46.87	39836	29007.26	276.6	97.91	17404.203	226.6	98.53	11603.022	24.47	9.025	7251.892	43.08	9.58
	86000	46.91	40343	29007.26	279.9	77.97	17404.203	230.1	28.59	11603.022	28.00	9.092	7251.892	46.71	9.65
	87000	46.96	40851	29007.26	283.2	58.03	17404.203	233.5	68.66	11603.022	21.53	9.159	7251.892	50.35	9.72
	88000	47.00	41360	29007.26	286.5	38.09	17404.203	236.9	98.72	11603.022	25.06	9.226	7251.892	53.99	9.79
	89000	47.04	41869	29007.26	289.8	18.15	17404.203	240.4	38.79	11603.022	28.59	9.293	7251.892	57.63	9.86
	90000	47.09	42380	29007.26	293.0	98.21	17404.203	243.8	68.85	11603.022	22.13	9.36	7251.892	61.27	9.93
	91000	47.13	42891	29007.26	296.3	68.26	17404.203	247.3	08.91	11603.022	25.66	9.427	7251.892	64.91	10.00
	92000	47.18	43403	29007.26	299.6	48.32	17404.203	250.7	38.98	11603.022	29.19	9.494	7251.892	68.55	10.07
	93000	47.22	43917	29007.26	302.9	28.38	17404.203	254.1	79.04	11603.022	22.72	9.561	7251.892	72.19	10.14
	94000	47.27	44431	29007.26	306.2	08.44	17404.203	257.6	09.11	11603.022	26.25	9.628	7251.892	75.83	10.21
	95000	47.31	44946	29007.26	309.4	88.50	17404.203	261.0	49.17	11603.022	29.78	9.695	7251.892	79.47	10.29
	96000	47.36	45461	29007.26	312.7	68.56	17404.203	264.4	79.23	11603.022	23.31	9.762	7251.892	83.10	10.36
	97000	47.40	45978	29007.26	316.0	48.62	17404.203	267.9	19.30	11603.022	26.85	9.829	7251.892	86.74	10.43
	98000	47.44	46496	29007.26	319.3	28.68	17404.203	271.3	49.36	11603.022	30.38	9.896	7251.892	90.38	10.50
	99000	47.49	47014	29007.26	322.6	08.74	17404.203	274.7	89.43	11603.022	23.91	9.963	7251.892	94.02	10.57
Ground Aft	100000	47.53	47534	29007.26	325.8	88.80	17404.203	278.2	19.49	11603.022	27.44	10.03	7251.892	97.66	10.64
	101000	47.53	48009	29007.26	329.1	18.85	17404.203	281.5	69.54	11603.022	20.88	10.09	7251.892	01.19	10.70

	102000	47.53	48485	29007.27	372.33	8.90	17404.28	534.91	9.60	11603.02	924.32	10.14	7251.89	04.72	10.76
	103000	47.53	48960	29007.27	375.56	8.95	17404.28	538.26	9.65	11603.02	927.76	10.20	7251.89	08.25	10.82
	104000	47.53	49436	29007.27	378.78	9.00	17404.29	541.61	9.71	11603.02	931.20	10.26	7251.89	11.78	10.88
	105000	47.53	49912	29007.28	382.01	9.05	17404.29	544.97	9.76	11603.02	934.63	10.31	7251.89	15.31	10.94
	106000	47.54	50387	29007.28	385.23	9.10	17404.29	548.32	9.81	11603.02	938.07	10.37	7251.89	18.84	11.00
	107000	47.54	50863	29007.28	388.46	9.15	17404.30	551.67	9.87	11603.02	941.51	10.43	7251.89	22.38	11.06
	108000	47.54	51338	29007.29	391.68	9.20	17404.30	555.02	9.92	11603.02	944.95	10.48	7251.89	25.91	11.11
	109000	47.54	51814	29007.29	394.91	9.25	17404.30	558.37	9.98	11603.02	948.39	10.54	7251.89	29.44	11.17
	110000	47.54	52290	29007.29	398.13	9.30	17404.31	561.72	10.03	11603.02	951.83	10.60	7251.89	32.97	11.23
	111000	47.54	52765	29007.30	401.36	9.35	17404.31	565.07	10.08	11603.02	955.27	10.65	7251.89	36.50	11.29
	112000	47.54	53241	29007.30	404.58	9.40	17404.31	568.42	10.14	11603.02	958.71	10.71	7251.89	40.03	11.35
	113000	47.54	53717	29007.30	407.81	9.45	17404.32	571.77	10.19	11603.02	962.15	10.77	7251.89	43.56	11.41
	114000	47.54	54192	29007.31	411.03	9.50	17404.32	575.13	10.25	11603.02	965.59	10.83	7251.89	47.09	11.47
	115000	47.54	54668	29007.31	414.26	9.55	17404.32	578.48	10.30	11603.02	969.02	10.88	7251.89	50.62	11.53
	116000	47.54	55144	29007.31	417.48	9.60	17404.33	581.83	10.35	11603.02	972.46	10.94	7251.89	54.15	11.59
	117000	47.54	55620	29007.32	420.71	9.65	17404.33	585.18	10.41	11603.02	975.90	11.00	7251.89	57.68	11.65
	118000	47.54	56095	29007.32	423.93	9.70	17404.33	588.53	10.46	11603.02	979.34	11.05	7251.89	61.21	11.71
	119000	47.54	56571	29007.32	427.16	9.75	17404.34	591.88	10.51	11603.02	982.78	11.11	7251.89	64.74	11.77
	120000	47.54	57047	29007.33	430.38	9.80	17404.34	595.23	10.57	11603.02	986.22	11.17	7251.89	68.27	11.83
	121000	47.54	57522	29007.33	433.61	9.85	17404.34	598.58	10.62	11603.02	989.66	11.22	7251.89	71.81	11.89
	122000	47.54	57998	29007.33	436.83	9.90	17404.35	601.93	10.68	11603.02	993.10	11.28	7251.89	75.34	11.94
	123000	47.54	58474	29007.34	440.06	9.95	17404.35	605.28	10.73	11603.02	996.54	11.34	7251.89	78.87	12.00
	124000	47.54	58950	29007.34	443.28	10.00	17404.35	608.64	10.78	11603.02	999.97	11.39	7251.89	82.40	12.06
	125000	47.54	59425	29007.34	446.51	10.05	17404.36	611.99	10.84	11603.03	003.41	11.45	7251.89	85.93	12.12
	126000	47.54	59901	29007.34	449.73	10.10	17404.36	615.34	10.89	11603.03	006.85	11.51	7251.89	89.46	12.18
	127000	47.54	60377	29007.35	452.96	10.15	17404.36	618.69	10.95	11603.03	010.29	11.56	7251.89	92.99	12.24
MZFW Aft	128000	47.54	60853	29007.35	456.18	10.20	17404.37	622.04	11.00	11603.03	013.73	11.62	7251.89	96.52	12.30
	129000	47.54	61328	29007.35	459.50	10.25	17404.37	625.48	11.05	11603.03	017.24	11.67	7251.84	00.08	12.36
	130000	47.54	61804	29007.36	462.83	10.30	17404.37	628.92	11.10	11603.03	020.75	11.73	7251.84	03.64	12.41

	131000	47.54	62279	29007.35	56.15	10.35	17404.53	32.36	11.16	11603.02	24.27	11.78	7251.84	07.20	12.47
	132000	47.54	62755	29007.36	59.47	10.39	17404.53	35.79	11.21	11603.02	27.78	11.83	7251.84	10.76	12.52
	133000	47.54	63231	29007.37	62.80	10.44	17404.53	39.23	11.26	11603.02	31.29	11.89	7251.84	14.32	12.58
Ground Aft	134000	47.54	63707	29007.37	66.12	10.49	17404.53	42.67	11.31	11603.02	34.80	11.94	7251.84	17.88	12.63
MLW Aft	134500	47.52	63910	29007.37	67.60	10.51	17404.53	44.20	11.33	11603.02	36.37	11.96	7251.84	19.46	12.65
	135000	47.49	64118	29007.37	69.05	10.53	17404.53	45.70	11.35	11603.02	37.90	11.98	7251.84	21.01	12.67
	136000	47.45	64534	29007.38	71.95	10.57	17404.53	48.69	11.39	11603.02	40.95	12.03	7251.84	24.11	12.72
	137000	47.41	64948	29007.38	74.85	10.61	17404.54	51.69	11.44	11603.02	44.01	12.07	7251.84	27.21	12.76
	138000	47.36	65362	29007.38	77.76	10.65	17404.54	54.68	11.48	11603.02	47.06	12.11	7251.84	30.31	12.81
	139000	47.32	65775	29007.39	80.66	10.69	17404.54	57.67	11.52	11603.02	50.11	12.16	7251.84	33.41	12.86
	140000	47.28	66187	29007.39	83.56	10.73	17404.54	60.67	11.56	11603.02	53.17	12.20	7251.84	36.51	12.90
	141000	47.23	66598	29007.39	86.46	10.77	17404.54	63.66	11.61	11603.02	56.22	12.24	7251.84	39.61	12.95
	142000	47.19	67009	29007.39	89.36	10.81	17404.54	66.66	11.65	11603.02	59.28	12.29	7251.84	42.71	12.99
	143000	47.15	67418	29007.40	92.27	10.85	17404.54	69.65	11.69	11603.02	62.33	12.33	7251.84	45.81	13.04
	144000	47.10	67827	29007.40	95.17	10.89	17404.54	72.65	11.73	11603.02	65.39	12.38	7251.84	48.91	13.08
	145000	47.06	68234	29007.40	98.07	10.93	17404.55	75.64	11.77	11603.02	68.44	12.42	7251.84	52.01	13.13
	146000	47.01	68641	29007.41	00.97	10.96	17404.55	78.64	11.82	11603.02	71.50	12.46	7251.84	55.12	13.17
	147000	46.97	69047	29007.41	03.87	11.00	17404.55	81.63	11.86	11603.02	74.55	12.51	7251.84	58.22	13.22
	148000	46.93	69452	29007.41	06.78	11.04	17404.55	84.62	11.90	11603.02	77.60	12.55	7251.84	61.32	13.27
	149000	46.88	69856	29007.41	09.68	11.08	17404.55	87.62	11.94	11603.02	80.66	12.59	7251.84	64.42	13.31
	150000	46.84	70260	29007.42	12.58	11.12	17404.55	90.61	11.99	11603.02	83.71	12.64	7251.84	67.52	13.36
	151000	46.80	70662	29007.42	15.48	11.16	17404.55	93.61	12.03	11603.02	86.77	12.68	7251.84	70.62	13.40
	152000	46.75	71064	29007.42	18.38	11.20	17404.56	96.60	12.07	11603.02	89.82	12.73	7251.84	73.72	13.45
	153000	46.71	71465	29007.43	21.28	11.24	17404.56	99.60	12.11	11603.02	92.88	12.77	7251.84	76.82	13.49
	154000	46.67	71864	29007.43	24.19	11.28	17404.56	02.59	12.16	11603.02	95.93	12.81	7251.84	79.92	13.54
	155000	46.62	72263	29007.43	27.09	11.32	17404.56	05.59	12.20	11603.02	98.99	12.86	7251.84	83.02	13.58
MTOW Aft	156000	46.58	72662	29007.43	29.99	11.36	17404.56	08.58	12.24	11603.02	02.04	12.90	7251.84	86.12	13.63

MRW Aft	157000	46.30	72690	29007.55	50.18	11.36	17404.53	58.77	12.24	11603.07	72.23	12.90	7251.84	86.33	13.64

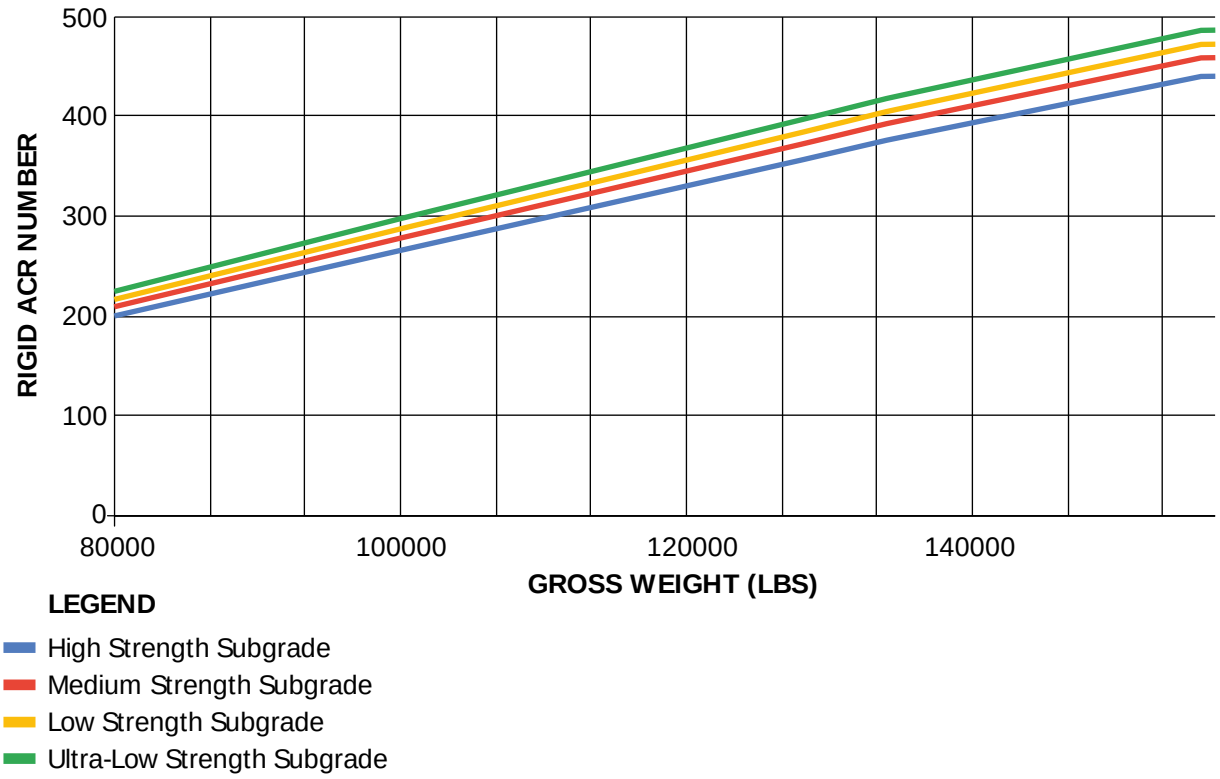

ICN-BD500-A-J000000-A-3AB48-80842-A-001-01

Figure 7 Rigid ACR (Most AFT C.G) - (Sheet 1 of 2)

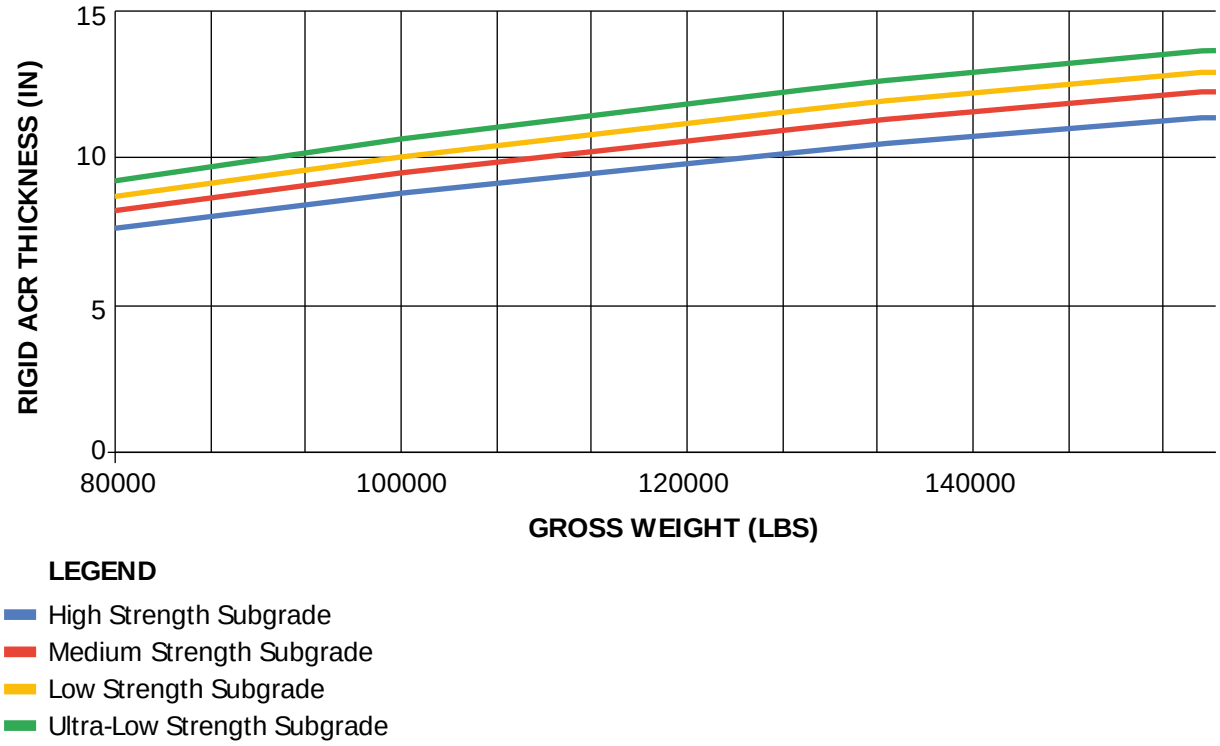

ICN-BD500-A-J000000-A-3AB48-80843-A-001-01

Figure 7 Rigid ACR (Most AFT C.G) - (Sheet 2 of 2)

Table 14 Aircraft Classification Rating (ACR) results for most forward C.G. positions for rigid pavement

Gross Weight (lbs)		% GW on Gear	Tot. Load on MLGs |(lbs	Subgrade Category											
				A			B			C			D		
				Sub-grade Mod-ulus (psi)	Rigid ACR-Num-ber	ACR Thick-ness t (in)	Sub-grade Mod-ulus (psi)	Rigid ACR Num-ber	ACR Thick-ness t (in)	Sub-grade Mod-ulus (psi)	Rigid ACR Num-ber	ACR Thick-ness t (in)	Sub-grade Mod-ulus (psi)	Rigid ACR Num-ber	ACR Thick-ness t (in)
MFW Fwd	80000	44.74	35788	29007.59	190.85	7.43	17404.59	199.60	8.01	11603.22	206.60	8.48	7251.89	214.37	9.00
	81000	44.73	36234	29007.59	193.76	7.48	17404.59	202.64	8.06	11603.22	209.72	8.54	7251.89	217.58	9.06
	82000	44.73	36680	29007.59	196.67	7.53	17404.59	205.67	8.12	11603.22	212.84	8.59	7251.89	220.78	9.12
	83000	44.73	37126	29007.59	199.58	7.58	17404.59	208.71	8.17	11603.22	215.97	8.65	7251.89	223.99	9.18
	84000	44.73	37572	29007.59	202.49	7.63	17404.59	211.74	8.23	11603.22	219.09	8.71	7251.89	227.19	9.24
	85000	44.73	38018	29007.59	205.40	7.68	17404.59	214.78	8.28	11603.22	222.21	8.76	7251.89	230.40	9.30
	86000	44.73	38464	29007.59	208.31	7.73	17404.59	217.81	8.33	11603.22	225.33	8.82	7251.89	233.60	9.36
	87000	44.72	38910	29007.59	211.22	7.78	17404.59	220.85	8.39	11603.22	228.46	8.88	7251.89	236.81	9.42
	88000	44.72	39356	29007.59	214.13	7.83	17404.59	223.88	8.44	11603.22	231.58	8.93	7251.89	240.02	9.48
	89000	44.72	39802	29007.59	217.04	7.88	17404.59	226.92	8.50	11603.22	234.70	8.99	7251.89	243.22	9.54
	90000	44.72	40248	29007.59	219.95	7.93	17404.59	229.96	8.55	11603.22	237.82	9.05	7251.89	246.43	9.60
	91000	44.72	40693	29007.59	222.86	7.98	17404.59	232.99	8.61	11603.22	240.95	9.10	7251.89	249.63	9.66
	92000	44.72	41139	29007.59	225.77	8.03	17404.59	236.03	8.66	11603.22	244.07	9.16	7251.89	252.84	9.72
	93000	44.71	41585	29007.59	228.68	8.08	17404.59	239.06	8.71	11603.22	247.19	9.22	7251.89	256.04	9.77
	94000	44.71	42030	29007.59	231.59	8.13	17404.59	242.10	8.77	11603.22	250.31	9.27	7251.89	259.25	9.83
	95000	44.71	42476	29007.59	234.50	8.18	17404.59	245.13	8.82	11603.22	253.44	9.33	7251.89	262.45	9.89
	96000	44.71	42922	29007.59	237.41	8.23	17404.59	248.17	8.88	11603.22	256.56	9.39	7251.89	265.66	9.95
	97000	44.71	43367	29007.59	240.32	8.28	17404.59	251.20	8.93	11603.22	259.68	9.45	7251.89	268.87	10.01
	98000	44.71	43813	29007.59	243.23	8.33	17404.59	254.24	8.98	11603.22	262.80	9.50	7251.89	272.07	10.07
	99000	44.71	44258	29007.59	246.14	8.38	17404.59	257.28	9.04	11603.22	265.92	9.56	7251.89	275.28	10.13
	100000	44.70	44704	29007.59	249.05	8.43	17404.59	260.31	9.09	11603.22	269.05	9.62	7251.89	278.48	10.19
	101000	44.70	45149	29007.59	251.96	8.48	17404.59	263.35	9.15	11603.22	272.17	9.67	7251.89	281.69	10.25
	102000	44.70	45595	29007.59	254.87	8.53	17404.59	266.38	9.20	11603.22	275.29	9.73	7251.89	284.89	10.31

	103000	44.70	46040	29007.25	257.78	8.58	17404.26	269.42	9.26	11603.02	278.41	9.79	7251.82	288.10	10.37
	104000	44.70	46486	29007.26	260.69	8.63	17404.27	272.45	9.31	11603.02	281.54	9.84	7251.82	291.31	10.43
	105000	44.70	46931	29007.26	263.60	8.68	17404.27	275.49	9.36	11603.02	284.66	9.90	7251.82	294.51	10.49
	106000	44.69	47376	29007.26	266.51	8.73	17404.27	278.52	9.42	11603.02	287.78	9.96	7251.82	297.72	10.55
	107000	44.69	47822	29007.26	269.42	8.78	17404.28	281.56	9.47	11603.02	290.90	10.01	7251.83	300.92	10.61
	108000	44.69	48267	29007.27	272.33	8.83	17404.28	284.60	9.53	11603.02	294.03	10.07	7251.83	304.13	10.67
	109000	44.69	48712	29007.27	275.24	8.88	17404.28	287.63	9.58	11603.02	297.15	10.13	7251.83	307.33	10.73
	110000	44.69	49157	29007.27	278.15	8.93	17404.29	290.67	9.63	11603.03	300.27	10.18	7251.83	310.54	10.79
	111000	44.69	49602	29007.28	281.06	8.98	17404.29	293.70	9.69	11603.03	303.39	10.24	7251.83	313.75	10.85
	112000	44.69	50047	29007.28	283.97	9.03	17404.29	296.74	9.74	11603.03	306.51	10.30	7251.83	316.95	10.91
	113000	44.68	50493	29007.28	286.88	9.08	17404.29	299.77	9.80	11603.03	309.64	10.35	7251.83	320.16	10.97
	114000	44.68	50938	29007.28	289.79	9.13	17404.30	302.81	9.85	11603.03	312.76	10.41	7251.83	323.36	11.03
	115000	44.68	51383	29007.29	292.70	9.18	17404.30	305.84	9.91	11603.03	315.88	10.47	7251.83	326.57	11.09
	116000	44.68	51828	29007.29	295.61	9.23	17404.30	308.88	9.96	11603.03	319.00	10.52	7251.83	329.77	11.15
	117000	44.68	52273	29007.29	298.52	9.28	17404.31	311.92	10.01	11603.03	322.13	10.58	7251.83	332.98	11.21
	118000	44.68	52718	29007.30	301.43	9.33	17404.31	314.95	10.07	11603.03	325.25	10.64	7251.83	336.18	11.26
	119000	44.67	53162	29007.30	304.34	9.38	17404.31	317.99	10.12	11603.03	328.37	10.69	7251.83	339.39	11.32
	120000	44.67	53607	29007.30	307.25	9.43	17404.32	321.02	10.18	11603.03	331.49	10.75	7251.83	342.60	11.38
	121000	44.67	54052	29007.31	310.16	9.48	17404.32	324.06	10.23	11603.03	334.62	10.81	7251.83	345.80	11.44
	122000	44.67	54497	29007.31	313.07	9.53	17404.32	327.09	10.28	11603.03	337.74	10.86	7251.83	349.01	11.50
	123000	44.67	54942	29007.31	315.98	9.58	17404.33	330.13	10.34	11603.04	340.86	10.92	7251.83	352.21	11.56
	124000	44.67	55387	29007.31	318.89	9.63	17404.33	333.16	10.39	11603.04	343.98	10.98	7251.83	355.42	11.62
	125000	44.67	55831	29007.32	321.80	9.68	17404.33	336.20	10.45	11603.04	347.11	11.03	7251.83	358.62	11.68
Ground Fwd	125972	44.66	56264	29007.32	324.63	9.73	17404.33	339.15	10.50	11603.03	350.14	11.09	7251.83	361.74	11.74
	126000	44.66	56277	29007.32	324.72	9.73	17404.33	339.25	10.50	11603.03	350.24	11.09	7251.83	361.84	11.74
	127000	44.70	56764	29007.32	328.02	9.79	17404.34	342.74	10.56	11603.03	353.81	11.15	7251.83	365.50	11.80
MZFW Fwd	128000	44.73	57252	29007.33	331.32	9.84	17404.34	346.23	10.61	11603.03	357.38	11.20	7251.83	369.15	11.86
	129000	44.76	57737	29007.33	334.68	9.89	17404.34	349.72	10.66	11603.03	360.94	11.26	7251.83	372.86	11.92

	130000	44.79	58222	29007.35	358.04	9.94	17404.53	353.21	10.72	11603.02	324.50	11.31	7251.89	976.57	11.98
	131000	44.82	58708	29007.54	361.40	9.99	17404.55	356.70	10.77	11603.02	328.06	11.37	7251.89	980.29	12.04
	132000	44.84	59194	29007.54	364.76	10.04	17404.56	360.19	10.83	11603.02	331.63	11.43	7251.89	984.00	12.10
	133000	44.87	59681	29007.54	368.12	10.09	17404.56	363.68	10.88	11603.02	335.19	11.48	7251.89	987.71	12.16
	134000	44.90	60169	29007.55	371.48	10.14	17404.56	367.17	10.93	11603.02	338.75	11.54	7251.89	991.42	12.22
MLW Fwd	134500	44.92	60413	29007.55	373.16	10.16	17404.56	368.91	10.96	11603.02	340.53	11.57	7251.89	993.28	12.25
	135000	44.93	60656	29007.55	374.91	10.18	17404.57	370.71	10.99	11603.02	342.37	11.60	7251.89	995.15	12.28
	136000	44.96	61145	29007.55	378.40	10.23	17404.57	374.32	11.04	11603.02	346.05	11.65	7251.89	998.88	12.33
	137000	44.99	61633	29007.56	381.89	10.28	17404.57	377.93	11.09	11603.02	349.73	11.70	7251.89	1002.61	12.39
	138000	45.02	62123	29007.56	385.38	10.33	17404.58	381.54	11.14	11603.02	353.41	11.76	7251.89	1006.34	12.45
	139000	45.05	62613	29007.56	388.87	10.38	17404.58	385.14	11.19	11603.02	357.09	11.81	7251.89	1010.08	12.50
	140000	45.07	63103	29007.57	392.36	10.43	17404.58	388.75	11.25	11603.02	360.76	11.87	7251.89	1013.81	12.56
	141000	45.10	63594	29007.57	395.86	10.48	17404.59	392.36	11.30	11603.02	364.44	11.92	7251.89	1017.54	12.61
	142000	45.13	64086	29007.57	399.35	10.52	17404.59	395.97	11.35	11603.02	368.12	11.97	7251.89	1021.27	12.67
	143000	45.16	64578	29007.58	402.84	10.57	17404.59	399.57	11.40	11603.02	371.80	12.03	7251.89	1025.01	12.73
	144000	45.19	65071	29007.58	406.33	10.62	17404.60	403.18	11.45	11603.02	375.48	12.08	7251.89	1028.74	12.78
	145000	45.22	65564	29007.58	409.82	10.67	17404.60	406.79	11.50	11603.02	379.16	12.13	7251.89	1032.47	12.84
	146000	45.25	66058	29007.59	413.32	10.72	17404.61	410.39	11.56	11603.02	382.84	12.19	7251.89	1036.20	12.89
	147000	45.27	66553	29007.59	416.81	10.77	17404.61	414.00	11.61	11603.02	386.52	12.24	7251.89	1039.94	12.95
	148000	45.30	67048	29007.60	420.30	10.82	17404.61	417.61	11.66	11603.02	390.20	12.29	7251.89	1043.67	13.01
	149000	45.33	67544	29007.60	423.79	10.87	17404.62	421.22	11.71	11603.02	393.87	12.35	7251.89	1047.40	13.06
	150000	45.36	68040	29007.60	427.28	10.91	17404.62	424.82	11.76	11603.02	397.55	12.40	7251.89	1051.13	13.12
	151000	45.39	68537	29007.61	430.77	10.96	17404.62	428.43	11.82	11603.02	401.23	12.46	7251.89	1054.87	13.17
	152000	45.42	69034	29007.61	434.27	11.01	17404.63	432.04	11.87	11603.02	404.91	12.51	7251.89	1058.60	13.23
	153000	45.45	69532	29007.61	437.76	11.06	17404.63	435.65	11.92	11603.02	408.59	12.56	7251.89	1062.33	13.29
	154000	45.47	70031	29007.62	441.25	11.11	17404.63	439.25	11.97	11603.02	412.27	12.62	7251.89	1066.07	13.34
	155000	45.50	70530	29007.62	444.74	11.16	17404.64	442.86	12.02	11603.02	415.95	12.67	7251.89	1069.80	13.40
	156000	45.53	71029	29007.62	448.23	11.21	17404.64	446.47	12.07	11603.02	419.63	12.72	7251.89	1073.53	13.45

MTOW Fwd	156300	45.54	71180	29007.62	529.28	11.22	17404.54	537.55	12.09	11603.08	520.73	12.74	7251.84	474.65	13.47
MRW Fwd	157000	45.57	71539	29007.62	531.91	11.25	17404.54	530.26	12.12	11603.08	523.66	12.79	7251.84	477.47	13.51

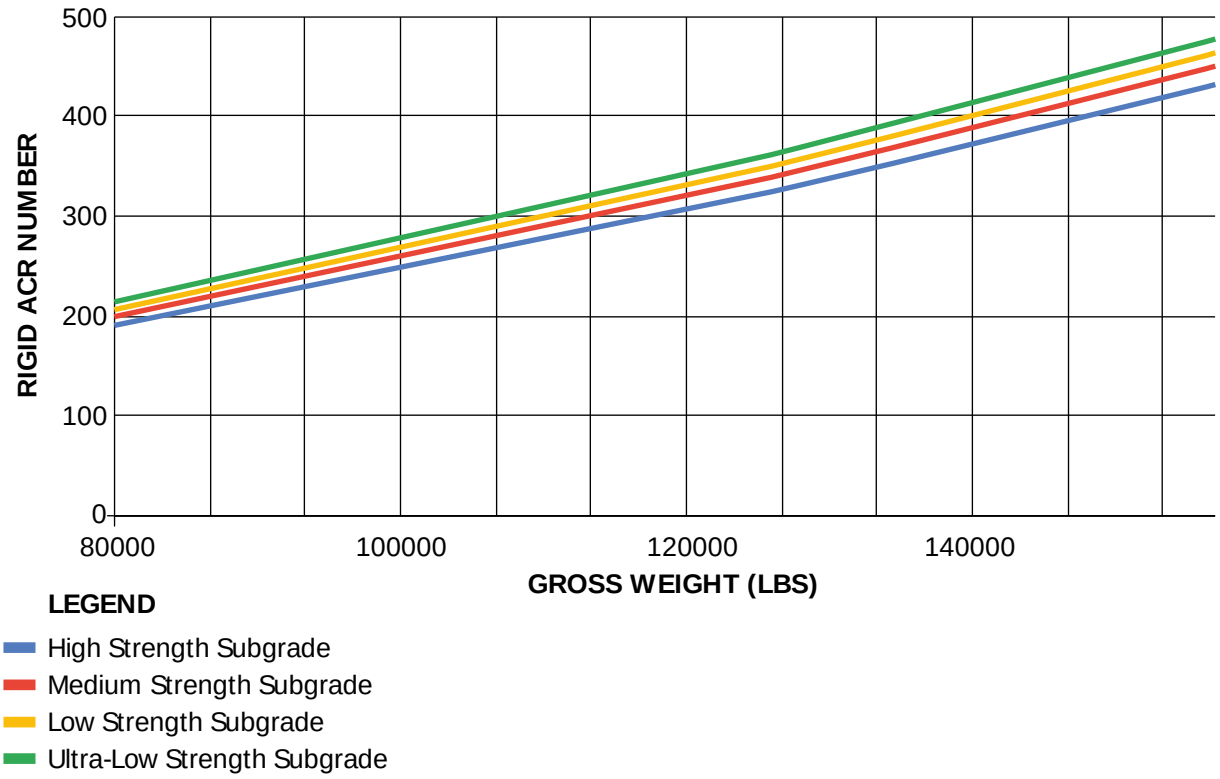

ICN-BD500-A-J000000-A-3AB48-80844-A-001-01

Figure 8 Rigid ACR (Most FWD C.G) - (Sheet 1 of 2)

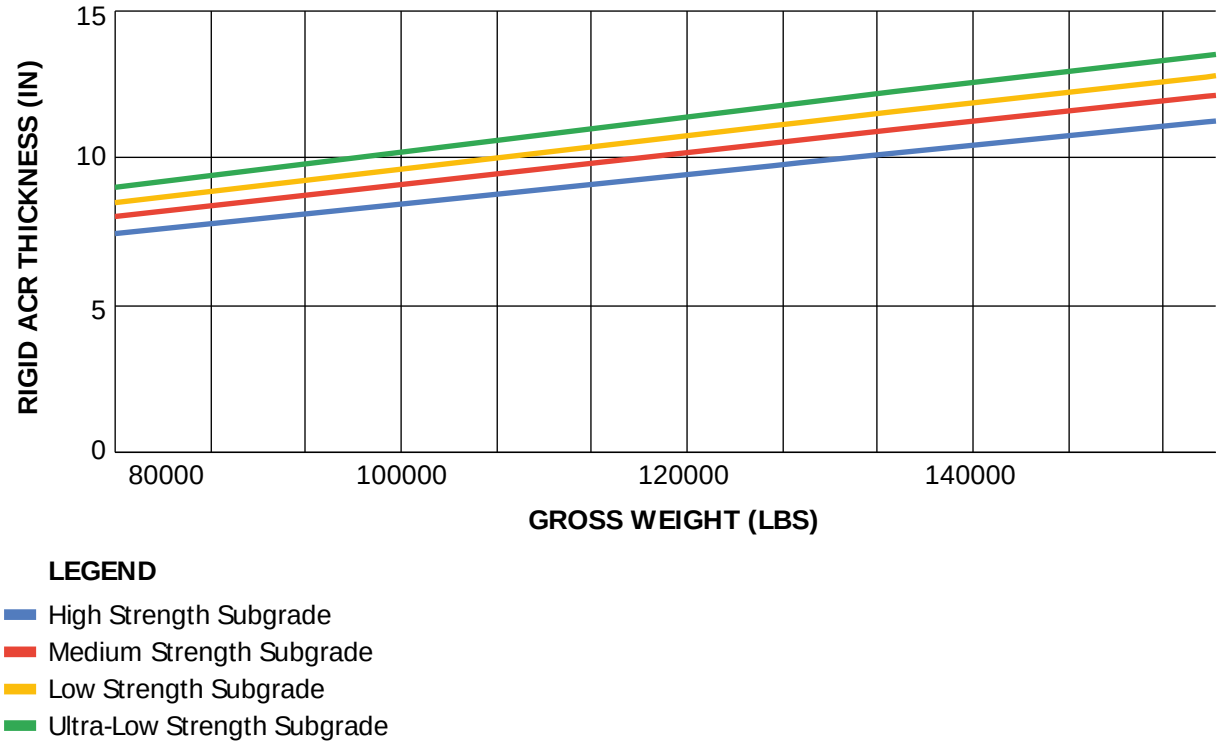

ICN-BD500-A-J000000-A-3AB48-80845-A-001-01

Figure 8 Rigid ACR (Most FWD C.G) - (Sheet 2 of 2)

5 Load Classification Number (LCN) results for most aft C.G. positions

Refer to Table 15 for tabular format and Fig. 9 for graphical format for the LCN results for rigid pavement and Table 16 for tabular format and Fig. 10 for graphical format for the LCN results for flexible pavement.

Table 15 LCN RESULTS FOR MOST AFT C.G. RIGID PAVEMENT

Aircraft weight (Lbs)	Aircraft Weight (Kg)	Tire Pressure (psi)	L = 30 inches		L = 40 inches		L = 50 inches	
			ESWL	LCN	ESWL	LCN	ESWL	LCN
80000	36287	223	23617	42	24712	44	25735	45
81000	36740	223	24038	43	25143	45	26161	46
82000	37194	223	24460	44	25575	46	26588	47
83000	37648	223	24881	44	26006	46	27014	48
84000	38101	223	25302	45	26438	47	27441	48
85000	38555	223	25723	46	26869	48	27868	49
86000	39008	223	26145	47	27301	49	28294	50
87000	39462	223	26566	48	27732	50	28721	51
88000	39916	223	26987	48	28163	50	29147	52
89000	40369	223	27408	49	28595	51	29574	53
90000	40823	223	27829	50	29026	52	30001	54
91000	41276	223	28251	51	29458	53	30427	54
92000	41730	223	28672	52	29889	54	30854	55
93000	42184	223	29093	52	30321	54	31280	56
94000	42637	223	29514	53	30752	55	31707	57
95000	43091	223	29935	54	31183	56	32134	58
96000	43544	223	30357	55	31615	57	32560	59
97000	43998	223	30778	56	32046	58	32987	59
98000	44452	223	31199	56	32478	58	33413	60
99000	44905	223	31620	57	32909	59	33840	61
100000	45359	223	32042	58	33341	60	34267	62
101000	45812	223	32388	59	33692	61	34652	63

Aircraft weight (Lbs)	Aircraft Weight (Kg)	Tire Pressure (psi)	L = 30 inches		L = 40 inches		L = 50 inches	
			ESWL	LCN	ESWL	LCN	ESWL	LCN
102000	46266	223	32735	59	34044	61	35037	63
103000	46719	223	33082	60	34396	62	35423	64
104000	47173	223	33429	60	34748	62	35808	64
105000	47627	223	33776	61	35100	63	36193	65
106000	48080	223	34122	61	35452	63	36579	65
107000	48534	223	34469	62	35803	64	36964	66
108000	48987	223	34816	62	36155	64	37349	66
109000	49441	223	35163	63	36507	65	377351	67
110000	49895	223	35510	63	36859	65	38120	67
111000	50348	223	35856	64	37211	66	38505	68
112000	50802	223	36203	64	37563	66	38891	68
113000	51255	223	36550	65	37914	67	39276	69
114000	51709	223	36897	65	38266	67	39661	70
115000	52163	223	37244	66	38618	68	40047	70
116000	52616	223	37590	66	38970	68	40432	71
117000	53070	223	37937	67	39322	69	40818	71
118000	53523	223	38284	67	39674	69	41203	71
119000	53977	223	38631	68	40025	70	41588	72
120000	54431	223	38978	68	40377	70	41973	73
121000	54884	223	39324	69	40729	71	42359	73
122000	55338	223	39671	69	41081	71	42744	74
123000	55791	223	40018	70	41433	72	43130	74
124000	56245	223	40365	70	41785	72	43515	75
125000	56699	223	40712	710	42136	73	43900	75
126000	57152	223	41058	71	42488	73	44866	76
127000	57606	223	41405	72	42840	74	44671	76
128000	58059	223	41752	72	43192	74	45056	77

Aircraft weight (Lbs)	Aircraft Weight (Kg)	Tire Pressure (psi)	L = 30 inches		L = 40 inches		L = 50 inches	
			ESWL	LCN	ESWL	LCN	ESWL	LCN
129000	58513	223	42021	73	43468	75	45398	77
130000	58966	223	42290	73	43745	75	45740	78
131000	59420	223	42559	74	44021	76	46082	78
132000	59874	223	42827	74	44297	76	46424	78
133000	60327	223	43096	75	44574	77	46767	79
134000	60781	223	43365	75	44850	77	47109	79
134500	61008	223	43499	75	44989	77	47255	80
136000	61688	223	43903	75	45433	77	47697	80
137000	62142	223	44171	76	45728	78	47992	81
138000	62595	223	44440	76	46024	78	48287	81
139000	63049	223	44709	76	46320	78	48582	81
140000	63502	223	44978	77	46615	79	48877	82
141000	63956	223	45247	77	46911	79	49172	82
142000	64410	223	45516	77	47207	79	49467	82
143000	64863	223	45784	78	47503	80	49762	82
144000	65317	223	46053	78	47798	80	50057	83
145000	65770	223	46322	78	48094	80	50351	83
146000	66224	223	46591	79	48390	81	50646	83
147000	66678	223	46860	79	48685	81	50941	83
148000	67131	223	47129	79	48981	81	51236	84
149000	67585	223	47397	80	49277	82	51531	84
150000	68038	223	47666	80	49573	82	51826	84
151000	68492	223	47935	80	49868	82	52121	85
152000	68945	223	48204	81	50164	83	52416	85
153000	69399	223	48473	81	50460	83	52711	85
154000	69853	223	48742	81	50755	83	53006	85
155000	70306	223	49010	82	51051	84	53301	86

Aircraft weight (Lbs)	Aircraft Weight (Kg)	Tire Pressure (psi)	L = 30 inches		L = 40 inches		L = 50 inches	
			ESWL	LCN	ESWL	LCN	ESWL	LCN
156000	70760	223	49279	82	51347	84	53596	86
157000	71213	223	49286	82	51354	84	53603	86

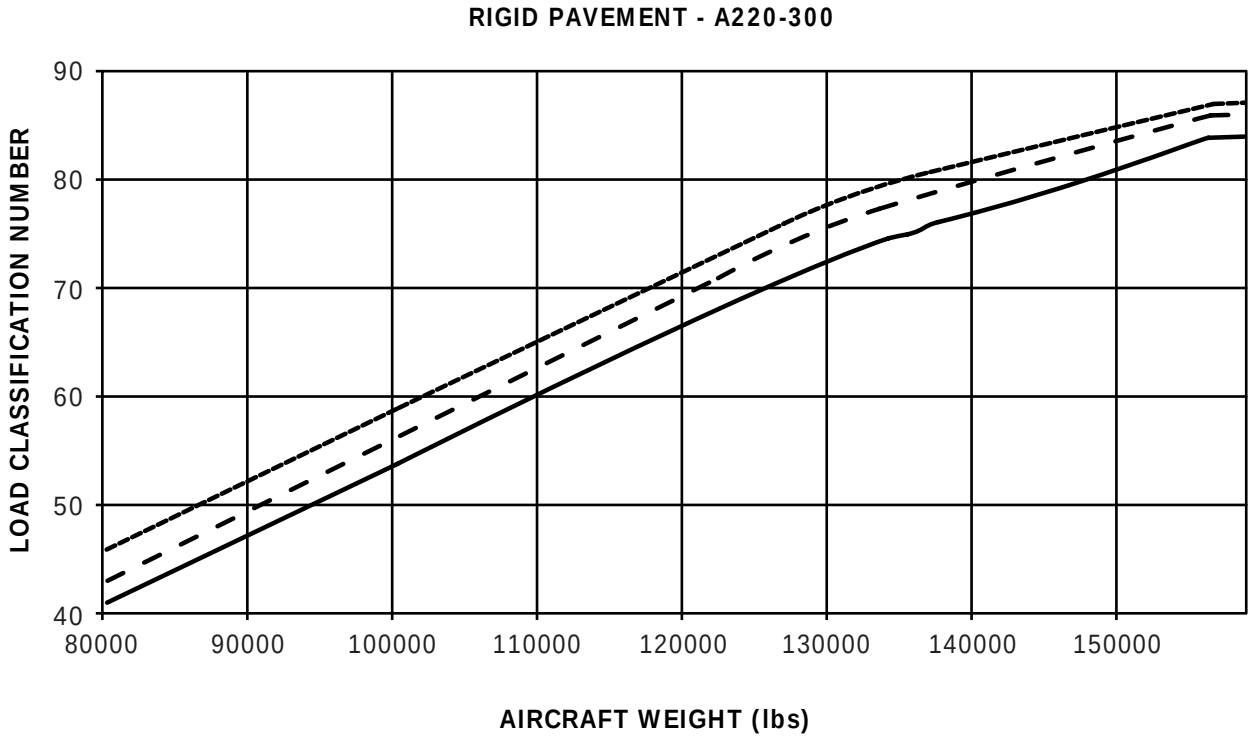

LEGEND

Radius of relative stiffness L= 50.00 in. (1270.00 mm).

Radius of relative stiffness L= 40.00 in. (1016.00 mm).

Radius of relative stiffness L= 30.00 in. (762.00 mm).

ICN-BD500-A-J000000-C-3AB48-57659-A-003-01

Figure 9 LCN results - Rigid pavement

Table 16 RESULTS FOR MOST AFT C.G. FLEXIBLE PAVEMENT

Aircraft Weight (lbs)	Aircraft Weight (Kg)	Tire Pressure (psi)	Pavement Thickness 10 inches		Pavement Thickness 15 inches		Pavement Thickness 20 inches		Pavement Thickness 30 inches	
			ESWL	LCN	ESWL	LCN	ESWL	LCN	ESWL	LCN
80000	36287	223	18658	32	19711	36	22206	40	26268	48
81000	36740	223	18958	33	20053	37	22586	41	26709	49
82000	37194	223	19259	33	20396	37	22967	41	27151	50
83000	37648	223	19560	34	20738	38	23348	42	27592	50
84000	38101	223	19860	35	21081	38	23728	43	28034	51
85000	38555	223	20161	35	21423	39	24109	44	28475	52
86000	39008	223	20462	36	21766	40	24490	44	28917	53
87000	39462	223	20763	37	22108	40	24870	45	29358	54
88000	39916	223	21063	37	22451	41	25251	46	29800	54
89000	40369	223	21364	38	22794	41	25632	46	830242	55
90000	40823	223	21665	39	23136	42	26012	47	30683	56
91000	41276	223	21966	39	23479	43	26393	48	31125	57
92000	41730	223	22266	40	23821	43	26773	48	31566	58
93000	42184	223	22567	40	24164	44	27154	49	32008	58
94000	42637	223	22868	41	24506	44	27535	50	32449	59
95000	43091	223	23168	42	24849	45	27915	51	32891	60
96000	43544	223	23469	42	25191	46	28296	51	33332	61
97000	43998	223	23770	43	25534	46	28677	52	33774	62
98000	44452	223	24071	44	25877	47	29057	53	34215	62
99000	44905	223	24371	44	26219	47	29438	53	34657	63
100000	45359	223	24672	45	26562	48	29819	54	35098	64
101000	45812	223	24909	45	26839	49	30126	55	35452	64
102000	46266	223	25146	46	27117	49	30432	55	35805	65
103000	46719	223	25384	46	27394	50	30739	56	36159	65
104000	47173	223	25621	47	27672	50	31046	56	36512	676

Aircraft Weight (lbs)	Aircraft Weight (Kg)	Tire Pressure (psi)	Pavement Thickness 10 inches		Pavement Thickness 15 inches		Pavement Thickness 20 inches		Pavement Thickness 30 inches	
			ESWL	LCN	ESWL	LCN	ESWL	LCN	ESWL	LCN
105000	47627	223	25858	47	27949	51	31353	57	36866	66
106000	48080	223	26095	48	28227	51	31660	57	37219	67
107000	48534	223	26333	48	28504	52	31967	58	37573	67
108000	48987	223	26570	49	28782	52	32274	58	37926	68
109000	49441	223	26807	49	29059	53	32580	59	38280	68
110000	49895	223	27044	50	29337	53	32887	59	38633	69
111000	50348	223	27281	50	29614	54	33194	60	38987	69
112000	50802	223	27519	51	29892	54	33501	60	39340	70
113000	51255	223	27756	51	30169	55	33808	61	39693	70
114000	51709	223	27993	52	30447	55	34115	61	40047	71
115000	52163	223	28230	52	30724	56	34422	62	40400	71
116000	52616	223	28467	52	31002	56	34728	62	40754	71
117000	53070	223	28705	53	31279	57	35035	63	41107	72
118000	53523	223	28942	53	31557	57	35342	63	41461	72
119000	53977	223	29179	54	31834	58	35649	64	41814	73
120000	54431	223	29416	54	32112	58	35956	64	42168	73
121000	54884	223	29654	55	32389	59	36263	65	42521	74
122000	55338	223	29891	55	32667	59	36570	65	42875	74
123000	55791	223	30128	56	32944	609	36876	66	43228	75
124000	56245	223	30365	56	33222	60	37183	66	43582	75
125000	56699	223	30602	57	33499	61	37490	67	43935	76
126000	57152	223	30840	57	33777	61	37797	67	44289	76
127000	57606	223	31077	58	34054	62	38104	68	44642	76
128000	58059	223	31314	58	34332	62	38411	68	44996	77
129000	58513	223	31552	59	34614	63	38722	68	45353	77
130000	58966	223	31790	59	34897	63	39033	69	45710	77

Aircraft Weight (lbs)	Aircraft Weight (Kg)	Tire Pressure (psi)	Pavement Thickness 10 inches		Pavement Thickness 15 inches		Pavement Thickness 20 inches		Pavement Thickness 30 inches	
			ESWL	LCN	ESWL	LCN	ESWL	LCN	ESWL	LCN
131000	59420	223	32027	60	35179	64	39345	69	46067	78
132000	59874	223	32265	60	35461	64	39656	69	46425	78
133000	60327	223	32503	61	35744	65	39968	70	46782	78
134000	60781	223	32741	61	36026	65	40279	70	47139	78
134500	61008	223	32842	61	36147	65	40412	70	47292	78
135000	61234	223	32932	61	36255	65	40531	70	47428	78
136000	61688	223	33112	61	36471	65	40769	70	47700	78
137000	62142	223	33292	62	36687	66	41007	71	47972	79
138000	62595	223	33472	62	36903	66	41245	71	48244	79
139000	63049	223	33652	62	37119	66	414828	71	48516	79
140000	63502	223	33832	63	37335	67	41720	72	48788	80
141000	63956	223	34012	63	37551	67	41958	72	49061	80
142000	64410	223	34192	63	37767	67	42195	72	49333	80
143000	64863	223	34372	63	37983	67	42433	72	49605	80
144000	65317	223	34552	64	38199	68	42671	73	4977	81
145000	65770	223	34732	64	38415	68	42909	73	50149	81
146000	66224	223	34913	64	38631	68	43146	73	50421	81
147000	66678	223	35093	64	38847	68	43384	73	50693	81
148000	67131	223	35273	65	39063	69	43622	74	50965	82
149000	67585	223	35453	65	39279	69	43860	74	51237	82
150000	68038	223	35633	65	39495	69	44097	74	51509	82
151000	68492	223	35813	66	39711	70	44335	75	51781	83
152000	68945	223	35993	66	39927	70	44573	75	52053	83
153000	69399	223	36173	66	40143	70	44811	75	52325	83
154000	69853	223	36353	66	40359	70	45048	75	52597	83
155000	70306	223	36533	67	40575	71	45286	76	52869	84

Aircraft Weight (lbs)	Aircraft Weight (Kg)	Tire Pressure (psi)	Pavement Thickness 10 inches		Pavement Thickness 15 inches		Pavement Thickness 20 inches		Pavement Thickness 30 inches	
			ESWL	LCN	ESWL	LCN	ESWL	LCN	ESWL	LCN
156000	70760	223	36713	67	40791	71	45524	76	53141	84
157000	71213	223	36718	67	40797	71	45530	76	53149	84

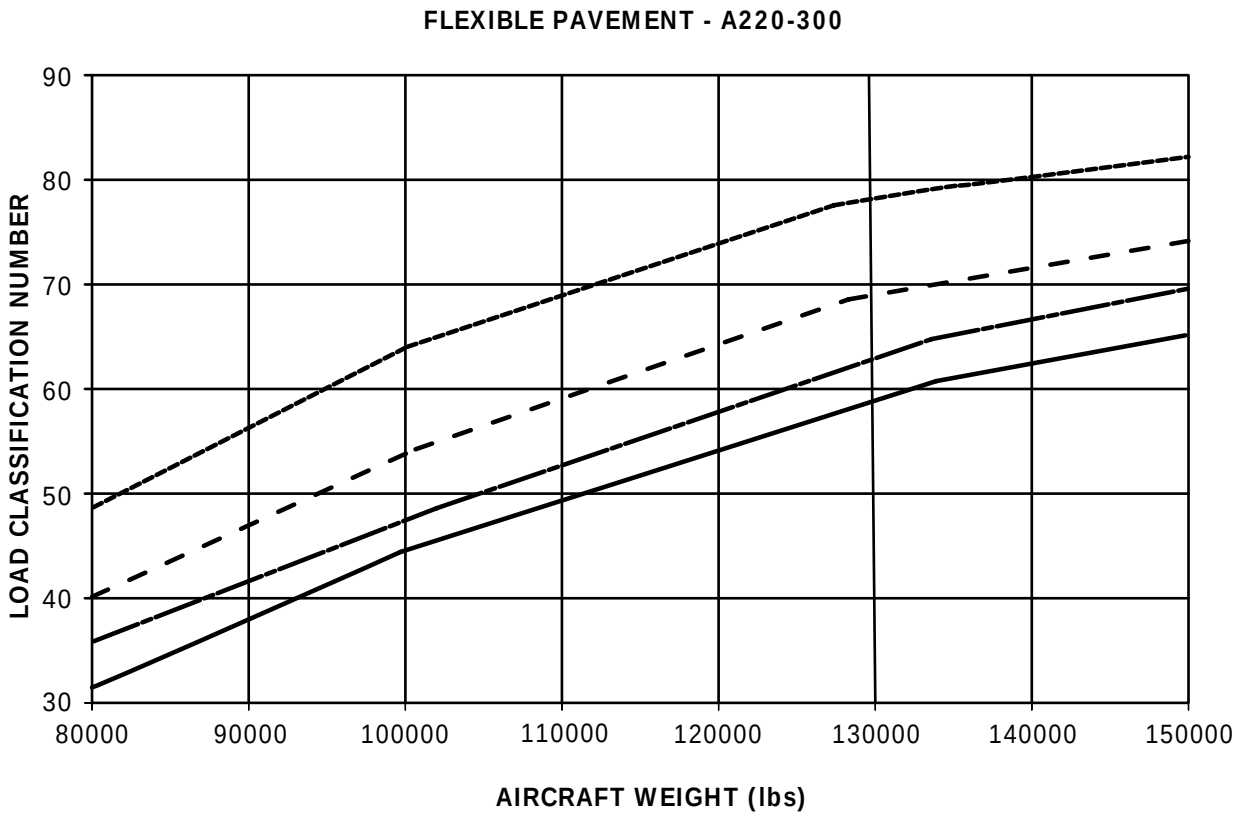

LEGEND

- Radius of relative stiffness P= 10.00 in. (254.00 mm).
- Radius of relative stiffness P= 15.00 in. (381.00 mm).
- Radius of relative stiffness P= 20.00 in. (508.00 mm).
- Radius of relative stiffness P= 30.00 in. (762.00 mm).

ICN-BD500-A-J000000-C-3AB48-57660-A-004-01

Figure 10 LCN results - Flexible pavement

6 Required Pavement Thickness

An essential parameter to calculate the PCN is the required pavement thickness.Fig. 11 and Fig. 12. provide a graphical way to determine the required rigid or flexible pavement thickness based on the pavement strength, aircraft load applied to the pavement, and the annual departure rate. Normally, each airport calculates the PCN based on the different aircraft types which operate to and from that airport considering the number of annual departure for each aircraft type. Using the graphs in this section, one can conclude on the impact of annual departure on required pavement thickness. This material gives the user another mean to evaluate the considered airport for operating the A220 more realistically based on more realistic number of annual departure.

Note

Number of annual departure starts from 300 (close to 1 flight per day). In fact, this gives the reader a better idea about required pavement thickness on those small airports that might not have a very high usage rate.

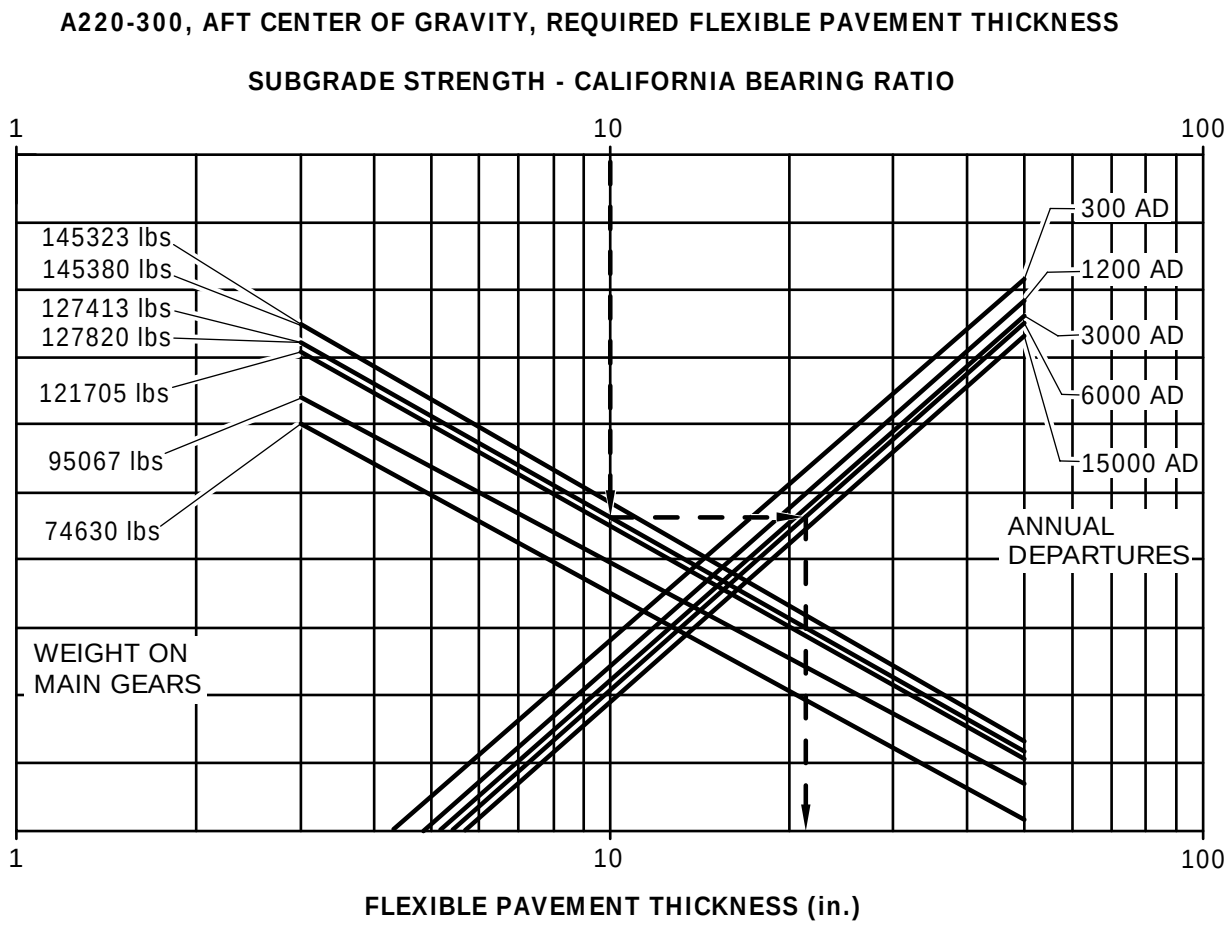

ICN-BD500-A-J000000-C-3AB48-57661-A-004-01

Figure 11 Flexible pavement required thickness

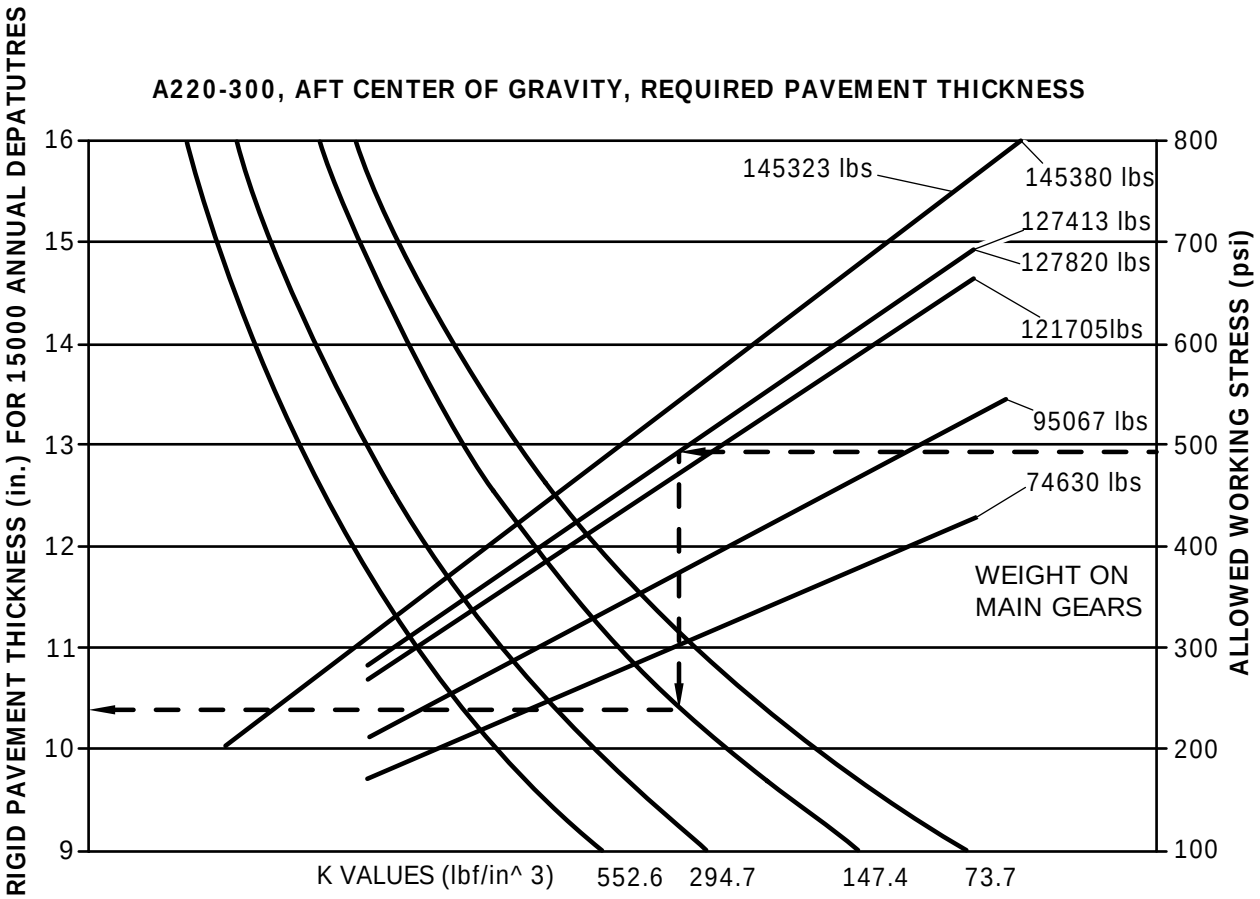

ICN-BD500-A-J000000-C-3AB48-57662-A-004-01

Figure 12 Rigid pavement required thickness

7 Landing gear footprint

Refer to Fig. 13 for the landing gear footprint.

Table 17 Landing gear footprint

code	A-B-C-D-E-F-G-H-I-J-K-L-M-N-O-P
Percentage of weight on main gear group	Refer to section 4
Nose gear tire size	27 x 8.5 R12 16 PR
Nose gear tire pressure	146 PSIG (10 Bar)
Main gear tire size	H42 x15.0 R21 26 PR
Main gear tire pressure	223 PSIG (1537 kPa)

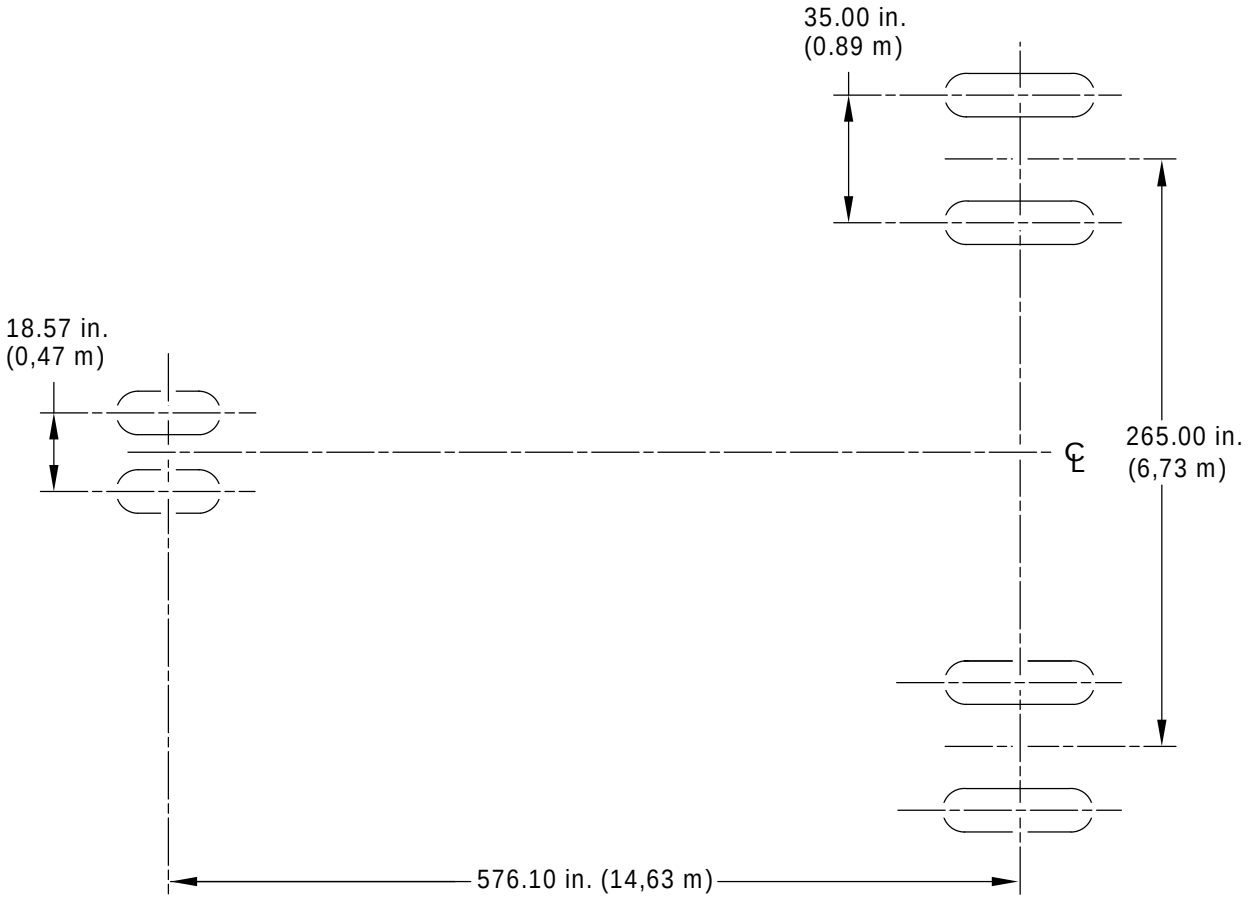

NOTE

Not to scale.

ICN-BD500-A-J000000-A-3AB48-21629-A-001-01

Figure 13 Landing gear footprint

8 Maximum pavement loads

The maximum pavement load is given at aircraft CG,weight on Main Landing Gear (MLG) and aircraft weight.

Refer to Fig. 14 for graphical format.

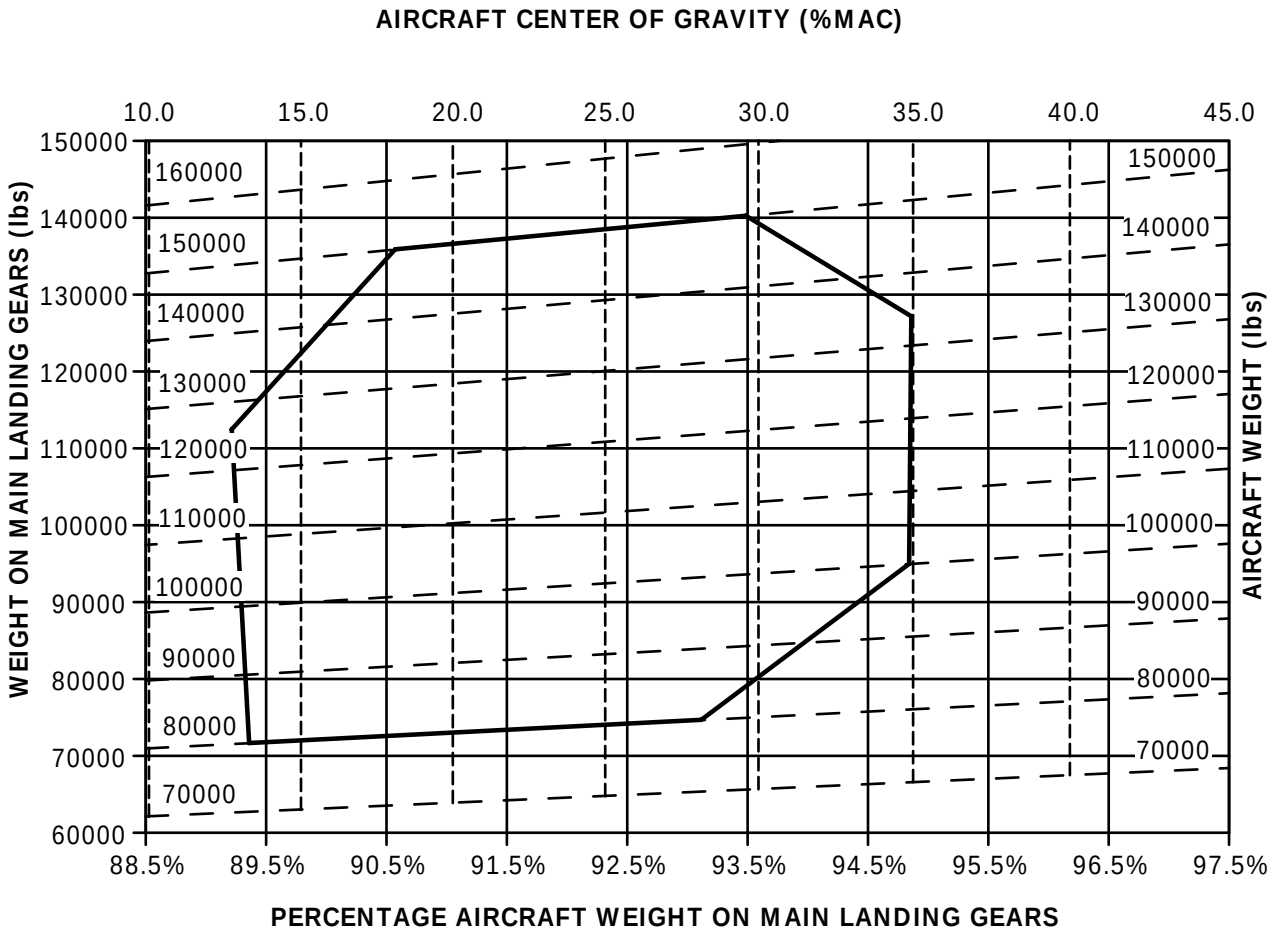

LEGEND

- Aircraft center of gravity.
- Aircraft weight.
- A220-300 ground center of gravity envelope.

ICN-BD500-A-J000000-C-3AB48-58657-A-001-01

Figure 14 Maximum pavement load

Principal dimensions, landing gear footprint - Technical data

Applicability:
50001-54999, 55001-59999

Table of contents

Page

Principal dimensions, landing gear footprint - Technical data 1
References 1
Description 1
1 Introduction 1

List of tables

Page

1 References 1
2 Landing gear footprint dimensions 1
3 Landing gear footprint dimensions 2

List of figures

Page

1 Landing gear footprint 3

References

Table 1 References

Data Module/Technical Publication	Title
None	

Description

1 Introduction

This data module contains data on the landing gear footprint.

Applicability:
50001-54999

Table 2 Landing gear footprint dimensions

Locator	Value
A	18.57 in. (47.17 cm)
B	35.00 in (88.90 cm)
C	22.08 ft. (6.73 m)
D	42.98 ft (13.10 m)

Applicability:
55001-59999

Table 3 Landing gear footprint dimensions

Locator	Value
A	18.57 in. (47.17 cm)
B	35.00 in (88.90 cm)
C	22.08 ft. (6.73 m)
D	49.98 ft (15.23 m)

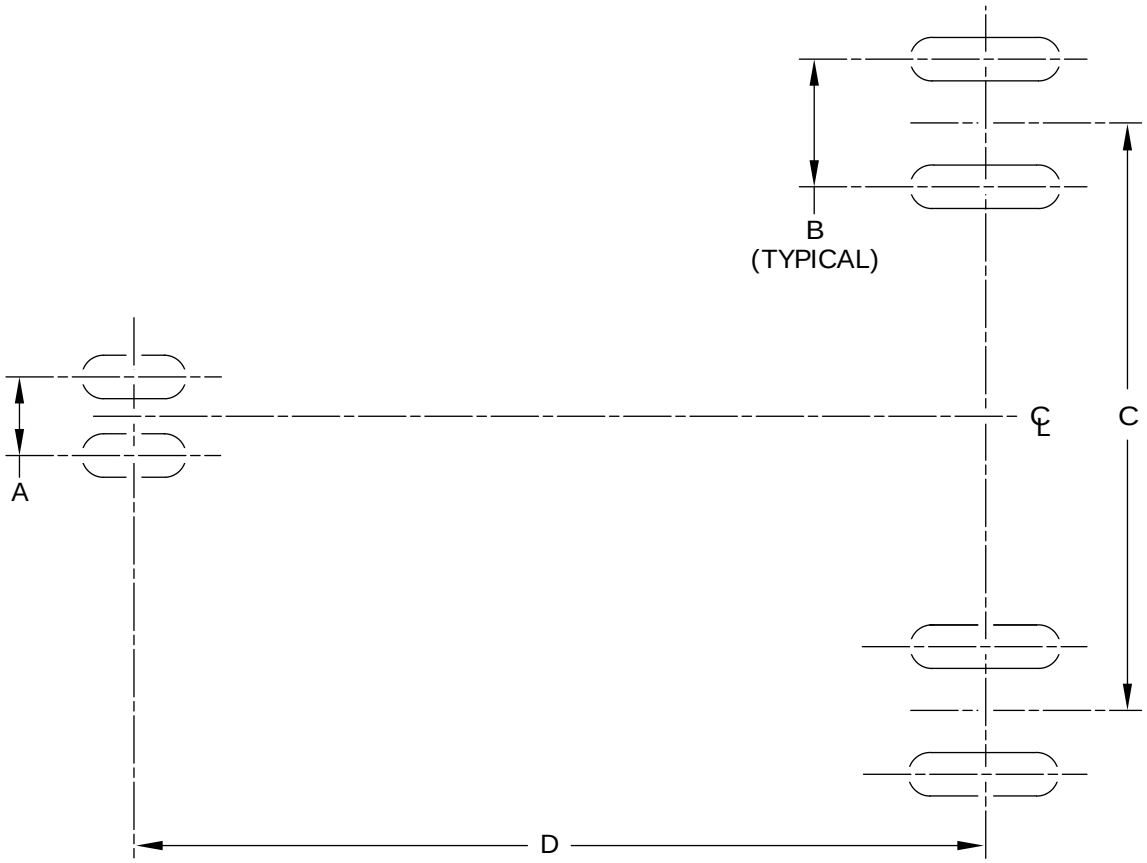

NOTE

Not to scale.

ICN-BD500-A-J061032-A-3AB48-00118-A-001-01

Figure 1 Landing gear footprint

Intentionally left blank

A220

Chapter 8: Scaled drawing

Intentionally left blank

A220

Scaled drawings - Technical data

Applicability:
50001-54999

Table of contents

Page

Scaled drawings - Technical data 1
References 1
Description 1
1 Introduction 1

List of tables

Page

1 References 1

List of figures

Page

1 Scaled drawing 2

References

Table 1 References

Data Module/Technical Publication	Title
None	

Description

1 Introduction

This data module contains the scaled drawings for the Airbus A220 BD500–1A10 (A220-100).

It can be used to plan and to verify runway, ramp, and maintenance facility layouts.

Refer to Fig. 1 for the scaled drawing.

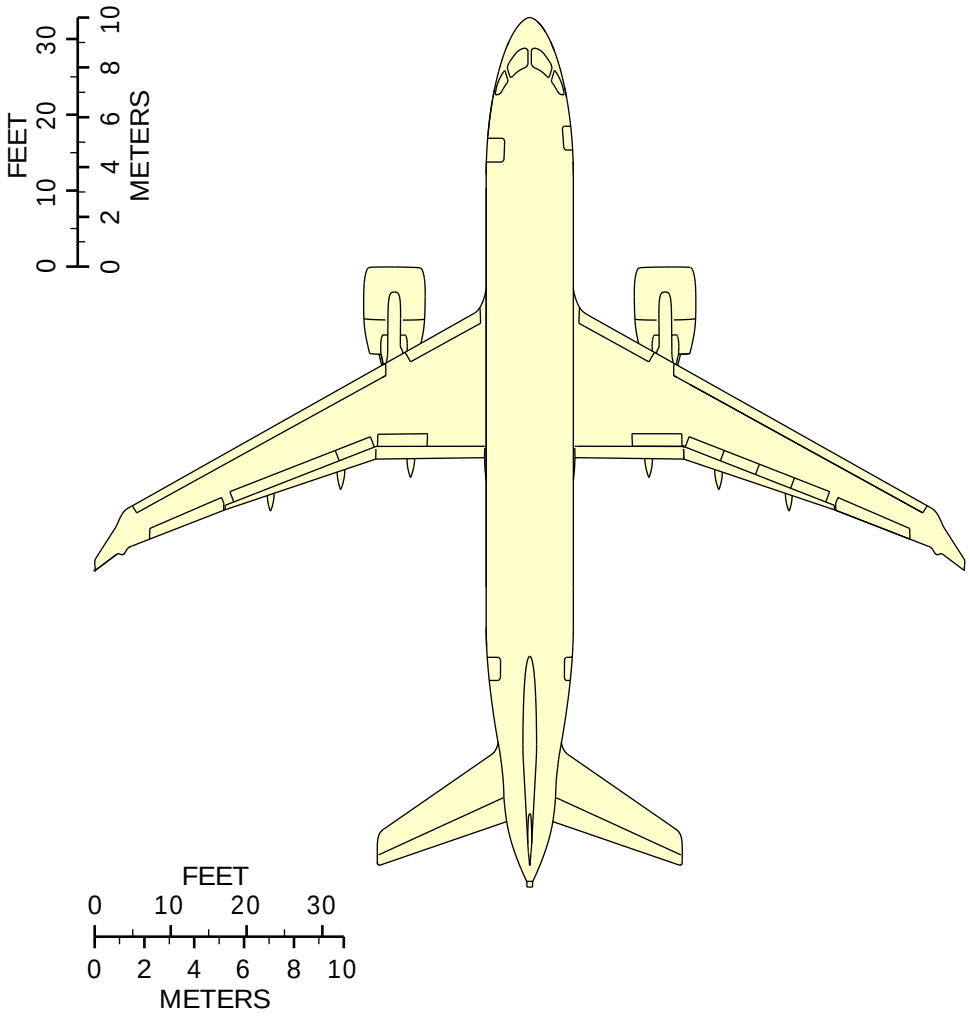

NOTES

1. Scale: 1 in. = 25 ft (1 cm = 3 m)
2. When printing this illustration, make sure to adjust for proper scaling.

ICN-BD500-A-J000000-A-3AB48-23312-A-001-01

Figure 1 Scaled drawing

A220

Scaled drawings - Technical data

Applicability:
55001-59999

Table of contents

Page

Scaled drawings - Technical data 1
References 1
Description 1
1 Introduction 1

List of tables

Page

1 References 1

List of figures

Page

1 Scaled drawing 2

References

Table 1 References

Data Module/Technical Publication	Title
None	

Description

1 Introduction

This data module contains the scaled drawings for the Airbus BD500–1A11 (A220-300).

It can be used to plan and to verify runway, ramp, and maintenance facility layouts.

Refer to Fig. 1 for the scaled drawing.

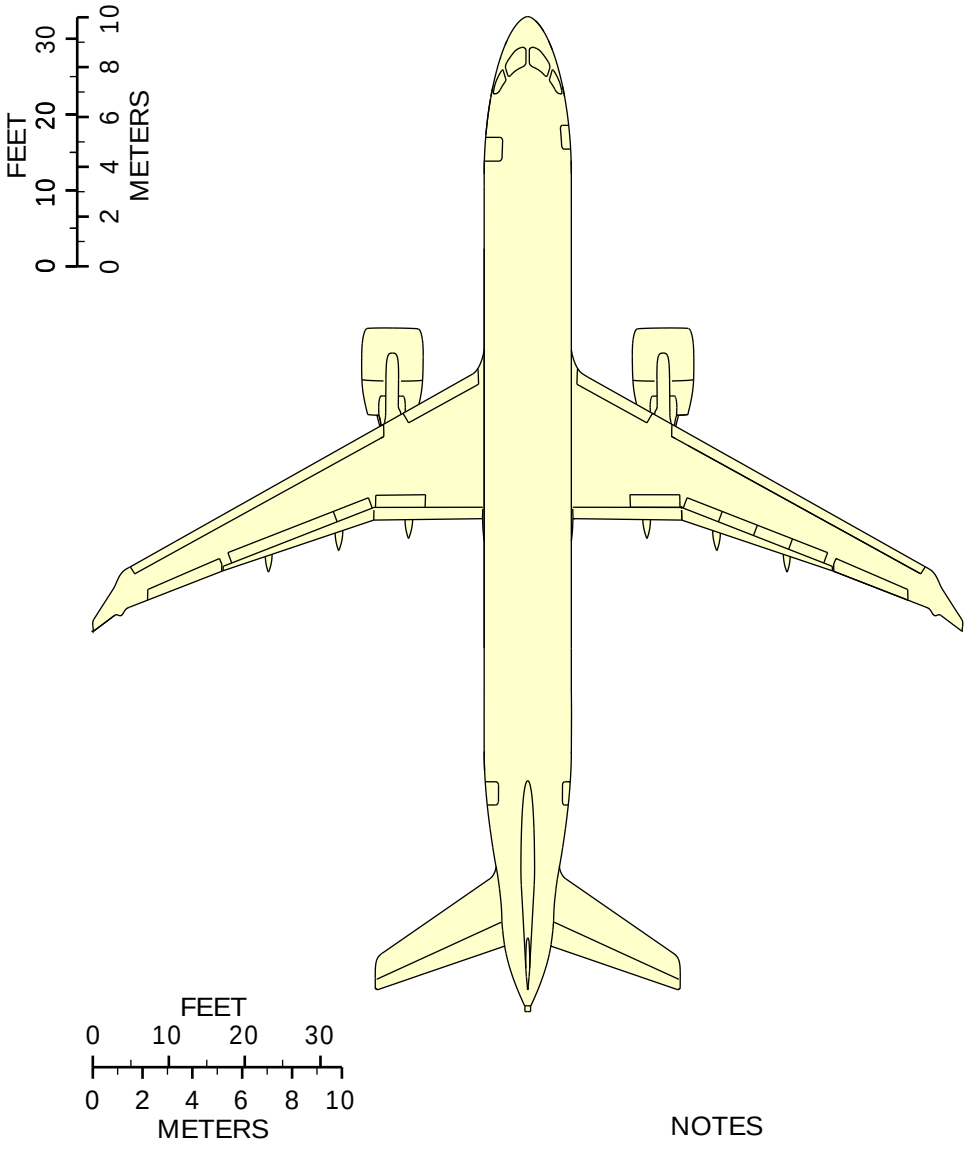

NOTES

1. Scale: 1 in. = 25 ft (1 cm = 3 m)
2. When printing this illustration, make sure to adjust for proper scaling.

ICN-BD500-A-J000000-A-3AB48-23263-A-001-01

Figure 1 Scaled drawing

Aircraft scaled down dimensions - Technical data

Applicability:
50001-54999, 55001-59999

Table of contents

Page

Aircraft scaled down dimensions - Technical data 1
References 1
Description 1
1 Introduction 1

List of tables

Page

1 References 1

List of figures

Page

1 Scaled drawing 2

References

Table 1 References

Data Module/Technical Publication	Title
None	

Description

1 Introduction

This data module contains the scaled drawing for the Airbus A220. It can be used to plan and to verify runway, ramp, and maintenance facility layouts.

Refer to Fig. 1 .

(Sheet) Applicability:
50001-54999

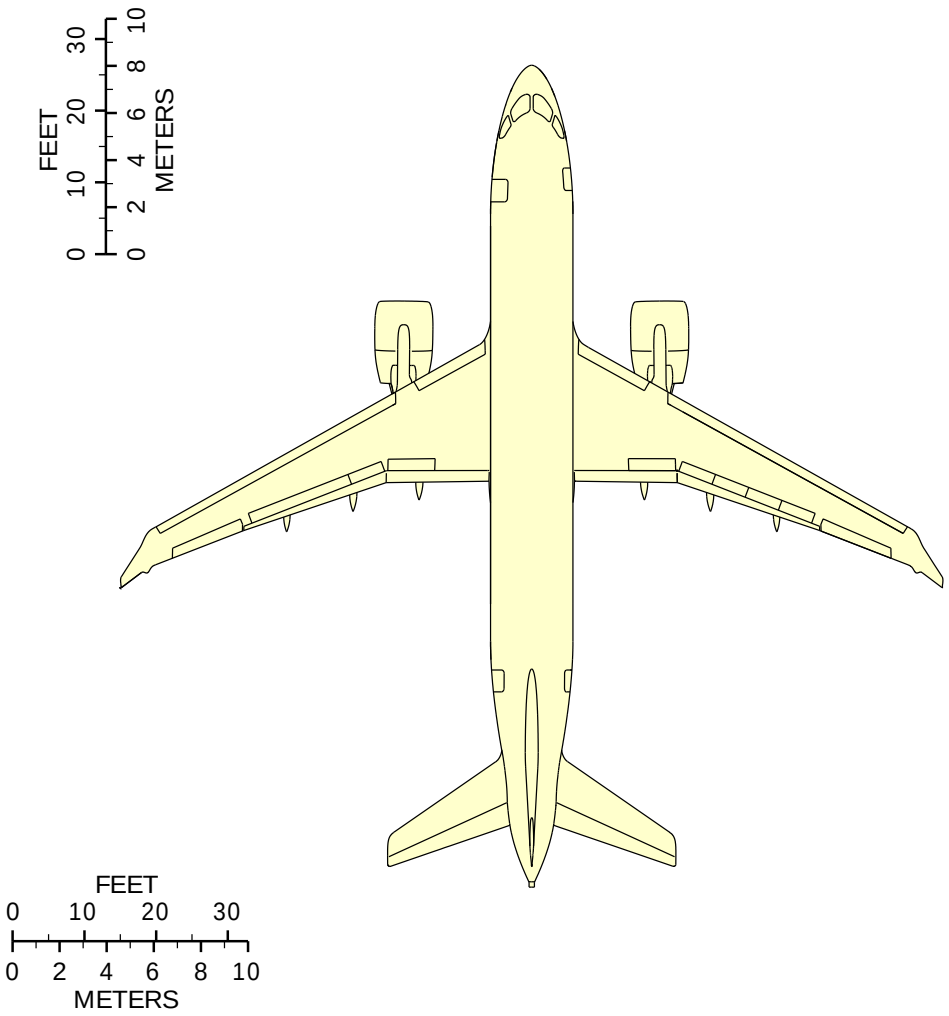

NOTES

1. Scale: 1 in. = 25 ft (1 cm = 3 m)
2. When printing this illustration, make sure to adjust for proper scaling.

ICN-BD500-A-J061000-A-3AB48-00006-A-001-01

Figure 1 Scaled drawing - (Sheet 1 of 2)

(Sheet) Applicability:
55001-59999

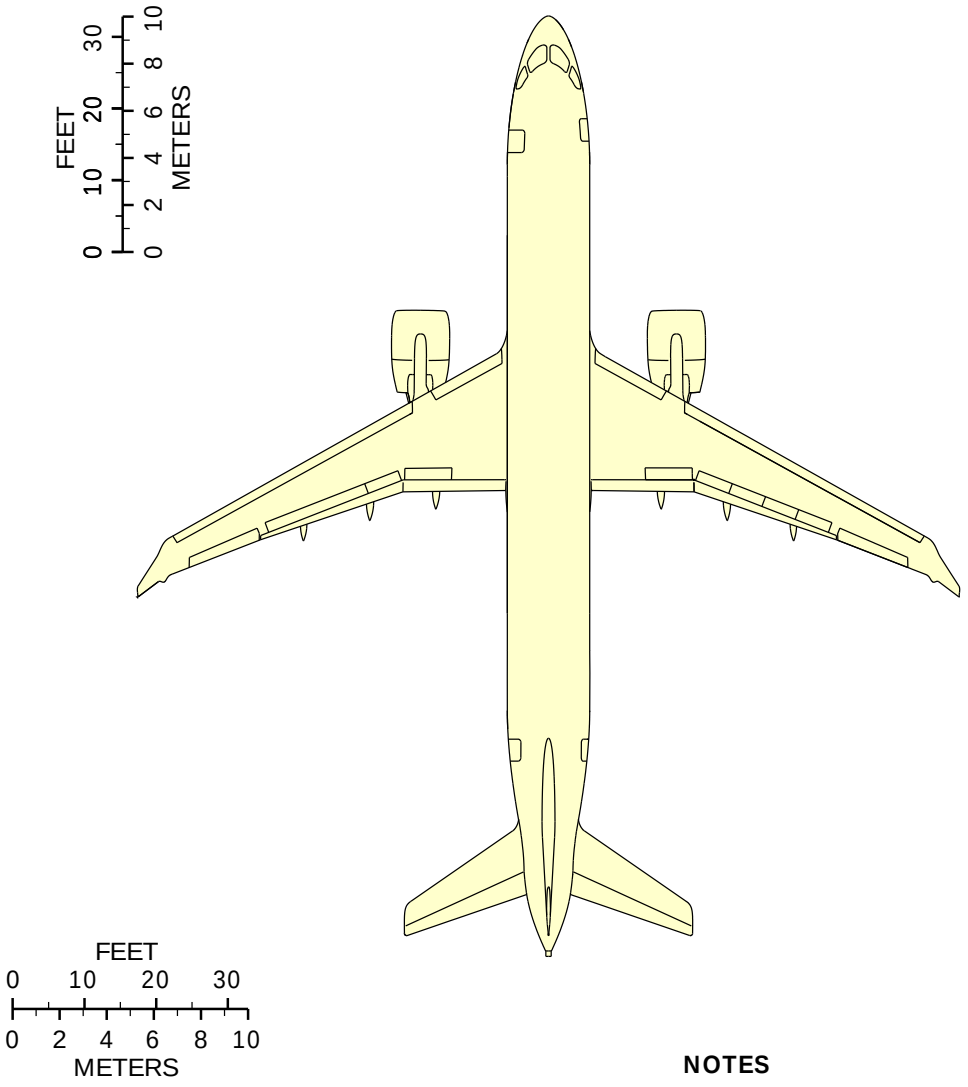

NOTES

1. Scale: 1 in. = 25 ft (1 cm = 3 m)
2. When printing this illustration, make sure to adjust for proper scaling.

ICN-BD500-A-J061000-A-3AB48-25078-A-001-01

Figure 1 Scaled drawing - (Sheet 2 of 2)

Intentionally left blank

A220

Chapter 10: Aircraft rescue and fire fighting

Intentionally left blank

A220

Emergency exits and evacuation - Technical data

Applicability:
50001-54999, 55001-59999

Table of contents

Page

Emergency exits and evacuation - Technical data 1
References 1
Description 1
1 General 1
1.1 Emergency exits and evacuation 1
1.1.1 Passenger doors 2
1.1.2 Service doors 2
1.1.3 Overwing Emergency Exit Door (OWEED) 2
1.1.4 Flight Crew Emergency Escape (FCEE) door 3

List of tables

Page

1 References 1

List of figures

Page

1 Emergency exits and evacuation 4

References

Table 1 References

Data Module/Technical Publication	Title
None	

Description

1 General

This section contains general data about the BD-500-1A10 (A220-100) and BD-500-1A11 (A220-300) aircraft emergency exits and evacuation procedures.

1.1 Emergency exits and evacuation

The emergency exits give the passengers and crew more exits which let them go out of the aircraft more quickly during an emergency. Seven exits are available if an emergency occurs, as follows

- Two passenger doors (front and aft, left side of the aircraft);
- Two service doors (front and aft, right side of the aircraft);
- Two Overwing Emergency Exit Door (OWEED) (one in each side of the aircraft);
- One Flight Crew Emergency Escape (FCEE) door (flight compartment).

Refer to Fig. 1.

1.1.1 Passenger doors

Two semi-plug type doors on the left side of the aircraft give access to the passengers and the crew. Door 1L is the primary entrance while door 2L gives a secondary entrance available for passenger and ground servicing.

Each door is classified as a type C floor level exit. Because of the sill height, each door has an emergency evacuation slide system. The door moves out from the closed position, supported by a hinged arm to stay in the open position.

The door can be operated externally or internally and has an inspection window to let the crew examine the external condition. The external handle is connected to a vent flap system to equalize the pressure between the aircraft and the ambient air.

Door opening procedure (from the external side):

Note

Before you open the doors, make sure that you fully release the pressure from the aircraft. The CABIN PRESSURE warning light panel is installed in the door window.

1 Push the flap (Fig. 1) to hold the external handle (Fig. 1).

2 Pull the external handle (Fig. 1) up to lift the door.

3 Pull the door outwards in forward direction.

4 Make sure that the hold open mechanism locks the door in the open position.

1.1.2 Service doors

Two semi-plug type doors on the right side of the aircraft give access to the forward and aft galley servicing area.

Each door is classified as a type C floor level exit. Because of the sill height, each door has an emergency evacuation slide system. The door moves out from the closed position, supported by a hinged arm to stay in the open position.

The door can be operated externally or internally and has an inspection window to let the crew examine the external condition. The external handle is connected to a vent flap system to equalize the pressure between the aircraft and the ambient air.

Door opening procedure (from the external side):

Note

Before you open the doors, make sure that you fully release the pressure from the aircraft. The CABIN PRESSURE warning light panel is installed in the door window.

1 Push the flap (Fig. 1) to hold the external handle (Fig. 1).

2 Pull the external handle (Fig. 1) up to open the door.

3 Pull the door outwards in forward direction.

4 Make sure that the hold open mechanism locks the door in the open position.

1.1.3 Overwing Emergency Exit Door (OWEED)

The OWEED are type III semi-plug type doors.

The exits are provided with an operating handle with removable cover and are fitted with a standard sized passenger compartment window. Each door is fully lined and insulated to meet thermal and noise performance requirements.

The door opens out and up from the closed position, supported by a hinged arm to stay in the open position. An actuator automatically helps the door opening sequence.

For emergency access to the passenger compartment, the doors can be opened from the external side. Escape ropes are available to help the evacuation.

Because of the height from the ground, an emergency evacuation slide system is given.

Note

The evacuation slide system is automatically operated when the OWEED is opened from the external side. Remove all equipment and personnel from the area where the emergency evacuation slide will be open.

OWEED opening procedure (from the external side):

1 Push the flap (Fig. 1) to hold the external handle (Fig. 1).

2 Pull the external handle (Fig. 1) up to open the door.

3 Pull the door outwards.

4 Make sure that the hold open mechanism locks the door in the open position.

1.1.4 Flight Crew Emergency Escape (FCEE) door

The FCEE door is on the fuselage centerline at the top of the fuselage, forward of the flight compartment bulkhead. It is a plug type door that has two hook type hinges on the aft edge.

The FCEE door opens in and can be removed from its hinges when it is fully open. The door can be operated externally or internally through its inner and outer handles.. A escape rope is available in the area to help the evacuation.

FCEE door opening procedure (from the external side):

1 Push the flap (Fig. 1) to hold the external handle (Fig. 1).

2 Pull the external handle (Fig. 1) up to open the door.

3 Push the door in.

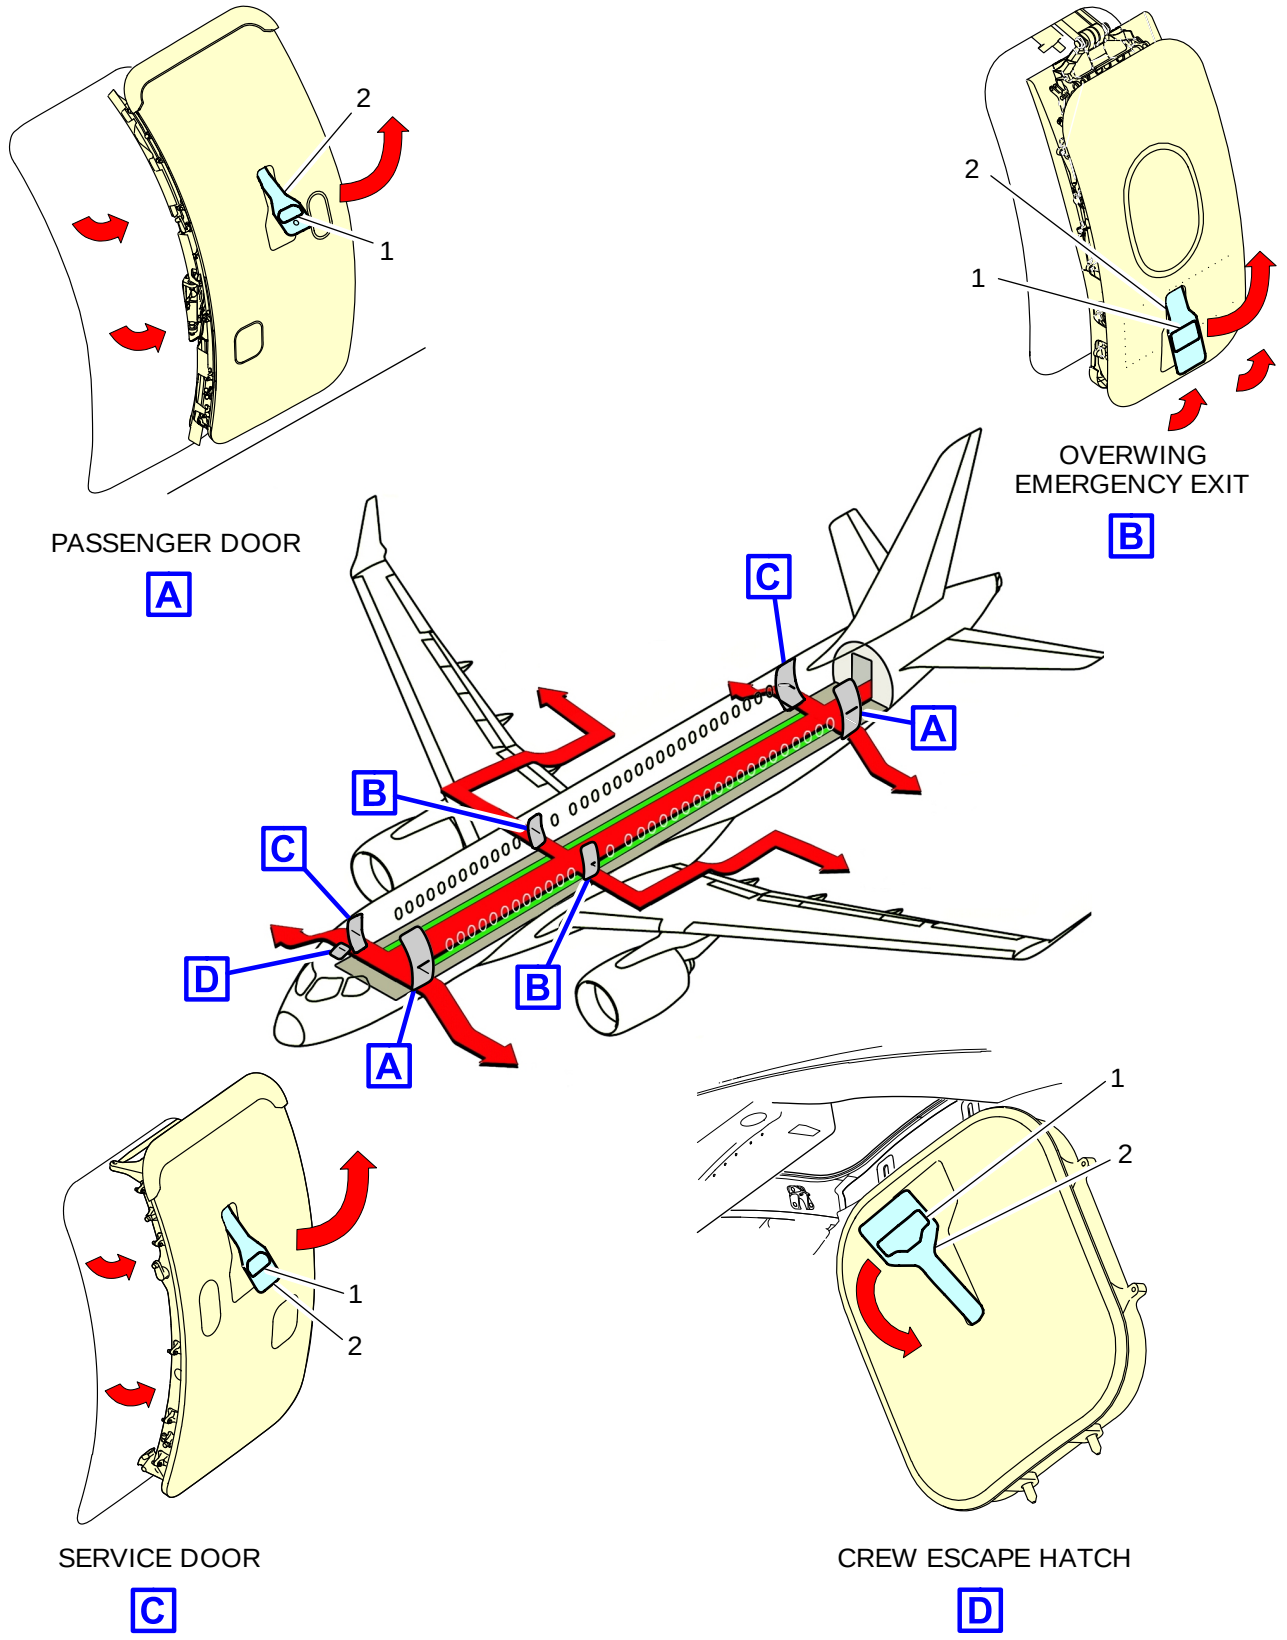

ICN-BD500-A-J154100-A-3AB48-24914-A-001-01

Figure 1 Emergency exits and evacuation

A220

Fire-fighting - Fire-fighting and rescue

Applicability:
50001-54999, 55001-59999

Table of contents

Page

Fire-fighting - Fire-fighting and rescue 1
References 1
Common information 1
Preliminary requirements 2
Procedure 2
Requirements after job completion 8

List of tables

Page

1 References 1
2 Required conditions 2
3 Support equipment 2
4 Consumables, materials, and expendables 2
5 Spares 2
6 Recommended fire fighting agents 3
7 Recommended fire fighting agents 4
8 Required conditions 8

List of figures

Page

1 Fire indication and control / Flammable material location 5
2 Fire-fighting 7

References

Table 1 References

Data Module/Technical Publication	Title
BD500-A-J25-61-00-00AAA-010A-A	Emergency equipment location - General data
BD500-A-J15-41-00-01AAA-030A-A	Emergency exits and evacuation - Technical data

Common information

This data module gives the procedure to follow if the aircraft is on fire.

Preliminary requirements

Required conditions

Table 2 Required conditions

Action/Condition	Data Module/Technical publication
None	

Support equipment

Table 3 Support equipment

Name	Identification/Reference	Quantity	Remark
None			

Consumables, materials, and expendables

Table 4 Consumables, materials, and expendables

Name	Identification/Reference	Quantity	Remark
None			

Spares

Table 5 Spares

Name	Identification/Reference	Quantity	Remark
None			

Safety conditions

None

Procedure

1 If the aircraft is on fire do as follow:

WARNING

Only trained personnel must fight the fire. Fire-fighting is dangerous and can cause injury or death.

1.1 Refer to Fig. 1 for:

- Flammable material location.
- Battery location
- Control switch location

1.2 Evacuate the aircraft, if applicable. For emergency exits and evacuation refer to BD500-A-J15-41-00-01AAA-030A-A.
1.3 If possible, move the aircraft to a safe area.
1.4 Get access to the emergency equipment available in the aircraft, if applicable. For emergency equipment location refer to BD500-A-J25-61-00-00AAA-010A-A.
1.5 In the flight deck control, use the control panels to extinguish fire in:

- Left engine
- Right engine
- Auxiliary Power Unit (APU)
- Cargo compartment

Refer to Fig. 1.

WARNING

The weakest area on a tire is the sides. Go near the tire by the front or rear to prevent injuries to personnel.

1.6 If the brakes are hot, apply a water mist to decrease the temperature of the brakes. Refer to Fig. 2.
1.7 Refer to table below for the complete list of recommended fire fight agents.

Applicability:
50001-50065, 50067-50085, 50087-54987, 55001-59999

Table 6 Recommended fire fighting agents

Engine fire	Clean agent or dry chemical
Exhaust nozzle fire	Clean agent or dry chemical
APU fire	Clean agent or dry chemical
Fuel fire	Dry chemical for leaking fuel and foam for ground spill area
Wheel and brake fire	Water or dry powder
Electrical fire	Clean agent or dry chemical
Flight compartment and cabin area fire	Clean agent 1211, or dry powder, or water extinguisher

Cargo compartment fire	Clean agent
Aft equipment compartment fire	Clean agent

Applicability:
50066, 50086

Table 7 Recommended fire fighting agents

Engine fire	Clean agent or dry chemical
Exhaust nozzle fire	Clean agent or dry chemical
APU fire	Clean agent or dry chemical
Wheel and brake fire	Water or dry powder
Electrical fire	Clean agent or dry chemical
Flight compartment and cabin area fire	Clean agent 1211, or dry powder, or water extinguisher
Forward cargo compartment fire	Clean agent
Aft equipment compartment fire	Clean agent
Aft accessory compartment-Auxiliary Center Tank (ACT)	Dry chemical for leaking fuel and foam for ground spill area

(Sheet) Applicability:
50001-50065, 50067-50085, 50087-54987, 55001-59999

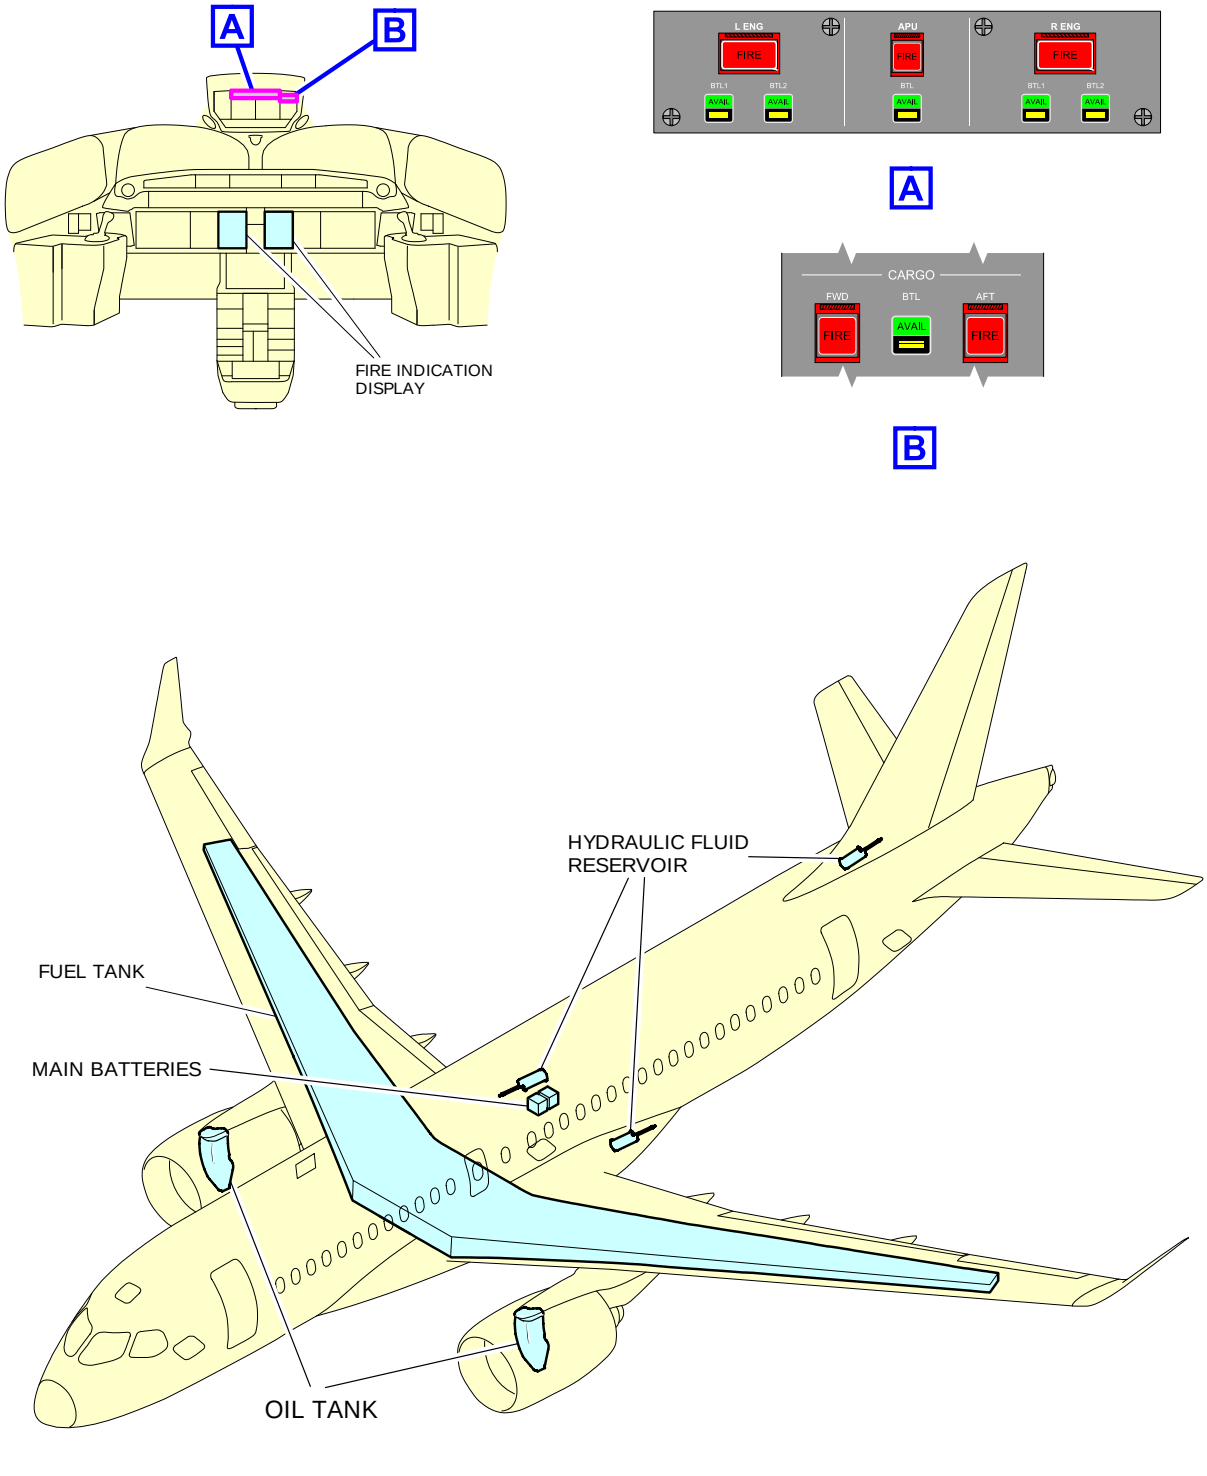

ICN-BD500-A-J154100-A-3AB48-25025-A-001-01

Figure 1 Fire indication and control / Flammable material location - (Sheet 1 of 2)

(Sheet) Applicability:
50066, 50086

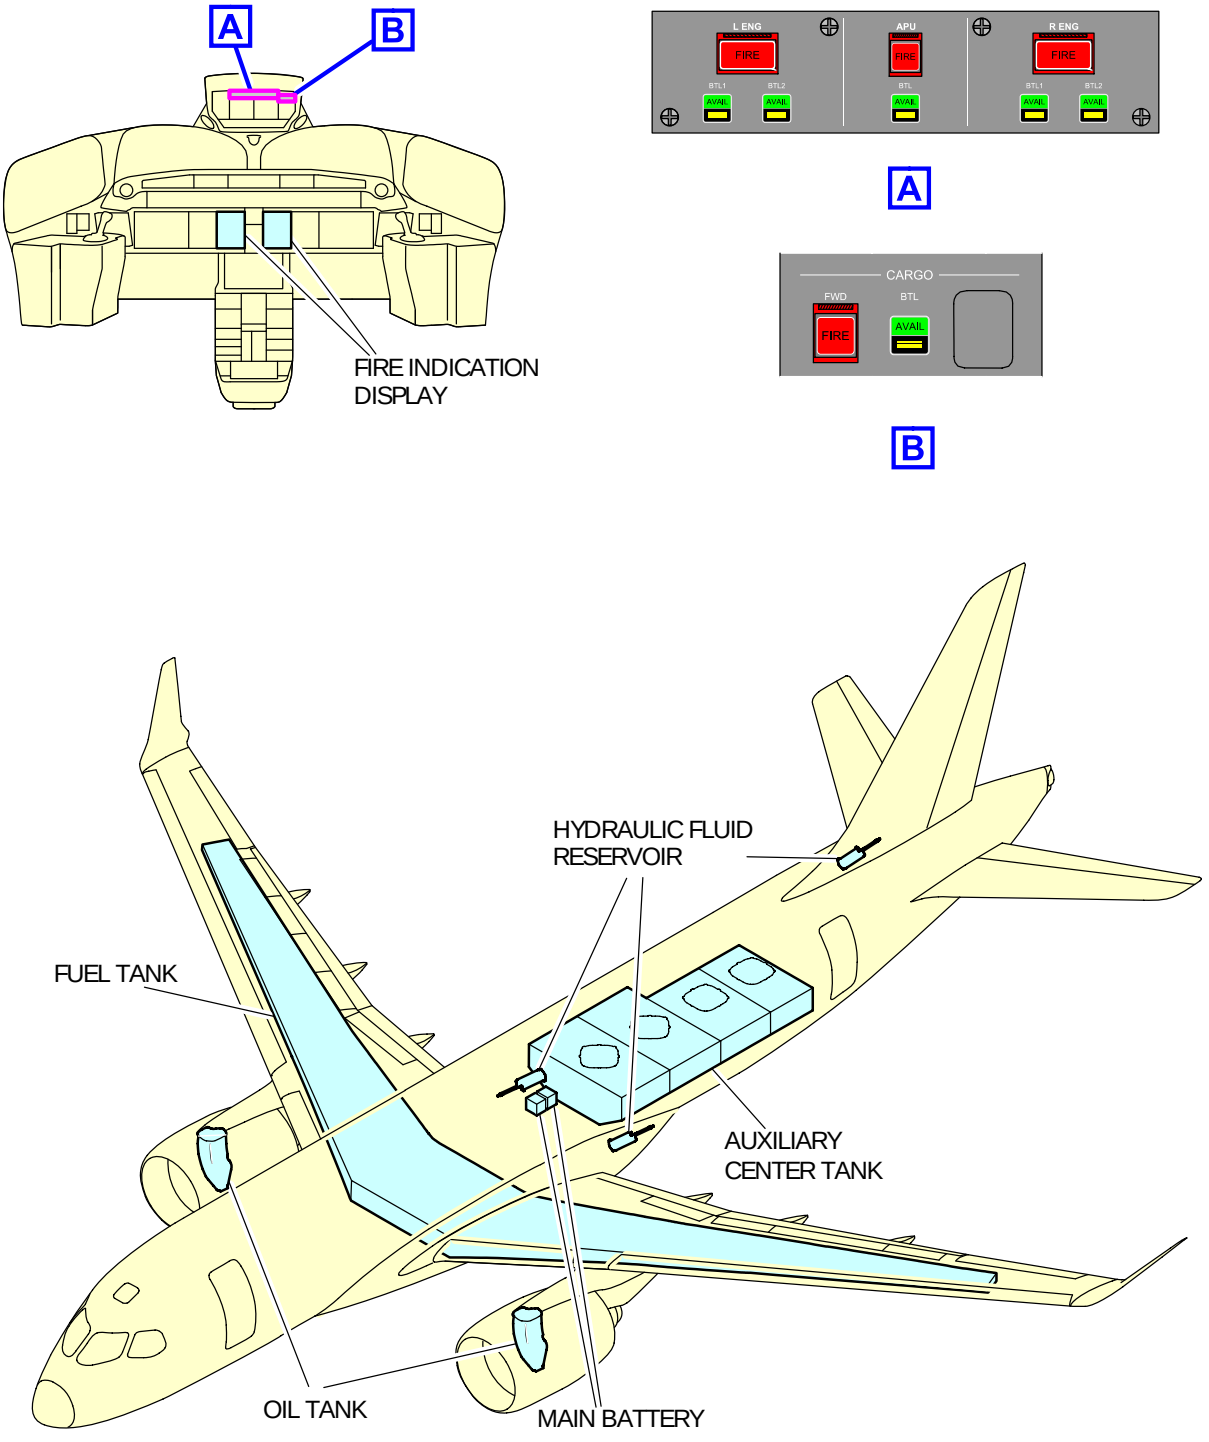

ICN-BD500-A-J154100-C-3AB48-79159-A-001-01

Figure 1 Fire indication and control / Flammable material location - (Sheet 2 of 2)

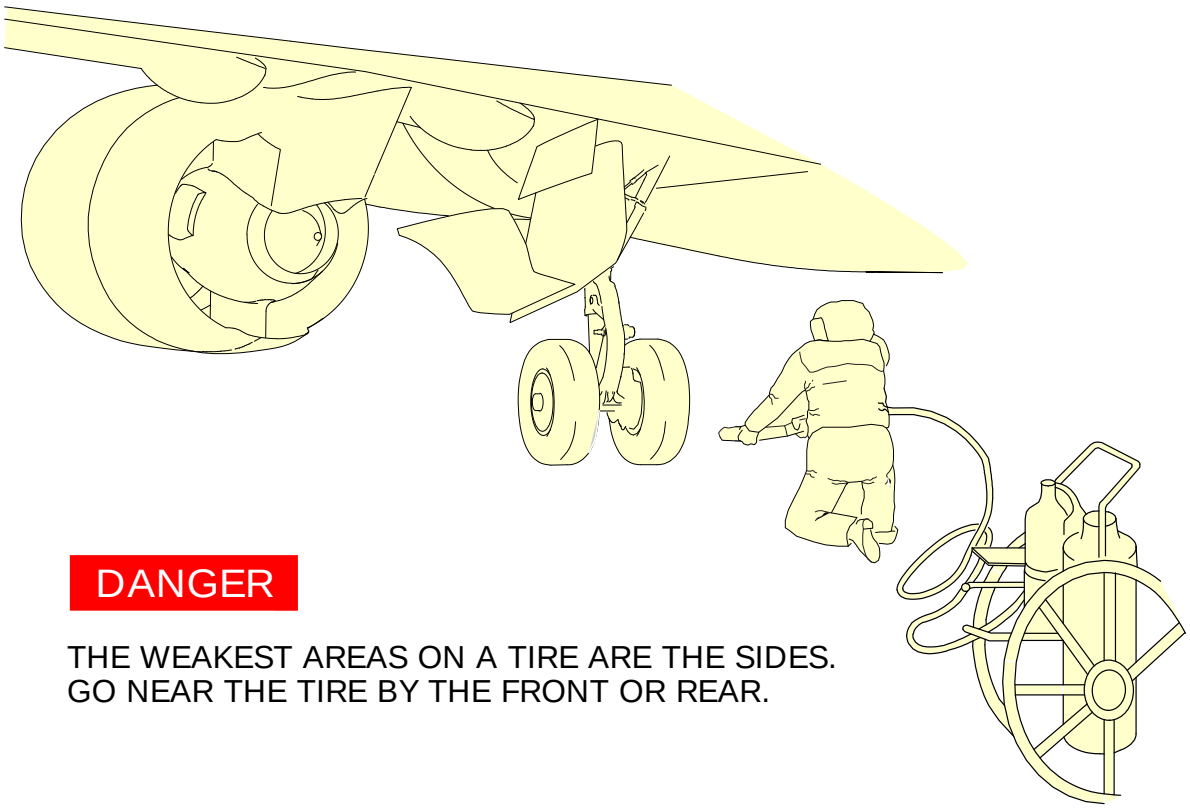

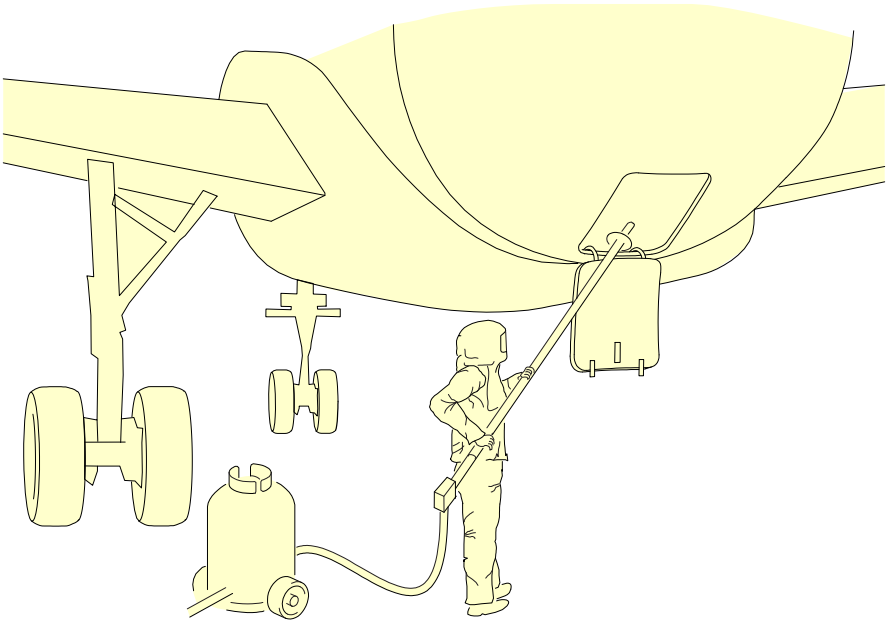

ICN-BD500-A-J154100-A-3AB48-25142-A-001-01

Figure 2 Fire-fighting

Requirements after job completion

Required conditions

Table 8 Required conditions

Action/Condition	Data Module/Technical publication
None	

A220

Chapter 11: Fire Protection

Intentionally left blank

A220

Cargo compartment and fire protection system safety risk assessment - Technical data

Applicability:
50001-54999, 55001-59999

Table of contents

Page

Cargo compartment and fire protection system safety risk assessment - Technical data 1
References 1
Description 1
1 Introduction 1
2 General 2
3 Cargo Compartment 2
4 Fire Suppression System 6
5 References 8

List of tables

Page

1 References 1
2 Cargo Compartments Volume Capacity 6
3 Firex bottle type 8

List of figures

Page

1 Aircraft Side View – Cargo Compartments 3
2 Aircraft Side View – Cargo Compartments 5

References

Table 1 References

Data Module/Technical Publication	Title
None	

Description

1 Introduction

This section provides the characteristics, technical specifications, certification requirements and capabilities of the cargo compartments and associated fire protection systems of the A220-100 and A220-300 aircraft (Models: BD500-1A10 and BD500-1A11). This information can be used by the Operator when conducting safety risk assessments of operations involving the aircraft cargo compartment.

2 General

Applicability:
50001-50065, 50067-50085, 50087-54987

The A220 aircraft has two underfloor cargo compartments, accessible from the ground under normal operations; one in the forward section and one in the aft section of the aircraft.

Applicability:
50066, 50086

The A220 aircraft has one underfloor cargo compartments, accessible from the ground under normal operations in the forward section is the cargo compartment and one in the aft section of the aircraft is the aft accessory compartment having Auxiliary Center Tank (ACT) which holds additional fuel.

The aircraft is certified and fully meets the requirements of Transport Canada Civil Aviation (TC-CA) CAR-Part V, Airworthiness Manual (AWM) Chapter 525, Federal Aviation Administration (FAA) 14 Code of Federal Regulations (CFR) Part 25, and European Aviation Safety Agency (EASA) CS 25, Airworthiness Standards for Transport Category Airplanes.

3 Cargo Compartment

General

The cargo compartments of the A220-100 and A220-300 are similar in that they share the same design characteristics and features (i.e. construction-assembly, materials, fire protection), except for the length-volume of compartments.

The cargo compartments are categorized as Class C cargo compartments and meet the certification requirements of § 525/25.857.

The cargo compartments are designed for bulk loading/loose, individually loaded baggage & cargo, and cargo door protective nets and cargo load divider nets are provided.

Three cargo lights are provided in each compartment which includes a protective clear polycarbonate lens and is activated by a light switch on the cargo door surround panel.

Location

The two cargo compartments are underfloor, and located forward and aft of the aircraft wing. The Fwd cargo compartment is located between the forward avionics bay and the Environmental Control System (ECS) compartment.

The Aft cargo compartment is located between the mid avionics bay and the water system compartment.

They are accessed through their respective cargo doors on the right hand side of the aircraft.

(Sheet) Applicability:
50001-50065, 50067-50085, 50087-54987

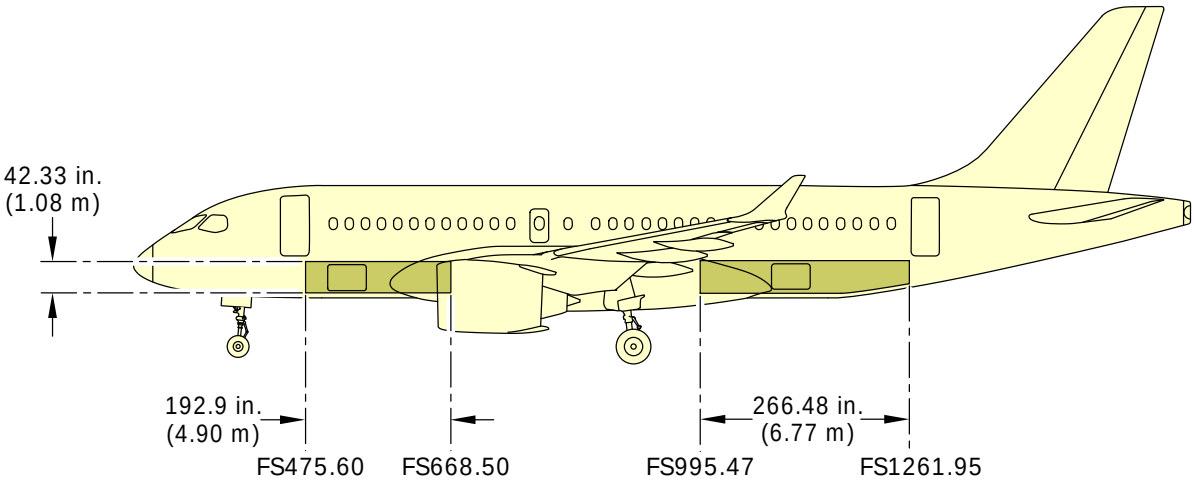

ICN-BD500-A-J084305-A-3AB48-10441-A-001-01

Figure 1 Aircraft Side View – Cargo Compartments - (Sheet 1 of 2)

(Sheet) Applicability:
50066, 50086

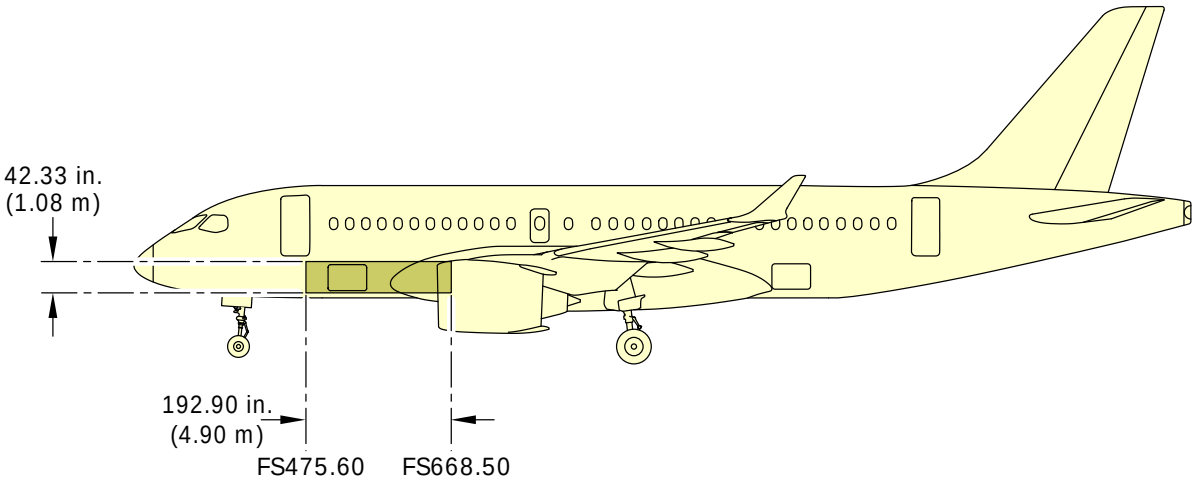

LEGEND

Cargo compartment region.

ICN-BD500-A-J000000-C-3AB48-79175-A-001-01

Figure 1 Aircraft Side View – Cargo Compartments - (Sheet 2 of 2)

Applicability:
55001-59999

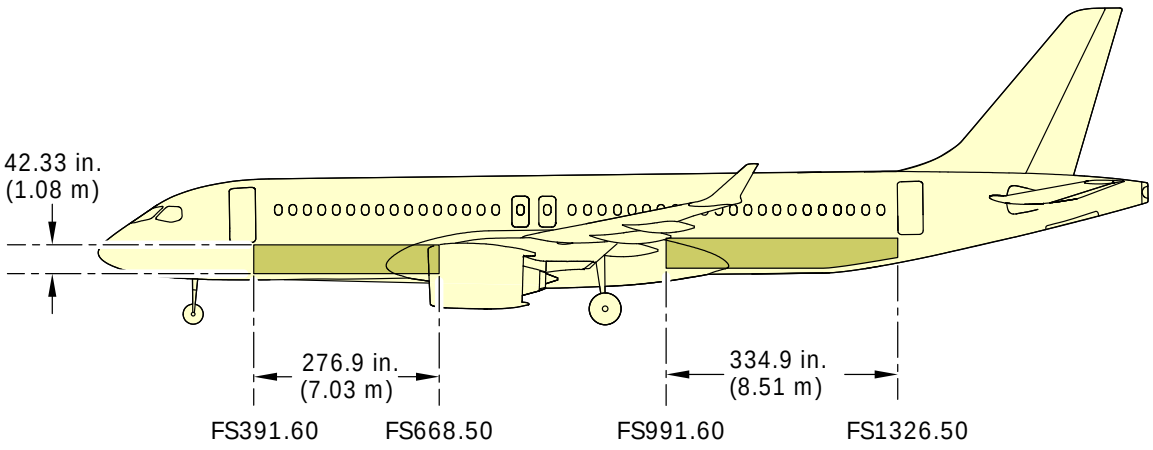

ICN-BD500-A-J084305-A-3AB48-24365-A-001-01
Figure 2 Aircraft Side View – Cargo Compartments

Volume

The cross-section area of the Fwd cargo compartments and the Aft compartment are the same, however the Aft compartment area does reduce towards the aft bulkhead of the compartment.

Table 2 Cargo Compartments Volume Capacity

Aircraft Model	Volume Capacity	
	FWD Cargo Compartment	AFT Cargo Compartment
A220-100	365 ft^3(10.3m^3)	474 ft^3 (13.4 m^3)
A220-300	524 ft^3 (14.8 m^3)	594 ft^3 (16.8 m^3)

Compartment Materials

The cargo compartments contain ceiling panels, vertical sidewall panels, curved sidewall panels, floor panels, bulkhead panels, door liners, grills and ducting. The compartment panels, liners and design features installed in them (i.e. blow out panels, lamp assemblies, ducting, smoke detector mounts, etc.) are designed to contain cargo fires and prevent the fire and smoke from entering the passenger compartment.

The ceiling and vertical sidewall panels are made of 1-ply composite laminate facings with a Nomex honeycomb core. The bulkhead panels are made of Aluminum sheet facings with an Aluminum honeycomb core. The reinforced flat floor panels and curved sidewall panels are made with a Nomex honeycomb core, a single-ply composite laminate facing on the lower surface and a 6-ply composite laminate facing on the top surface and edges of the panels. All the joints between the panels are sealed and covered with flame-resistant tape.

The ceiling panels, vertical sidewall panels, curved sidewall panels, and bulkhead panels used in the construction of the Class C cargo compartments meet the certification requirements of § 525/25.855 and § 525/25.857 and the applicable test criteria prescribed in Part III of Appendix F of Part 25. The floor panels used in the construction of the Class C cargo compartments meet the certification requirements of § 525/25.853 and the applicable test criteria prescribed in Part I of Appendix F of Part 25.

The capabilities of the cargo compartments to contain a cargo fire and resist flame penetration are demonstrated by testing the sidewall and ceiling panels, joints, and the design features. The panels / features are exposed to a flame source at 1700 °F ±100 °F (927 °C ±38 °C) with a heat flux of 8.0 ±0.5 BTU/ft^2 sec. (9.1 ±0.6 Watts/cm^2). The flame source is set 8 inches (20 cm) under the horizontal ceiling panel and 2 inches (50 mm) from the vertical sidewall panel for 5 minutes. Under these test conditions, the panels / features showed no flame penetration and the temperature measured 4 inches above the upper surface of the horizontal ceiling panels did not exceed 400 °F (204 °C) during the 5 minutes.

The fire resistance characteristics of the materials used in the construction of the cargo compartment floor panels are demonstrated through testing to ensure that a 1550 °F (843 °C) flame does not penetrate through the panel when the panel is set at a 45 degrees angle and subjected to the flame for 15 seconds. In addition, the average flame time after removal of the flame source and the average glow time must not exceed 15 seconds and 10 seconds respectively.

4 Fire Suppression System

General

The A220 Class C cargo compartments are equipped with a ventilation, smoke detection and a built-in fire suppression system that meet the certification requirements of § 525/25.365, § 525/25.795, § 525/25.851, § 525/25.855, § 525/25.857 and § 525/25.858.

Ventilation

Each cargo compartment is ventilated and includes inlet and outlet ducting, pressure equalization valves, and decompression panels. Only the forward compartment is provided with temperature controlled conditioned air.

Two Cargo Shut-Off Valves (CSOV) are provided in each cargo compartment and are installed in the cargo ventilation ducting lines, one at the inlet and the other at the outlet of the cargo compartments, providing isolation capability for fire extinguishing.

The CSOVs remain open for normal operating condition with the RFAN running. In case of smoke detected in the forward or aft cargo compartments, the CSOV's are automatically driven closed by the Integrated Air System Controllers Integrated Air System Controller (IASC). When the recirculation is selected off, ventilation to both forward and aft cargo bays is automatically shut-off by the Integrated Air System Controller (IASC) closing all CSOV's, unless heating of the forward cargo is selected, in which case ventilation to the forward cargo is ensured with fresh air ducted from the mixing manifold.

The ventilation air to forward and aft cargo compartments can be shut off manually by flight crew by selecting the CARGO FWD or CARGO AFT switches to OFF.

Decompression panels in the compartment are designed to protect the structure and open inward or outward when the pressure differential between compartments reaches the activation pressure of 1.45 ± 0.55 psi (inward) and 1.80 ±0.20 psi (outward).

Each decompression panel has a protective cage to prevent possible damage or blockage from baggage.

The cockpit and cabin air distribution system has been designed and flight tested to prevent smokes penetration to the occupied areas such as cockpit and cabin compartments.

Smoke Detection System

The smoke detection system is common on the A220-100 and A220-300. Each cargo compartment includes four photoelectric based open area smoke detectors. Each smoke detector is protected with a protective cage, proud of the ceiling panel, to prevent potential damage during baggage loading or shifting. In addition a cargo loading limit line (max baggage height) is marked on the cargo sidewall & bulkhead panels, around the perimeter of the compartment, to ensure free air movement to the smoke detectors.

Smoke detection provides aural alarm and visual indication in the flight deck.

The cargo smoke detectors have been certified to Time Since Overhall (TSO)C1d. The cargo smoke detectors report alarm when the smoke is detected or ambient temperature of 100 °C (212 °F) is reached.

The cargo smoke detection certification flight test was performed using a simulated smoldering fire as per FAA AC 25-9A to report the smoke alarm to cockpit within 1 minute of smoke production.

The flight test has demonstrated that the cargo fire extinguishing agent will not penetrate to the occupied compartments such as cockpit and cabin compartments. The leakage of the forward and aft cargo compartments are verified on each production aircraft as part of production functional test.

Fire Suppression System

The aircraft has a built-in cargo fire suppression system which is common for the Fwd and Aft cargo compartments. The suppression is provided by a High Rate Discharge (HRD) extinguish-

er and re-ignition is suppressed by a Low Rate Discharge (LRD) extinguisher that utilizes internal metering units to regulate the flow of agent for the basic aircraft.

The fire extinguishing agent used in the cargo compartment is Halon 1301 (Bromotrifluoromethane $CBrF^3$).

The part numbers of the cargo fire extinguisher bottles for the baseline A220-100 and A220-300 are the same. The HRD bottle is common and the baseline LRD provides 60 minutes fire suppression. For Extended-Range Twin-Engine Operational Performance Standards (ETOPS) selectable options are available for additional LRD to provide 120 minutes or 180 minutes fire suppression.

The fire suppression system is designed for one fire event in either the Fwd or Aft cargo compartment. The probability of a fire event occurring in both cargo compartments on the same flight is deemed extremely improbable.

The fire suppression system is activated and extinguishing agent is distributed to the Fwd or Aft cargo compartment by depressing the appropriate switch in the flight deck.

The cargo fire extinguisher bottles are located on a rack in the aircraft belly fairing, with tubing running along the centerline of each cargo compartment and ending with three Firex nozzles in the Fwd compartment and four Firex nozzles in the Aft compartment. Each Firex nozzle is protected with a protective cage, proud of the ceiling panel, to prevent potential damage during baggage loading or shifting.

Flight test demonstrated compliance and validated the fire suppression duration for baseline and ETOPS.

Table 3 Firex bottle type

Fire Extinguisher Bottle Type	Quantity	Capacity Per Unit	Halon Weight Per Unit
HRD (Baseline and ETOPS)	1	375 in^3 (6145 cm^3)	15.40 lbs (6.98 kg)
LRD (Baseline 60 minutes)	1	1400 in^3 (22942 cm^3)	40.80 lbs (18.50 kg)
LRD (ETOPS 120 minutes option)	2	1400 in^3 (22942 cm^3)	31.50 lbs (14.29 kg)
LRD (ETOPS 180 minutes option)	2	1400 in^3 (22942 cm^3)	46.00 lbs (20.86 kg)

5 References

Regulations & Guidance

EASA CS 26	Certification Specifications and Guidance Material for Additional Airworthiness Specifications for Operations [§ CS26.175 Cargo compartment fire protection]

FAA AC 120-121	Safety Risk Management Involving Items in Aircraft Cargo Compartments
ICAO Doc. 10102	Guidance for Safe Operations Involving Aeroplane Cargo Compartments
ICAO Annex 6	Operation of Aircraft, Part I – International Commercial Air Transport-Aeroplanes [Chapter 15, Cargo Compartment Safety]

Airbus Publications

Reference Publications available to Operators (related to cargo compartments and cargo compartment fire protection)

Note

This is not an exhaustive list of documents

BD500-3AB48-13200	System Description and Function Publication (SDFP)
- BD500-A-J21-…	- Environmental control
- BD500-A-J26…	- Fire protection
- BD500-A-J50…	- Cargo and accessory compartments
BD500-3AB48-13800-00	Aircraft Characteristics Publication (ACP)
- BD500-A-J00-00	- A220 Aircraft Description, General
- BD500-A-J14-20	- Product Loading and offloading-Cargo
BD500-3AB48-22600-01	Flight Crew Operating Manual, Vol. 1 (A220-100)
- Chapter 2	- Air conditioning, bleed air and pressurization
- Chapter 9	- Fire and overheat protection
BD500-3AB48-32600-01	Flight Crew Operating Manual, Vol. 1 (A220-300)
- Chapter 2	- Air conditioning, bleed air and pressurization
- Chapter 9	- Fire and overheat protection
BD500-3AB48-22100-00	Weight and Balance Manual (A220-100)
- Chapter 60	- Cargo
BD500-3AB48-32100-00	Weight and Balance Manual (A220-300)
- Chapter 60	- Cargo
BD500-3AB48-10200-00	Aircraft Maintenance Publication (AMP)
- BD500-A-J06-48…	- Dimensions and areas-Cargo & avionics compartment Access

- BD500-A-J21…
- BD500-A-J26…
- BD500-A-J50…
- Environmental control
- Fire protection
- Cargo and accessory compartments