
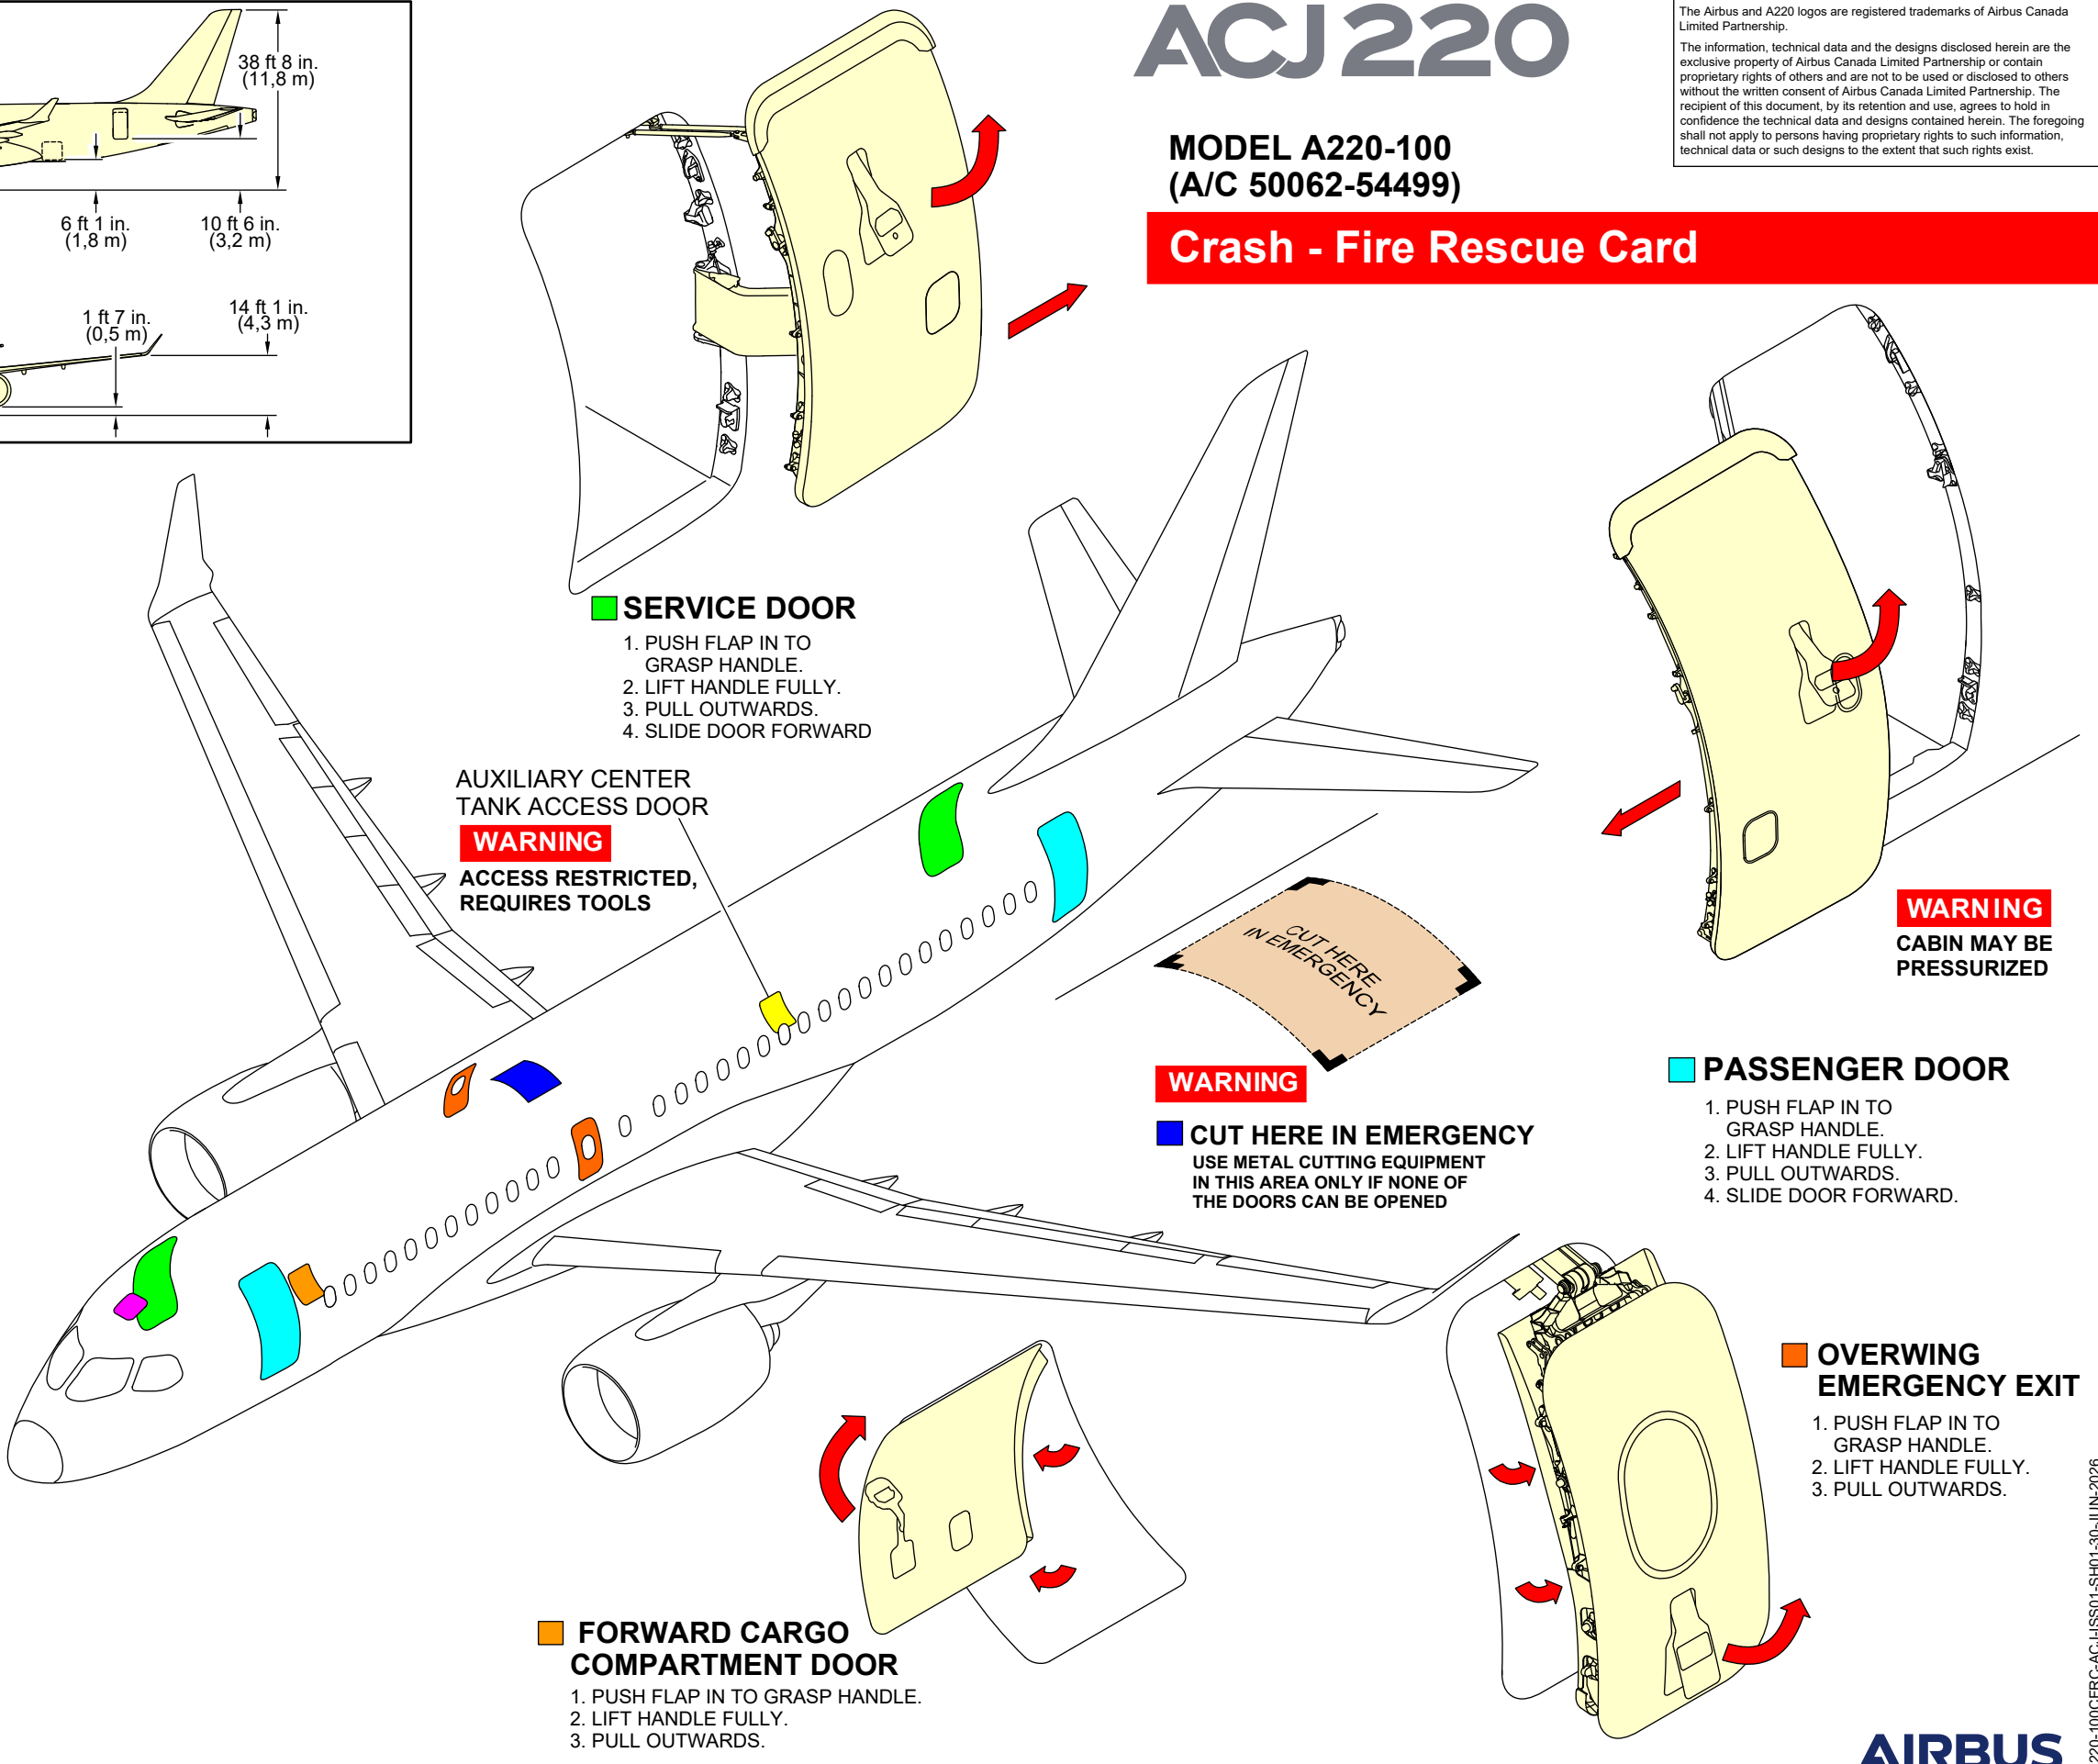
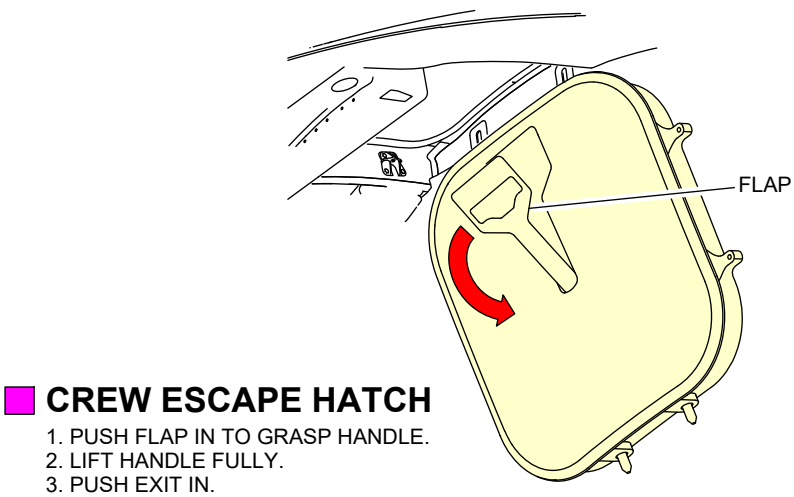
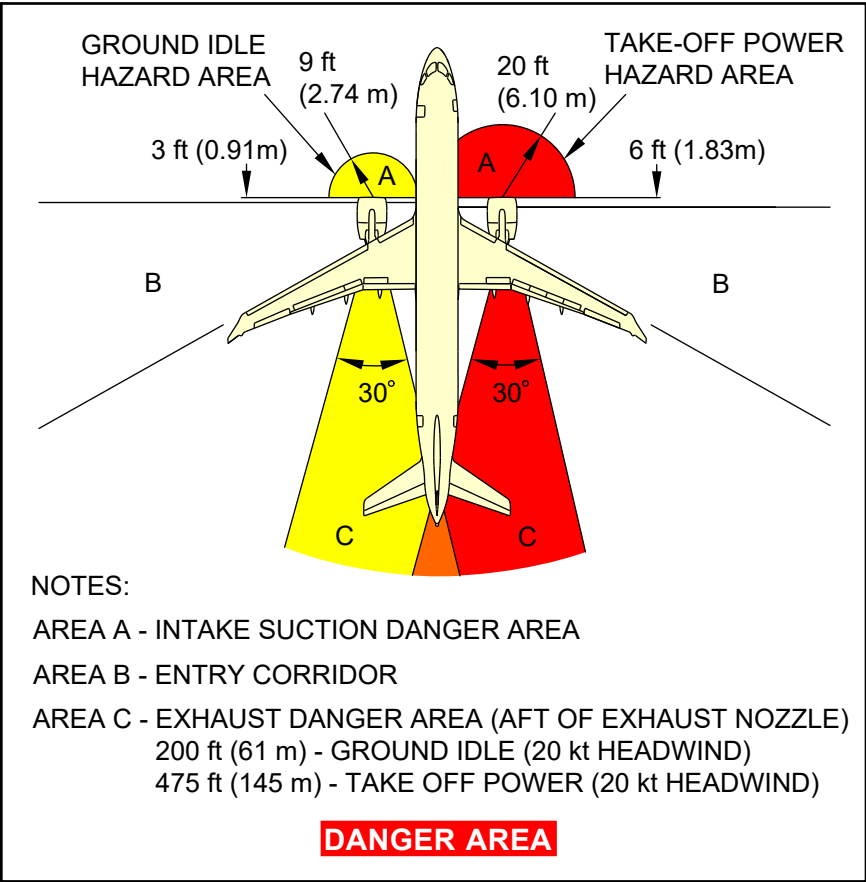



EMERGENCY RESCUE ACCESS AND SERVICE DOORS

GENERAL INFORMATION	
MAXIMUM CAPACITY	
PASSENGER	CREW
No PAX	3
MAXIMUM FUEL CAPACITY	
48564 lb (22051 kg)	
7101 U.S. gal (26884 L)	

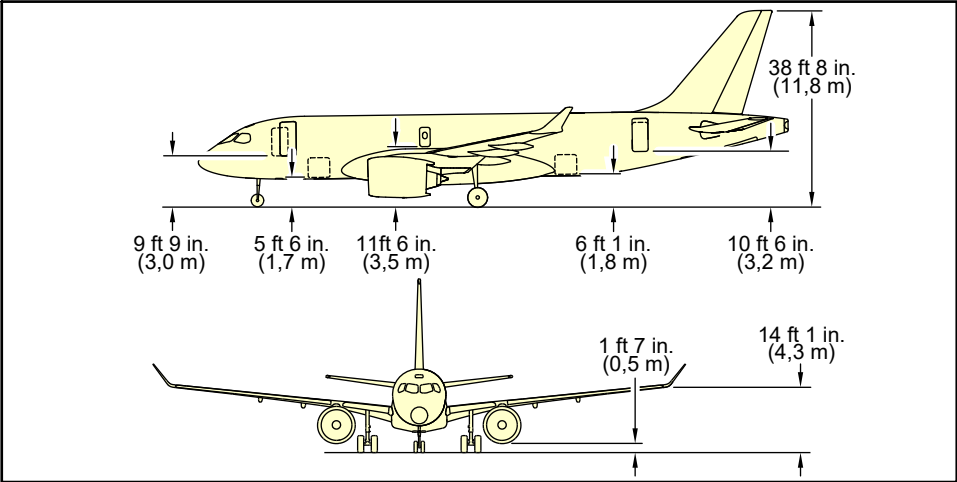


Copyright © Airbus Canada Limited Partnership
All rights reserved. No part of this work may be reproduced or copied in any form or by any means without written permission of Airbus Canada Limited Partnership.
The Airbus and A220 logos are registered trademarks of Airbus Canada Limited Partnership.
The information, technical data and the designs disclosed herein are the exclusive property of Airbus Canada Limited Partnership or contain proprietary rights of others and are not to be used or disclosed to others without the written consent of Airbus Canada Limited Partnership. The recipient of this document, by its retention and use, agrees to hold in confidence the technical data and designs contained herein. The foregoing shall not apply to persons having proprietary rights to such information, technical data or such designs to the extent that such rights exist.


FLAMMABLE MATERIAL AND INTERPHONE LOCATION

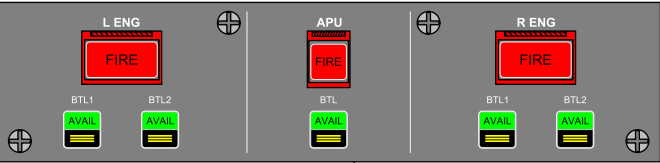

NOTE
TO DISCHARGE ENGINES,
CARGO AND APU,
FIRST LIFT GUARD
THEN PUSH.

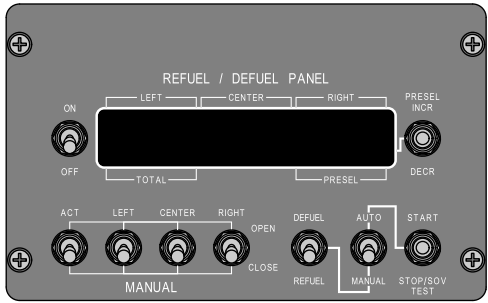


**REFUEL DEFUEL
CONTROL PANEL**

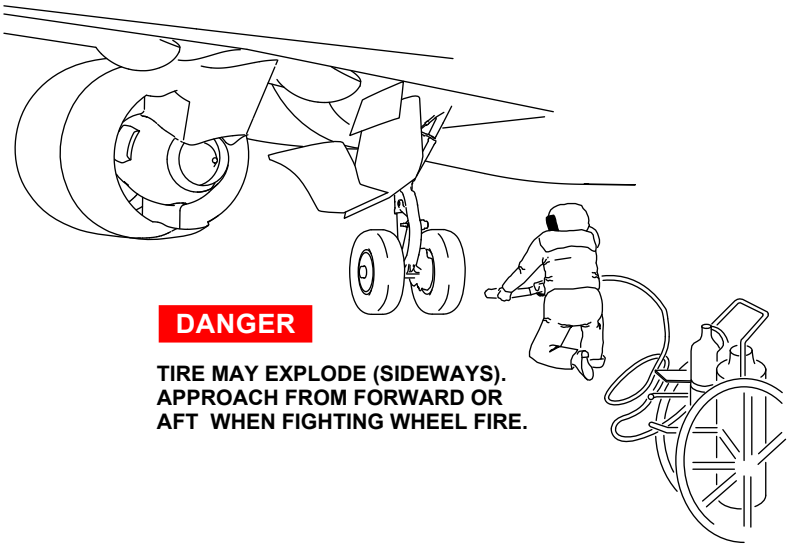


DANGER


**TIRE MAY EXPLODE (SIDWAYS).
APPROACH FROM FORWARD OR
AFT WHEN FIGHTING WHEEL FIRE.**

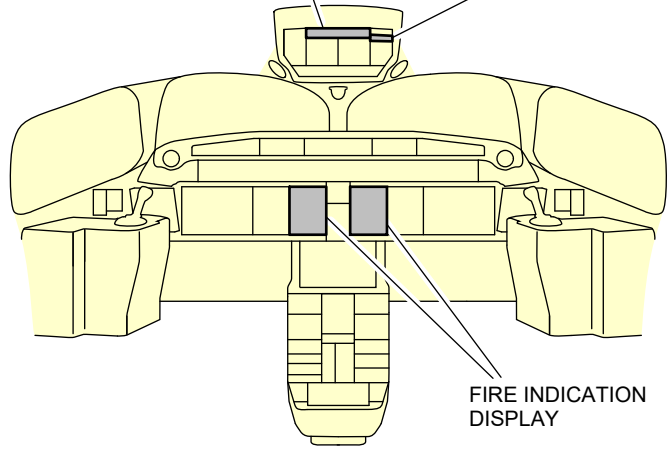

**FIRE INDICATION
DISPLAY**

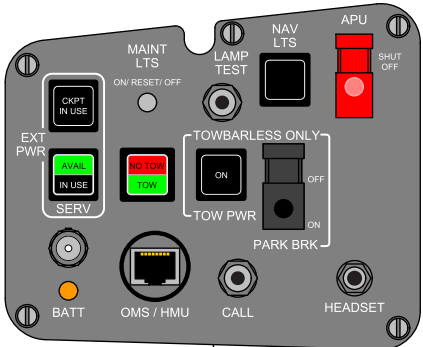

**FLIGHT COMPARTMENT
PROTECTIVE BREATHING
EQUIPMENT**

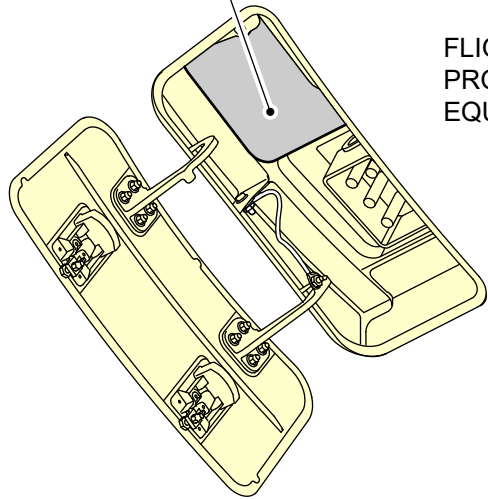


EXTERNAL SERVICE PANEL

1. DISENGAGE LATCHES.
2. OPEN PANEL DOOR FORWARD.

**FORWARD
EQUIPMENT
BAY DOOR**

1. PRESS RELEASE
BUTTON. HANDLE
WILL SPRING OUT.
2. TURN HANDLE
COUNTERCLOCKWISE.
3. PUSH DOOR INWARD.
4. SLIDE DOOR REARWARD.

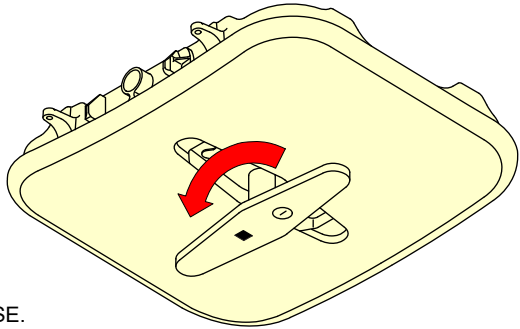





1

**MID EQUIPMENT
BAY DOOR**

1. PRESS RELEASE BUTTON.
2. PULL HANDLE DOWN.
3. PUSH DOOR INWARD.

NOTE

- 1 Access door located on WTBF.

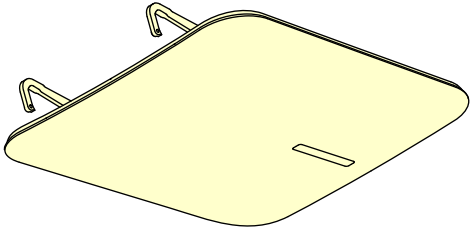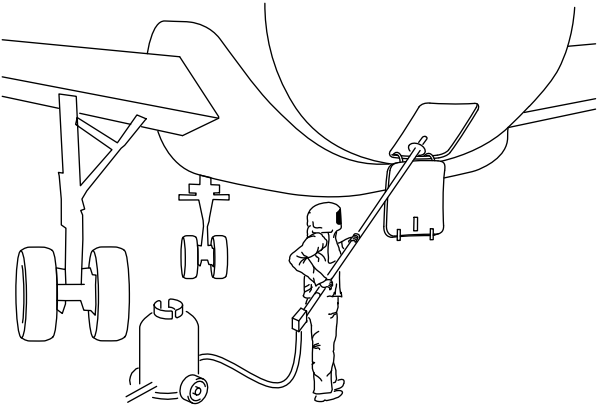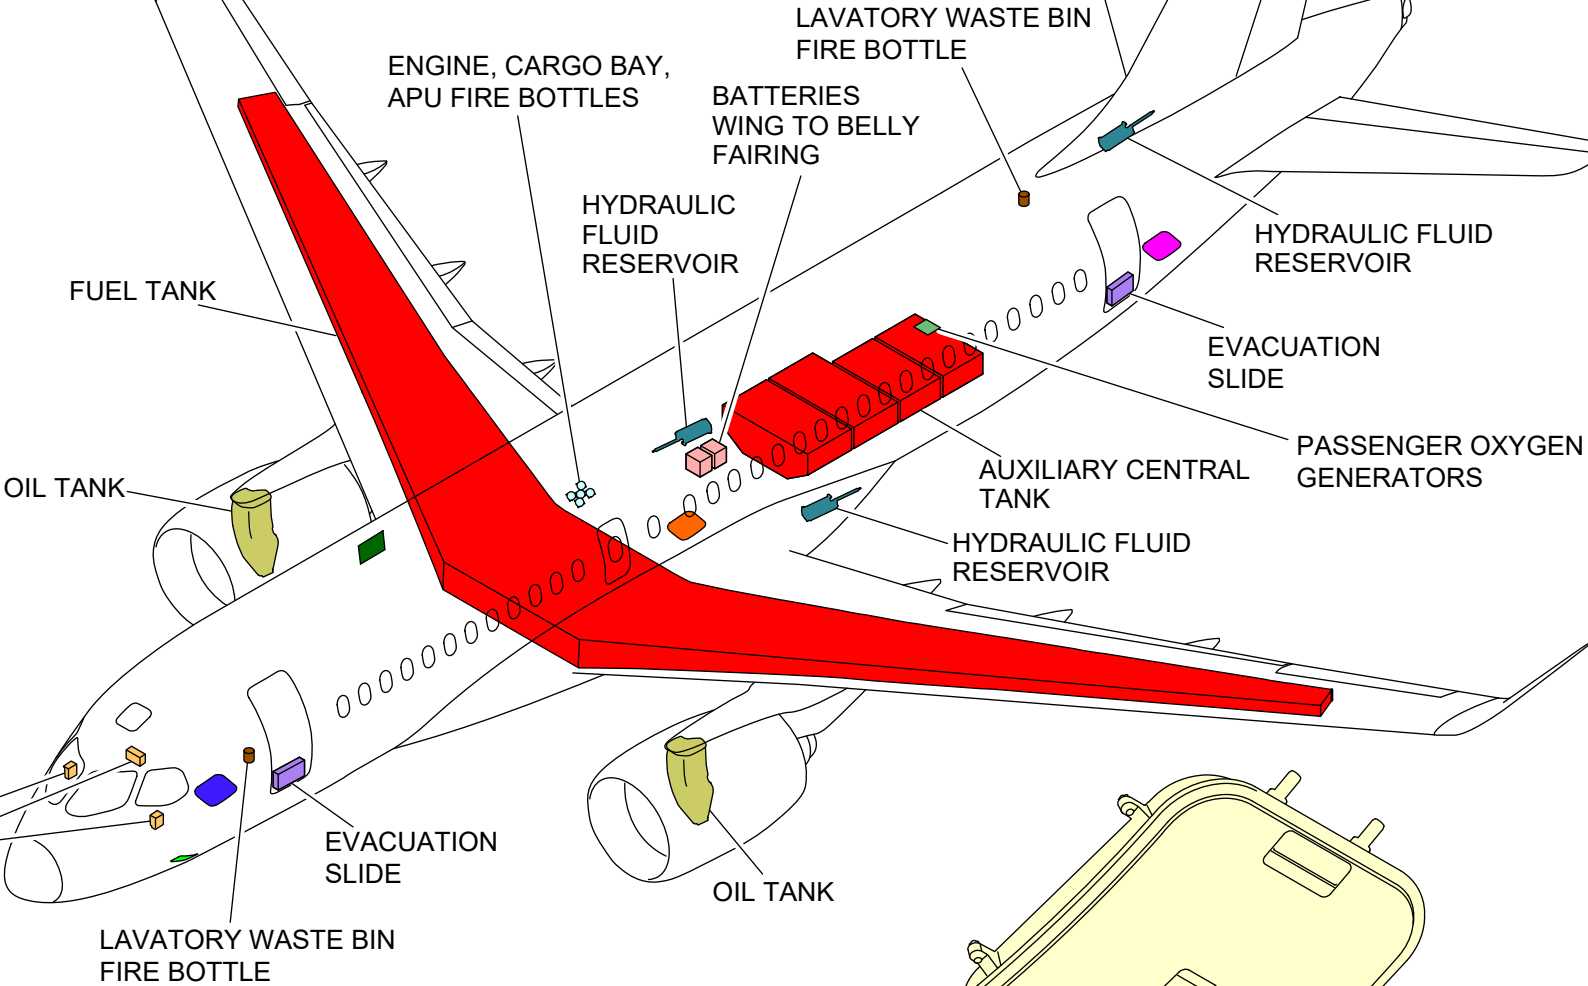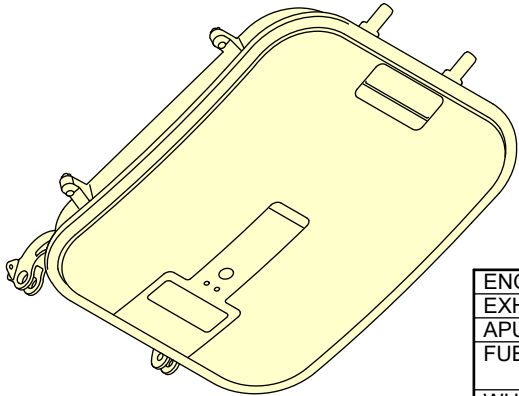

AFT EQUIPMENT BAY DOOR

1. PRESS RELEASE BUTTON.
2. PULL HANDLE DOWN.

ENGINE FIRES	HALON OR DRY CHEMICAL
EXHAUST NOZZLE FIRE	HALON OR DRY CHEMICAL
APU FIRE	HALON OR DRY CHEMICAL
FUEL FIRE	DRY CHEMICAL FOR LEAKING FUEL AND FOAM ON GROUND SPILL AREA
WHEEL AND BRAKE FIRES	WATER FOG OR DRY POWDER
	APPROACH LANDING GEAR FROM FORWARD OR AFT. STRAND UPWIND OF FIRE TO AVOID SKYDROL FUMES
ELECTRICAL FIRES	HALON OR DRY CHEMICAL
FLIGHT COMPARTMENT AND CABIN AREA FIRES	HALON 1211, OR DRY POWDER, OR WATER EXTINGUISHER
CARGO COMPARTMENT FIRE	HALON
AFT EQUIPMENT COMPARTMENT FIRE	HALON

WARNING

RECOMMENDED FIRE FIGHTING AGENTS